CERTIFICATE OF AUTHENTICITY

This microfilm was created from the record copy of unit histories and related historical material of the United States Air Force stored in the Archives Branch of The Albert F. Simpson Historical Research Center at Maxwell AFB, Alabama. This facility is the official repository for these records in accordance with AF Regulation 210-3 and AF Manual 12-50. This microfilm was created in accordance with the provisions of AF Regulation 12-40 as AU Project AU-1B-67. The microfilming was completed under AF Contract F01600-75-90668 under the supervision of the Technical Systems Branch of The Albert F. Simpson Historical Research Center.

BILLIE H. HIX


Chief, Technical Systems Branch The Albert F. Simpson Historical Research Center This document is made available through the declassification efforts and research of John Greenewald, Jr., creator of:

The Black Vault




The Black Vault is the largest online Freedom of Information Act (FOIA) document clearinghouse in the world. The research efforts here are responsible for the declassification of hundreds of thousands of pages released by the U.S. Government & Military.


Discover the Truth at: http://www.theblackvault.com

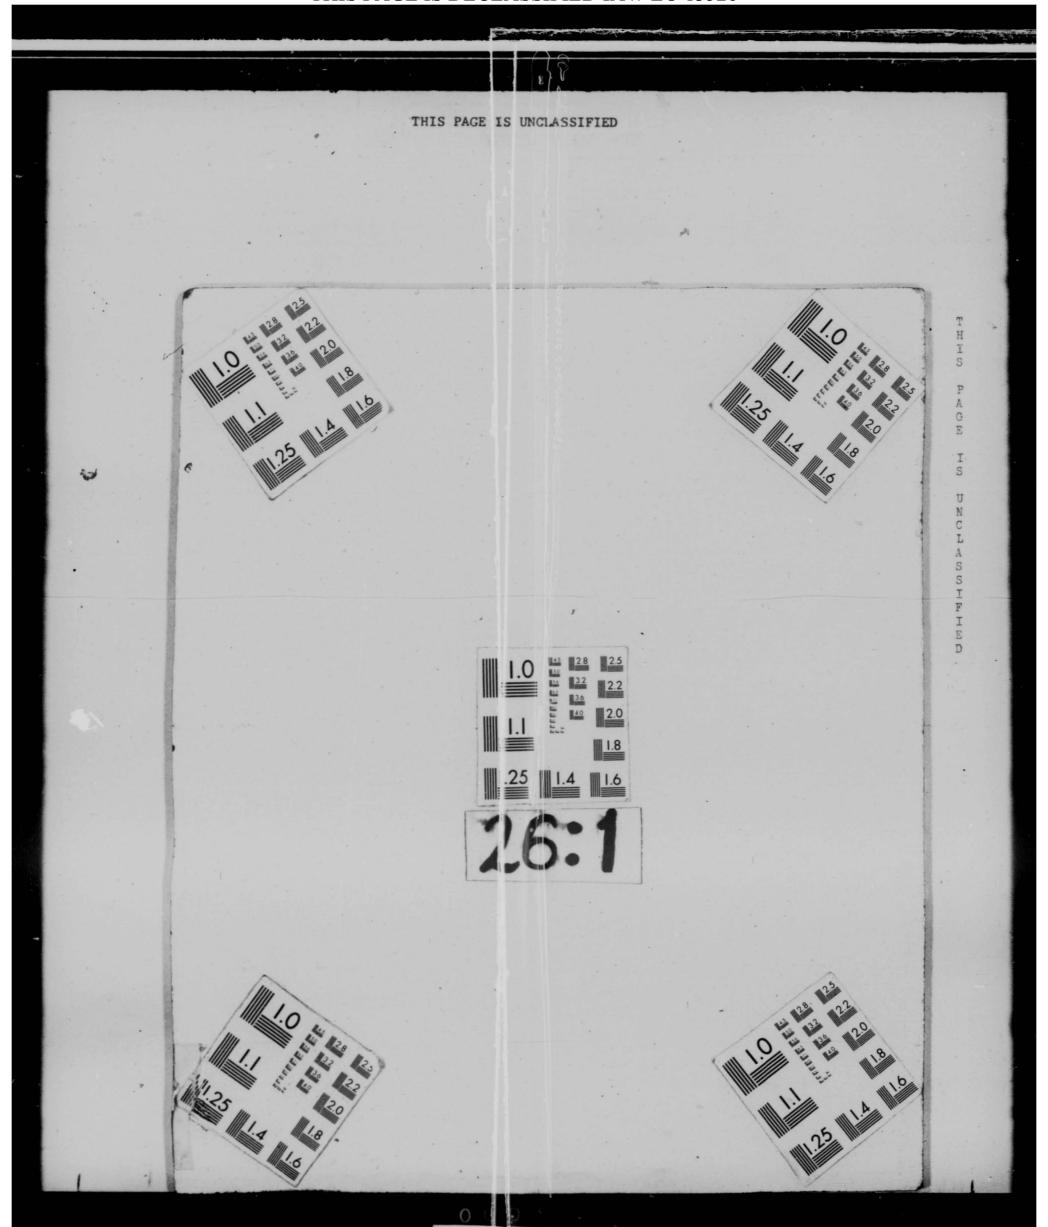

THIS PAGE IS DECLASSIFIED IAW EO 13526

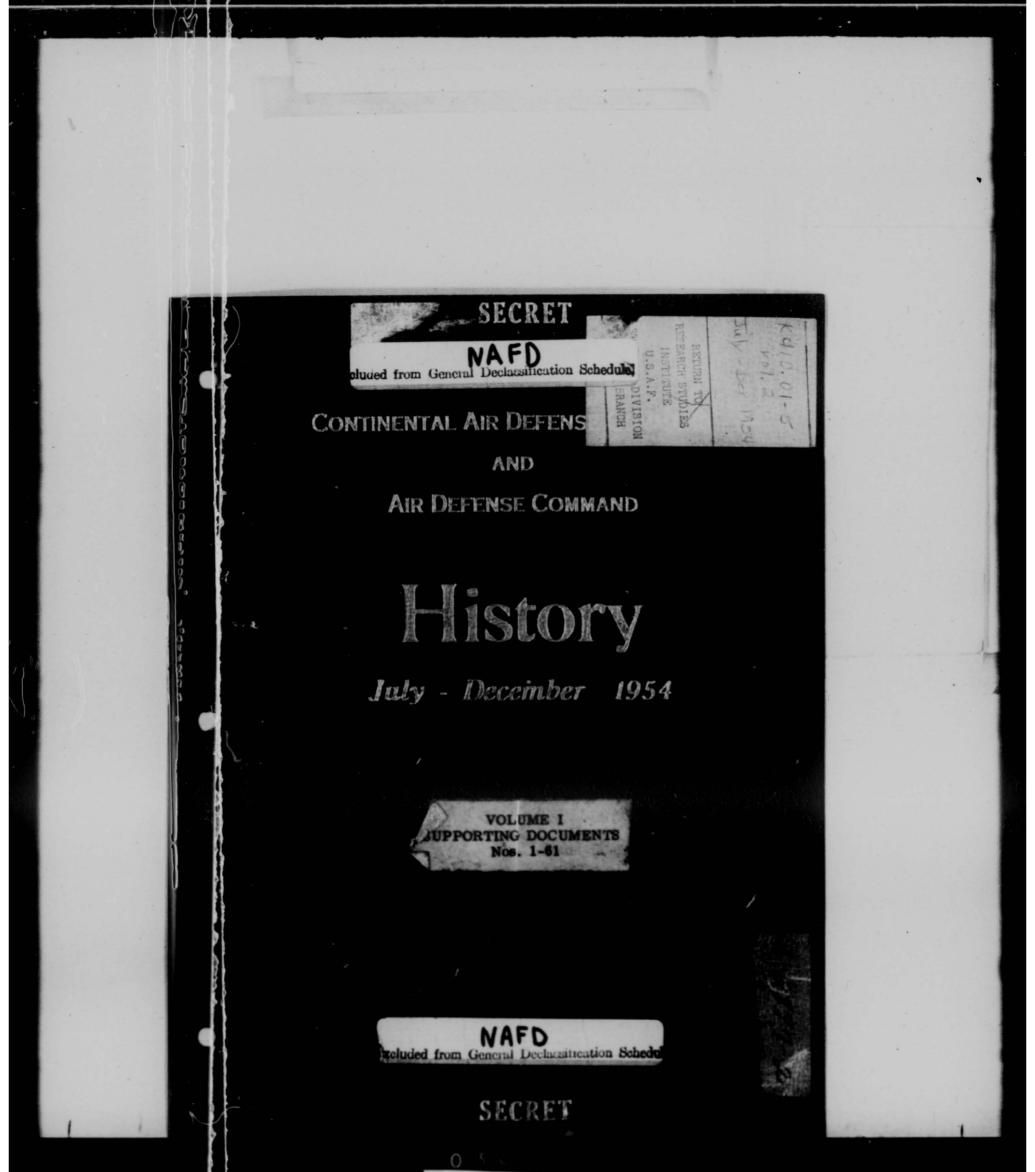

THIS PAGE IS DECLASSIFIED IAW EO 13526

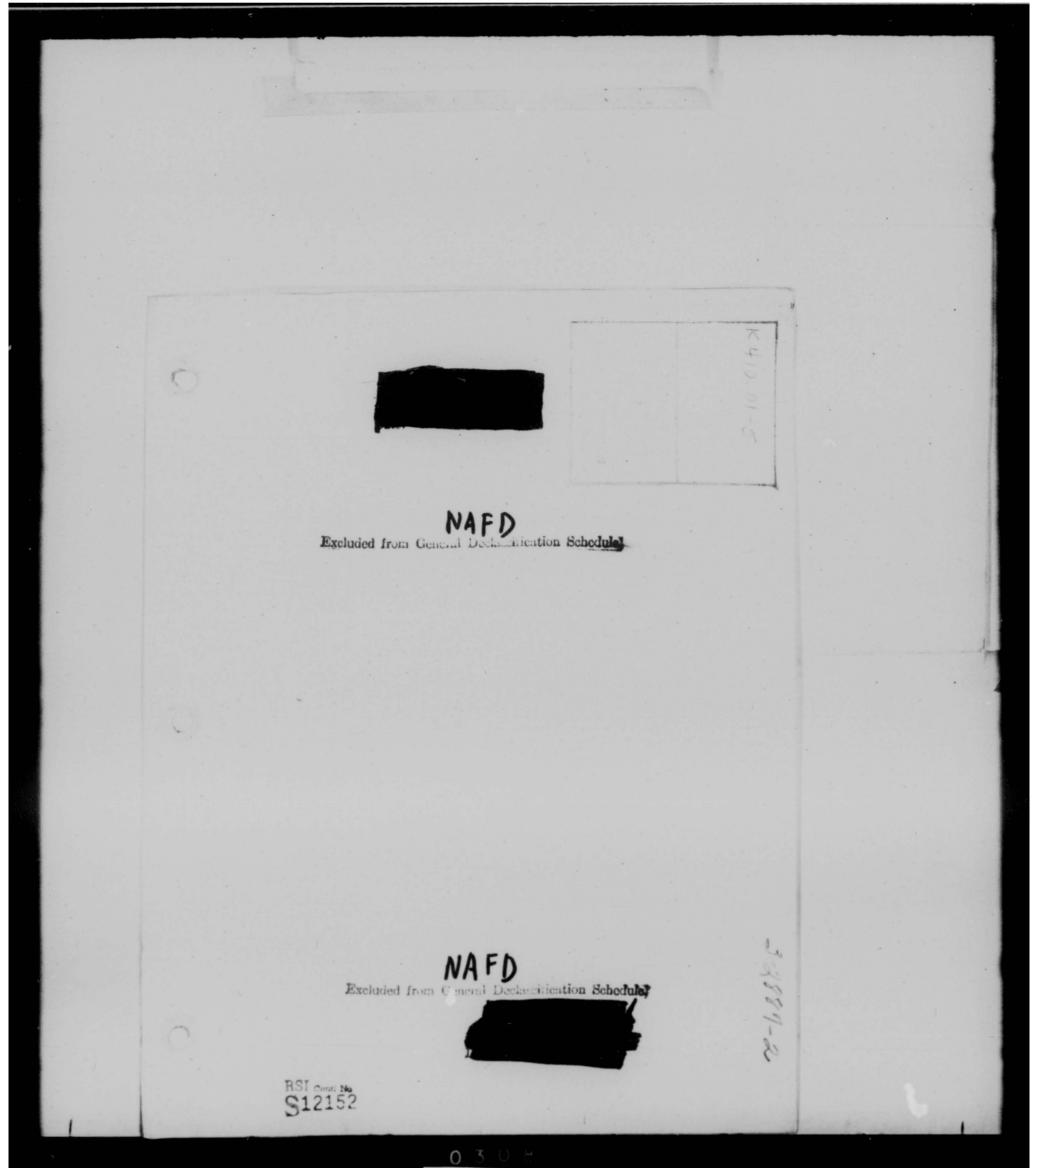

DOCUMENT NO.

THIS DOCUMENT MAY BE FOUND

IN VOLUME VI OF THE SUPPORTING

DOCUMENTS TO THIS HISTORY.

*AFR 55-101

AIR FORCE REGULATION NO. 55-101

DEPARTMENT OF THE AIR FORCE WASHINGTON, 9 OCTOBER 1953

OPERATIONS

AC&W Operational Status Report-RCS: AF-Z20

	Paragrap
Purpose and Scope	
Responsibility	
Entries—RCS: AF-Z2U	
Transmission	
Classification	***************************************

(Effective 10 December 1953)

1. Purpose and Scope:

- a. Purpose. This Regulation prescribes standard instructions for the preparation and submission of reports on AC&W sites.
 - (1) These reports are: a quarterly report entitled "AC&W Operational Status Report"; and a change report entitled "AC&W Status Change Report"
 - (2) The reports will reflect the latest status of all AC&W sites, and point out areas limiting the operational status of AC&W sites.
- b. Scope. For reporting purposes this Regulation applies to all major air commands having units assigned to radar sites (including sites used for tactical training) and control centers.
- 2. Responsibility. The commanders of the applicable major air commands will insure accurate preparation and timely submission of the reports required herein.
- 3. Preparation. The "AC&W Operational Status Report" will be prepared as of 2400, local time, the 10th day of March, June, September, and December each year. AC&W Status Change Reports will be submitted immediately in the event of:
 - a. The establishment of a new site.
 - b. The discontinuance of a site.
 - c. Receipt of new equipment for a site.
- d. Change in site designation (site number, site type, or unit operating the site).
- e. Change in operational status. Temporary changes (10 days or less) will not be reported.

- f. A change of 20 percent or more for any of the items listed in paragraph 4a (10) through (17).
- NOTE: Sample formats are shown in attachment 2.

4. Entries-RCS: AF-Z20:

- a. AC&W Operational Status Report. Entries will be made for each site on a single numbered line. Sites will be grouped under the group or air division having operational control of the squadron assigned to the site. (See sample format.)
 - Column (1)—If more than one site is operated by one squadron, enter the letter or the numerical designation of the detachment operating the site. Otherwise leave blank.
 - (2) Column (2)—Enter the numerical designation of the squadron operating the site.
 - (3) Column (3)—Enter the designation of the installation or the nearest geographical landmark where the equipment is physically located. If the location of the site is classified "TOP SECRET" the word "CLASSIFIED" will be entered.
 - (4) Column (4)—Enter the function of the site, that is, EW, EW/GCI, ADCC, ACC, CRC, TDP. When codes other than those listed are used, the appropriate command code will be entered. Footnotes at the end of the report will explain such codes.
 - (5) Column (5)—Enter the type/model of primary search radar assigned.
 - (6) Column (6)-Enter the type/model

*Effective 10 December 1953, this Regulation supersedes AFR 55-101, 28 May 1952.

.

AFR 55-101 4-6

- of primary height finder radar assigned.
- (7) Column (7)—Enter the type/model of standby search radar assigned.
- (8) Column (8)—Enter the type/model of standby height finder radar assigned.
- (9) Column (9)—Enter the appropriate overall code which consists of two parts: (1) a letter denoting the operational status of the site (see attachment 1) and (2) a number denoting the major limiting factor. This numerical suffix will be determined in accordance with the following:
 - (a) Show "1" if construction is major reason for current status. A "1" will not be used in connection with any symbol other than symbol X.
 - (b) Show "2" if lack of personnel or insufficient training is major reason for current status. A "2" will not be used in connection with symbols F and CF.
 - (c) Show "3" if lack of equipment is major reason for current status. A "3" will not be used in connection with symbols F and CF.
 - (d) Subject to limitations shown above, "1," "2," and/or "3" may be used in any combination provided it is considered that the factors indicated are equally and materially responsible for the site's current status.
- (10) Column (10)—Enter the percent of completion of construction program.
- (11) Column (11)—Enter the percent of completion of primary search radar installed.
- (12) Column (12)—Enter the percent of completion of primary height finder radar installed.
- (13) Column (13)—Enter the percent of completion of standby search radar installed.
- (14) Column (14)—Enter the percent of completion of standby height finder radar installed.
- (15) Column (15)—Enter the percent of completion of radio communication equipment installed.
- (16) Column (16)—Enter the percent of

- completion of inside plant telephone facilities.
- (17) Column (17)—Enter the percent of completion of outside plant telephone facilities
- (18) Column (18)—Enter a forecast of the site's operational status as of 10th of each of the three months immediately following the "as of" date of the report. Use codes listed in (9) above and separate with slants.
- b. Remarks. Add remarks to the end of the report and carry the same line number as the site to which they apply. Show remarks for the following:
 - Changes subsequent to 10 December 1953 in the geographical reference coordinates of a site and the use being made of a site "O" if operational or "T" if training.
 - (2) Sites utilizing lash-up equipment.
 - (3) Where a major air command has additional sites programmed, a comment will be made, giving the estimated date of site survey.

Remarks may also be used to explain data entered in columns (1) through (18) or to spell out more fully conditions affecting the status of a particular site.

c. AC&W Status Change Report. Entries will show, for units affected, all items required by a(1) through (17) above. (See sample change report.) Remarks need not be added unless considered necessary.

5. Transmission:

a. The AC&W Operational Status reports will be airmailed by the major air commands and will be due in Headquarters USAF, not later than 15 days after the "as of" date. Address as follows:

Director of Statistical Services Headquarters, USAF

ATTENTION: Operations Statistics Division Washington 25, D. C.

b. "AC&W Status Change" reports will be submitted by the major air commands electrically and will be due in as soon as possible after a change takes place. Address as follows:

COFS USAF WASH DC

Classification. Reports will be classified in accordance with AFR 205-1.

AFR 55-101

By Order of the Secretary of the Air Force:

OFFICIAL:

K. E. THIEBAUD Colonel, USAF Air Adjutant General

Code for operational status
 Sample formats

DISTRIBUTION:

·	
Headquarters USAF	1100
Alaskan Air Command	50
Air Defense Command	100
Tactical Air Command	50
Far East Air Force	50
Northeast Air Command	50
U. S. Air Forces in Europe	50
Military Air Transport Service	50

N. F. TWINING Chief of Staff, United States Air Force

2

AFR 55-101

CODE FOR COLUMN 9, OPERATIONAL STATUS

Inoperative (Symbol X)—For any reason the site cannot be placed in operation in less than 10 days.

Limited Operational (Symbol L)—The site is integrated into an air defense or tactical control system but due to shortages of personnel and/or equipment cannot be operated continuously. The site can operate for a minimum of 24 hours on an emergency basis.

Sustained Operational (Symbol S)—The site is integrated into an air defense or tactical control system, minimum personnel and equipment are on hand to allow continuous operation.

Fully Operational (Symbol F)—The site is integrated into an air defense or tactical control system, complete coverage of the site is known (for radar sites only) either by calibration or operational experience, sufficient equipment is on hand to allow continuous operation, adequate trained personnel are on hand to maintain the equipment, adequate trained personnel are on

hand to operate the site in accordance with approved SOP's.

Capable of Limited Operations (Symbol CL)—No requirement exists for the site to operate in an air defense or tactical control system. The site could be integrated into an air defense or tactical control system within 48 hours and would be capable of limited operations in the system.

Capable of Sustained Operations (Symbol CS)—No requirement exists for the site to operate in an air defense or tactical control system. The site could be integrated into an air defense or tactical control system within 48 hours and would be capable of sustained operations.

Capable of Full Operations (Symbol CF)—No requirement exists for the site to operate in an air defense or tactical control system. The site could be integrated into an air defense or tactical control system within 48 hours and would be capable of full operations.

5

RCS: SAMPLE AC&W OPERATIONAL STATUS REPORT 10 11 12 13 14 15 16 17 18 540 AC&W Gp A 124 Durham, N. C. EW/GCI FPS-3 FPS-5 FPS-8 FPS-4 S 100 70 80 70 80 100 80 70 F/F/F B 124 Shaw AFB, N. C. EW/GCI CPS-1 CPS-4 TPS-1D TPS-10D S-2 100 80 80 80 80 90 70 70 S-2/F/F A 125 Langley AFB, Va. EW TPS-1D TPS-10D — B 125 Louisville, Ky. CRC MPS-7 MPS-14 REMARKS Site will become fully operational with scheduled assignment of 5 additional controllers and 4 radar mechanics February.
 Status due to critical shortage of spare parts and test equipment. SAMPLE AC&W STATUS CHANGE REPORT FROM: TO: Follows AF.....As of 15 February 1954

AFDHOL-AD/C

SUBJECT: Procurement of Radar Set AV/FPS-3A

2/2.5


C: Commander
Air Defense Command
Lat Air Force Rase
Colorado Springs, Colorado

1. The Air Material Command has been directed by P. D. 54-11-12, dated 15 Jan 1954, to initiate procurement of twenty additional A / PS-2A radars with linear feed and "los-polar radars".

- 2. The system as called for by the Procurement Directive will have the following parameters:
 - a. A single 0.5 1% transmitter using a 5J26 magnetron.
- of 34 db as compared to the present antenna system which has a gain of 36.3 db.
- c. A receiver system employing an R.P. amplifier having an overall noise Figure of 9.7 to 10 ft.
- (In the event the features outlined above are not available for these 20 sets, the AL/PPS-3A will contain the present two . S request branchitters, dual-bear MTI and the new York, W-31 A/PPS-3).
- 2. Netrofit kits for presently installed A /PPS-3 radars to incorporate linear feed and the receiver and I applifier can be procured; however, Air Research and Development Command has recommended that such kits be ordered only for those sites where high altitude coverage is a primary requirement and spacing is sufficiently along (appreciately 140 miles) to provide adequate overlap. Air research and Development Command has estimated that such a kit would see 11,500 per unit.
- 4. Air Research and Development Command has pointed out that an additional feature can be made a part of the new producement mentioned in paragraph 3 above. This is facility for standby operation as described in Inclosure No. 1 attached hardle. In the case of the retrofit kits, this feature will increase the cost per unit by an estimated \$1,500 for a total of \$20,000 per kit.

V-73-1

AFDRQ-AE/O, Lir to Too, ADC, subj: Procurement of Radar Sel AT/FPS-SA (Uncl) Contra. . Jovernor Marrows of the linear feed versus four horn feed with the old and new duplexer are inclosed. The R.F. amplifier will have proceed that the many duplexer; however, it will offer much better crystal protection and therefore should maintain this figure better under field conditions. distinct a gainged single transmitter is expected prosent by P - a set a could see the core the 2 sequent transmitter is available. School L. LAUGHLIN School, USAF Chief, Air Defense Division Directorate of Requirements, DCS/D 1. Standby Proposal
2. Soverage Chart A / PPS-3
3. Coverage Chart A / PPS-3 1-73-2

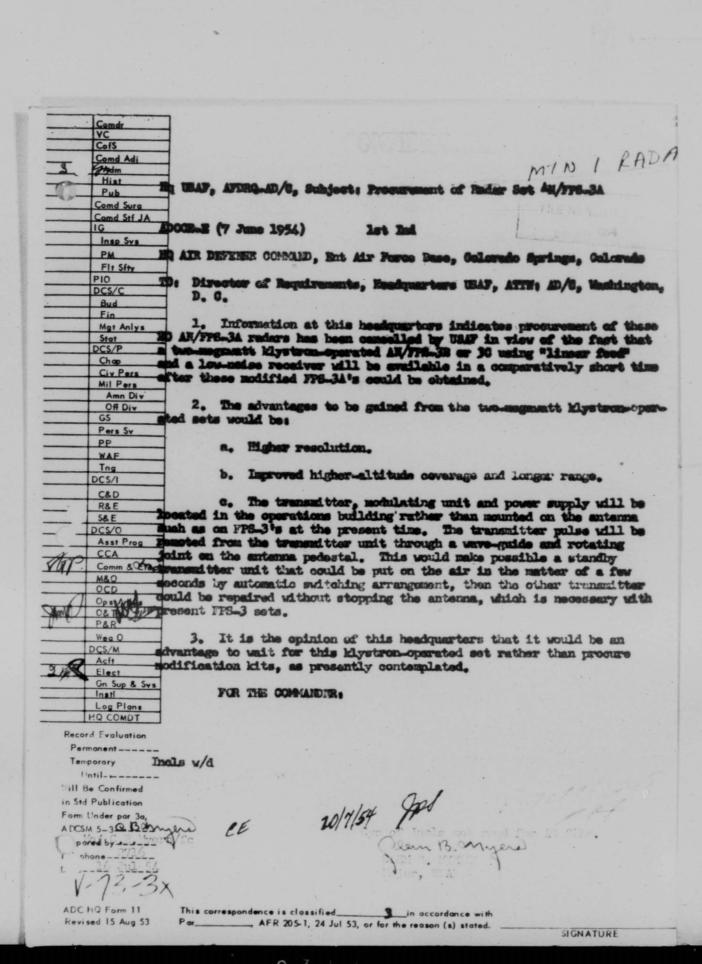

		SECURITY CLASSIFICATION (I/ eng)	
DISPOS	SITION FORM	FILE NUMBER	227
Disiros	MION PORM	L	a
FILE NO.	SUBJECT Magnetron QK 3	38	
D/C&E	FROM	DATE 4 Nov 54	COMMENT NO.
T:30	· AMADD	100	
DCS/M - (In A)			
designed for. Gene output of the AN/FI requirement with th	eral Electric has met all spe PS-6. However, since Raytheo he GK 338 magnetron, a change	of contract notice has	o the power eak power authorized
designed for. General coutput of the AN/FI requirement with the reduction in power of QK 338 magnetron \$2,000 each, represent the second secon	eral Electric has met all spe PS-6. However, since Raytheo he GK 338 magnetron, a change output to 4.5 MW. At the pr is are approximately 6,000, we sents an investment of approximate on the AN/FPS-6 using subject tested in the AN/FPS-6 before the serious degradated the 4.5 MW level.	cifications in regards to annot meet the 5 MW per of contract notice has a sesent time, total Air For hich at the cost of approximately \$12,000,000. The cost magnetron indicate the ore one can be found that the aspects of operations on in radar information come Air Force Depot Maintenance the above deficiency of the life when used with the life when used with the contract the above deficiency of the life when used with the contract the above deficiency of the life when used with the contract the above deficiency of the life when used with the contract the above deficiency of the life when used with the contract the above deficiency of the life when used with the contract the life when used with the life when used with the contract the life when used with the life	o the power eak power authorized ree assets eximately sts conducted at from 8 to t will operal capability will result tenance Engirencies, esame AN/FPS-5.
designed for. General coutput of the AN/FI requirement with the reduction in power of QK 338 magnetron \$2,000 each, represent the second secon	eral Electric has met all spe PS-6. However, since Raytheo he GK 338 magnetron, a change output to 4.5 MW. At the pr his are approximately 6,000, we sents an investment of approximate on the AN/FPS-6 using subject tested in the AN/FPS-6 before the devel.	cifications in regards to annot meet the 5 MW per of contract notice has a sesent time, total Air For hich at the cost of approximately \$12,000,000. The cost magnetron indicate the ore one can be found that the aspects of operations on in radar information come Air Force Depot Maintenance the above deficiency of the life when used with the life when used with the contract the above deficiency of the life when used with the contract the above deficiency of the life when used with the contract the above deficiency of the life when used with the contract the above deficiency of the life when used with the contract the above deficiency of the life when used with the contract the life when used with the life when used with the contract the life when used with the life	o the power eak power authorized ree assets eximately sts conducted at from 8 to t will operal capability will result tenance Engirencies, esame AN/FPS-5.
designed for. General coutput of the AN/FI requirement with the reduction in power of QK 338 magnetron \$2,000 each, represent the second secon	eral Electric has met all spe PS-6. However, since Raytheo he GK 338 magnetron, a change output to 4.5 MW. At the pr is are approximately 6,000, we sents an investment of approximate on the AN/FPS-6 using subject tested in the AN/FPS-6 before the serious degradated the 4.5 MW level.	cifications in regards to cannot meet the 5 MW per of contract notice has seent time, total Air For hich at the cost of appreciately \$12,000,000. The et magnetron indicate the ore one can be found that the aspects of operations in radar information one Air Force Depot Maintenance of the above deficited the varies from zero to	the power eak power authorized ree assets eximately sts conducted at from 8 to t will operal capability will result tenance Engirencies, esame AN/FPS-5.
designed for. Gene output of the AN/FI requirement with the reduction in power of QK 338 magnetrom \$2,000 each, represent the general Electrical in number must be at the 4.5 MW 12. Request your and, particularly, from operation at the sering as to any acceptably from the sering as to any acceptable from the sering as to any acceptable from the serious and period and serious from the se	eral Electric has met all spe PS-6. However, since Raytheo he GK 338 magnetron, a change output to 4.5 MW. At the pr is are approximately 5,000, we sents an investment of approximate of approximate of approximate of approximate on the AN/FPS-6 before the tested in the AN/FPS-6 before whether any serious degradate the 4.5 MW level. The property of the serious degradate of the magnetrons used to the serious of the magnetrons used to the serious degradate of the serious degradate of the serious degradate of the magnetrons used to the serious degradate of the serious	cifications in regards to cannot meet the 5 MW per of contract notice has seent time, total Air For hich at the cost of appreciately \$12,000,000. The et magnetron indicate the ore one can be found that the aspects of operations in radar information one Air Force Depot Maintenance of the above deficited the varies from zero to	the power eak power authorized ree assets eximately sts conducted at from 8 to t will operal capability will result tenance Engirencies, esame AN/FPS-5.
designed for. Gene output of the AN/Fi requirement with the reduction in power of GK 338 magnetron \$2,000 each, represent the second of the se	eral Electric has met all spe PS-6. However, since Raytheo he GK 338 magnetron, a change output to 4.5 MW. At the pr is are approximately 5,000, we sents an investment of approximate of approximate of approximate of approximate on the AN/FPS-6 before the tested in the AN/FPS-6 before whether any serious degradate the 4.5 MW level. The property of the serious degradate of the magnetrons used to the serious of the magnetrons used to the serious degradate of the serious degradate of the serious degradate of the magnetrons used to the serious degradate of the serious	cifications in regards to annot meet the 5 MW per of contract notice has seen time, total Air For hich at the cost of appreciately \$12,000,000. The et magnetron indicate the ore one can be found that the aspects of operations come Air Force Depot Maintenance the above deficiency of the life when used with the late varies from zero to the appreciation of the correct the above deficiency of the life when used with the late varies from zero to the life when the late varies from the late var	the power eak power eak power authorized ree assets eximately sts conducted at from 8 to t will operal capability will result tenance Engirencies, esame AN/FPS-5.
designed for. Gene output of the AN/FI requirement with the reduction in power of QK 338 magnetrom \$2,000 each, represent the general Electrical in number must be at the 4.5 MW 12. Request your and, particularly, from operation at the sering as to any acceptably from the sering as to any acceptable from the sering as to any acceptable from the serious and period and serious from the se	eral Electric has met all spe PS-6. However, since Raytheo he GK 338 magnetron, a change output to 4.5 MW. At the pr is are approximately 5,000, we sents an investment of approximate of approximate and subject to the AN/FPS-6 before the steed in the AN/FPS-6 before the serious degradate the 4.5 MW level. The comments on the above from the serious degradate the 4.5 MW level. The property of the serious degradate the serious that the serious degradate the serious that the serious degradate the serious	cifications in regards to a cannot meet the 5 MW per of contract notice has seen time, total Air For hich at the cost of appreciately \$12,000,000. The et magnetron indicate the core one can be found that the aspects of operations come Air Force Depot Maintenance of the above deficited by the life when used with the late varies from zero to the correct the above deficited by the correct the above deficited by the late varies from zero to the late v	o the power eak power eak power authorized ree assets eximately sts conducted at from 8 to t will operal capability will result tenance Engirencies, esale AN/FPS-5.
designed for. Gene output of the AN/Fi requirement with the reduction in power of QK 338 magnetron \$2,000 each, represent the general Electrical in number must hate at the 4.5 MW 12. Request your and, particularly, from operation at the sering as to any aspecially from the serion operational life.	eral Electric has met all spe PS-6. However, since Raytheo he GK 338 magnetron, a change output to 4.5 MW. At the pr hs are approximately 5,000, w sents an investment of approx c on the AN/FPS-6 using subje be tested in the AN/FPS-6 bef level. r comments on the above from whether any serious degradat the 4.5 MW level. brate is currently querying Re etion being taken by them to aspects of short magnetron tuice of the magnetrons used to	cifications in regards to annot meet the 5 MW per of contract notice has seen time, total Air For hich at the cost of appreciantly \$12,000,000. The et magnetron indicate the core one can be found that the aspects of operations come Air Force Depot Maintenance to the above deficiency of the life when used with the late varies from zero to the correct the above deficiency of the life when used with the late varies from zero to the correct the above deficiency of the life when used with the late varies from zero to the life when life	o the power eak power eak power authorized ree assets eximately sts conducted at from 8 to t will operal capability will result tenance Engirencies, esale AN/FPS-5.
designed for. Gene output of the AN/Fi requirement with the reduction in power of GK 338 magnetron \$2,000 each, represent the second se	eral Electric has met all spe PS-6. However, since Raytheo he GK 338 magnetron, a change output to 4.5 MW. At the pr hs are approximately 5,000, w sents an investment of approx c on the AN/FPS-6 using subje be tested in the AN/FPS-6 bef level. r comments on the above from whether any serious degradat the 4.5 MW level. brate is currently querying Re etion being taken by them to aspects of short magnetron tuice of the magnetrons used to	cifications in regards to a cannot meet the 5 MW per of contract notice has a sesent time, total Air For hich at the cost of appreciately \$12,000,000. The et magnetron indicate the ore one can be found that the aspects of operations in radar information on a radar information on the form of the above deficited at the varies from zero to the life when used with the late varies from zero to the life when the late varies from zero to be life when the late varies from zero to be life when the late varies from zero to be life when the late varies from zero to be life when the late varies from zero to be life when the late varies from zero to be life when the late varies from zero to be life when the late varies from zero to be life when the late varies from zero to be life when the late varies from zero to be life when the late varies from zero to be life when the late varies from zero to be life when the late varies from zero to be life when the late varies from zero to be late varies from zero to b	o the power eak power eak power authorized ree assets eximately sts conducted at from 8 to t will operal capability will result tenance Engirencies, esale AN/FPS-5.
designed for. Gene output of the AN/Fi requirement with the reduction in power of QK 338 magnetron \$2,000 each, represent the second se	eral Electric has met all spe PS-6. However, since Raytheo he GK 338 magnetron, a change output to 4.5 MW. At the pr hs are approximately 5,000, w sents an investment of approx c on the AN/FPS-6 using subje be tested in the AN/FPS-6 bef level. The comments on the above from whether any serious degradat the 4.5 MW level. The property of the magnetrons used to a spects of short magnetron tul the of the magnetrons used to a Div	cifications in regards to a cannot meet the 5 MW per of contract notice has a sesent time, total Air For hich at the cost of appreciately \$12,000,000. The et magnetron indicate the ore one can be found that the aspects of operations in radar information on a radar information on the form of the above deficited at the varies from zero to the life when used with the late varies from zero to the life when the late varies from zero to be life when the late varies from zero to be life when the late varies from zero to be life when the late varies from zero to be life when the late varies from zero to be life when the late varies from zero to be life when the late varies from zero to be life when the late varies from zero to be life when the late varies from zero to be life when the late varies from zero to be life when the late varies from zero to be life when the late varies from zero to be life when the late varies from zero to be life when the late varies from zero to be late varies from zero to b	o the power eak power eak power authorized ree assets eximately sts conducted at from 8 to t will operal capability will result tenance Engirencies, esale AN/FPS-5.

NDOCK-E

SUBJECT: (Unclassified) Requirement for Additional Weight Finders

170


20 NOV 1954

TO: Commander
Air Defense Command
Ent Air Force Base
Coloredo Springs, Colorado

1. Your attention is invited to the following reference:

Request for Replacement of PIC-5 Padar Sets, 15 Jul 54 and 1st Indorsement your headquarters, 40 0-0, 2 Nov 54.

- 2. The original programming, whereby 1-6 was not scheduled to receive an additional height finder radar, was based on the premise that the site was not a perimeter site in the Foulde Terimeter Concept. Recent informal information from your headquarters indicates that the perimeter now extends along the United States Canadian Forder across to P-14, Nosh May, ashington. If this information is correct, F-6 has now become a perimeter station and will require an additional height finder radar.
- Installation of an AS/AS -6 arctic type radar set at radar site -6, Curley, askington, at the earliest consillerate.
- A. The IM/PTC-5 height finiters installed at and processed to receip at 70% without 1-6, 1-60, 1-57, and 1-60 will some a interim backum accirrent only. The set is designed to track 1-79 type aircorft to a distance of 60 miles and fighter aircorft to a distance of 65 miles. These performance figures are selded reached, therefor, little benefit to minuting the squire ont.
- 5. Lament that this head norters be authorized to change the IC document to indicate this equiment as interiored program any Fig. 4 could not for our anent installation.

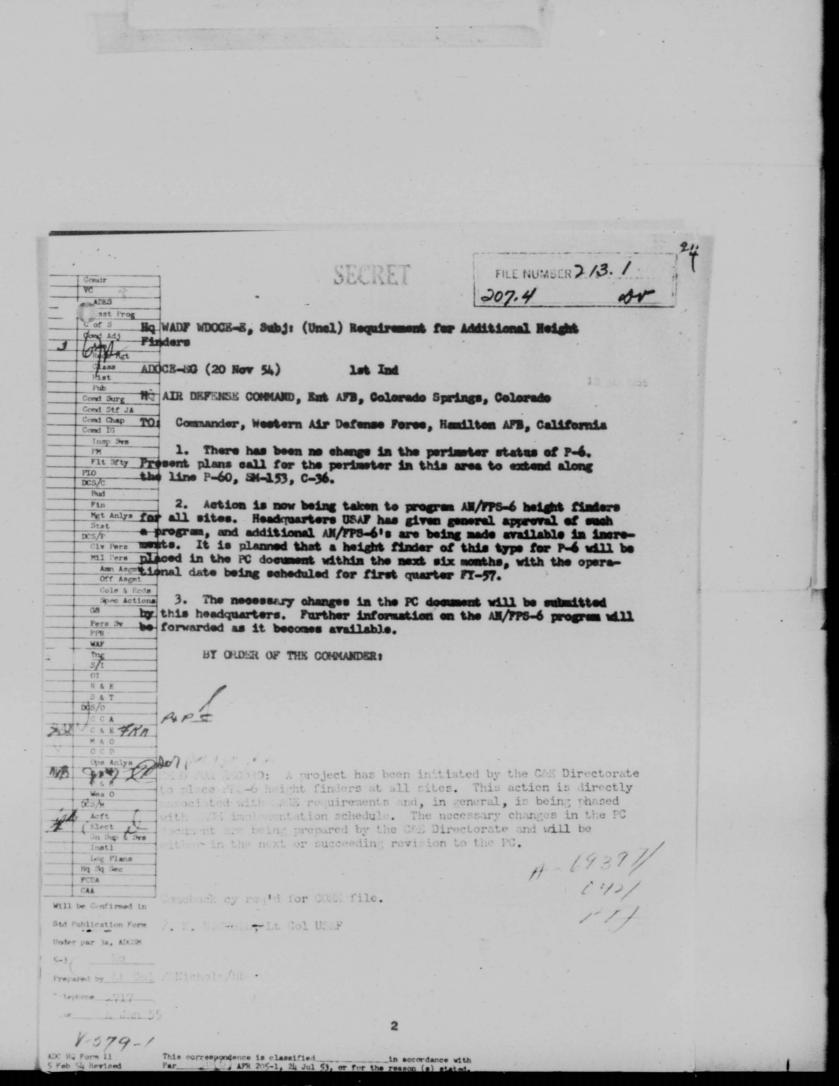

CONFIDENTIAL

MEADQUARTERS 25TH AIR DIVISION (DEPENSE) McChord Air Force Base, Washington

2500B-5

SUBJECT: Radar Reight Finding Equipment

10:

Communitor Western Air Defense Porce Hamilton Air Porce Base Hamilton, California 713.1

- 1. As a result of the reorganization of the 25th Air Division, this second has only one (1) AN/FFS-5 Reight Finding Radar Set (P-57) and no others programed.
- 2. Legistical problems of this command would be simplified if the AM/FFS-5 was replaced with either an AM/FFS-h or AM/FFS-6 equipment. In all probability loss difficulty would be experienced detaining an AM/FFS-h or its mobile equivalent.
- 3. Resides the advantages which would seems from alimination of "one more type" of reder equipment, it is believed this command would benefit in numerous other ways, including:
- a. Pastory or technical representatives are available on both the AM/FFS-4, and the AM/FFS-6, but this is not the ease for the AM/FFS-5.
- b. Additional range and height capability for constal locations is desirable.
 - h. Your assistance and recommendations on this matter are requested.

 FOR THE COMMENDER:

V-519-1

CONFIDENTIAL

CONFIDENTIAL

Hq 25th Air Div (Def) 2500E-5, Subject: Radar Height Finding Equipment

7 DEL 1954

WIMEL-2 (20 Nov 54)

lst Ind


HQ MESTERN AIR DEFENSE FORCE, Hamilton AFB, Hamilton, California


TO: Commander, Air Defense Command, Ent Air Force Base, Colorado Springs, Colorado

- l. Nour attention is invited to letter, this headquarters, WDGGS-E, subject, Request for Additional Height Finders, recently forwarded to your headquarters. Subject letter recemended that P-G Decements be changed to reflect AM/FRS-5 radar sets as interim equipment and replacement made with FRS-4 types.
- 2. It is fult that the facts outlined in basic letter are accurate and the reasons given for the deletion of the AR/FR-5 are sound and practicable.
- 3. Request, therefore, that in view of this correspondence and in view of this headquarters' desires in letter outlined in paragraph 1 above, consideration be given to eliminating the FRS-5 radar as recommended.

FOR THE COMMINER:

ons Comdr, 25th Ally (Def)

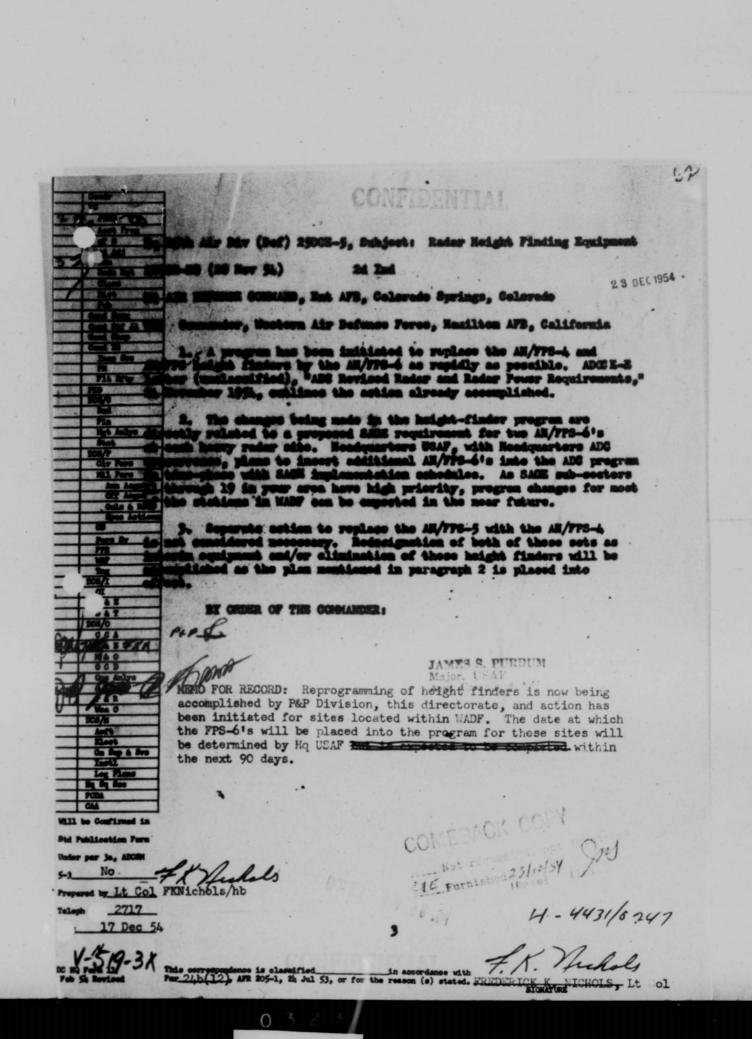

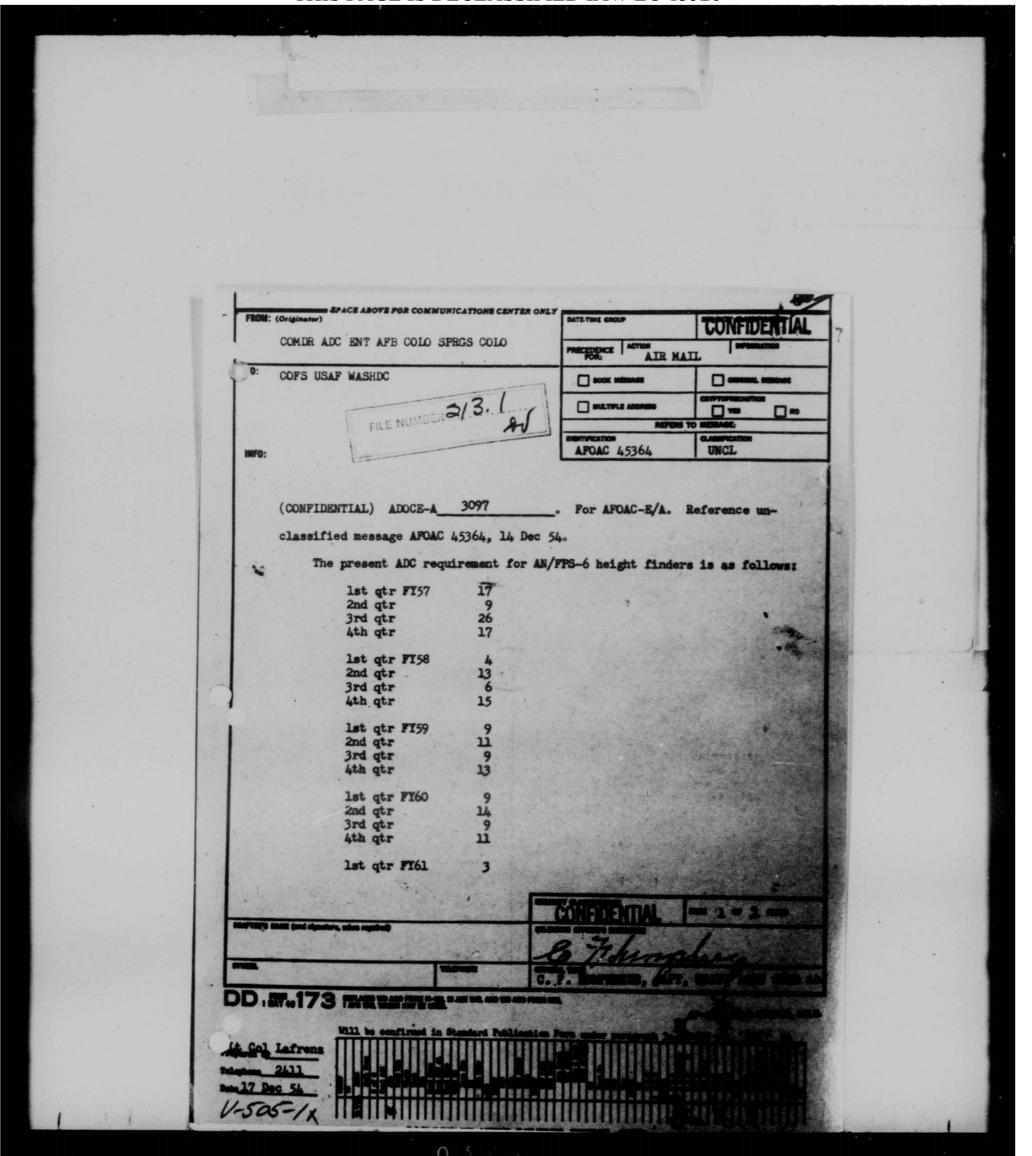

THIS PAGE IS DECLASSIFIED IAW EO 13526

20

WDMEL-3

15 JUL 1954

SUBJECT: Request for Replacement of FPS-5 Radar Sets (Confidential)

To: Commander
Air Defense Command
Ent Air Force Base
Colorado Springs, Colorado

- l. This command is now operating four FPS-5 type radar sets (height finder), all of which are in the 25th Air Division area. These equipments are not entirely satisfactory from both an operations and maintenance standpoint. In the recent past considerable difficulty has been experienced in the procurement of parts and in one or two isolated instances an individual set has been off the air in an ROCP condition for as long as two weeks because the needed spare was not immediately available. In addition, the design, range limitation, and other factors do not make this piece of equipment a desirable set for long range height finding when operating in conjunction with the FPS-3 search type.
- 2. Information at this headquarters indicates the existence of seven MPS-8 type radar sets in a storage condition at Fairchild Air Force Base, Spokane, Washington. These sets are marked for certain "M" and "SM" sites, some of which have been deleted from the ADC program. Serial numbers 13, 14, and 15 on AFSD 75140 are on hand at that station marked for SM 152, which has been completely eliminated. Serial numbers 16 and 17 are on hand marked for site SM 153. The ADC Programming Document indicates one only MPS-8 type radar for that station.
- 3. It is requested, therefore, that your headquarters consider the release to this command of MPS-8 radar sets, serial numbers 13, 14, 15 and 16, so that these sets may be shipped to and installed at sites P-60, P-6, P-40 and P-57 to replace the FPS-5's existing. The FPS-5's will then be returned to the appropriate air material area.

1.84-7

NEIDENTIAL

Hq WADF WDMEL-3, Subject: Req for Repl of FPS-5 Radar Sets

- 4. It has been determined that the presently installed FPS-5 tower will, with some minor modification, accept the MPS-8 radar set and it is estimated that an individual change-over when fully coordinated with the appropriate air material area will take approximately ten days.
- 5. Since the RCA company has technical representatives in the areas concerned and since the spare part and test equipment situation for this type radar set is steadily improving, support of these equipments is in a comparatively good condition. The capability of the MPS-8 (FPS-4) radar over the FPS-5 type will very definitely increase the overall ACAW capability of this command.
- plen, request that necessary ground radar directives be obtained and that this headquarters be notified so that planning can be started with the appropriate air material area.

FOR THE COMMANDER:

J. P. CRIM Major, USAR

2

184-3×

Condr VC ADES April Prog.
MIN / L
5.9
word Adj Eq WADF WDexi-9, Subj: (Confidential) Request for Replacement of
Rode Ngt
713.2
Cond Surg NO ATR DEPENSE CONCIAND, Ent AFD, Colorado Springs, Colorado
Count Character and Character
Com ID TO: Commander, Western Air Defense Perce, Hamilton AFB, California
71 The depot markings indicated in paragraph 2, basic letter, are
710 not in agreement with the equipment programing of this headquarters. 103/0 Separate action will be taken to correct this discrepancy.
Pin 2. The ADS requirement for height-finder radars continues to be in
Stat emess of the equipment programed in the PC. Until all first-priority DSS/F Stations within the over-all ACAN Program are equipped, reallocation of
THE PROPERTY CONTACT TO THE PROPERTY ASSESSMENT ASSESSMENT TO THE PROPERTY OF
Am Angus considered at this time.
Cols & Rods 3. With reference to the supply of AM/PPS-5 spares, this head-
The state of whether the state of whether the state of th
Pers by accordance with ADGR 67-4.
The BY ORDER OF THE COMMANDER:
MEMO FOR RECORD:
The let Ted same
The 1st Ind serves as a reply to the basic letter and WADF mes- sage WDMEL-2 17430. The basic letter was indorsed from this head-
qualters in August but, prior to its dispatch it was midwlessed in
distribution within this headquarters. Upon receipt of the WADF message, a search was made and the basic letter and initial indorse-
and not be still the latter and was reaccomplished and was jointly
Markared by ADOUR and ADMEL.
F. K. MICHOLS, Lt Col USAF
1 Book MIN FX Hickols
Comeback cy ped'd for COMM file.
In the See
PCDA CAA
Will be Confirmed in COME
Std Publication Form
Order per 3a, ADOM O. 1 1
5-3 No FI This ICTE Turnished PAT
Prepar r_ Lt Col Finichols/hb (Date) (Enter)
2717 E-4501
22 Oct 54
1841
100 Mg Form 11 This correspondence is classified in accordance with p w arround a re-
Per 24,D(12) AFR 205-1, 26 Jul 53, or for the reason (a) stated, F. K.NICHOLS, Lt Col


DOCUMENT NO. 9


THIS DOCUMENT MAY BE FOUND

IN VOLUME VI OF THE SUPPORTING

DOCUMENTS TO THIS HISTORY.

0 3 2 8

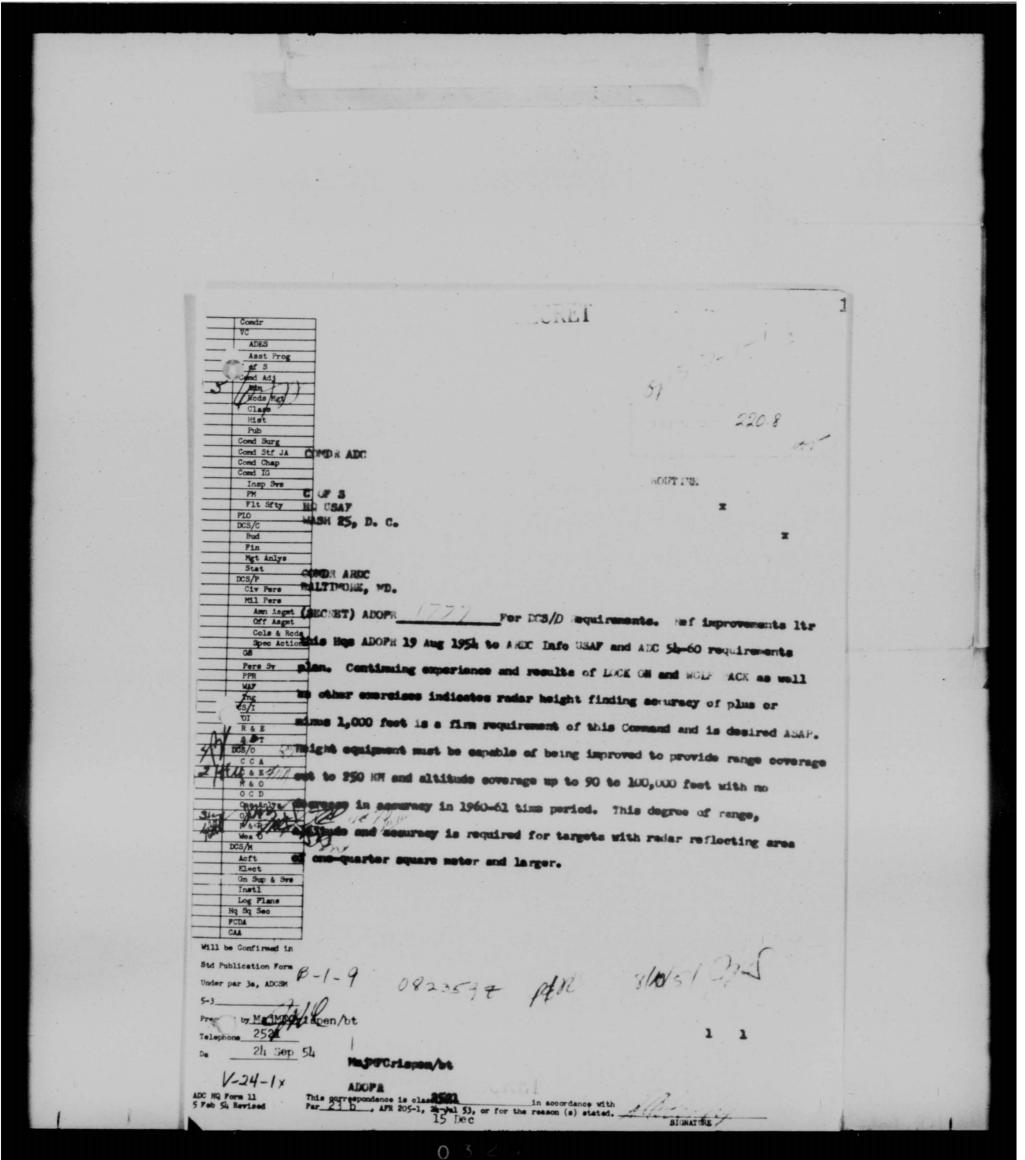

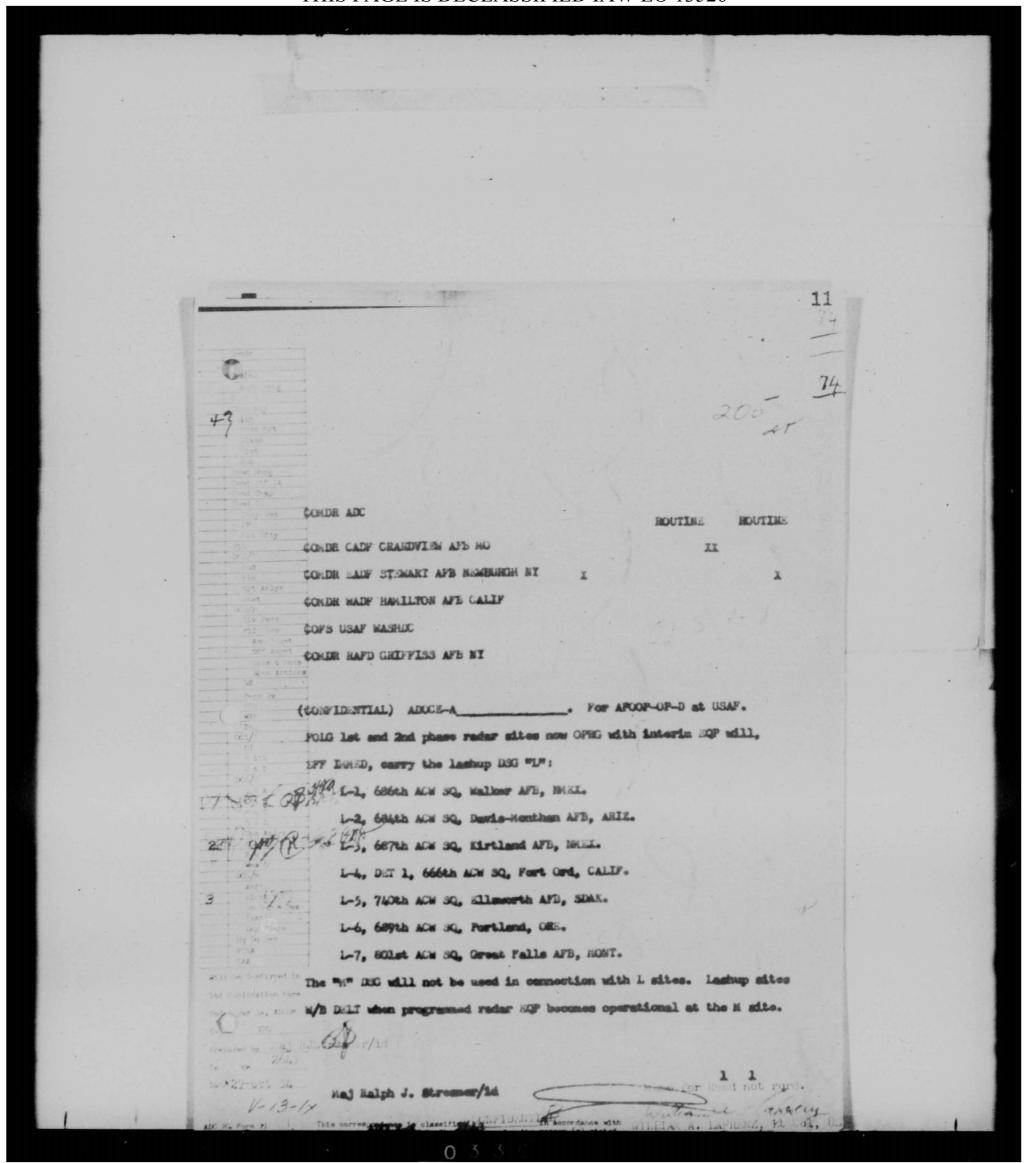

CONFIDENT

FILE NUMBER 205

From: COMMANDER, ADC

19 Jan 1955

To: CHIEF OF STAFF, HQ USAF, WASHINGTON DC

(CONFIDENTIAL) ADOCE-EG___O151__. URMSG AFOAC 32205, dated 10 Jan 55. This message in 3 parts. Part 1. NR WW11 radars in possession of ADC to be retained during part of FT-56 and beyond as FOL:

Search Rader

AN/CPS_1

O AN/CPS_4

AN/MPS_5

O

AN/CPS_5(C), (D) 8

AN/TPS_1C

O

Part 11. NR required during above time PD to be utilized for interim back-up in ADD to those presently in the FLD, as FOL:


Search Rader Height Finder
AN/CPS-5(D) 6 AN/CPS-4

Part 111. ADD INFO in regard to above SUBJ W/B FURN upon REQ.
MEMO FOR RECORD: Over

Comeback cy req'd for COMM file.


JAMES S. PURDUM Major, USAF Asst Command Adj

CONFIDENTIAL

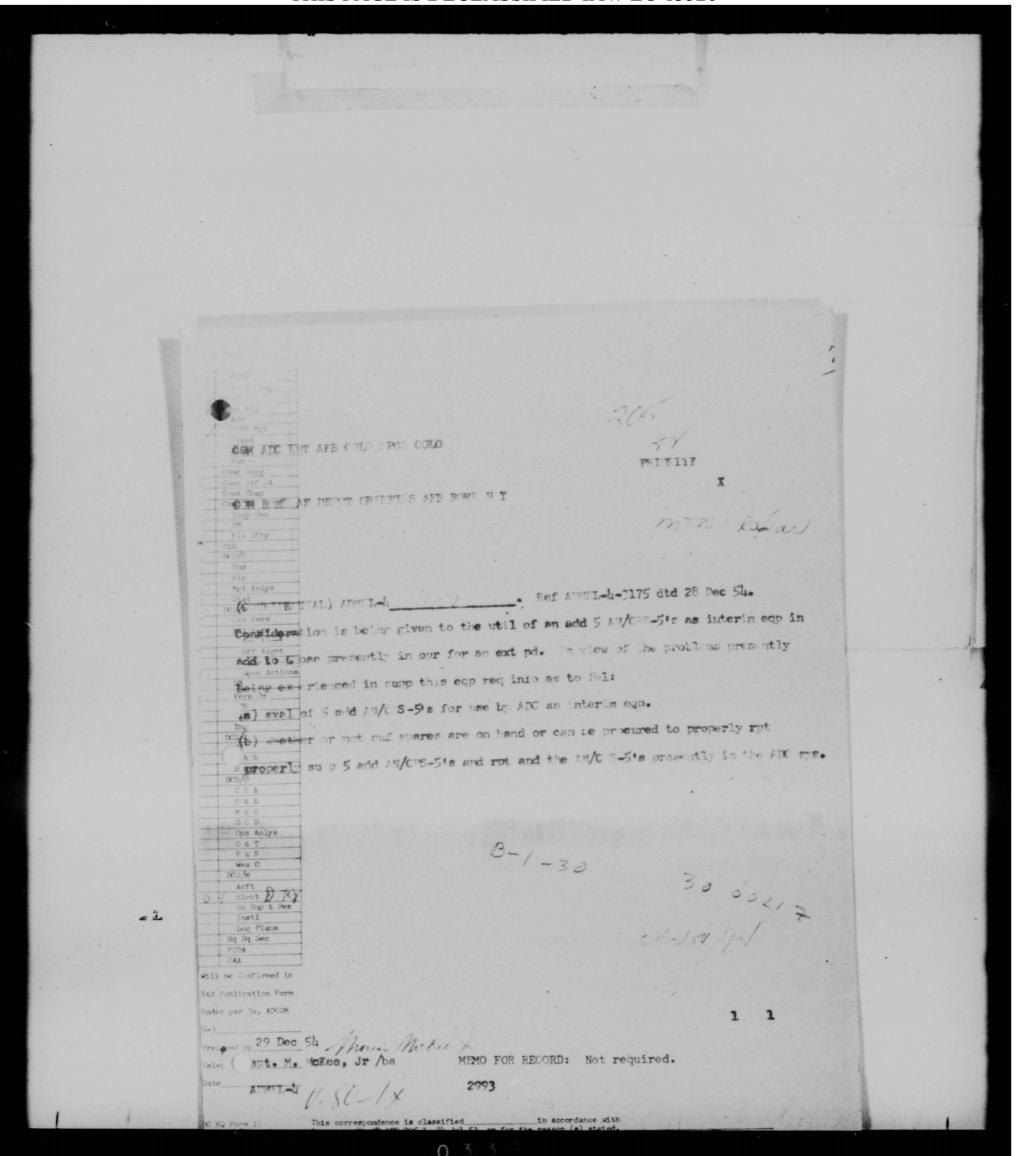

THIS PAGE IS DECLASSIFIED IAW EO 13526

COMFIGHRAL WDOCE-E 16 DEC 1 SUBJECT: (Unclassified) Change of Rader Equipment at "SH" Sites TO: Air Defense Commence Ent Air Force Base Colorado Springs, Colorado 1. Request that consideration be given to the replacement of the AM/TPS-ID radar sets, programmed at "SM" sites, by a more efficient, higher powered set. 2. Those sites presently programed the AN/TPS-ID redars are to perform the function of a lew altitude gap-filler redar. The AN/TPS-ID will not provide the severage required due to the type of rediated pattern inherent with that set and the lack of a stable MTI system. A study of the herison profile charte for the sites concerned, indicates that high angle masking is very prevalent, which will retard target detection at low altitudes unless a good MTI system is incorporated. Although the range of the TPS-ID provides overlap coverage with adjacent sites, it is not to the extent that would be possible with a higher powered radar. The increase in overlap coverage will directly effect the target pickup and tracking efficiency of the air defense system. 3. It is realised that a change in the program of equipment may effect the operational date of those sites concerned. Therefore, it is requested that the AN/TPS-1D radar sets be programed as interin, to be replaced at a later date by an AN/CPS-5D or suitable substitute. FOR THE COMMANDERS MARVIN L. CRAM Capt. CONFIDENTIAL 4C-9599

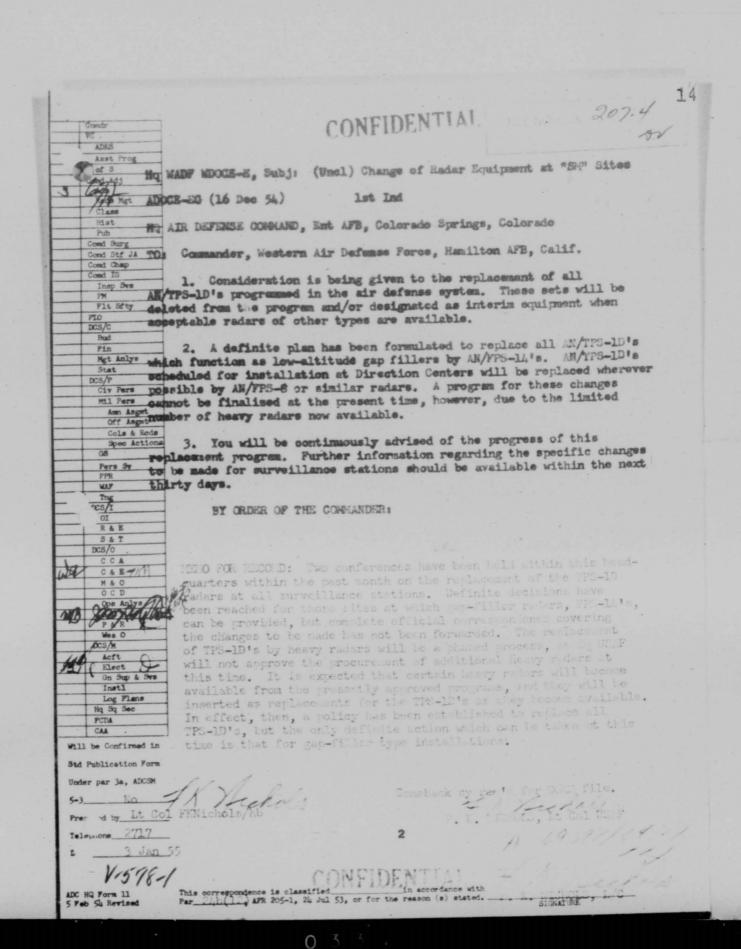

15

MDOCE-E


SUBJECT: (Unclassified) Mobile Radar for Emergency Use at ACEN Sites

70:


Gammader Air Defense Command Ent Air Force Ense Golerado Springo, Golerado


- 1. Reference is made to your letter ADOCE-E, 15 November 1956, Subjects (Unclassified) Mobile Emergency Backup Radar Equipment at Air Division Mondquarters.
- 2. This handquarters is of the spinion that an emergency mobilised returned is still a requirement at each air division to support the present and proposed rader sites, and to provide this command a resource from which a degree of operational capacity may be continued during pariods of duress.
- 3. The installation of backup radar equipment at perimeter stations does not insure continuous operation in the event of severe storm damages, substage, or war damage.
- the availability of a mobilized emergency radar set for use at "M" and "M" sites, while permanent equipment is being installed, will mave 30 to 60 days in the operational date of the site. While every effort is being made to allow the Air Material Area to phase their installation work in consensus with construction progress, in certain cases this will not be prior to the Beneficial Occupancy Date, due to unforcess delays experienced by the construction agency.
- 5. The most for empressy redor equipment at "N" and "SN" sites during periods of everteal and extensive emergency mintenance periods will be apparent in the most future. With the exception of SK 162, no image periods sites are programed backup search equipment.
- in view of the above considerations, it is requested that your bendparters concer in this requirement and take necessary action to

V-609-2

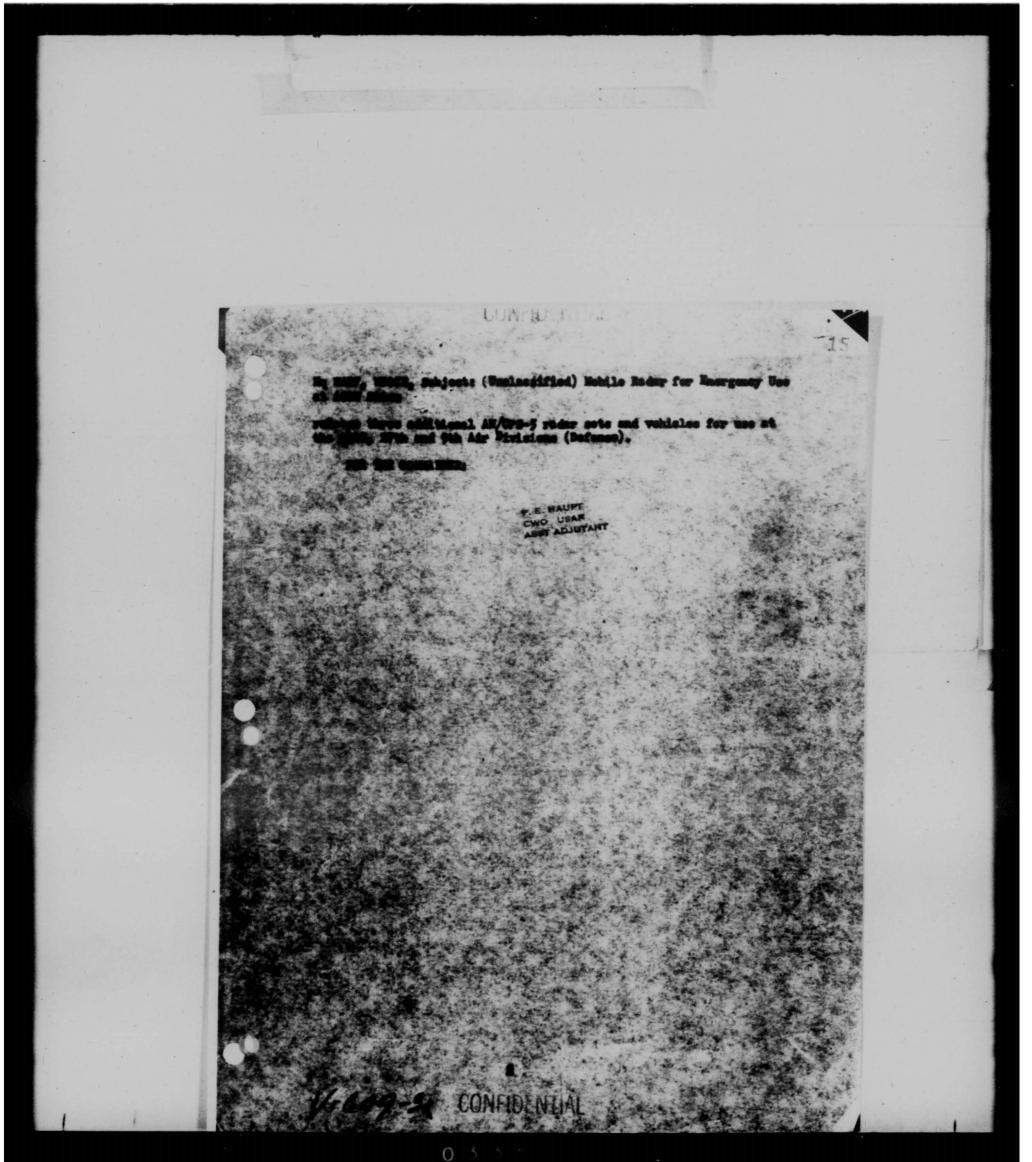

THIS PAGE IS DECLASSIFIED IAW EO 13526

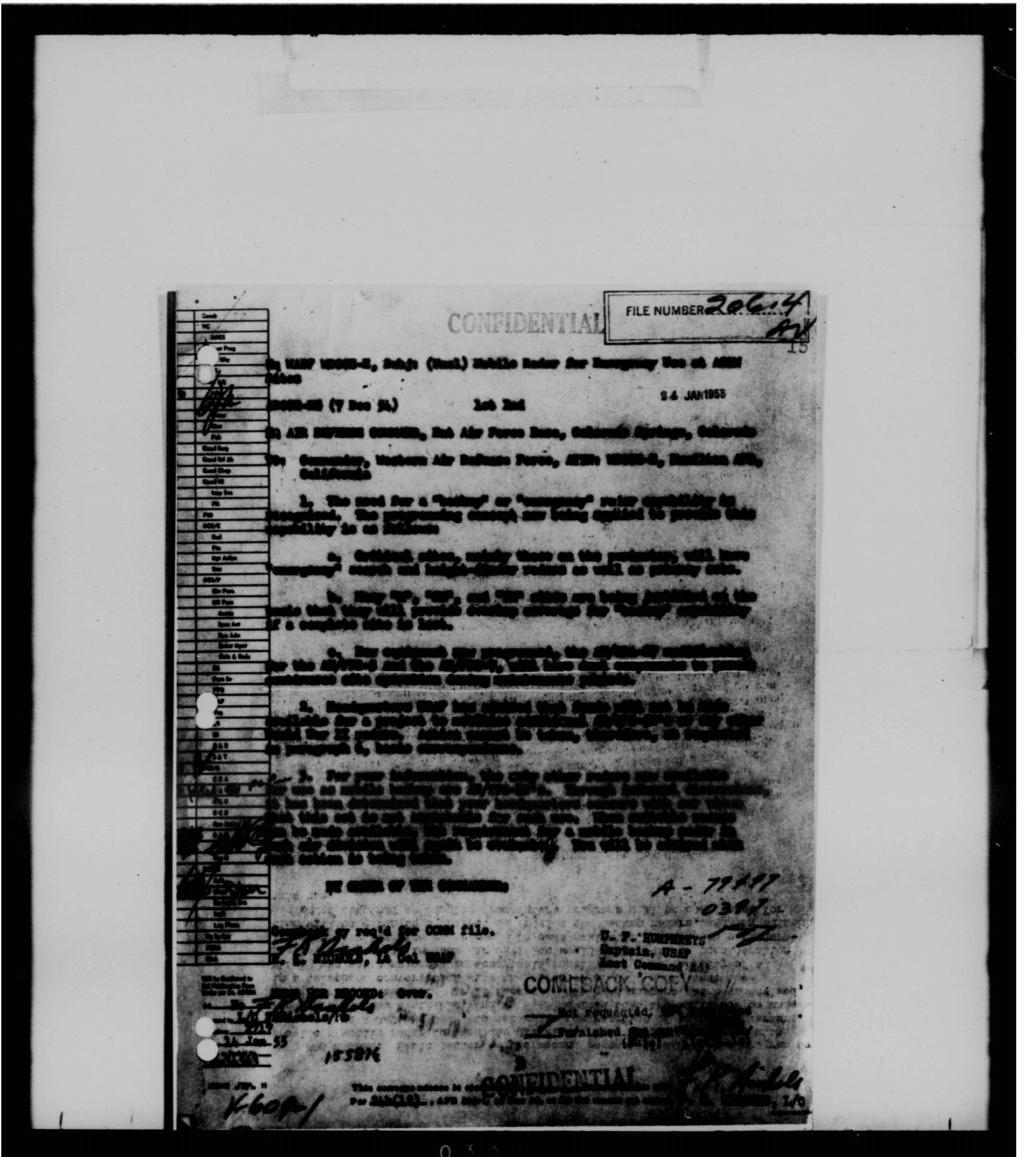

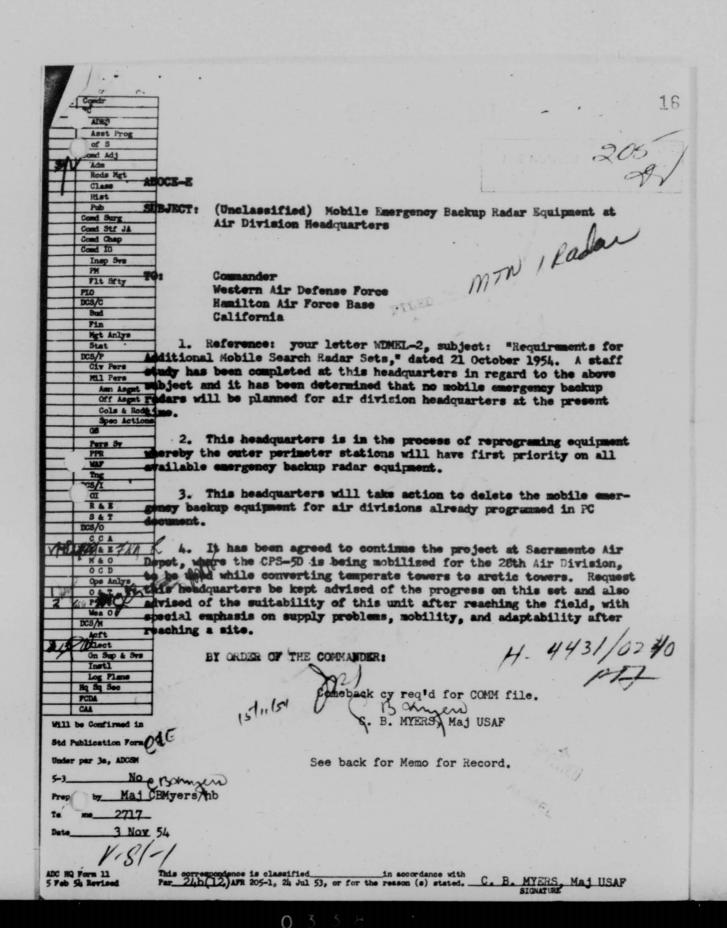

HEADQUARTERS WESTERN AIR DEFENSE FORCE HAMILTON AIR FORCE BASE HAMILTON, CALIFORNIA

CONFIDENTIAL

In Reply Refer To

WIMEL-2

21 OCT 1954

16

SUBJECT: Requirement for Additional Mobile Search Radar Sets

TO: Commander Air Defense Command Ent Air Force Base Colorado Springs, Colorado

- 1. A review of the overall capability of search radar installed within this command from a standpoint of hours available versus hours of actual operation has resulted in a requirement for additional equipment. This requirement is based on the following distinct and important factors:
- a. Three ACKW "P" sites in Western Air Defense Force will not receive back-up search gear according to the ADC Programming Document (classified), dated 1 July 1954. These sites are P-6, P-32, and P-74.
- b. Approximately 2500 hours of non-operational time due to annual overhaul and radome painting was consumed during the past. 12 months on 14 of the FPS-3 radars installed. In addition, approximately 1070 hours was consumed as non-operational time on six CFS-6B radars while accomplishing those same functions. This total of 3500 hours, which does not include hours lost due to factory modifications, command authorized modifications and occasional breskdowns, had a definite adverse effect on the ground radar capability of this defense force. It is anticipated that the slippage, which has occurred in the programmed installation of secondary search sets at all but the three squadrons mentioned above, will result in a comparable loss of operational hours during the next 12 months.
- c. This command has operated mobile type radar search sets (TE-1C, TE-1D, and CE-5D) for the past two years. This type of equipment, supported by geographical AMA's, has proven versatile and satisfactory for utilization as emergency back-up gear or gap filler equipment. The operation of this equipment has proven beyond a doubt, that its value to the command offsets the cost of engineering, construc-

11-51-2

CONFIDENTIAL

Ng WARF WIREL-2, Subject: Requirement for Additional Mobile Search Radar Sets

tion, and maintenance. The possession of a mobile radar set which can be quickly transported to any location where power is available, and be in operation within a short period of time is a valuable esset to the operating unit.

- 2. Informal information available to this headquarters indicates the existence of some 25 CFS-5 type radar sets in the ZI that have been allocated to the Air Defense Command. There are suitable vehicles available for issue at Sacramento Air Nateriel Area to mobilize three each CFS-5 radar sets. The Maintenance Engineering Section at SNAMA is in a position to accomplish the engineering and construction of the mobile mounts.
- 3. This headquarters has received informal information to the effect that Headquarters USAF has concurred in the need and utilization of mobile type radar sets as outlined herein. It is further understood informally that Headquarters USAF is desirous of shipping to this command from SMAMA certain mobile radar sets of the CPC-1 (MPS-5) type. In this regard your attention is invited to the following information which was obtained as a result of a visit by representatives of this headquarters to SMAMA on 15 October 1954.
- a. There are only two CPS-1 mobile radar sets available at SMAMA. (AFSN 1800-N/I-68001).
- b. The CB-l mobile reder sets (two), as they now exist, consist of 21 vehicles. The minimum amount of vehicles required to make the CPS-l operational, based on this command's requirements, would be one operations trailer, one maintenance trailer, one antenna trailer, and one antenna reflector truck. This would require three truck tractors and four drivers.
- c. Extensive changes would be necessary to adapt the set from a 21 vehicle arrangement to a four rehicle operation. This adaptation would cause 17 Air Force vehicles that had been extensively modified to be rendered surplus unless they were reverted to their original function. It is felt that the cost of reverting these vehicles would be higher than the cost of engineering and installation of three CRS-5 type radars.
- d. It should be pointed out that the CRS-1 type radars in question are not equipped with moving target indicators.
- e. To move, connect, and set up a CE-1 radar utilizing the four necessary vehicles would require the crew of eight men whereas a crew of four men could have accomplished the same task with a CE-5 type. In addition, the time necessary to get the VE-1 in operation after arrival at the operating site would be on the order of a 4 to 1 ratio to the CE-5.

1.81-3

Hq WADF WIMEL-2, Subject: Requirement for Additional Mobile Search Radar Sets

4. Attached herewith for your information and perusal are three photographs of the CRS-1 set at SMAMA as it exists. The overall view of part of the mobile CRS-1 indicates its bulk and consequently its inability to traverse a typical AC&W site access road. The operations van side view gives the viewer an idea of the extensive modifications that have already been performed on the vehicles. The photograph showing the components and plotting board indicates the size of the operation and the fact that two Air Force vans were joined together to make up the operations room. In summation, it should be pointed out that the CRS-1 (MPS-5) set was intended to be a complete radar station and not an emergency search set in the strict sense of the word.

5. It is requested that your headquarters take necessary action to secure release of three each CRS-5D radar sets equipped with GPX-13 (IFF) and the authority to draw from SMAMA depot stock, three each truck trailers and three each Air Force vans of the K-55 type. Detailed information as to the nomenclature and "W" numbers of the vehicles needed will be furnished on request.

6. A project to mobilize a CES-5D for the 28th Air Division (Defense) is underway at present. The additional three sets requested above will be assigned to the 9th, 25th and 27th Air Divisions (Defense). Maintenance and care of the radar and associated vehicles should pose no problem since the equipment will be located (when not being utilized as emergency search goar) at air division headquarters.

P. E. Haupt

FOR THE COMMANDER:

3 Incls: 1. Mobile CPS-1

2. Opr Van

3. Opr Van

U-81-4x

Shithto CONFIDENTIAL WADE

AC-836,1

C&E MR

SUBJECT: (Unclassified) Radar Coverage Deficiencies Within 34th Air Division (Defense)

TO: Commander
Air Defense Command
Ent Air Force Base
Colorado Springs, Colorado

1. It has been a matter of common knowledge for some time that the radar coverages of the "P" sites within 3hth Air Division (Defense) were not satisfactory according to the potential capabilities of the equipments. This condition is primarily a result of siting the radars at locations where they encounter relatively high angles of close-in screening.

- 2. The unsubstantiated story as to the reasons for the selection of sites behind high screening is that the sites were originally selected for low clutter and permanent echo returns for non-MTI radars; and that if the radar antennae were removed a short distance in each case, lower screening would result.
- 3. It is difficult to get a true measure of the loss of effectiveness of a radar site because of high screening; however, the following might serve to illustrate the loss if one considers the limitations of the illustration.
- 4. Figure one shows an idealized cross section of the lobe pattern of an AN/FPS-3 radar with zero screening for a B-29 type sircraft. It is assumed for purposes of the illustration that the slant range of detection is 200 nautical miles and the vertical dimension of the lobe covers 7 nautical miles. A section of a cylinder inscribed according to these dimensions will enclose much of the volume of air under surveillance by the radar, and can be found by the following formula:

$$V_1 = \pi r^2 H \tag{1}$$

where V₁ is the volume of air within the hypothetical cylinder, r is the radius (slant range) of maximum coverage in nautical miles, and H is the height of coverage in nautical miles.

= 878,000 cubic nautical miles



SECRET

17

CAE MR SUBJECT: (Uncl) Radar Coverage Deficiencies Within 3hth Air Division (Def)

5. If, however, the average screening around the radar site is plus one degree, as it is for one site in 3hth Air Division (reference Radar Calibration Report for P-8, 3 July 1953) the volume of air under surveillance is altered as illustrated in figure two. In this case the volume can be found by the following:

$$V_2 = \eta r^2 (3H-2r \tan \theta)$$
 (2)

where V₂ is the inscribed volume of the altered cylinder V₁, r is the radius (slant range) of maximum coverage in nautical miles, H is the height of coverage with zero degrees screening in nautical miles, and Ø is the average positive screening in degrees.

$$V_2 = 3.14(200)^2 3(200) - 2(200) \tan \emptyset$$

= 587,000 cubic nautical miles

6. The loss in volume of air under surveillance in the example is 291,000 cubic nautical miles, or roughly 1/3 the theoretical maximum. Thus it can be deduced that poor siting, judging from high screening, seriously affects the potential of the radar.

7. Since more efficient utilization of the existing radar potential is desired, consideration is being given to the possibility of relocating or extending the antenna towers and associated equipment for the P-sites within 3hth Air Division to improve the average screening figures, and remoting the video and other electrical information to the present operations location by coaxial cable or microwave radio. It is requested that this headquarters be furnished any available data on remoting facilities such as equipment nomenclatures and technical descriptions, operating characteristics, availability, costs, etc. so that preliminary studies can be made on remoting the radars. If such data are not available within your headquarters, it is requested that Rome Air Development Center be contacted for their assistance.


FOR THE COMMANDER:

Mil.Ton A. - BESDESSON Cast. UDAR Arch Addusant


1 Inel Illustration --Figures 1 and 2


V-256-3x

SECRET

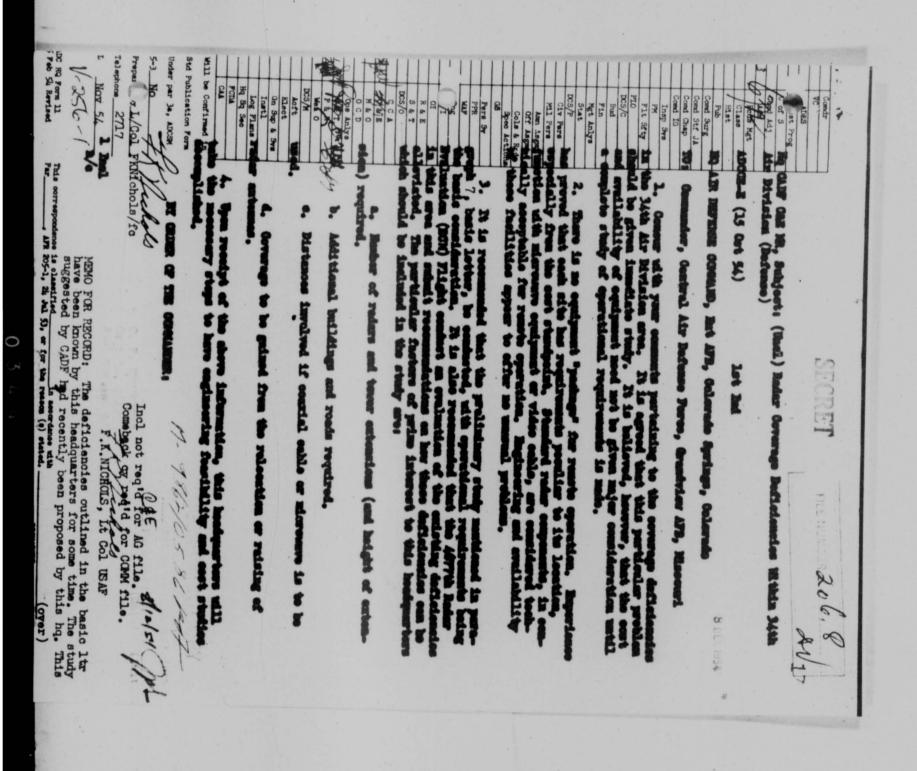

		And the second s
Comdr 12		5
CofS	- 00	FUE NUMBER 230
Comd A		181
Hist		
Pub Comd Sya		
IG ADOCT-G		11 FEB 1974
Insp St	Addidini n	
FIT SET	Comparison of RA Surveillance Tra	IID Problem Reproducer Equipment and 3kD
PIO DCS/C		PIDED TNGGEN
Bud		1114 42
Fin Mgt Any 801	director of Requ	dresets
Stat	Headquarters USA	
Chap		from tile, or detoe and it manh
Civ Pet Mil Per		cross references accordingly.
Amn Agmt		
	he fellowing con	merison is made between the RAND Problem
	T	A and the Un Survey 11 men Trailing Iss distri-
	T	A and the Un Survey 11 men Trailing Iss distri-
Spec shoproducer GS finition of Pers St.	Equipment (PRE)	o requirements established by this commid-
Spec control of Special Specia	Equipment (PRE) f training device . Descriptions	end the Jul Surveillance Trainer for elect-
Special Personner GS Clastion of Pers St. PP	Equipment (PRE) f training devia . Descriptions (1) The RAM	per is an electronic device designed to
Spec control of the second of	Equipment (PRE) f training devia . Descriptions (1) The RAM place re	per requirements established by this commend. D PRR is an electronic device designed to calistic targets on search and height rader. The consists of three flying spot seasons.
Spec control of the street of	Equipment (PRE) f training devia . Descriptions (1) The RAM place r scopes.	per requirements established by this commend. D PRE is an electronic device designed to calistic targets on sourch and height rader. It consists of three flying spot seamers.
Spec concern GS Pers St. Pers St. PP WAF Ing DCS/I OI R8 E SR T DCS/C	Equipment (PRE) f training devia . Descriptions (1) The RAM place r scopes. One fly duction	o requirements established by this commend. D FRE is an electronic device designed to eslight targets on search and height rader. It consists of three flying spot seamers, ing spot seamer is devoted to the representation of height data. Utilizing 70mm
Spec control of the street of	Equipment (PRE) f training devia . Descriptions (1) The RAM place R scopes. One fly duction the rep film. ti	o requirements established by this command. D FRE is an electronic device designed to calistic targets on search and height radar. It consists of three flying spot seamers. ing spot seamer is devoted to the repre- of surveillance data and the other two to creduction of height data. Utilizing 70mm the FRE can accurately place up to 200
Spec remotions US Pers St Pers St PP WAF Tng DCS/I OI R8 E SR T DCS/C Asst Pr2g CCA Comm & Elect M&O	Equipment (PRE) f training devia . Descriptions (1) The RAM place rescopes. One fly duction the rep film, to separate	or requirements established by this command. D PRE is an electronic device designed to calistic targets on search and height rader. It consists of three flying spot commers. ing spot season is devoted to the representations of surveillance data and the other two to reduction of height data. Utilizing 70mm he PRE on accurately place up to 200 to blips on radar scopes.
Spec control of the street of	Equipment (PRE) f training devia . Descriptions (1) The RAM place R scopes. One fly duction the rep film, ti scoperate (2) The ShD	o requirements established by this commend. D FRE is an electronic device designed to calistic targets on search and height radar. It consists of three flying spot seamers. In season is devoted to the representation of height data. Utilizing 70mm he FRE can accurately place up to 200 to blips on radar scopes. Surveillance Trainer is a kit which consists
Spec control of the state of th	Equipment (PRE) f training devia . Descriptions (1) The RAM place rescopes. One fly duction the rep film, to separate (2) The SkD of a separate	per requirements established by this commend. D PRE is an electronic device designed to calistic targets on search and bright radar. It consists of three flying spot seamors. In season is devoted to the representation of height data. Utilizing 70mm he PRE can accurately place up to 200 to blips on radar scopes. Surveillance Trainer is a kit which consists to of tape recordings, a precedure booklet, are carde, a small self trainer which simulates
Spec control of the state of th	Equipment (PRE) f training devia . Descriptions (1) The RAM place rescopes. One fly duction the rep film, to separate (2) The SkD of a separate	or requirements established by this command. D PRE is an electronic device designed to calistic targets on search and height rader. It consists of three flying spot seamers. In spot seamer is devoted to the representation of height date. Utilizing 70mm he PRE can accurately place up to 200 to blips on radar scopes. Surveillance Trainer is a kit which consists a of tame recordings, a precedure booklet.
Spec control of the state of th	Equipment (PRE) f training devia . Descriptions (1) The RAM place re scopes. One fly duction the rep film, to scoperate (2) The ShD of a se procedu a radar	or requirements established by this command. D PRE is an electronic device designed to calistic targets on search and height radar. It consists of three flying spot seamors. ing spot seamor is devoted to the representation of height data. Utilizing 70mm he PRE can accurately place up to 200 to blips on radar scopes. Surveillance Trainer is a kit which consists to of tape recordings, a precedure booklet, are cards, a small self trainer which simulates scope, and a tape recorder.
Spec concess GS Pers St Pers St PP WAF Ing DCS/I OI R8 E SR T DCS/C Asst Prig CCA Comm & Elect M8 O CCD Cp Anlys CS#I PAR Weg O DCS/M Acft Elect	Equipment (FRE) f training devia f training t	or requirements established by this command. D PRE is an electronic device designed to calistic targets on search and height maker. It consists of three flying spot seamers, ing spot seamers is devoted to the representation of height data. Utilizing 70mm he PRE can accurately place up to 200 to blips on radar scopes. Surveillance Trainer is a kit which consists a of tape recordings, a precedure booklet, are cards, a small self trainer which simulates scope, and a tape recorder.
Spec control of the state of th	Equipment (FRE) f training devia f training training the representation f a see proceedure a radar f training training f training devia f training devi	per requirements established by this command. D PRE is an electronic device designed to calistic targets on search and height rader. It consists of three flying spot seamers, ing spot seamer is devoted to the representation of height date. Utilizing 70mm he PRE can accurately place up to 200 to blips on radar scopes. Surveillance Trainer is a kit which consists a of tape recordings, a precedure booklet, are cards, a small self trainer which simulates scope, and a tape recorder.
Spec control of the state of th	Equipment (FRE) f training devia f training training training f train	per requirements established by this command. D PRE is an electronic device designed to calistic targets on search and height rader. It consists of three flying spot seamers. In gent seamer is devoted to the representation of height date. Utilizing 70mm he PRE can accurately place up to 200 to blips on rader scopes. Surveillance Trainer is a kit which consists to of tape recordings, a precodure booklet, are cards, a small self trainer which simulates scope, and a tape recorder. D PRE is designed to be used for the or reise and on the team as the smallest unit to be
Spec comments GS Pers St Pers St PP WAF Tng DCS/I OI R8 E S8 T DCS/C Asst Prog CCA Comm 8 Elect M8 O OCD Cps Anlys Cs H Veg O DCS/M Actt Elect Gn Sup & Sys Inst! Lag Plans HQ CCMUT	Equipment (PRE) f training devia f train	per requirements established by this commend. D PRE is an electronic device designed to calistic targets on search and height reder. It consists of three flying spet seamers, ing spet seamer is devoted to the representation of height date. Utilizing 70mm he PRE can accurately place up to 200 to blips on radar scopes. Surveillance Trainer is a kit which consists to of tape recordings, a precedure beaklet, are cards, a small solf trainer which simulates a scope, and a tape recorder. D PRE is designed to be used for the or reise and on the team as the smallest unit to be in the system.
Spec of Products GS Pers Si Pers Si PP WAF Tng DCS/I OI R&E S&I DCS/C Asst Pr2g CCA Comm & Elect M&O OCD Cps Anlys CsHI PAR Veg O DCS/M Actt Elect Gn Sup & Sys Inst! Lag Plans HO CCMUT	Equipment (FRE) f training devia f training f	per requirements established by this commend. Dept is an electronic device designed to calistic targets on search and height rader. It consists of three flying spet seamers. In open seamer is devoted to the representation of height data. Utilizing 70sm the FRE can accurately place up to 200 to blips on radar scopes. Surveillance Trainer is a kit which consists to of tape recordings, a precedure booklet, are carde, a small self trainer which simulates a scope, and a tape recorder. Dept is designed to be used for the expression of the team as the smallest unit to be in the system. Surveillance Trainer is designed for the
Spec of Products GS Pers Si Pers Si PP WAF Tng DCS/I OI R&E S&I DCS/C Asst Pr2g CCA Comm & Elect M&O CCB Cps Anlys CsHI PAR Veg O DCS/M Actt Llect Gn Sup & Sys Inst! Lag Plans HO CCMUT	Equipment (FRE) f training devia f train	per requirements established by this commend. D PRE is an electronic device designed to calistic targets on search and bright radar. It consists of three flying spet seamors. In g spet seamors is devoted to the representation of height data. Utilizing 70mm he PRE can accurately place up to 200 to blips on radar scopes. Surveillance Trainer is a kit which consists to of tape recordings, a precedure booklet, are early, a small self trainer which simulates scope, and a tape recorder. D PRE is designed to be used for the extrainer of on the team as the smallest unit to be in the system. Surveillance Trainer is designed for the ag of the individual. It is designed to
Spec selection of Special Spec	Equipment (FRE) f training devia	per requirements established by this commend. Dept is an electronic device designed to calistic targets on search and height rader. It consists of three flying spet seamers. In open seamer is devoted to the representation of height data. Utilizing 70sm the FRE can accurately place up to 200 to blips on radar scopes. Surveillance Trainer is a kit which consists to of tape recordings, a precedure booklet, are carde, a small self trainer which simulates a scope, and a tape recorder. Dept is designed to be used for the expression of the team as the smallest unit to be in the system. Surveillance Trainer is designed for the
Spec selection of Pers St. Pers St. PP WAF Ing DCS/I OI R&E S&T DCS/C Asst Prig CCA Comm & Elect M&Q OCD Cps Anlys C&H Liga O DCS/M Actt Elect Gn Sup & Sys Instil Log Plans HQ COMUT cort Evaluation emporary Until Inder par Ja.	Equipment (FRE) f training devia	per requirements established by this command. D PRE is an electronic device designed to colistic targets on search and height maker. It consists of three flying spet seamers. In gapet seamer is devoted to the representation of height date. Utilizing 70mm he PRE can accurately place up to 200 to blips on refer scopes. Surveillance Trainer is a kit which consists to of tape recordings, a precedure booklet, are early, a small self trainer which simulates scope, and a tape recorder. D PRE is designed to be used for the erreise are. The entire RAID system training program of on the team as the smallest unit to be in the system. Surveillance Trainer is designed for the individual to a point where he can per-
Spec selection of Special Spec	Equipment (FRE) f training devia	per requirements established by this command. De PRE is an electronic device designed to calistic targets on search and height radar. It consists of three flying spot seamors, ing spot seamors is devoted to the representation of height data. Utilizing flow the PRE can accurately place up to 200 to blips on radar scopes. Surveillance Trainer is a kit which consists to of tape recordings, a procedure booklet, are cards, a small self trainer which simulates scope, and a tape recorder. De PRE is designed to be used for the extrainer and on the team as the smallest unit to be in the system. Surveillance Trainer is designed for the in the system. Surveillance Trainer is designed for the individual to a point where he can person in the team training.
Spec selection of Pers St. Pers St. PP WAF Ing DCS/I OI R8 E SR T DCS/C Asst Prig CCA Comm 8 Elect M8 O OCD Cps Anlys CSH I PAR Vieg O DCS/M Actt Elect Gn Sup & Svs Inst! Log Plans PO CMUT Cont Evaluation emporary Until Be Confirmed td Publication Under par Jaj. M 5-3	Equipment (FRE) f training devia	per requirements established by this command. D PRE is an electronic device designed to colistic targets on search and height maker. It consists of three flying spet seamers. In gapet seamer is devoted to the representation of height date. Utilizing 70mm he PRE can accurately place up to 200 to blips on refer scopes. Surveillance Trainer is a kit which consists to of tape recordings, a precedure booklet, are early, a small self trainer which simulates scope, and a tape recorder. D PRE is designed to be used for the erreise are. The entire RAID system training program of on the team as the smallest unit to be in the system. Surveillance Trainer is designed for the individual to a point where he can per-

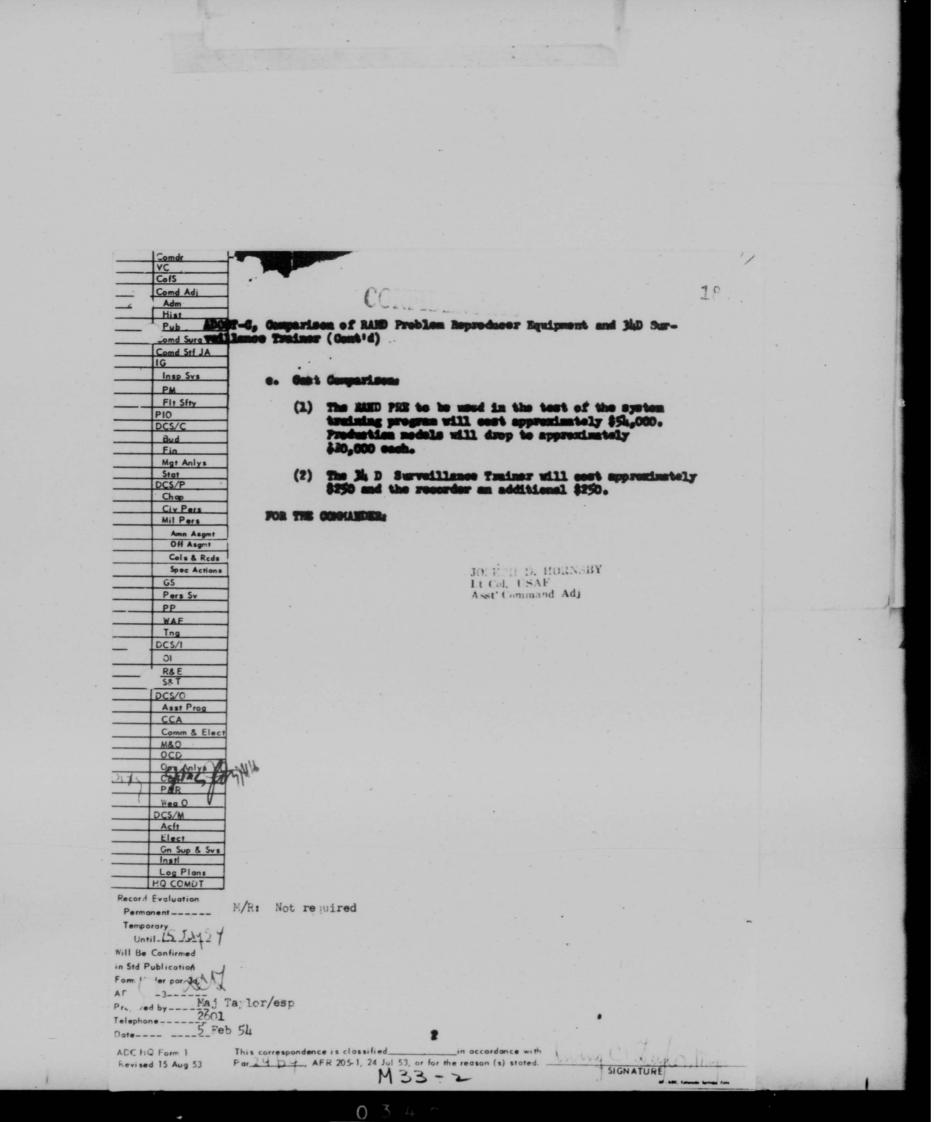

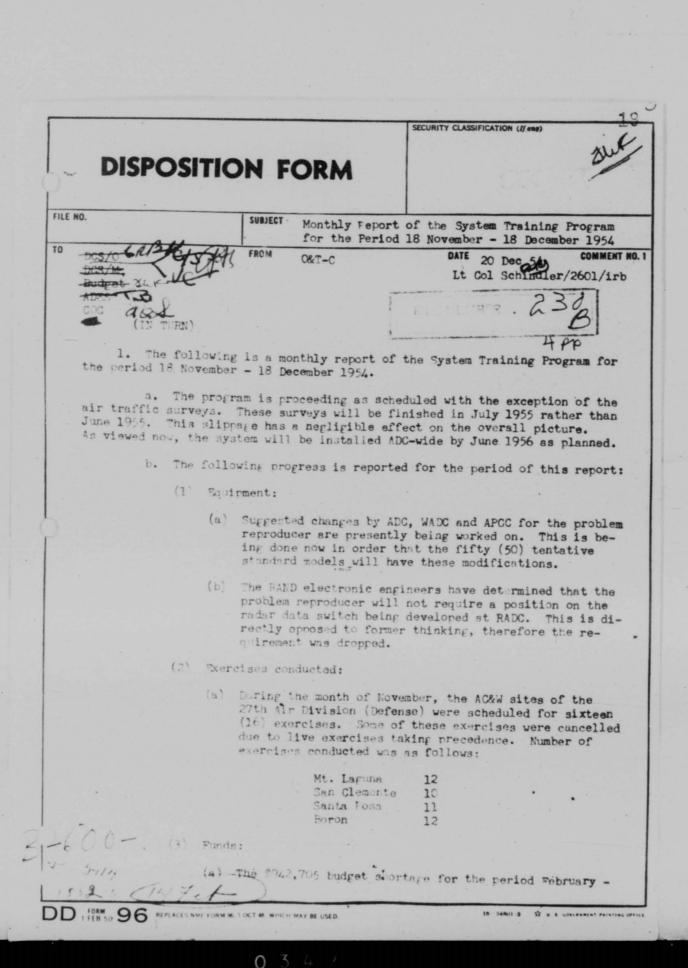

SECURITY CLASSIFICATION (If ane) DISPOSITION FORM FILE NO. Monthly Report of the System Training Program for the Period 18 November - 18 December 1954 TO FROM DATE COMMENT NO. 1 June 1955 has been made up by this command. AMC will be informed of the availability of funds in order that RAND may contract for operations up until 30 June 1955. (b) Now that RAND has the funds, the following rew facilities will be available on the dates indicated: 1. Occupation of new building, 1 Narch. 2. New direction center laboratory, 1 May. 2. 701 computer installed, 1 July. c. It Colonel Schindler visited the 27th Air Division (Defense) and Boron on the 1st and 2nd of November for the demonstration of the Problem Reproducer Equipment to Major Ceneral Timberlake, AFCC. Ceneral Timberlake was pleased with the progress of the OST of the equipment as reported by Cantain Porter, project officer, AFCC. d. Lt Colonel Schindler, (Task Croup): Major F. Fromfield, (ADES Croup); Mr. Mel Kappler, Dr. . C. Riel and Dr. J. Oxtoby, (TAIL), visited the Lincoln Laboratories 13, 14 and 15 December. Pur ose of visit and f. discuss the compatibility of the Tystem Training Frogram with the SACE System. Conclu-(1) The equipment used in the System Training Frogram (AS/CIG-T2) can be used in the SACE System at the prime and neight finder reduce. The value of using it at this time in a sector system exercise is questionable. The value of using the equipment at the trime rader sites for an extraining purposes so that the crow may be used for lack-up is very high. These cross-training on raises would, of course, se station—centered exercises. centered exercises. (2) Through the use of an adapter on the 701 computer of this, P3-7 (2007) computer take can be arranged. This makes it possible for the PI personnel to propose 2007 sector exercises; thus, the west air traffic information and training experience accorded by the TI program on a condition of use of.

			SECURITY CLASSIFICATION (1/ only)	
DI	SPOS	ITION FORM		
FILE NO.			port of the Tystem Training Prograted 18 Povember - 18 December 1	
то		FROM		COMMENT, NO
AFPTR, at Newton Co ton Conga andlitati	Readquat spony tes ny. Hest ve Corret	ings for consideration. due to pressing STP sch specialists are very nur all possible, future mer the subject. plorel Schindler and Mr. rierr TAP on 16 December not refer simple or. A ults of the meeting indictional Four irgner's letter	SAGE System and to present the No commitment was made at the edule now going on. The training the interested in this problem an etings will be arranged to investings will be arranged to investing to discuss requirements for The to discuss requirements for The tated that USAF will return ADC tested that USAF will return ADC tested that USAF will return the will be held at USAF during the	moment g if at tigate att, he c New- s erator
discuss o	r will be f. A sac (Lefense)	nroposals as requirement sommitted in agreement art evaluation of the Sys	ne Newton Company, MAND and ADC, its for the target ponerator. A with the recommendations of Majestem Training Program by the 27th November, resulted in the follows.	new or Frati h Air
		tent the period August - familiarization phase re some of the problems use	esults is difficult due to the factor was an installation and ther than a training phase. Also duere OCT problems which were a efficiency rather than progress	d so, de-
		44% in ! ovember in comps	unknowns for the division decreasison to October. (Of course, consible for the reduction).	
*		The percentage of hostil	e aircraft splashed in the probl	lems
		considerable difficulty	problems that the division encoin detecting, identifying and in mg along a line dividing the are jacent stations.	nter-
			and the second s	
	(5)	Time delays in displayin	g action at the GCC has decrease	ed.

		SECURITY CLASSIFICATION (I) on	7)
DISPO	SITION FORM		19
FILE NO.	SUBJECT Monthly	Report of the Tystem Traini	ng Iroprem
ТО	FROM	DATE	COMMENT NO.
Cises of Sir to	their targets and bond their targets and bond he 27th Air rivision (nego test their new tectica) board has eliminated delay	anse) has also used the highertion board at the COC.	h-lead exer-
VICTOR MII Lt Colonel Chf, Sys T	I, USAF Ing & Opre Div	Jorr C. vry Colonel, in Circtor, 7	ns ·
~			

AIR REFERSE CONCLUD Ent Air Force Base Colorado Springs, Colorado

OFFICE OF THE COMMANDER

19 Jul 1954

SUBFRET: Qualitative Operational Requirement, ADG-RAND System Training Program

TO: Birector of Requirements Hondquarters USAF Washington 25, D. U.

- 1. Pursuant to the provisions of AFR 57-3, a qualitative operational requirement on the equipment for the ADC System Training Program is submitted.
- 2. The especity and efficiency of the air defense not is measured by its ability to collect, process, display and disseminate air situation information and to perform threat evaluation, weapon assignment, weapon direction, and target destruction. This capacity has long been considered of a low order due to the necessity for manual operation involved in many of these functions. Increased capacity and effectiveness is considered mandatory to combat the increasing threat. Automatic data processing systems, like the Lincoln Transition System, while providing potential increases, will not be available for several years. Increased individual personnel training through schooling and the use of training aids, while helpful, is not adequate to provide increased effectiveness in the over-all system. The present manually operated data processing, threat evaluation, weapon assignment, and control portion of the air defense system must be substantially improved immediately to provide a more nearly adequate defense during the next few years.
- 3. It is believed that the 'DC System Training Program will provide the greatest improvement of any interim measure being considered for the correction of these deficiencies.
- 4. The time scale, Inclosure 7, has been established for the implementation of the System Training Program. This time scale is based on a realistic survey made by ADC and RAND personnel of the time required to produce the equipments and the parallel time required to prepare the training material for operation in the field. Any delay will be reflected as a delay in the attainment of a higher air defense capability.

AFDRQ 2589/54

In ADC, But AFB, Colo. Subj: Qualitative Operational Requirements

5. The objective to be obtained by the proposed implementation of the System Training Program is an improvement factor of three or four in the functions orthined in paragraph 2 above. The Problem Reproduces Equipment is an integral part of the program which allows for the training of the air defense team in their home station by electronically displaying the situation on the station radar seopes.

6. The performance characteristies, operational qualities, and design features of the Problem Reproducer Equi,ment are set forth in Inchesure 6.

7. An immediate requirement exists for Problem Reproducer Equipments for use in the System Training Program in all parameter radar sites, first and second phase semi-mobile sites, a total of 152 equipments.

8. The suggested method of meeting the requirement is to make a cole source procurement of the required 152 units of the Problem Repreducer Equipments from Radio Corporation of America. Radio Corporation
of America has had unique experience in the combination of radar and flying spot seames techniques which are incorporated in this device and
have profused six production protection equipments. For these removas
they are able to produce the production equipments in the time period in
which they are required as outlined in Indicates 7. It is estimated that
any other contractor would require six to twelve additional months for
familiarisation in order to produce these units.

9. In view of the urgency of obtaining the increased air defense espability and esmbat efficiency of the air defense system which is offered by the implementation of this program, it is recommended that a priority of 14, reference paragraph 4.a.(1), AFR 80-11, he assigned to equipment for this program, in order that this training may begin in the field as early as possible, as ortlined in the time schedule in Inclosure 7.

/e/V FREDERIC H. SCITH, JI

Inche!

1 - Lite Me ADG, ADDRE 319-1, 6 Jun 53 2 - Lite Me UMAF, APODR-OR-5 353, 13 Jul 53

(COPT)

Basic letter from Hq ADC, dtd 19 Jul 54, subj: Qualitative Operational Requirement, ADC-Rand System Training Program

AFDRQ-AD/C

lst Ind.

Department of the Air Force, Eq USAF, Washington 25, D. C. 16 Aug 1954

TO: Commander, Air Defense Command, Ent Air Force Base, Colorado Springs, Colorado

- 1. In letter to your headquarters, subj: (Unel) Air Defense System Training Program, dated 13 July 1953, this headquarters concurred in your urgent requirement for equipment and training facilities which would increase the capability of the air defense system to handle high density air situations. Authorization was granted and funds made available to implement the Systems Training Program in the 27th Air Division with further extension of the program to be considered by this headquarters after completion of field tests in the 27th Air Division. It is understood that sufficient testing will have been completed by Mid-September 1954 to provide information as to the desirability of extending the STP throughout ADC.
- 2. The determination to procure on a sole source basis is a responsibility of Eq AMC. Information contained in par 8, basic letter, will be forwarded to Eq AMC when procurement is directed by this headquarters.
- 3. This headquarters recognises the urgency of obtaining the ingreased air defense capability and therefore has assigned a priority of 1A to this equipment ir accordance with par 5d, AFR, 80-11.

BY ORDER OF THE CHIEF OF STAFF:

/s/t/ GILBERT L. MEYERS
Colonel, USAF
Deputy Director of Requirements
Deputy Chief of Staff, Development


7 Incls

AFDRQ 2589/54


25236

M26-4

20 4 Hq ADC, Ent AFB, Colo. Subj: Qualitative Operational Requirements, ADC-RAND System Training Program 3 - Ltr Hq ADC, ADOPR 319.1, 29 Jul 53 4 - Ltr Hq USAF, AFOOP-OP-D, 10 Aug 53 5 - Ltr Hq ADC, ADOOT-C, 24 May 54 6 - RAND Rach Memo, 1157-AD 7 - Time Schedule Info Cys to: Comdr, ARDC Comdr, WADC Comdr, APGC

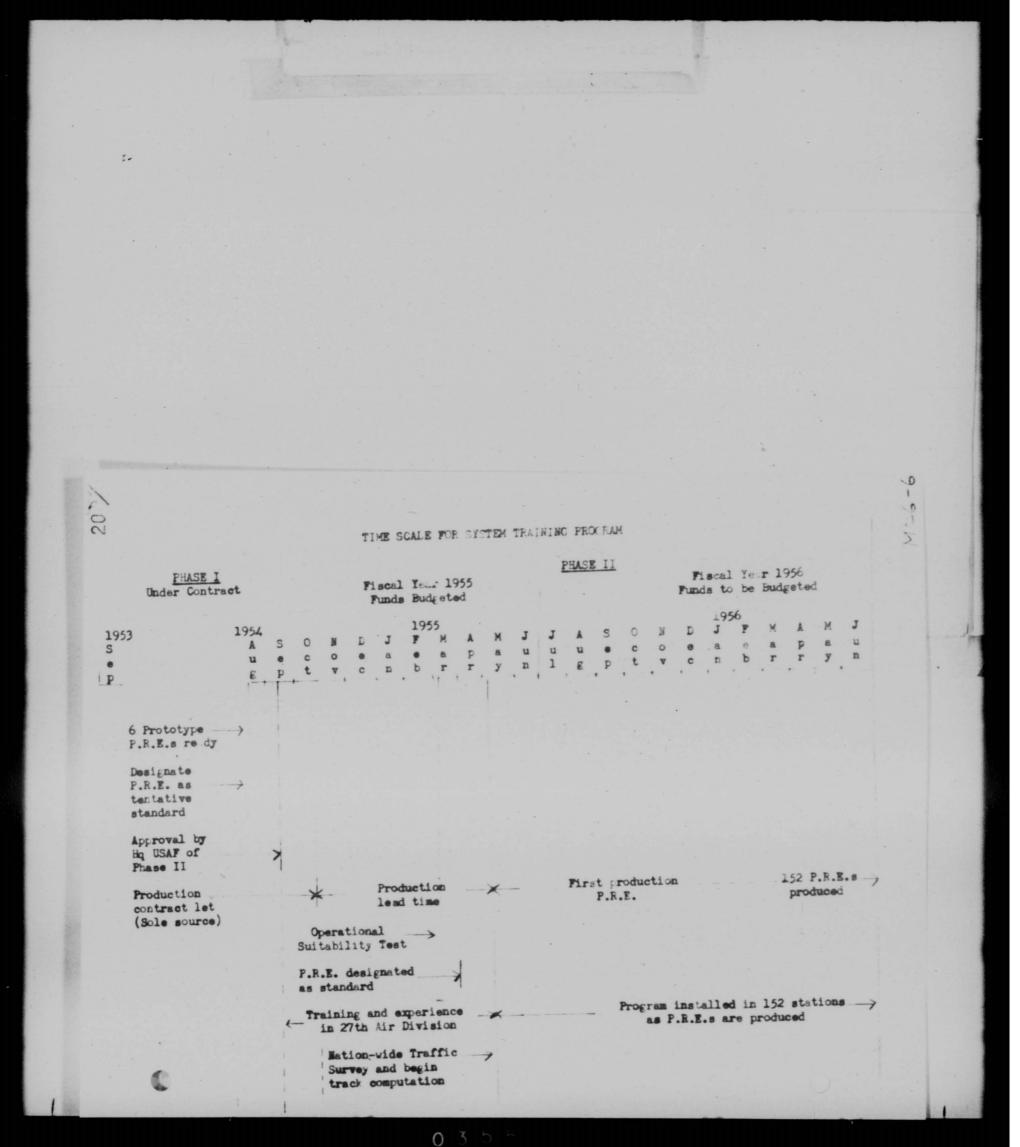

					230	
- Andrew						
Affect mag		_	719		21	
Joseph M. S.		T-17				
Stans ADOCT-G						
Cond Durg SUBJECT:	(UNCL) Classification the RAMD System	ion of Proble Training F	em Repreduce rogram	r Equipment T	leed	
Cond Chap Cond IG						
Inep Sve	Cormander					
PIO DCS/C	Air Research and I	Development C	comend			
Fin Met Anlyn	Post Office Box 13					
Stat DCS/P Civ Pers Mil Vers Program Ann Asgut reference Off Asgut tle ADC Cols & Reds Opec Actions suit	The development and in the Air Defense (se letters, subject: PR 319.1, Headquarte ject, File AFOOF 36, 19et. File ADOFR 319	installatio Command will "Air Defens ors Air Defens b, Headquarte	be accomplist be Systems Tr see Cosmand, ors USAF, dat ters Air Def	hed in two plaining Progradated 6 June ed 13 July 19 cense Command,	nases, m", 1953; 953; dated	
Otat DOS/F Civ Pers Mil Fers Mil Fers Ann Angut reference Off Asgut ale ADC Cols & Rods Opec Actions sub GS Pers 9v 29 July PPR WAP Tug DOS/I CI con air R & E S & T DOS/O The Sys C C A N vember The Actions of D One Anlys One Anlys The Cols Anlys	The development and in the Air Defense (see letters, subject: PR 319.1, Headquarts; ject, File AFOOF 36, ject, File AFOOF 31, 1953; and same subject august 1953. Four problem repredivision by September division by September 1953, classified (Reproducer Equipment)	i installation command vill "Air Defensers Air Defensers Vill to 1954 in Phance Research for the Air Confidential" by the Amenda Air Confidential Air	be accomplist to Systems Truse Command, or USAF, dat ters Air Def OOP 1196, Head to produced a mase I. These Memorendum R. Defense Corr., and RAND Systems I and the that 150 o	hed in two plaining Progredated 6 June ed 13 July 19 ense Command, dquarters USA nd installed e equipments M 1157-AD, er mand", dated posification II.	in are stitled 3 E-101,	
Otat DCS/F Civ Pers Mil Fers Mil Fers Amm Asget reference Off Asget rile ADC Cols & Reds Opec Actions sub G8 Pers Sv 29 July PPR MAP Tng DCS/I OI R & E S & T C C A N vember O C D Ope Anlys O C D Ope Anlys I S & T DCS/O O C D O C D O C D O C D O C D O C D O C D O C D O C D O C D O C C A O C C C C C C C C C C C C C C C C C C	The development and in the Air Defense (see letters, subject: PR 319.1, Headquarts; ject, File AFOOF 36, ject, File AFOOF 36, ject, File ADOFR 319 1953; and same subject august 1953. Four problem repredivision by September division by September 1953, classified (Reproducer Equipment)	i installation command vill "Air Defensers Air Defensers Vill to 1954 in Phance Research for the Air Confidential" to vith Amenda Air Confidential to vith Air Confi	be accomplist of Systems Truse Command, or USAF, datters Air Def OOP 1196, Head of produced state I. These Memorandum R. Defense Company and RAND States I and the state I for	hed in two plaining Progredated 6 June ed 13 July 19 ense Command, dquarters USA and installed e equipments M 1157-AD, er mand", dated posification II. f those equipment during the equipment of the equipment o	in are stitled 3 E-101,	
Stat DCS/P Civ Pers Mil Pers Mil Pers Amm Anget reference Off Asget ale Cols & Reds Spec Actions sub GS Same sub Pers Sv 29 July PPR MAP Trug DCS/I OI R & E S & T DCS/O The Sys C C A N vember M & O O C D Ops Anlys M & B Perd B Mea O DCS/M Acft Pelect On Sup & Sys Inetl Log Plane tional Rd Sq Sec O AFR 8 PCDA CAA In compl	The development and in the Air Defense (see letters, subject: PR 319.1, Headquarts; ject, File AFOOF 36, ject, File AFOOF 36, ject, File ADOFR 319 1953; and same subject august 1953. Four problem repredivision by September division by September 1953, classified (Reproducer Equipment Phase II of the project and installed in towarder 1952 to Nove	installation command will "Air Defens ors Air Defens ors Air Defens ors Air Defens ors Air Defens of the remaining of th	be secomplist of Systems Truse Command, or USAF, datters Air Def OOP 1196, Head of produced state I. These Memorandum R. Defense Correspond to the time to requested. The second of the second of the second of the time the time the second of the time the second of the second of the time the second of the time the second of the second of the time the second of the s	hed in two phaining Progredated 6 June ed 13 July 15 onse Command, dquarters USA nd installed e equipments M 1157-AD, er mand", dated posification II. If these equipments during ivisions during this est this e	in are stitled 3 E-101, sments ing the inhished	
Stat DCS/F Civ Pers Mil Fers Mil Fers Amm Asymt reference Off Asymt rile ADC Cols & Ricks Opec Actions suit G8 Pers Sv 29 July PPR MAF Thg DCS/I OI R & E S & T C C A DCS/O The Sys C C A N vember S & T DCS/O C D Ope Anlys MAF M & O O G D Ope Anlys Mes O DCS/M Actt Pilect On Sup & Sys Actt Pilect On Sup & Sys Instit Log Plans Vill be Forfirmed in SAA Bubblechter Form	The development and in the Air Defense (se letters, subject: PR 319.1, Headquarte spect, File AFOOP 36 sugust 1953. Four problem repred division by September division by September 1953, classified (Reproducer Equipment Phase II of the property of the following a. That the problem is standard item price attability testing to 0-6, deted 1 April 1 uate for procurement iance with paragraph	installation command will "Air Defens ors Air Defens ors Air Defens ors Air Defens of the Air Defens of the Air Defens of the Air Confidential" to the remaining the remaining of the remaining o	be secomplist of Systems from Systems from Systems from Systems from Systems from USAF, data term Air Def 198, Head to produced a sase I. These Memorandum R. Defense Corp., and RAND System air defense from System Systems from	hed in two plaining Progredated 6 June and 13 July 15 onse Command, dquarters USA and installed e equipments H 157-AD, or mend", dated posification II. If these equipment it is also a classified that the equipment is also item is also ite	in are stitled 3 E-101, smeats lightlehed as a sere-	
Stat DCS/P Civ Pers Mil Pers Mil Pers Amm Asget Paference Off Asget Ile ADC Cols & Reds Opec Actions sub G8 Pers Sv 29 July PPR MAP Thg DCS/I OI R & E S & T C C A N vember O C D Ope Anlys I S & R Wes O DCS/M Acft Pilet On Sup & Svalentativ Inetl Log Plane Vional Ed Poble Std Publication Form Under par Sa, ADCSM istered 5-3	The development and in the Air Defense (se letters, subject: PR 319.1, Headquarte spect, File AFOOP 36 spect, File AFOOP 36 spect, File ADOFR 319 1953; and same subject august 1953. Four problem repred division by September din the attached Reference Training Program 1953, classified (Reproducer Equipment Phase II of the property of the fellowing a. That the problem to standard item price standard item	installation command will "Air Defens ors Air Defens ors Air Defens ors Air Defens of the Air Defens of the Air Defens of the Air Confidential" to the remaining the remaining of the remaining o	be secomplist of Systems from Systems from Systems from Systems from Systems from USAF, data term Air Def 198, Head to produced a sase I. These Memorandum R. Defense Corp., and RAND System air defense from System Systems from	hed in two plaining Progredated 6 June and 13 July 15 onse Command, dquarters USA and installed e equipments H 157-AD, or mend", dated posification II. If these equipment it is also a classified that the equipment is also item is also ite	in are stitled 3 E-101, smeats lightlehed as a sere-ide sified,	
Stat DCS/F Civ Pers Mil Pers Mil Pers Amm Asget Paference Off Asget Ile ADC Cols & Reds Gee Actidates sub Gee Actidates sub Gee Actidates sub Pers Sv 29 July PPR MAP Thg DCS/I OI R & E S & T DCS/O The Sys G C A N Vember O C D Ops Anlys I C C A O D Ops Anlys I C C B Ops Anlys I C C C C C C C C C C C C C C C C C C	The development and in the Air Defense (se letters, subject: PR 319.1, Headquarte spect, File AFOOP 38. spect,	installation command will "Air Defens ors Air Defens ors Air Defens ors Air Defens of the Air Defens of the Air Defens of the Air Confidential" to the remaining the remaining of the remaining o	be secomplist of Systems from Systems from Systems from Systems from Systems from USAF, data term Air Def 198, Head to produced a sase I. These Memorandum R. Defense Corp., and RAND System air defense from System Systems from	hed in two plaining Progredated 6 June and 13 July 15 onse Command, dquarters USA and installed e equipments H 157-AD, or mend", dated posification II. If these equipment it is also a classified that the equipment is also item is also ite	in are stitled 3 E-101, smeats lightlehed as a sere-ide sified,	

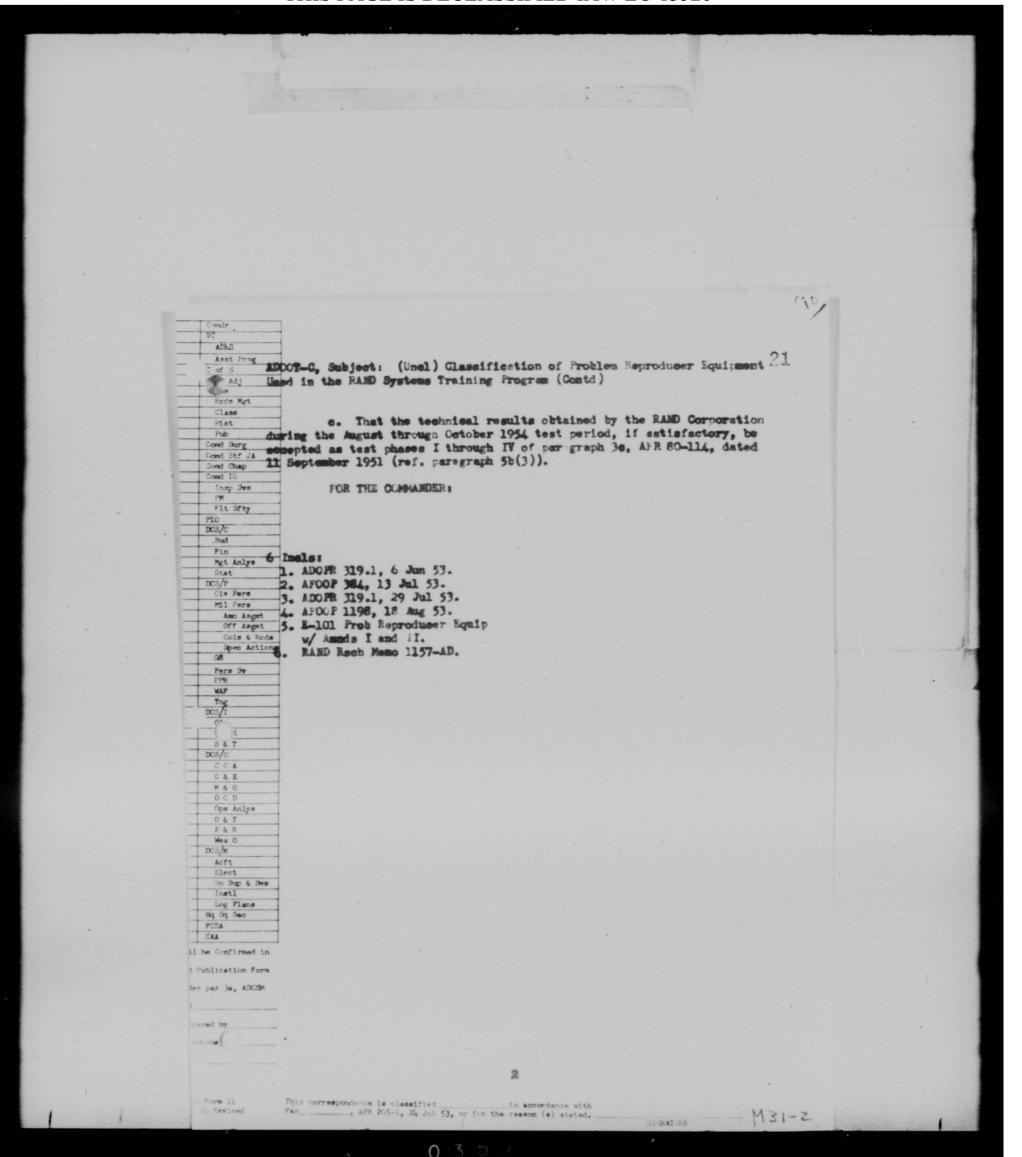

21 September 1954

L-15166

m4 GEN

Subject:

Contract AF 33(600)-26134 Schedule of Phase II of System Training Program

To:

Commander Headquarters, Air Defense Command Ent Air Force Base

Colorado Springs, Colorado

Reference: (a) Letter, Director of Operations and Training, dated
7 January 1954

(b) Schedule, Chart 6, RAND Research Memoranda 1157-AD

Attention: Director of Operations and Training


In answer to the request in Paragraph 2 of Reference (a), informal estimates for a 150 station Phase II of the System Training Program have been given verbally from time to time. Now that successful operation of the System Training Program in the 27th Air Division is being carried on, firm estimates are possible. In the light of our operational experience, it is believed that all units of the system should be included in the training insofar as possible. As installation proceeds in one division after another, all stations which are operational at that time should participate in the training.

2. The schedule, Reference (b), which anticipated installation in only 100 stations, will have to be extended to 30 June 1956 in order to accomplish the installation of 150 stations. Because of the increased number of stations and because of other factors which have been revealed by our field experience, an upward revision of the costs is necessary. The new cost schedule is contained in Attachment 1. A large fraction of these additional costs is brought about by the additional stations; however, some other factors are now more accurately known. Intense study of the computation process has provided a much firmer estimate of these costs. Experience with the Cogwheel run has indicated that a run of this type for each division to be installed is required with its attendant costs.


The cost schedule, Attachment 1, anticipates an organization of approximately 165 people occupying a building space of approximately 30,000 square feet. The building modifications provide for installation FILF.


CONTRACTOR FILE.


Commander Headquarters, Air Defense Command -2-21 September 1954 of the computing equipment, working space for personnel, and a simulated operations center for indoctrination runs similar to Cogwheel. 4. The rate of expansion required to accomplish installation in 150 stations by 30 June 1956 is considered to be maximum, and any additional stations would have to be installed after that date. Installation of 150 stations by that date is also possible only in sites located in the United States or contiguous areas. THE RAND OF PORATION R. Goldstein Associate Director JRG:bg Attach. 1. Cost Schedule

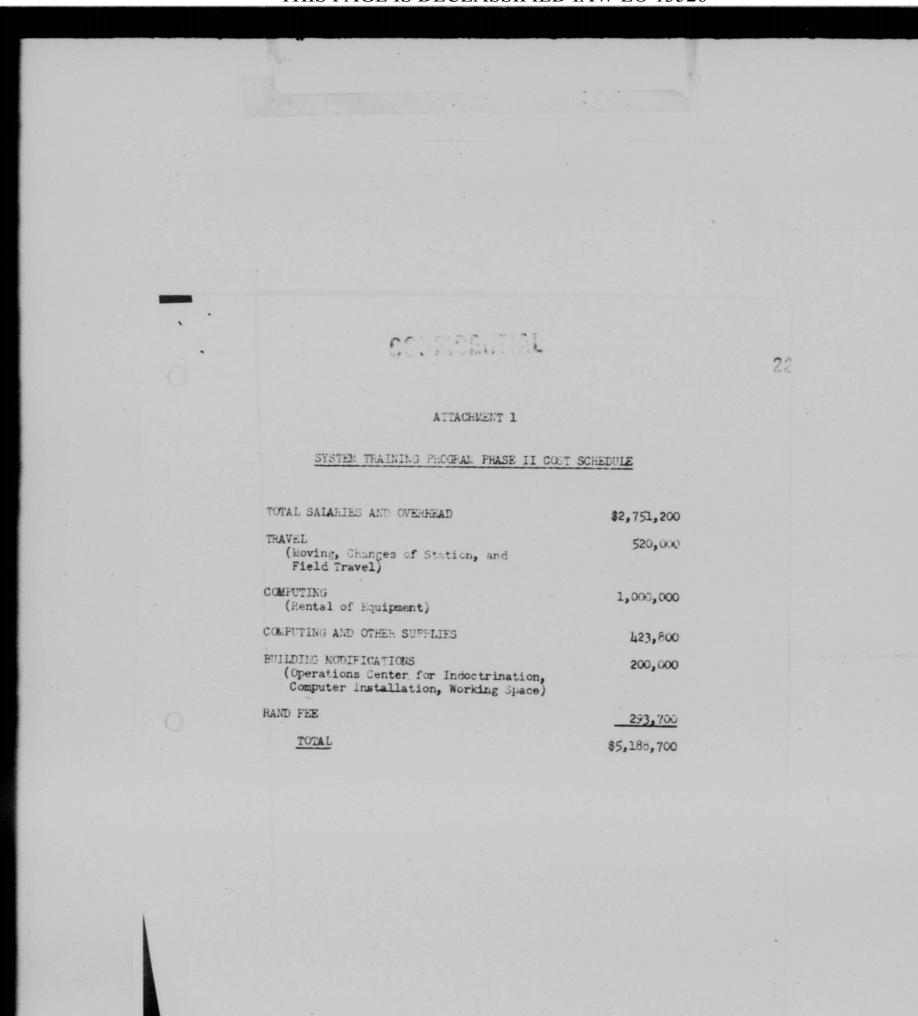


THIS PAGE IS DECLASSIFIED IAW EO 13526

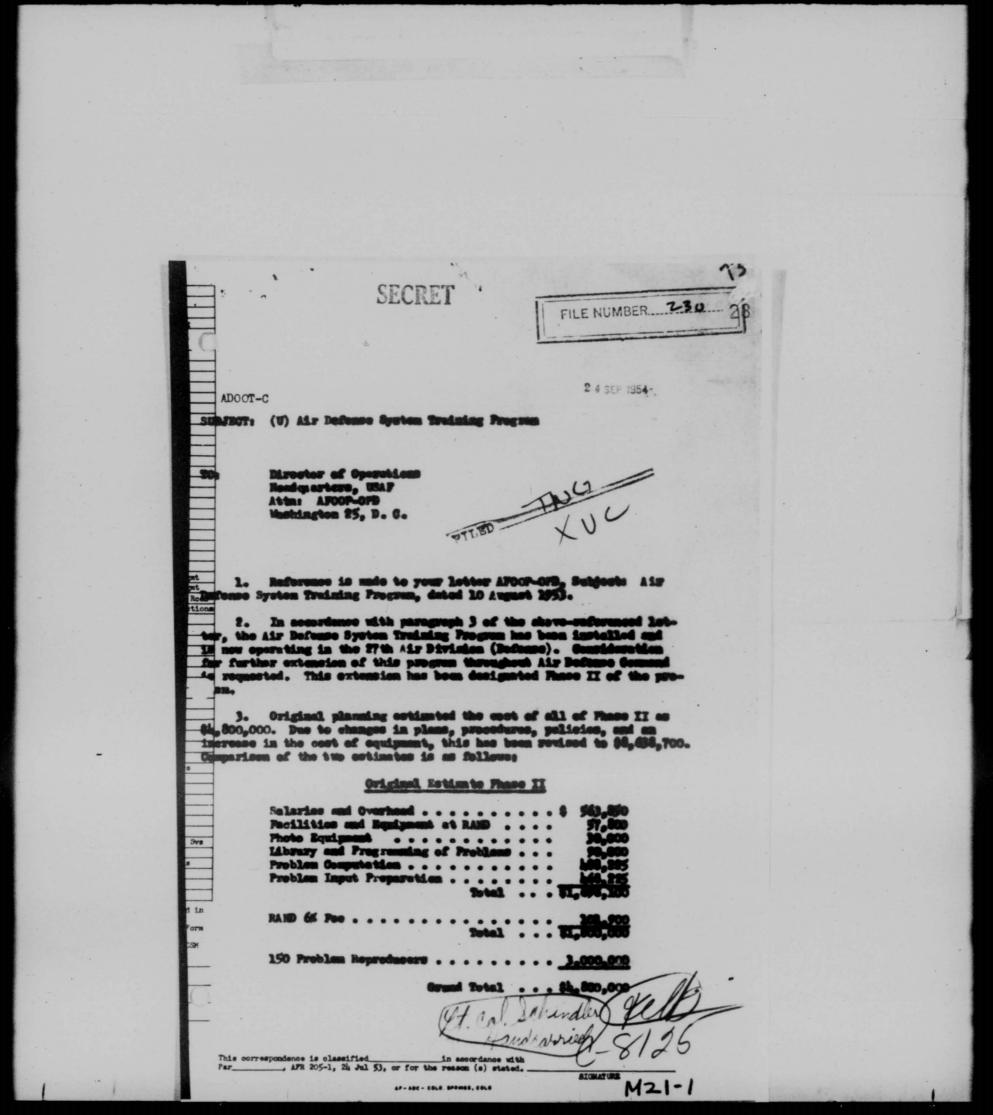


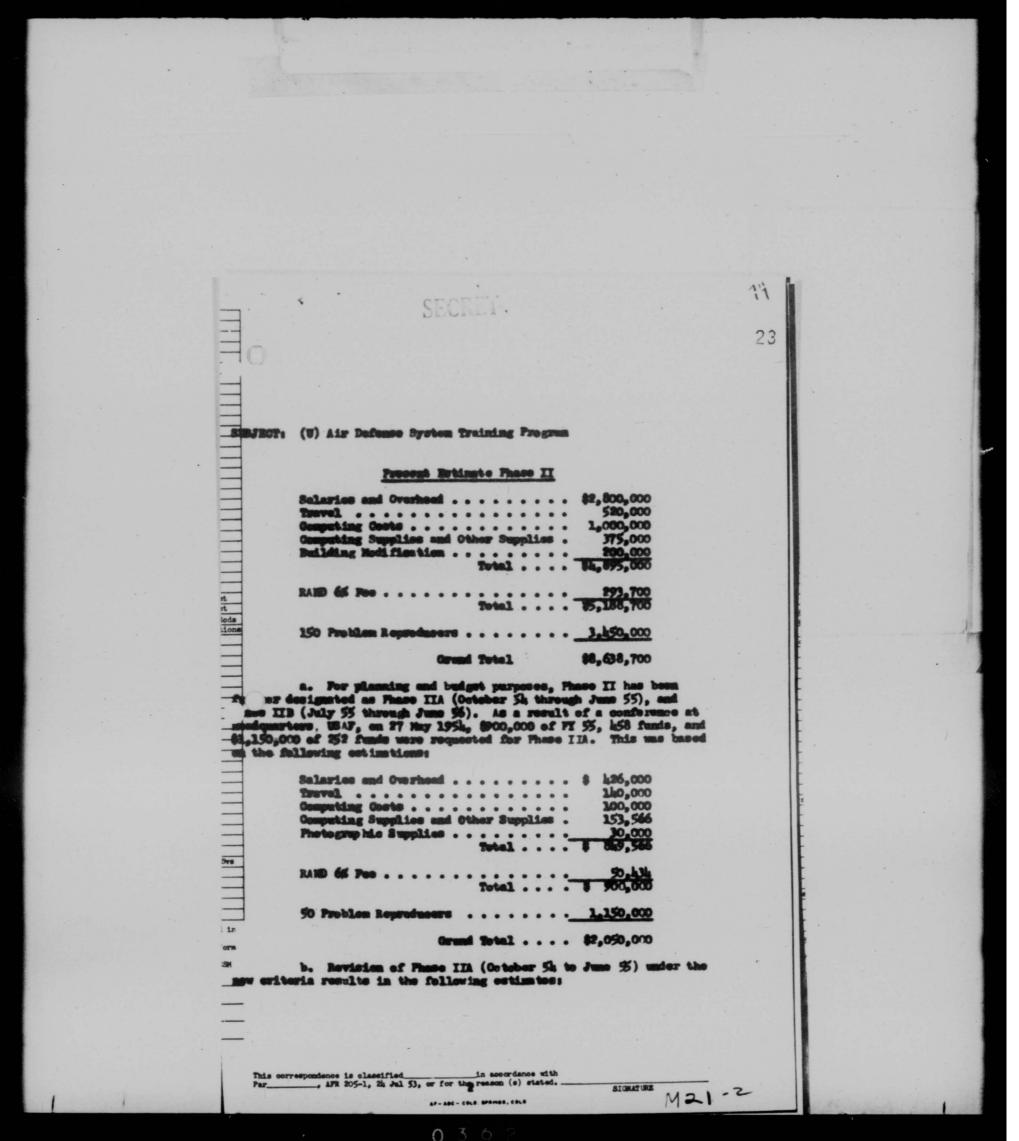

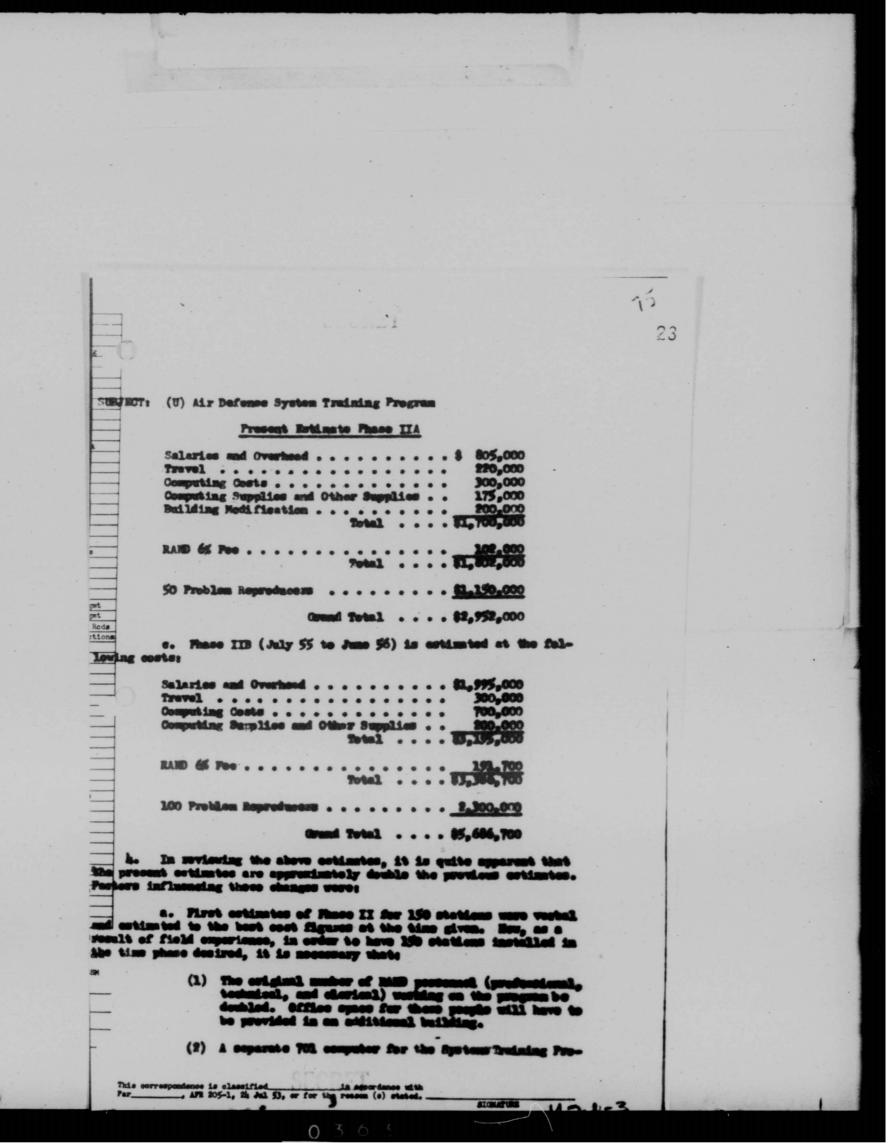

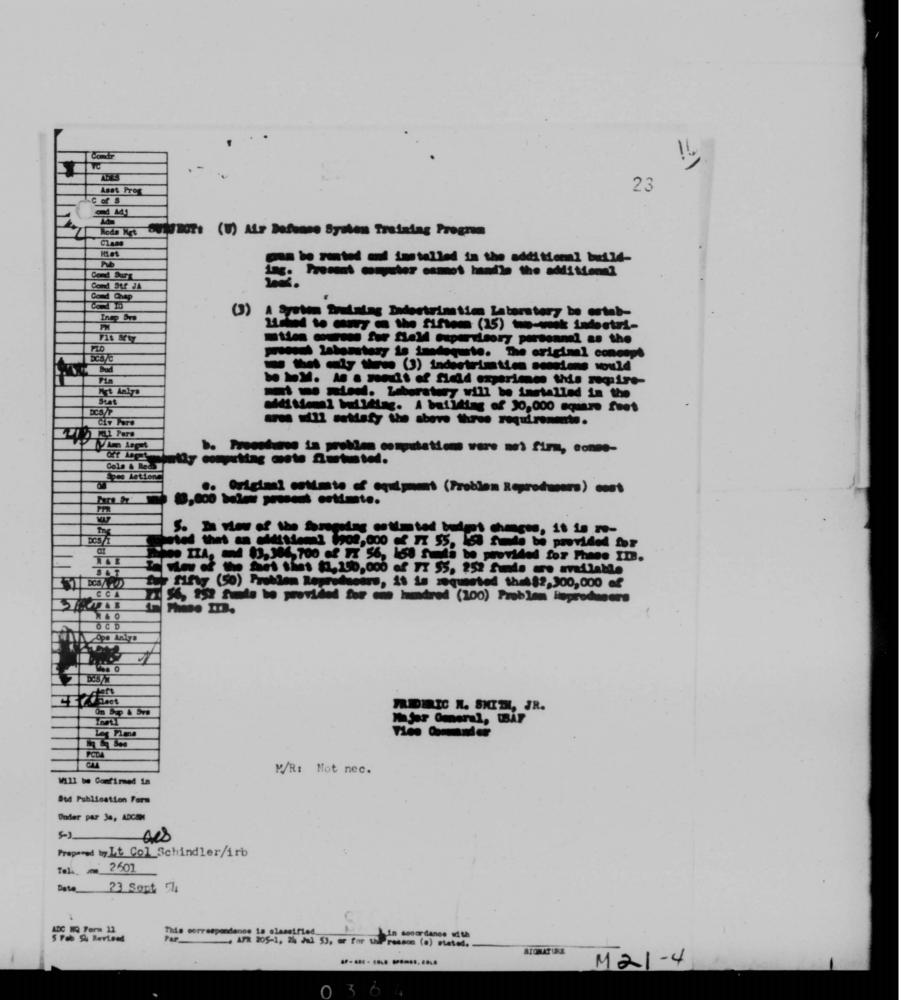

THIS PAGE IS DECLASSIFIED IAW EO 13526

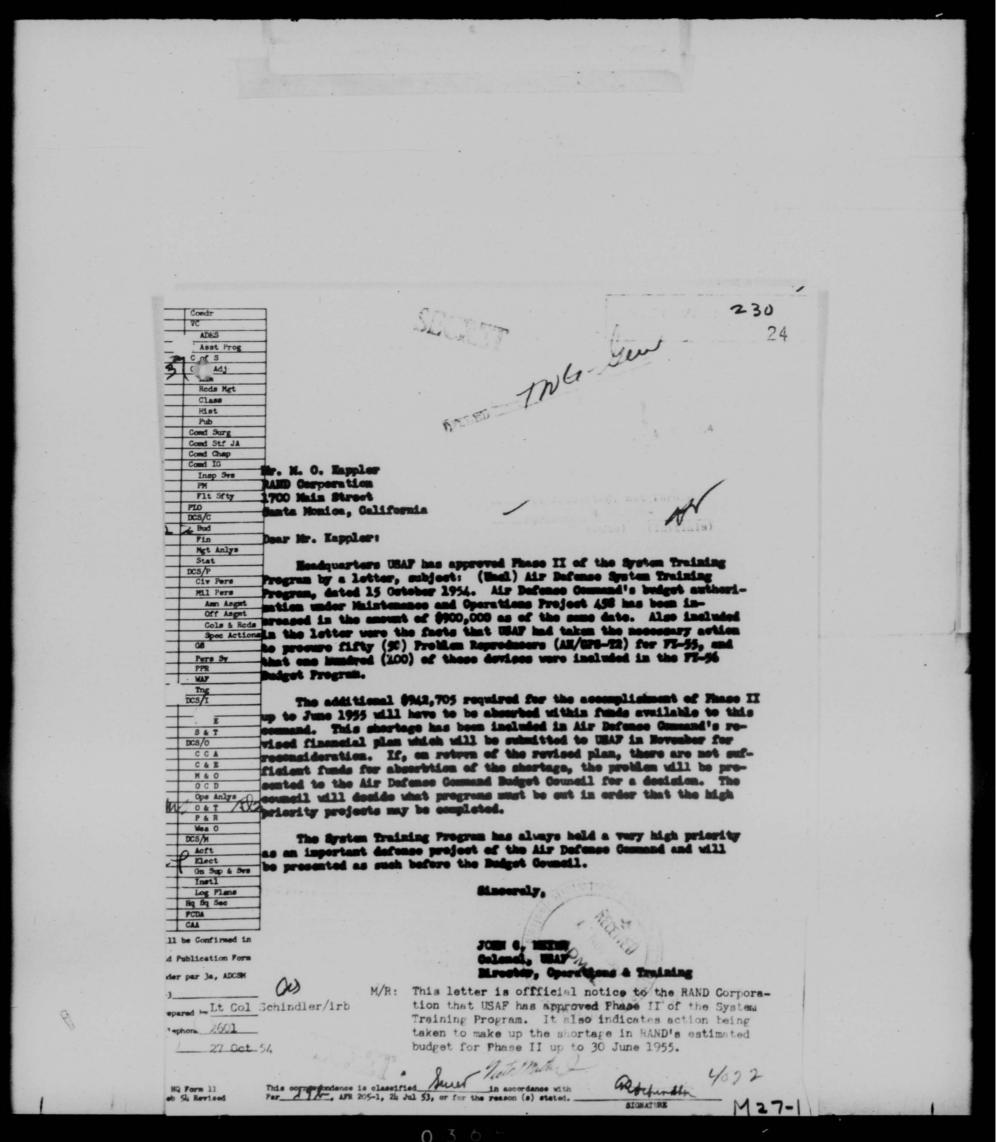

¿ SECRET 1.

25 2

AFOOP-OP-D

15 OCT 1954

SUBJECT: (Buel) Air Defense System Training Program

TO:

Commander
Air Defense Command
Ent Air Porce Base
Colorado Springs, Colorado

- 1. Reference your letter dated 24 September 1954, subject as
- 2. This Headquarters approves the extension of the Air Defense System Training Program throughout your Command.
- 3. Funds in the amount of \$900,000 have been retained in this Headquarters for Phase II of this program. Your budget authorization under Maintenance and Operations Project 456 is being increased in this amount. The additional \$902,000 indicated requirement for the accomplishment of Phase IIA will have to be absorbed within funds currently available to your Command. No additional allocation of funds for this project is possible at this time.
- 4. This Headquarters has taken the necessary action to procure fifty (50) Problem Reproducers (AM/GPS-T2) in FI-55 and the remaining one hundred (100) devices required by your Command have been included in the FI-56 Budget Program.
- 5. In view of the SAGE system being installed in your Command, the compatability of the AR/GPS-T2 and associated training system with SAGE should be determined by your Headquarters. Will the AN/FSQ-7 at Direction Center and Combat Center levels require a separate training device and a new systems training program? Or is the AN/FSQ-7 being so designed that a training device capability will be incorporated in the production model?
- 6. Assuming that this program is implemented by end FY-56, as indicated in your time phasing schedule, what are your plans for continuing this program past FY-56? Will it be more economical for the Air Force to continue this program under contract with the Rand Corporation or to absorb this program as a function of Operations and Training in your Headquarters?


M28-3

Ltr to ADC, Subj: "(U) Air Defense System Training Program" (Cont)

7. It is desired that the problems posed in paragraphs 5 and 6 above be studied by your Headquarters and this Headquarters furnished your comments and/or recommendations.

BY ORDER OF THE CHIEF OF STAFF:

M28-3

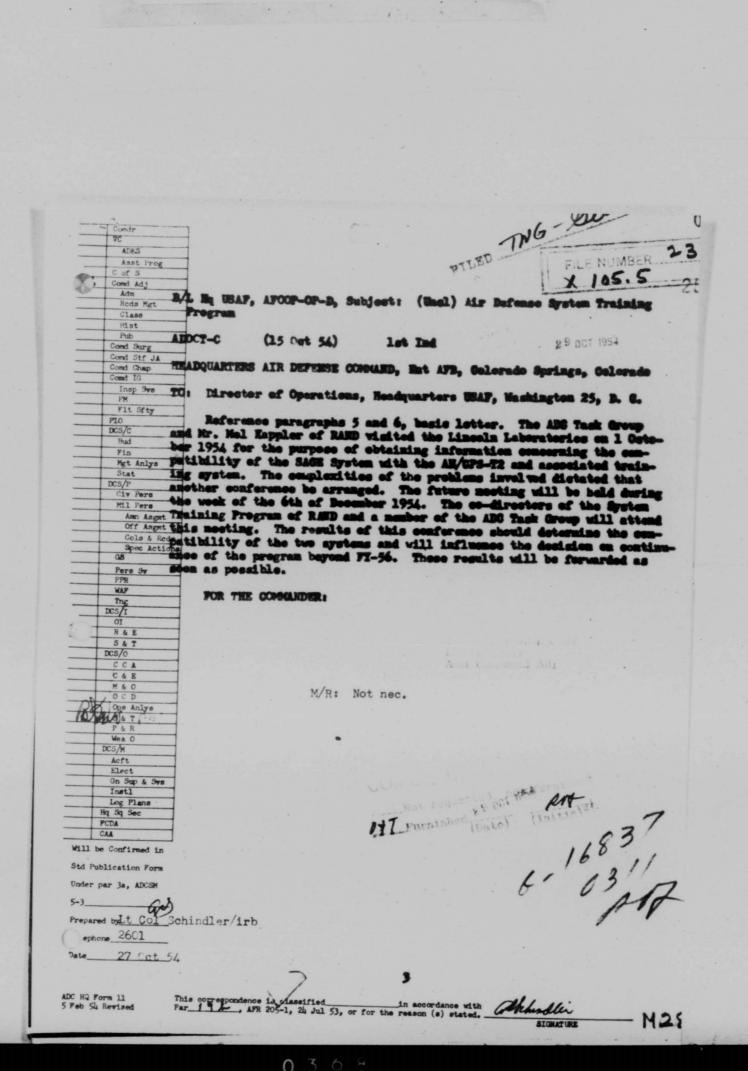

COMMINIAL

DEPARTMENT OF THE AIR FORCE Headquarters United States Air Force Washington 25, D.C.

AFPTR-D

17 March 54

SUBJECT: (Uncl) The 34D Surveillance Trainer

TO:

Commander
Air Defense Command
Ent AFB
Colorado Springs, Colo.

- 1. Reference is made to the following correspondence from your headquarters:
 - a. Letter, subject as above, dated 12 December 53.
- b. Letter, subject: "Comparison of RAND Problem Reproducer Equipment and 34D Surveillance Trainer," dated 11 Feb. 54.
- 2. The following additional information is requested in connection with the above correspondence:
- a. Introductory Tape Recordings. Information is requested as to whether a satisfactory recording could be produced locally in lieu of procuring the proposed elaborate recording commercially
- b. Procedures Booklet, Procedure Cards and Lesson Sheets. These publications will be subject to the provisions of AFR 6-1. Information is requested as to whether you have a preference of printing these items locally or having them printed by the Government Printing Office.
- c. 34D Surveillance Trainer. Action has been taken to request ARDC to prepare procurement specifications. Information is requested as to your views on whether any other major air command may have a requirement for this trainer. Information is also requested as to the number of trainers that have been or are being constructed locally.
- 3. Many Air Force activities are authorized a tape type recorderpreproducer in T/A 1-1. It is recommended that your headquarters initiate action IAW AFR 5-25 to include the requirements of your command. In this connection, it is requested that full consideration be given to the recorder-reproducer to be included in the RAND PRE.

BY ORDER OF THE CHIEF OF STAFF?

R. O. MOSHER Lt Col USAF Dep Ch, Special Trng Devices Div

0 3

20

CONFIDENTIAL

B/L fr Dept of the AF, Hq USAF, Wash 25, D.C. AFPTR-D, Subj: (Uncld) The 34D Surveillance Trainer

ADOOT-C (17 Mar 54) 1st Ind 9 Apr

9 Apr 54

HQ AIR DEFENSE COMMAND, Ent AFB, Colorado Springs, Colo.

TO: Director Personnel Procurement & Training, Ho USAF Washington 25, D.C.

- 1. The following information is submitted as requested.
- a. The introductory tapes include considerable sound effects which would make them difficult to reproduce locally. The set of master tapes is attached as Incl 1. These tapes could be duplicated at a relatively low cost.
- b. This headquarters has no preference as to the printing of the booklets, cards, or lesson sheets. The Government Printing Office is acceptable. A folder coering the printing specifications and illustration dummies is attached as Incl 2.
- c. The Far East Air Forces has indicated a requirement. This headquarters has informed them that our requirement has been submitted. NEAC, USAFE and Alaskan Air Command would probably be interested, if approached. If the trainer were procured for other commands the introductory tapes would require revision to comply with their regulations. The trainer built by CADS and available at this headquarters is the only one known to have been constructed. Engineering drawings of this unit are attached as Incl 3.
- 2. This headquarters prefers that the subject training aid be issued as a package. The separation of the recorder from the package may mean that either the training aids or the recorder could be idle for lack of the other. This could occur at time or original issue of in the case of unit transfer.

FOR THE COMMANDER:

3 Incls

1. Master Tapes

2. Printing Spec

& I lus
3. Engr Drawings

JOSEPH D. HORNSBY Lt Col USAF Asst Comd Adj

COMPIDE

M17-2

 $\rm\,B/L$ to ADC. Ent AFB, Colo. Subj: (Uncld) The 34D Surveillance Trainer, dtd 17 Mar 54

AFPTR-D

2d Ind

Dept of the Air Force, Hq USAF, Washington 25, D.C.

TO: Commander, Air Defense Command, Ent Air Force Base, Colo.

The requirements for subject trainer and allied equipment are considered valid. However, since the tape recordings, procedure booklets, procedure cards and lesson sheets may be subject to change and vary among commands, they should be locally produced by the using commands. As indicated in the basic letter ARDC has been requested to prepare procurement specifications for the trainer. These specifications will be completed by 1 July 54. The AMC will include this trainer in their FY 55 buying program. Your requirements for procurement, distribution and authorization should be forwarded to AMC for necessary action. It is requested that a suitable recorder be selected from presently standard stock listed recorders, and included in appropriate authorization tables if existing authorization tables if existing authorization tables if existing authorization tables if existing authorization tables are inadequate.

BY ORDER OF THE CHIEF OF STAFF:

R. O. MOSHER
Lt Col USAF
Dep Ch, Special Trng Devices Div
D/Personnel Procurement & Trng

C

Hq USAF AFPTR-D Subj: (Uncld) The 34D Surveillance Trainer

ADMEL-4 (17 Mar 54) 3d Ind

14 Jul 54

HQ AIR DEFENSE COMMAND, Ent AFB, Colorado

TO: Commander, Air Materiel Command, Wright Patterson AFB, O.

- 1. Reference 2d Ind and basic correspondence. This command has a requirement for 170 each 34D Surveillance Trainers and 170 each Recorder-Reproducers, SN 1790-612900468.
- 2. Due to the time involved before delivery can be expected on the 34D Trainer, no distribution instructions are being furnished at this time. These instructions will be furnished upon request.
- 3. It is requested that authorization for the 34D Surveil lance Trainer and the Recorder-Reproducer be included in the applicable authorization documents for one (1) each per AEW Sq. one (1) each per AC&W Sq (Permanet and Mobile), and one (1) each per Air Div (Def) Control Center. Until such time as the appropriate authorization documents can be modified, it is further requested that interim authorization be granted to the above units for the two items of equipment.
- 4. This request has been approved by the Air Defense Command Equipment Review Board.

FOR THE COMMANDER:

3 Incls

JOSEPH D. HORNSBY Lt Col USAF Asst Comd Adj

CONTINUIAL

M47-4

TIAL

Bsc ltr fr Hq USAF, AFPTR-D, 17 Mar 54, (Uncld) The 34D Surveillance Trainer. MCSEB/ML/mvs

4th Ind

30 Jul 54


Hq, AIR MATERIAL COMMAND, Wright Patterson AFB, Ohio

TO: Commander, Air Defense Command, Ent AFB, Colorado Spring Colo.

- 1. The requirements mentioned in the second indorsement as well as those of other commands, have been noted and included in the FY55 buying program.
- 2. It is requested that your recommended allowances be made more definitive as to the following: T/O numbers, peace and war versions, and specific parts, if applicable: MEAL columns, particularly as to UEE, BSE, and FSE; T/A numbers, if intended for T/D units, and identity of the types of units or activities for which intended; and any other qualifications restrictions, or remarks to be applied to each allowance.

FOR THE COMMANDER:

J. M. McCAMPBELL Col USAF Ch, Equip Auth Div Dir of Sup & Svs

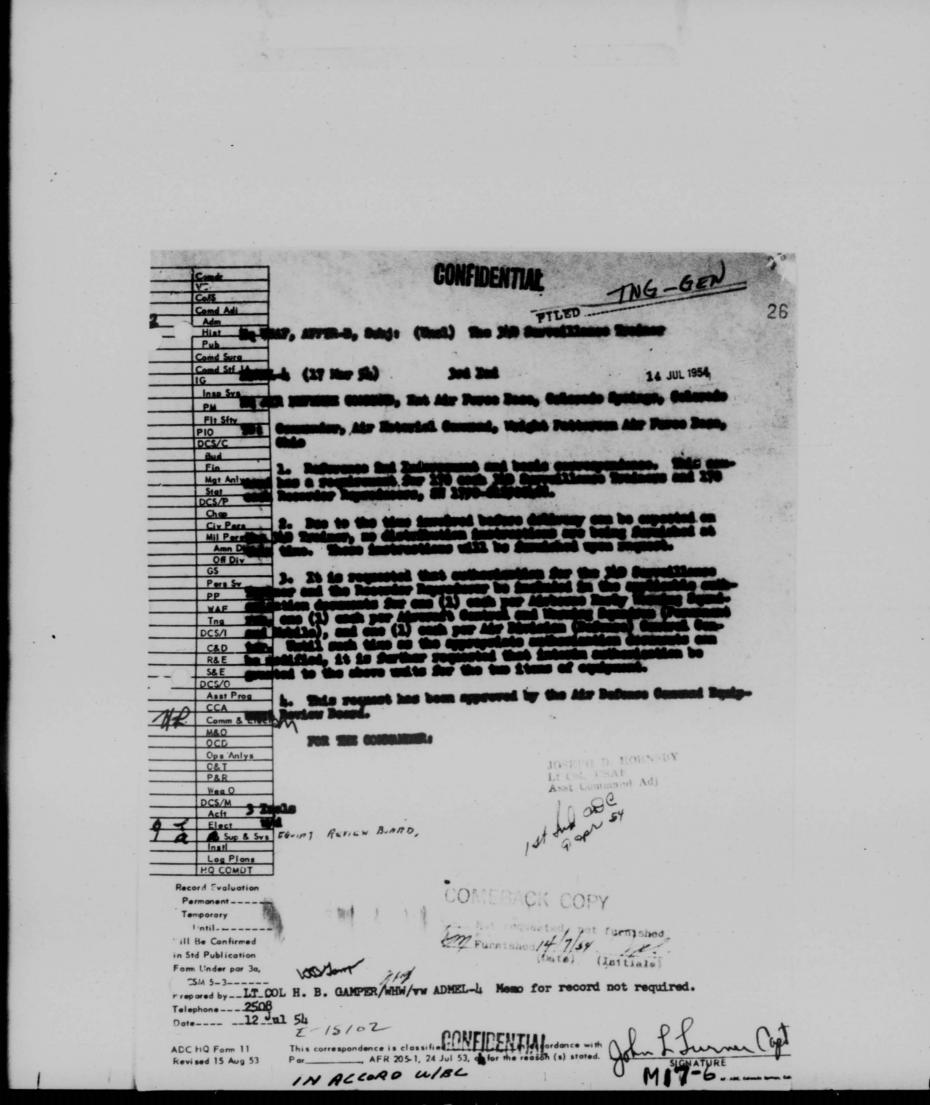

DOCUMENT NO.27

THIS DOCUMENT MAY BE FOUND

IN VOLUME VII

OF THE SUPPORTING

DOCUMENTS TO THIS HISTORY.

		SECRET DISTRIBUTION					28
				HQ	ADC		
USAF EADF	20		CG			1	
CADF	8 4 8 2 2		VC CofS			1	
WADF	8		DCS/O			1	
ARAACOM	2		DCS/M				
JADB	2		DCS/P			4	
AMC	10		DCS/C			1	
ARDC RAND CORP	5		DCS/I			1	
WSEG	1		P&R O&T			4	
WADC	4		M&O			4 4 50	
ATRC	4		C&E			4	
APGC	4 2 1 1 1 2 2 2 4		AG			50	
AV TAC	2						
SAC	1						
AAC	î .						
NEAC	2						
RCAF	2						
ADC (RCAF) AFCRC	2						
RADC	4						
SMAMA (McCLELLAN)	4						
OTIS AFB	4						
8TH AIR DIV (AEW&C)	10						
NAVY SPECIAL DEVICES CTR	2						
IG, NORTON AFB	2						
and the same of th	~						

SECRET

TABLE OF CONTENTS

		Page No
I.	MISSION	1
II.	TACTICS	1
III.	UNIT ORGANIZATION	4
IV & V.	TRAINING REQUIREMENTS AND	
	TRAINING DATES	6
VI.	OPERATIONALLY READY REQUIREMENTS	10
VII.	OPERATIONALLY READY DATES	12
VIII.	DEPLOYMENT LOCATIONS	12
IX.	CHANNELS OF CONTROL AND COMMUNICATIONS	3.0

OPERATIONAL PLAN
Extensions to Seaward of Contiguous Radar Coverage
10 March 1954

I. MISSION:

1. The primary mission of an AEW&C Division is the extension of land or sea-based radar surveillance and to increase the fighter-intercept zone.

II. TACTICS:

- 1. Four AEW&C stations will be maintained on the west coast, and five on the east coast. These stations will be seaward extensions of the picket vessel coverage, if available, or the land based radar when no picket vessels are deployer. Each AEW&C station will be equipped with an RC-121C or D aircraft containing the latest electronic equipment, including search radar, height finder radar, ECM equipment, and radar relay transmitters.
- 2. Each aircraft on station will be spaced approximately 200 nautical miles apart. This extension will be approximately 800-1000 miles long and maintained 24 hours per day. (Initial station coordinates are contained in Section VIII, Deployment Location.)
- 3. Each aircraft will fly an established one hour square pattern (15 minute leg) around its assigned station with all aircraft maintaining the same jux osition. Legs of the pattern will be adjusted time-wise to compensate for drift, thereby maintaining the square. The pattern may be modified as dictated by operational experience.
- 4. The method of operation will be identical off the east and west coasts of the U.S. Until the problem of sea clutter is eliminated or

sufficient operational experience is gained to indicate otherwise, the RC-121 aircraft will be operated at approximately 2,500 ft.

- 5. A 20% increase in actual on-station flight time shall be allowed to provide for aborted missions. An operational mission will average from 11 to 13 flight hours with eight hours on station. The schedule will, therefore, be in eight hour increments with five aircraft readied and in-commission for each eight hour period. One of these aircraft will be a stand-by, requiring a total of 15 aircraft in-commission daily for the west coast and 18 per day for the east coast. The average yearly flight time is 2,065 hours per aircraft.
- 6. The ECM operator will continuously monitor, visually and aurally, all anticipated frequencies within which the enemy's navigational radar is capable of operating. Radar pulses may be detected by ECM equipment at approximately line of sight from the radar originating the pulse. Azimuth information can be determined by a single ECM station; however, two or more stations must take radial cuts on the same transmission to obtain range.

 ECM equipment may be employed as a secondary navigational check.
- 7. All data gathered by the AEW&C aircraft (radar, ECM, and visual) will be reported to a central communications point in the appropriate air defense force sector. Cross-telling of this information, as required, will then become the responsibility of the sector in which the aircraft is operating. Control of fighter intercept aircraft will be accomplished by UHF radio. Passing of control will be accomplished in the same manner as employed by land-based_air defense direction centers.

28

- 8. The AEW&C Division will possess additional operating capabilitis for limited time periods on an emergency basis if intelligence information indicates its desirability. Such use of these aircraft is presently under study in Hq, ADC. The squadron will gear its ground activities to provide a 45 minute reservice time for the aircraft executing successive missions.
- 9. Initially, the identification function will be accomplished by the Air Defense Direction Center in whose subsector the AEW&C station is located. Later, if operational experience indicates increased efficiency, the identification could be transferred to the AEW&C station.
- 10. The employment of AEW&C aircraft under this plan is for the calendar year 1954-56 time period. The capabilities and limitations of the electronic equipment on the RC-121C&D aircraft dictate this plan of operation encompass manual Air Defense operations only.
- ll. An agreement has been reached between Air Defense Command and Air Proving Ground Command whereby APGC will supply technical advisors and observers to conduct the OST Program which will be run concurrently with initial Air Defense Command operations. All items which are normally proper subjects for such a test will be included in this joint operation.
 - 12. Summary of flight data for a 24-hour operation period per base:

		McClellan	Otis	Seymour-Johnson
a.	Airplanes	30	30	10
b.	Missions per day	12	12	3
c.	Airplanes required per day	15	15	5
d.	Actual flight hours	141.23	111.23	35.31
e.	20% allowance for abort	28.24	28.24	7.6
f.	Total flight hours per day	169.47	169.47	42.91
g.	Total flight hours per year	61,956.00	61,956.00	15,662.00
h.	Average flight hrs per yr per acft	2,065.00	2,065.00	1,566.00
i.	Average utilization per day per acft - total hrs/day divided by			-,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,
	airplanes	5.65	5.65	4.29
j.	Fuel used per day (gals)	48,789.00	48,789.00	16,263.00
k.	Miles flown per day	25,591.00	25,591.00	8,530.00
	SE	CRET		

III. UNIT ORGANIZATION.

- 1. An AEW&C Division will be activated; to be assigned to Air Defense Command or Defense Force as desired. Two AEW&C Wings will be formed, the 551st at Otis AFB and the 552nd at McClellan AFB. Each Wing will consist of three operational squadrons of ten RC-121 aircraft each, a Periodic Maintenance Squadron and an Electronic Maintenance Squadron. A seventh squadron (the 966th) has been authorized and will be based at Seymour-Johnson AFB. Initially, it will provide coverage for the southern extension of the east coast. It will have the capability of operating one station on a 24 hour basis and a second on an emergency or alert basis. Detailed plans for employing additional AEW&C Squadrons in ADC will be published at a later date.
- 2. The AEW&C aircraft delivery schedule extends over a period of three years, which necessitates the activation of the first two AEW&Con squadrons on a Table of Distribution. During this period of personnel build-up, operations will be limited as follows:
 - a. 100 hours per month per aircraft.
 - b. Crew of 12 members.
 - c. Crew to aircraft ratio, 1.2 to 1
- 3. The personnel requirements for each AEW&C Wing are based on the following factors:
 - a. 30 RC-121C or D aircraft (10 per tactical squadron).
 - b. 24-hour operation.
 - c. Crew of 18 and a ratio of 2.5 per aircraft.
 - d. Each aircraft to operate 172 hours per month.

SEUNET

SECRET 4. The breakdown of required personnel is listed below:

ACTIVITY (ONE BASE)	OFFICERS	STRENGTH W/O	AIRMEN
Division Hq Wing Hq AEW&C Tactical Sq AEW&C Tactical Sq	27 28 182 182	1	52 124 292 292
AEW&C Tactical Sq Periodic Maintenance Sq Electronic Maintenance Sq	182 12 <u>9</u> 622	5 3 9	292 598 270 1920
SUPPORT AUGMENTATION			
T/DA (estimated as tenant unit and includes 5 officers and 221 airmen increase for field maintenance squad-	_13	1	470
ron, plus 5 officers and 72 airmen for a quality control section to be in field maintenance squadron or division hq, depending upon location of unit.	635	_10	2390
Total military aggregate	3035		
Total military aggregate for two bases	6070		
164 cm 4 h c 1 11 1			

After the present units become operational and actual experience is obtained, changes will be made as required.

5. The crew on an RC-121 C or D aircraft will consist of seven (7) officers and eleven (11) airmen, composed of the following type personnel:

AFSC	NO	JOB TITLE
1044B	2	Pilot Transport
1534A	1	Aircraft Observer, Navigator
43271C	1	Flight Engineer Technician
29353	1	Airborne Radio Operator
1644	3	Intercept Controllers
27351	.6	Airborne Radar Observer
29373	2	Airborne Radio & ECM Operator Technician
30173	SECRET.	Airborne Early Warning Radar Technician

- 6. The AEWSC Wing will be responsible for maintenance in the three tactical squadrons as follows:
- a. Aircraft maintenance, pre-flight, post-flight and periodic inspections will be accomplished by the Periodic Maintenance Squadron.
- b. Communications and electronics maintenance to include preflight, post flight and periodic inspections will be accomplished by the Electronics Maintenance Squadron.
- 7. Field Maintenance on aircraft and engines will be accomplished by the host base. Field maintenance on communications and electronic equipment will be accomplished by the Electronic Maintenance Squadron.
- 8. The facilities required to accomplish the organization and field maintenance workload are estimated as follows:
 - a. Hangar and shop space to accommodate 50% of the aircraft assigned.
 - b. An engine build-up shop.
 - c. A special electronics maintenance shop.
- 9. Depot maintenance of the aircraft and associated equipment will be required and provided by AMC. The high aircraft utilization will require that IRAN and other maintenance be accomplished with minimum aircraft out-of-service time.
- IV & V. TRAINING REQUIREMENTS AND TRAINING DATES.
- 1. The initial training of aircrew and aircraft maintenance personnel is being conducted at the Lockheed Factory School. The 4701st AEW&C has been overmanned to make a sufficient number of personnel available to train for the 4701st requirement and to man the 4712th AEW&C Squadron with trained personnel. The training schedule at Lockheed is as follows:

a. Pilots (Ground School Course)

Class Enter		Class Graduate	No. Quotas Allocated		
	12 Oct 53	30 Oct 53	10		
	9 Nov 53	27 Nov 53	10		
	30 Nov 53	18 Dec 53	10		
	11 Jan 54	29 Jan 54	10		

Six pilots received 15 hours of flight training in RC-121C aircraft under supervision of a Lockheed Instructor Pilot.

b. Flight Engineers

Class Enter	Class Graduate	No. Quotas Allocated
10 Aug 53	30 Nov 53	10
2 Nov 53	22 Jan 54	10
25 Jan 54	16 Apr 54	10

Six airmen from the class entering training on 10 Aug 53 remained at Lockheed for flight phase of training with the six pilots referred to above.

c. Maintenance Crew Chief

Class Enter	Class Graduate	No. Quotas Allocated
12 Oct 53	13 Nov 53	7
4 Jan 54	5 Feb 54	7
15 Mar 54	16 Apr 54	6
19 Apr 54	5 May 54	5

d. Power Plant Mechanics

Class Enter	Class Graduate	No. Quotas Allocated
19 Oct 53	30 Oct 53	7
11 Jan 54	22 Jan 54	7

		SECRET	
	Class Enter	Class Graduate	No. Quotas Allocated
	15 Feb 54	26 Feb 54	7
	26 Apr 54	7 May 54	6
	31 May 54	11 May 54	7
e.	Hydraulic & Control		
	Class Enter	Class Graduate	No. Quotas Allocated
	2 Nov 53	20 Nov 53	7
	8 Mar 54	26 Mar 54	7
f.	Electrical Systems		
	Class Enter	Class Graduate	No. Quotas Allocated
	12 Oct 53	30 Oct 53	7
	8 Mar 54	26 Mar 54	7
	12 Apr 54	30 Apr 54	4
g.	Air Conditioning Cou	irse	
	Class Enter	Class Graduate	No. Quotas Allocated
	26 Oct 53	6 Nov 53	7
	29 Mar 54	9 Apr 54	7
	3 May 54	14 May 54	6
h.	Communications Equip	ment Installation	
	Class Enter	Class Graduate	No. Quotas Allocated
	12 Oct 53	23 Oct 53	7
	15 Feb 54	26 Feb 54	7
	17 May 54	28 May 54	6
1.	Electronics (APS-45	, 20B) Installations	
	Class Enter	Class Graduate	No. Quotas Allocated
	23 Nov 53	22 Feb 54	10
	14 Dec 53	15 Mar 54	8

SE RET

Class Enter

Class Graduate

No. Quotas Allocated

1 Feb 54

26 Apr 54

10

Forty six (46) radar repairmen will be trained by 30 June 1954. This number will provide sufficient qualified key personnel for the 4701st and 4712th AEW&C Squadrons.

2. An additional requirement exists for 21 spaces in the flight engineers course at Lockeed Aircraft Corporation. The dates for training are as follows:

FY 2/55 3/55 4/55 1/56 5 5 5 6

- 3. A requirement exists for a suitable AEW&C radar operator course to train those personnel now attending Basic AC&W Radar Operator courses. The Training Command and Hq USAF have concurred. However, no conclusions have been reached at this time.
- 4. A requirement exists for forty-eight (48) Airborne Early Warning Radar Specialists. These airmen will be trained at the school operated by the Department of the Navy through the facilities of FAETUPAC. Quotas have been requested from 1 Jul 54 to 1 Jan 56 with an input of 8 students per class, course length of 12 weeks. Upon completion of the 12 weeks at FAETUPAC, two weeks of Electronics Equipment Installation instruction is required at Lockheed Aircraft Corporation.
- 5. Five (5) quotas have been requested for Senior Aircraft Propeller Specialists. Dates for entry of above students in ATFC course at Chanute have .at been received as of this date.
- 6. Future requirements for Heavy Transport Carrier Mechanic (Crew Chief 43171C) based on attrition training and aircraft delivery schedules total 71 airmen, with training dates as follows:

FY 2/55 3/55 4/55 1/56 2/56 8 7 21 21 14

St SI

7. A requirement exists for 32 Aircraft Engine Mechanic quotas on the Wright Turbo-Comp and R 3350-34 Engine to be allocated this command on the following time scale:

- 8. Due to the limited number of RC-121C & D aircraft programmed for use by the Air Force at the present date, maximum utilization of the training facilities at Lockheed Aircraft Corporation is recommended.
- 9. During the Operational Suitability Tests many of the Aircraft Controller and radar operator training requirements will be determined.

 Upon completion of the above tests, any adjustment required in formal school courses to train personnel to the desired proficiency levels will be presented.
- 10. The time phasing for military personnel assignment to the AEW&C Squadrons will be based upon aircraft delivery schedules and as authorized in T/D's and T/O's. In those AFSC's where lead time is required, the DCS/O will advise the DCS/P of the amount of lead time for each AFSC assignment.

 VI. OPERATIONALLY READY REQUIREMENTS.
- 1. Activation, manning, construction of facilities, aircraft delivery and unit training are considered minimum essentials for operational ready AEW&C Wings. Any part or whole program stated above which is incomplete shall be considered as delaying the date on which full 24-hour operations on four stations can be accomplished.
 - 2. Unit Activation Schedule:

Unit	(Calendar)	Location	Acft No.	Organizatio
%8th Air Division Hq *4701st AEW&C Sq	In Being In Being	McClellan AFB	1-10	T/D T/D

Unit	(Calendar)	Location	Acft No.	Type of Organization
#4712th AEW&C Sq	In Being	McClellan AFB	11-20	T/D
961st AFW&C Sq 551st Electronic Maint Sq 551st AEW&C Wg 551st Periodic Maint Sq 552nd Electronic Maint Sq 552nd Periodic Maint Sq 964th AEW&C Sq 962nd AEW&C Sq **552nd AEW&C Sq 965th AEW&C Sq 966th AEW&C Sq	1 Dec 54 1 Dec 54 1 Dec 54 1 Dec 54 1 Dec 54 1 Dec 54 1 Mar 55 1 Jul 55 1 Jul 55 1 Aug 55 1 Nov 55	Otis AFB Otis AFB Otis AFB Otis AFB McClellan AFB McClellan AFB McClellan AFB McClellan AFB Otis AFB McClellan AFB Seymour-Johnson	31-40 21-30 41-50 51-60 61-70	T/0 T/0 T/0 T/0 T/0 T/0 T/0 T/0

- % Scheduled to inactive te when three AEW&C sqns become operational at Otis
- AFB and the 551st AFM&C Wing activates.

 * To move to Otis March 55, inactivate and be redesignated 960th AEW&C Sq.

 # To be redesignated 963rd AEW&C Sq on 1 Mar 55.
- ** Activation during 3rd Qtr FY 55 under consideration.
- 3. Manning of AEW&C units is shown in Section III, Unit Organization, paragraphs 3, 4 and 5.
- 4. Construction of facilities to support the AEW&C Wings have been programmed in Public Works Programs during FY's 53, 54 and 55. The facilities consist of those normally connected with a tactical organization with mai: nance buildings for aircraft and electronics equipment designed to meet size and utilization rates previously described for the RC-121C & D.
 - 5. The current aircraft delivery schedule is as follows:

Date	RC-121C	RC-121D	Cumulative Totals*
On Hand	3*		3
May 1954	2		5
June 1954	2	1	á
July 1954	2	2	12
August 1954		3	15
September 1954		2	17
October 1954		2	19
November 1954		2	21
December 1954		3	24
January 1955		2	26
February 1955		2	28

· - T

Date	RC-121C	RC-121D	Cumulative Totals*
March 1955		2	30
April 1955		2	32
May 1955		2	34
June 1955		2	36
July 1955		2	38
August 1955		4	42
September 1955		Ä	46
October 1955		7	50
November 1955		7	54
December 1955		3	57
January 1956		4	61
February 1956		7	65
March 1956		3	68
April 1956		4	72
		3	75
May 1956 June 1956		4	79
Valio 2//0			

(*Does not include RC-121C wrecked at San Pablo Bay, California, Feb 54)
VII. OPERATIONALLY READY DATES.

1. The AEW&C Wings as defined in this operations plan are expected to be capable of operations on four stations, 24 hours per day on the following dates:

UKO2 AEW&C Div, Otis AFB - 1 March 1956

UKO1 AFW&C, McClellan AFB - 1 January 1957

- 2. Partial barrier establishment during build up phases shall be as directed by the FADF and WADF Commanders in the accomplishment of their assigned mission and/or as intelligence information so dictates.

 VIII. DEPLOYMENT LOCATIONS.
- 1. The AEW&C units will be based at the following locations as tenant units:
 - a. 8th Air Division McClellan AFB, California
 - b. 551st AEW&Con Wing Otis AFB, Mass.
 - c. 552nd AEW&Con Wing McClellan AFB, California

2. The "on-station" coordinates of AEW&C aircraft with picket vessels on-station are as follows:

East Coast			West Coast			
	0	0	0	0		
Sta 1 -	42 15'N	64 02 W	Sta 5 - 39 45'1	1 128 15'W		
	0	0	0	0		
Sta 2 -	39 28'N	66 48'W	Sta 6 - 36 30'1	1 127 41 'W		
*	0	0	0	0		
Sta 3 -	37 OL'N	69 46 W	Sta 7 - 34 29'1	1 124 36'W		
	0	0	0	0		
Sta 4 -	35 15'N	73 12'W	Sta 8 - 32 25'1	121 50'W		

3. The "on-station" coordinates of AEW&C aircraft with no picket Vessels on-station are as follows:

```
East Coast

Sta 1 - 42 48'N 66 18'W

Sta 2 - 39 35'N 68 20'W

Sta 3 - 38 10'N 71 56'W

Sta 4 - 35 30'N 73 05'W

Sta 8 - 31 26'N 120 25'W
```

4. Picket vessels "on-station" coordinates are as follows:

East (Coast	West	Coast
0	0	0	0
Sta 1 - 42 45'N	68 12 W	Sta 6 - 47 40'N	126 50'W
0	0	0	0
Sta 2 - 41 00'N	68 00 W	Sta 7 - 46 00'N	126 45'W
0	0	0	0
Sta 3 - 40 00'N	70 00 W	Sta 8 - 44 20'N	126 11 'W
0	0	0	0
Sta 4 - 38 56'N	72 05 W	Sta 9 - 37 42'N	124 59 W
0	0	0	.0
Sta 5 - 37 41'N	73 00 W	Sta 10- 36 05'N	124 06 W

- IX. CHANNELS OF CONTROL AND COMMUNICATIONS.
- 1. Operational control of AEW&C aircraft when on-station will be vested in the sector commander in whose area the AEW&C station is located.
- 2. The 8th AEW&C Division will be under the command and administrative control of Hq, Western Air Defense Force.

3. Communications between AEW&C aircraft and ground stations will be by high frequency radio in the two to twelve MCS band. Voice communication is planned in the interest of speed when atmospheric conditions permit.

Under some conditions it is anticipated that radio telegraph (CW) must be employed for realiability.

4. A total of seven ground HF radio stations are planned. The locations are as follows:

East Coast

West Coast

P-13 - Brunswich NAS, Me

Hamilton AFR

P-10 - North Truro, Mass

Norton AFB

P-45 - Montauk Foint, N. Y.

P-54 - Palermo, N. J.

P-56 - Cape Charles, Va.

Each of the above ground communications station is to be equipped with AN/FRT-15 (3KW) transmitters.

- 5. With four aircraft "on-station" using simplex type of operation, a total of 16 high frequencies (8 day and 8 night) between 2.8 and 8.0 MC are required for each coast. Minimum HF communication circuitry requirements will be determined as a result of Operational Suitability Test (Ref Sec II, paragraph 11). Power output used on these frequencies (see par. 4 above) will be adjusted to the minimum required for reliable communications.
- 6. Communications between AEW&C aircraft and interceptor aircraft will be accomplished by UHF radio. The frequencies for air-to-air operation will be made available from tactical frequencies presently assigned to ADC.
- 7. The complete list of programmed radar, ECM, navigation, identification, communications, and test equipment installed in the RC-121C and

SEC.

D aircraft is as follows:

		RADAR		
NUMBER	NOMENCLATURE	PURPOSE	RC-121C	RC-121D
5	AN/APA-56	P.P.I	9 Adapted APS 20B IP203 indicators	x
1	AN/APA-57B	Ground Position Ind	X	x
1 1 1 1 1 1 1 1	AN/AFA-81	Indicator(G.S.P.I.)		x -
1	AN/APS-20B	Search Radar	x	x
1	AN/APS-45	Radar Height Finder	x	x
1	AN/APR-27A	Radar Relay Receiver	x	x
1	AN/ART-28	Radar Relay Transmitter	x	x
1		AMTI	x	x
1	Poloroid Land			
2	Camera		x	
		COMMUNICATIONS		
		COMMUNICATIONS		
1	R-23A/ARC-5	L/F Comm.		A Company
ī	AN/AIC-8	Intercom System		x
ī	AN/AIC-10	Intercom System	x	
8	AN/ARC-27	UHF Transceiver	x	x
1 8 3 2 2 1 1 1	AN/ARR-15	Command Liaison Rx	x	x
2	AN/ART-13	Command Liaison Tx	x	x
2	BC-453-B	L. F. Receiver	x	x
1	MI-36A	P. A. System	x	x
1	ARA-26	Emergency Keyer	x	x
	LM-14	Frequency Meter	x	
*2	AN/ARC-21	H. F. Transceiver	x	x
		NAVIGATIONAL AIDS		
1	C-1	Compass Sig-Power Amp.		
ī	AN/APN-1	L. A. Radio Altimeter		x
ī	AN/APN-9	Loran	x	
1	AN/ARN-6	Radio Compass	x	
1	AN/ARN-12	Marker Beacon	x	x
1	AN/ARN-14A	VCR Receiver	x	x
1	AN/ARN-18	Glide Slope Receiver	x	x x
1	SCR-718-C	H. A. Radio Altimeter	x	^
1	AN/APN-22	Radio Altimeter		x
1	AN/ARA-25	UHF Direction Finder		x
1	AN/APN-70	Loran Receiver		x
	TS-352/U		-352A/U)	(-352A/U)
	OS-4/AP	Oscilliscope	x	
. 1	TS-1550	Test Set	x	
1	AN/USM-3	Test-Tool Set	x	x


15

		E : I			
NUMBER	NOMENCLATURE	PURPOSE	RC-121C	RC-121D	
	<u>N</u>	NAVIGATIONAL AIDS CONTD			
1	TS-147(C)/UP AN/USM-25	Test Set Oscilliscope	x	(-147C/UP)	
1	TS-403/U	Test Set		x	
1	AN/ARN-21	Tacan	x	x	
		IDENTIFICATION			
*1 ·	AN/APX-6	IFF Transponder	. x	x	
ī	AN/APX-7	Interrogator	. x	X	
1 *1	AN/APX-25	SIF	x	x	
		ECM EQUIPMENT			
1	AN/APR-9B	ECM Receiver	x	x	
ī	AN/APA-69	D/F Unit	x	(1st 15 a/c x)	
ī	AN/ALA-11A	Pulse Analyzer	x		
**1	AN/ALA-6	D/F Unit		X	
**1	AN/APA-74	Pulse Analyzer		x	


^{*} Installed or retrofitted when equipment becomes available.


** The AN/ALA-6 and AN/APA-74 will be retrofitted to replace the AN/APA-69 and AN/ALA-11A when equipment becomes available.


		and a			
				208.6	
0		DEPAREMENT OF THE A	IN PORCE		
	APONO 4073		医多种性 医皮肤性 医皮肤	stober 1954	
	SUBJECT: Constitution Varying and	and Activation of the Control Wing and Certa	Eq. 551st Airborn ain Other USAF U	me Early mits	
	TO: Communder, Ad	r Defense Command			
	1. The following Command, and will be accated:	units are constituted, tivated on or about 15	assigned to the December 1954, a	Air befense te indi-	
	Unit	7/0 Composition	Autho Str Off Wo Amp S	Sta of Act	
	Ng, SSLet Airborne Sarly Warning & Control Wg	1-2121, 1 Det 54, 1 x Part II	Po	is AB, dmouth, as	4
	Alst Airborne Early Warning & Control Sq	1-2132, 1 Oct 54, . 1 1 x Part II	18 266		
	55 d. Electronics Maint 8:	1-124, 1 Oct 54, 1 x Part II		Clellan AFB, cremento, Lif	
	55 d Periodie Meint Sq	1-125, d Oct 54. a. 1 x Part II	9 6 594		
	Commander, Air Defense	be furnished from sour	ces under contro	l of the	
	30 The above are Courrently listed in inci- Currently listed in inci- Unit Authorization Lists equipment in the HME col- listed in USE column. We in Lefense Command will cluded in the MS 41 for 1	based on current UALt; umm of Form 601B; rema (ithin sixty (60) days; submit a proposed list	ense Command wil s listing Unit Ed inder of equipment from date of this	l prepare ssential at will be	
	4. The preceience us indicated in the curreriprities of Programmed sequent issues of this p	Units; any changes will	Derating Program		
•	5. Thom activation Warming and Control Wing Squadron is assigned to Wing.	of the Hemiquarters, 5, the 961st Airborne Esthe 551st Airborne Earl	urly Warning and	ontrol	
	6. When the action will be made to Readquar Status Change Report (Recurrent instructions.	directed herein has be ters 'EAF by means of t ports Control Symbol AF	he Air Force Ore	anization	
					The second second

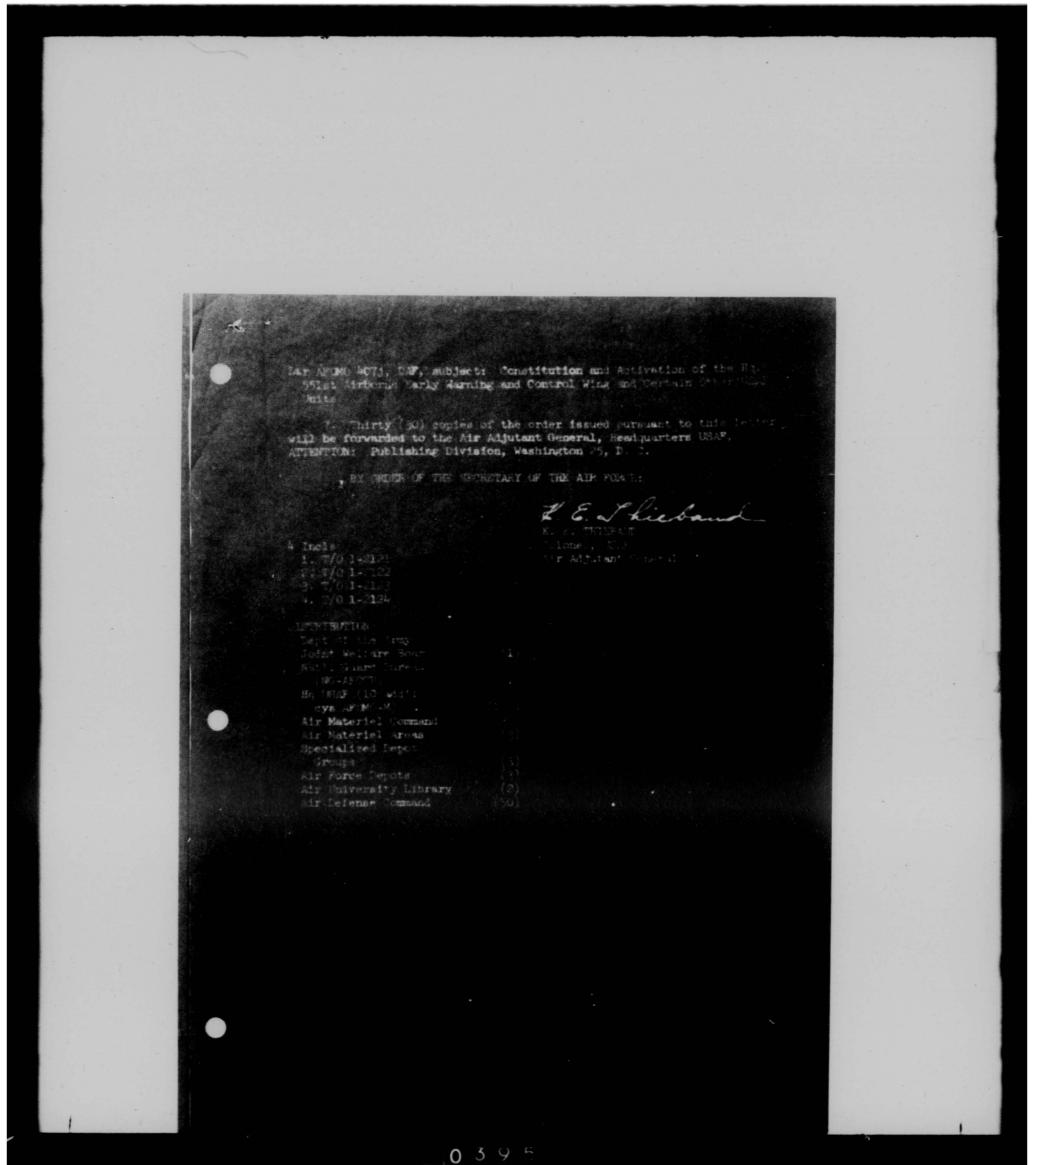


APONO 4275 1 Movember 1954 SUBJECT: Constitution and Activation of the 551st Electronics Maintenance Squadron and the 551st Periodic Maintenance Squadron TO: Commander, Air Defense Command 1. The 551st Electronics Maintenance Squadron and the 551st Periodic Maintenance Squadron are constituted, assigned to the Air Defense Communi, and will be activated on or about 18 December 1954, at Otis Air Force Base, Falmouth, Massachusetts, under appropriate Unit Manning Documents with non-T/O authorization. Authority is granted to reorganize these units in the future as desired, without reference to this headquarters, provided the reorganization does not exceed the command's grade and space authorization. 2. Concurrently with the activation of the Headquarters, 551st Airborne Early Warning and Control Wing in letter AFOMO 407j, DAF, dated 11 October 1954, the above units are further assigned to the 551st Airborne Early Warning and Control Wing. 3. Personnel will be furnished from sources under control of the Commander, Air Defense Command. 4. UAL's for the above units will be prepared similarly to those prepared for like units directed activated in letter AFOND 407j, DAF, dated 11 October 1954, except that all equipment will be listed in the USE column of Form 601B. 5. The precedence categories for the above units are established as indicated in the current issue of the USAF Operating Program - Priorities of Programmed Units; any change will be reflected in subsequent issues of this publication. 6. Redesignation, inactivation and any future activation of these units vill remain a function of Headquarters USAF and appropriate directives will be issued upon request. 7. When the action directed herein has been accomplished, report will be made to Headquarters USAF by means of the Air Force Organization Status Change Report (Reports Control Symbol AF-Ol) in compliance with current instructions.

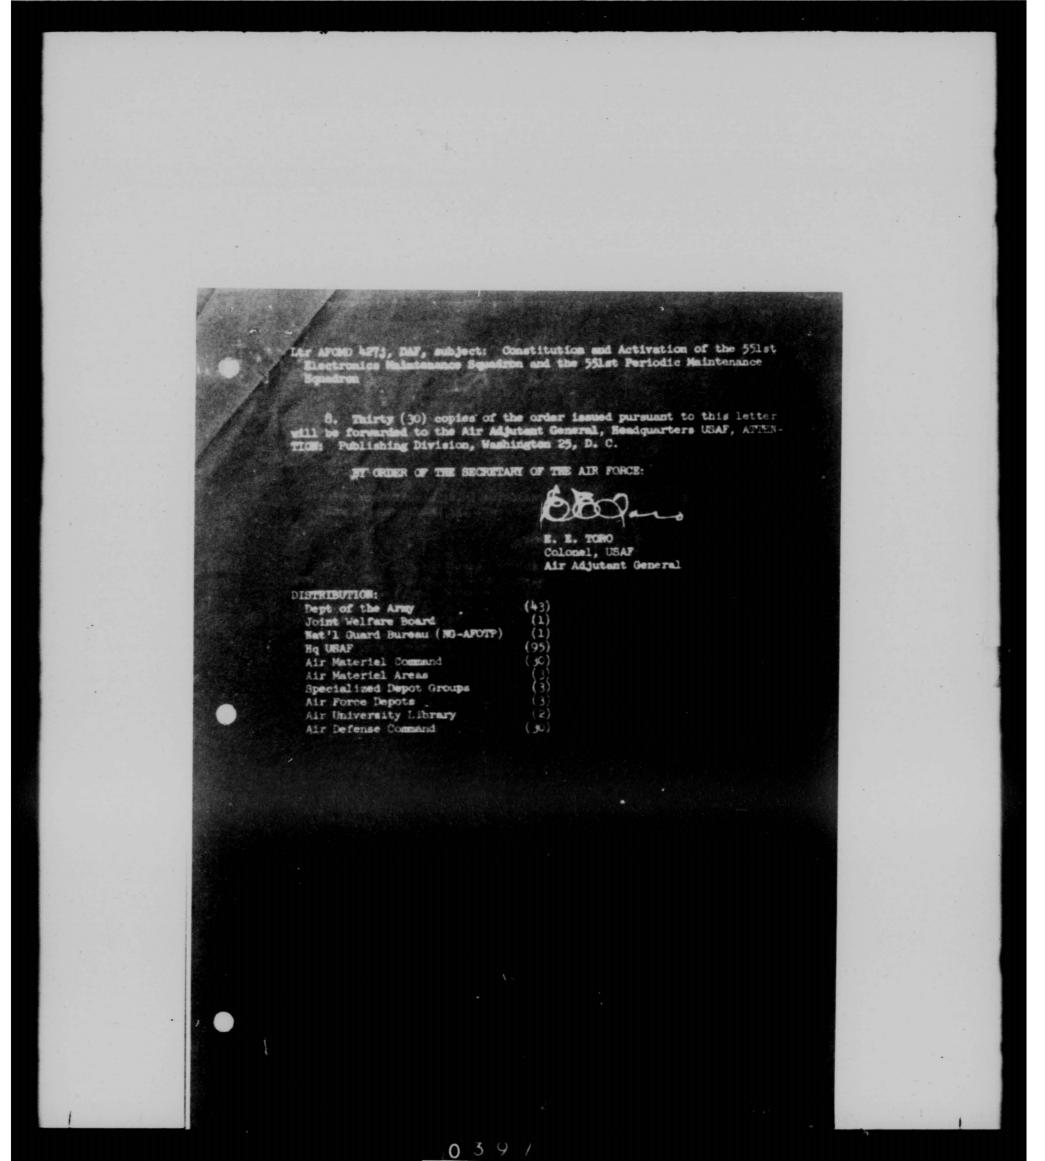

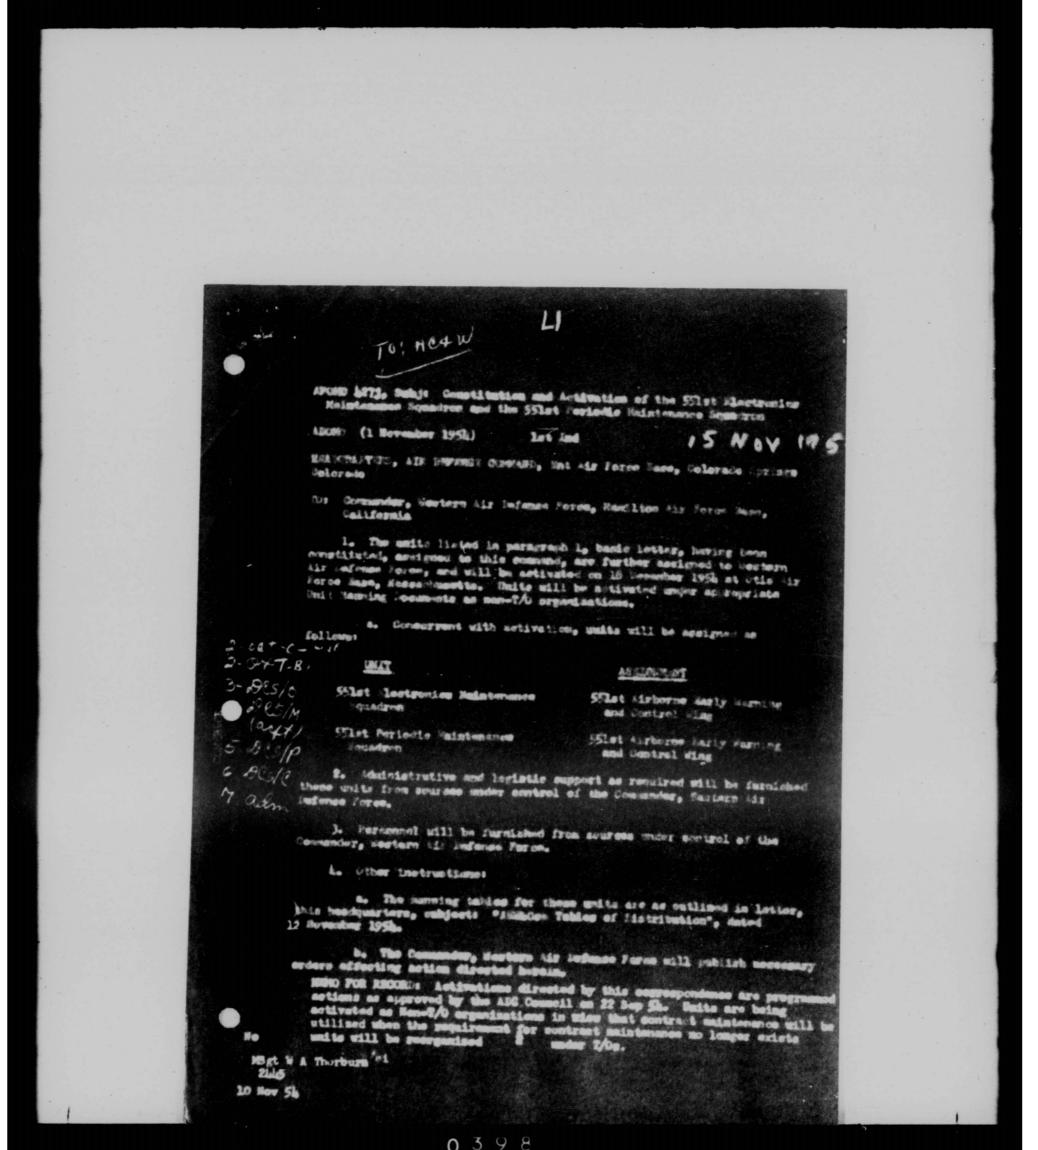

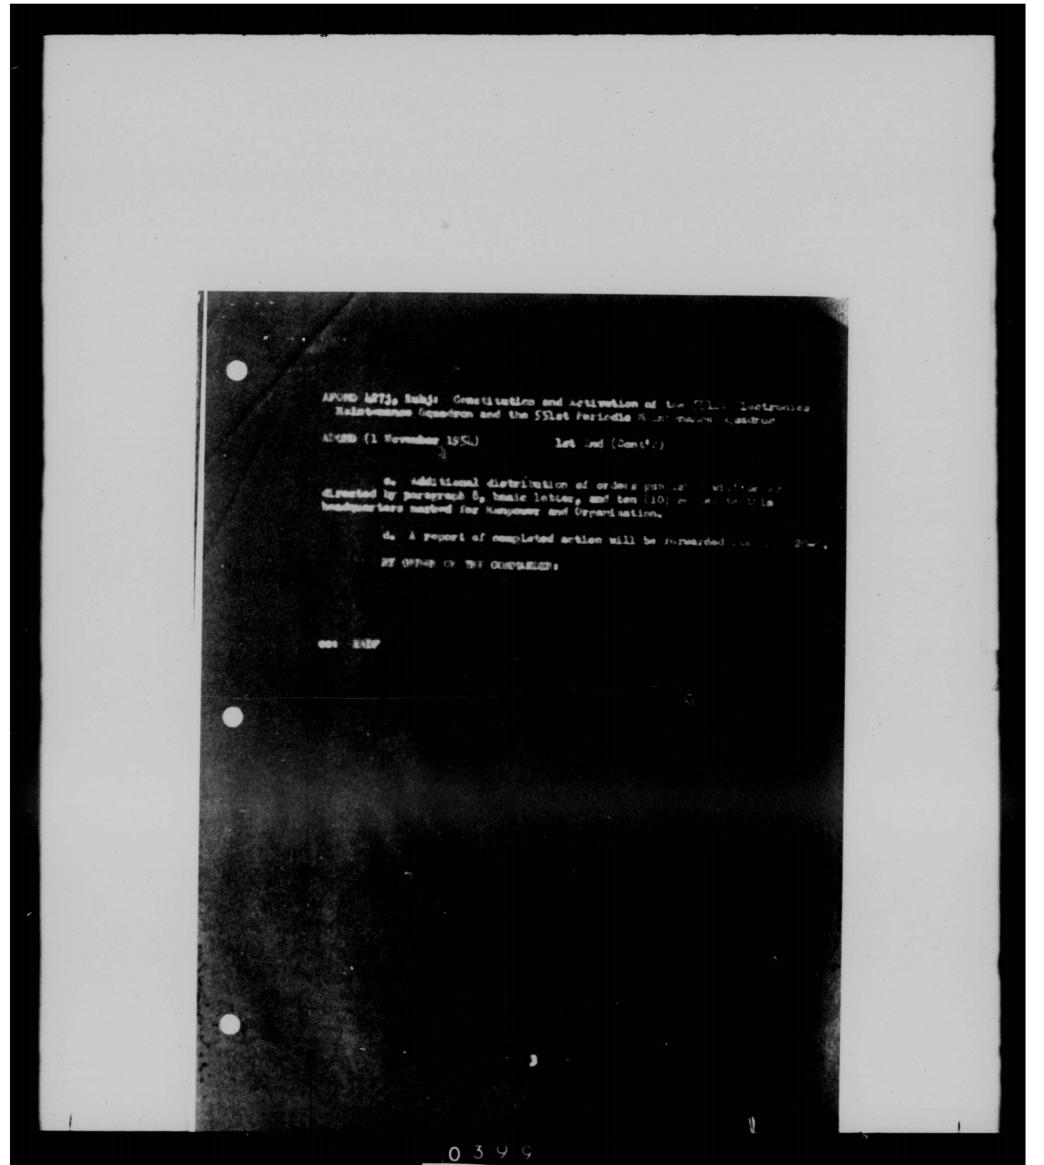

THIS PAGE IS DECLASSIFIED IAW EO 13526

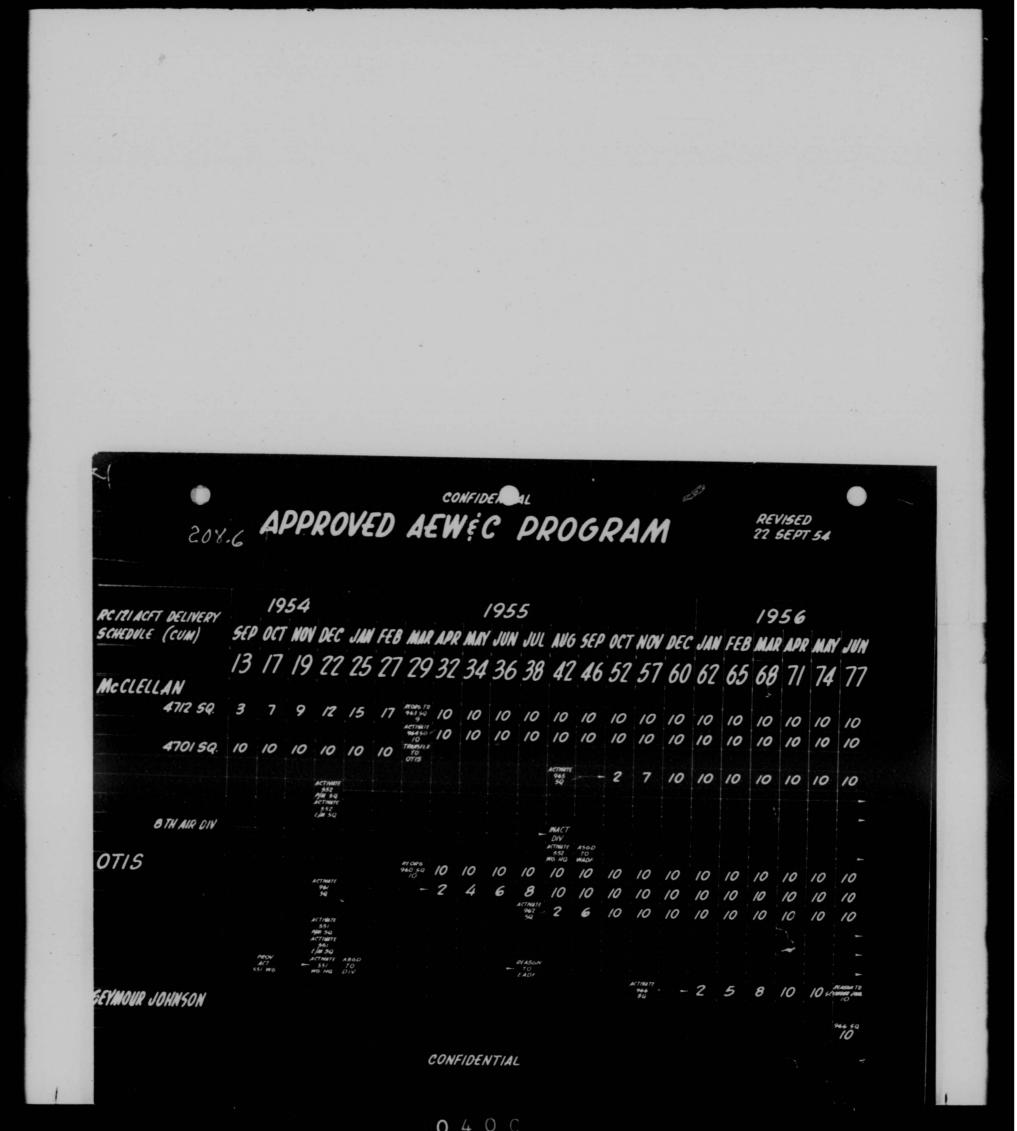

THIS PAGE IS DECLASSIFIED IAW EO 13526

208.

OAT


(Unclas) Summary of AEMAC Facilities
Dir/Instls


28 Sep 54 /s/t/ Capt.L.C.Porter,Jr./2616/1


1. The following resume of AFMAC Facilities is listed for your information and record:


a. McClellan AFB. It will be possible to park and maintain up to ho RC-121 aircraft on the interim parking area shown on Inclosure \$1. This plan has been coordinated between the 5th Air Division and the base commander at McClellan AFB. It should be pointed out that the permanent mission at this base has only 26 aircraft and the additional aircraft are shown to indicate the location of an additional squadrom in the event Otis facilities are not available. Housing will be available for all assigned airmen as the decision has been made to double up permanent barracks space until additional housing is completed in December 1955. Real estate acquisition approval for our permanent facilities has been held up by House Armed Services Committee until recently and after Joint House and Serate Committee approval, money will be available to acquire this land. In view of this delay, it will be at least two years before any permanent maintenance or operational facilities are completed for the AFMC wing and tactical squadroms. This headquarters, together with 5th Air Division periodic and electronic maintenance requirements in the interim area which will meet the full Group operational mission until permanent facilities are completed some two years hence.

b. Otis AFB. The Public Norks Program for AEMAC facilities at Otis AFB vill provide Senericial Occupancy of the major portion of the mintenance facilities between December '55 and February '56, including the necessary operational parking for 24 aircraft. This latest Beneficial Occupancy Date is at variance with the September '55 figure given in 8th Air Division presentation. In order to provide facilities for the programmed arrival of the let Squadron to Otis on 1 March 1955, certain interim mintenance facilities sited across the airfield out of the construction area, were programmed out of PT-55 MMO funts and will be ready for the 1 March 55 arrival of 10 C-121 aircraft. These facilities are shown on Inclosures 2 and 3. The mintenance facilities provide seven paved maintenance stubs, five of which are equipped with nose docks, electrical requirements, water and air. Prefabricated buildings will provide for periodic and electronic mintenance and technical supply facilities. Barracks, SOQ, training and administrative facilities have been provided by activation of existing buildings at Otis AFB. Although parking of 30 C-121 is a major problem, with 12 aircraft in the mintenance area and 9 aircraft on the existing TaB ramp, and with those at "Iran" and on missions, all assigned aircraft can be parked.

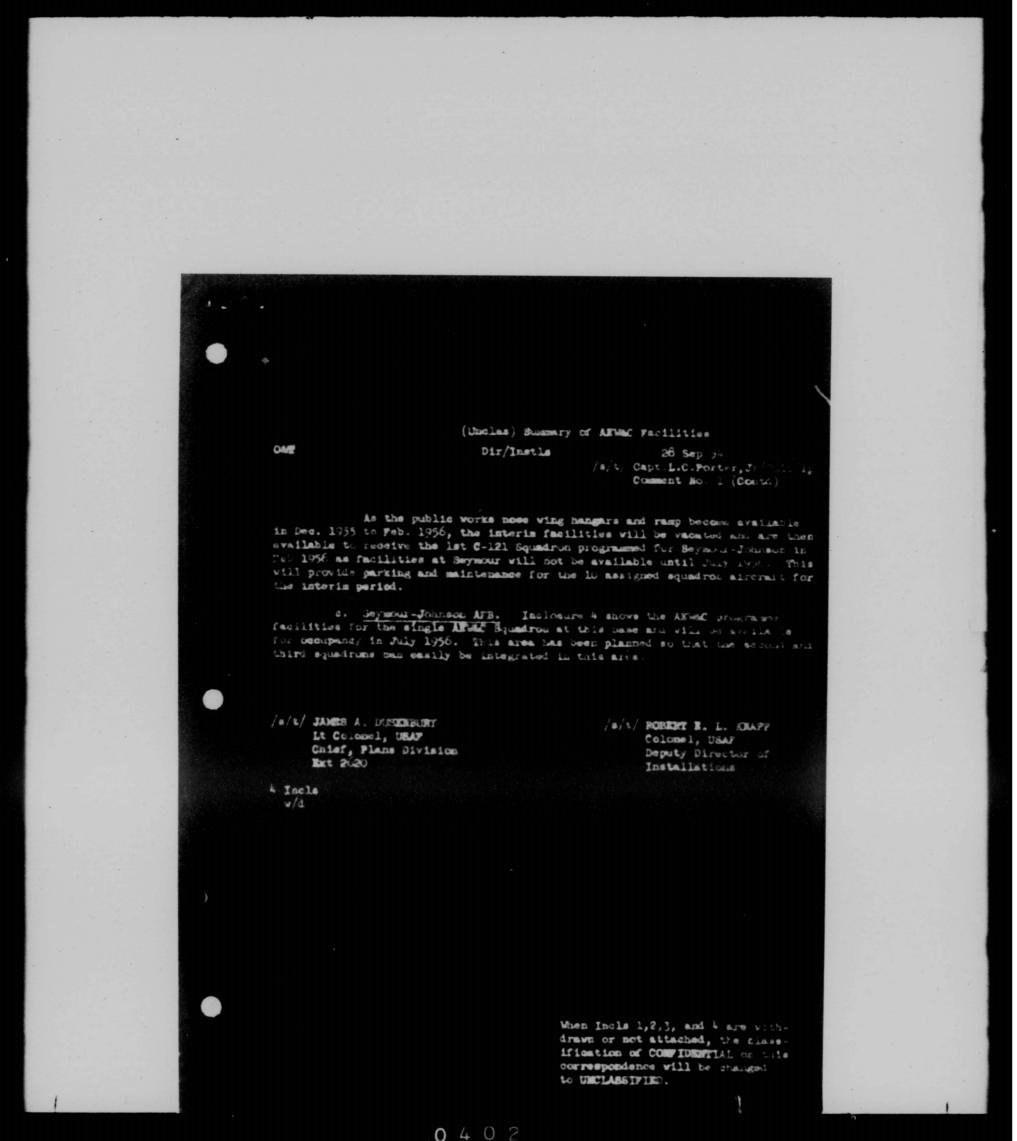

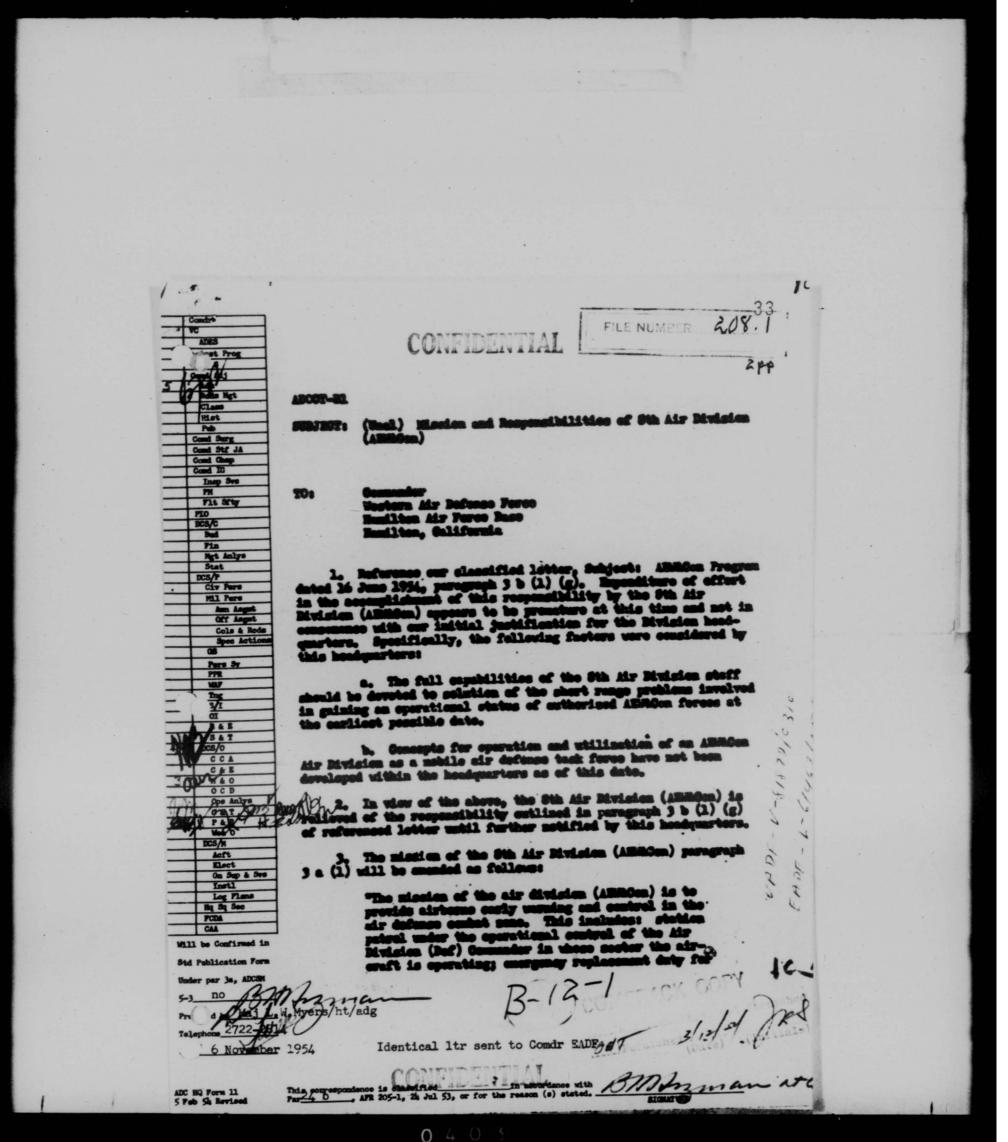

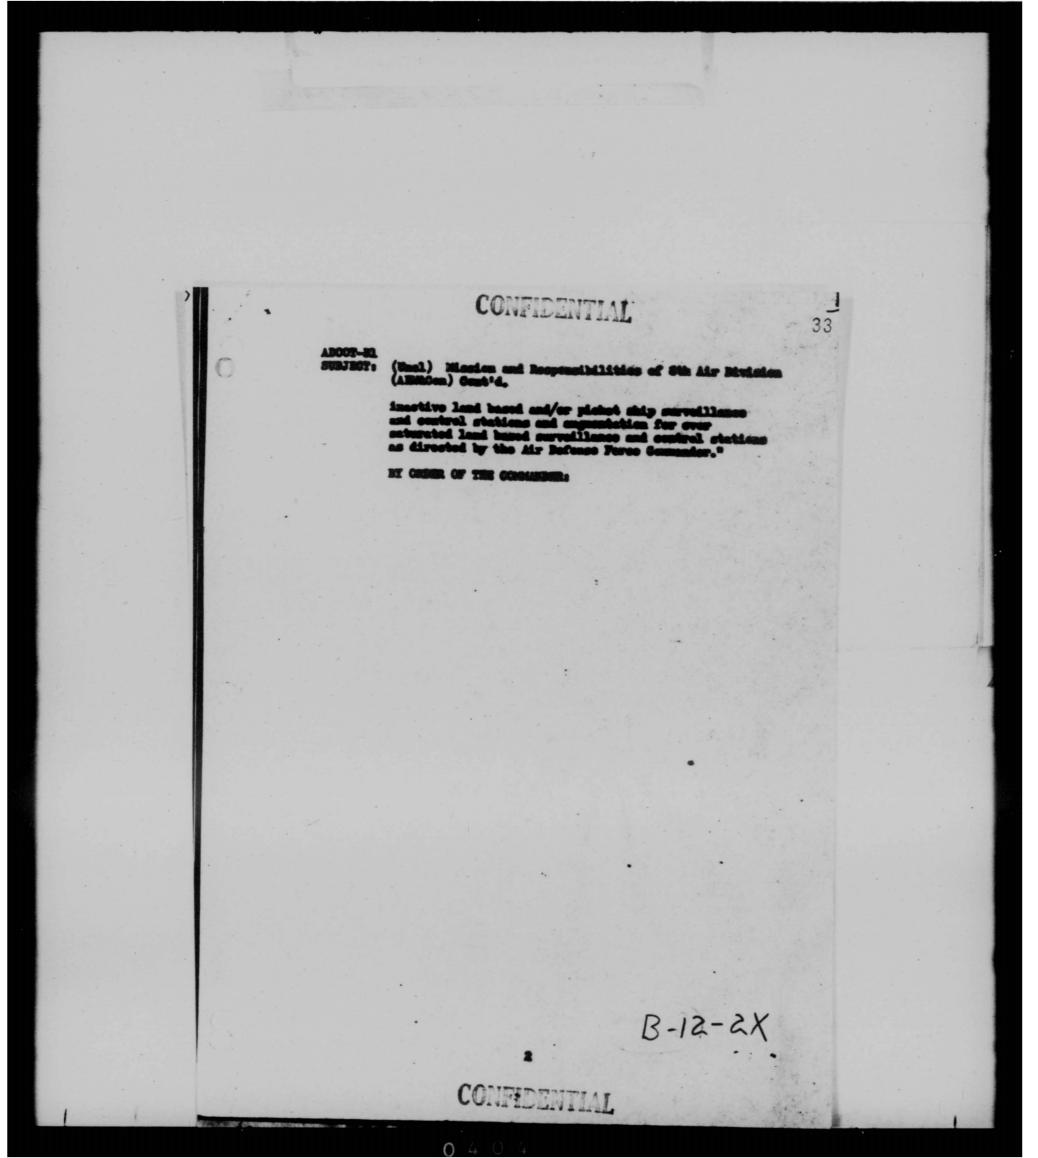

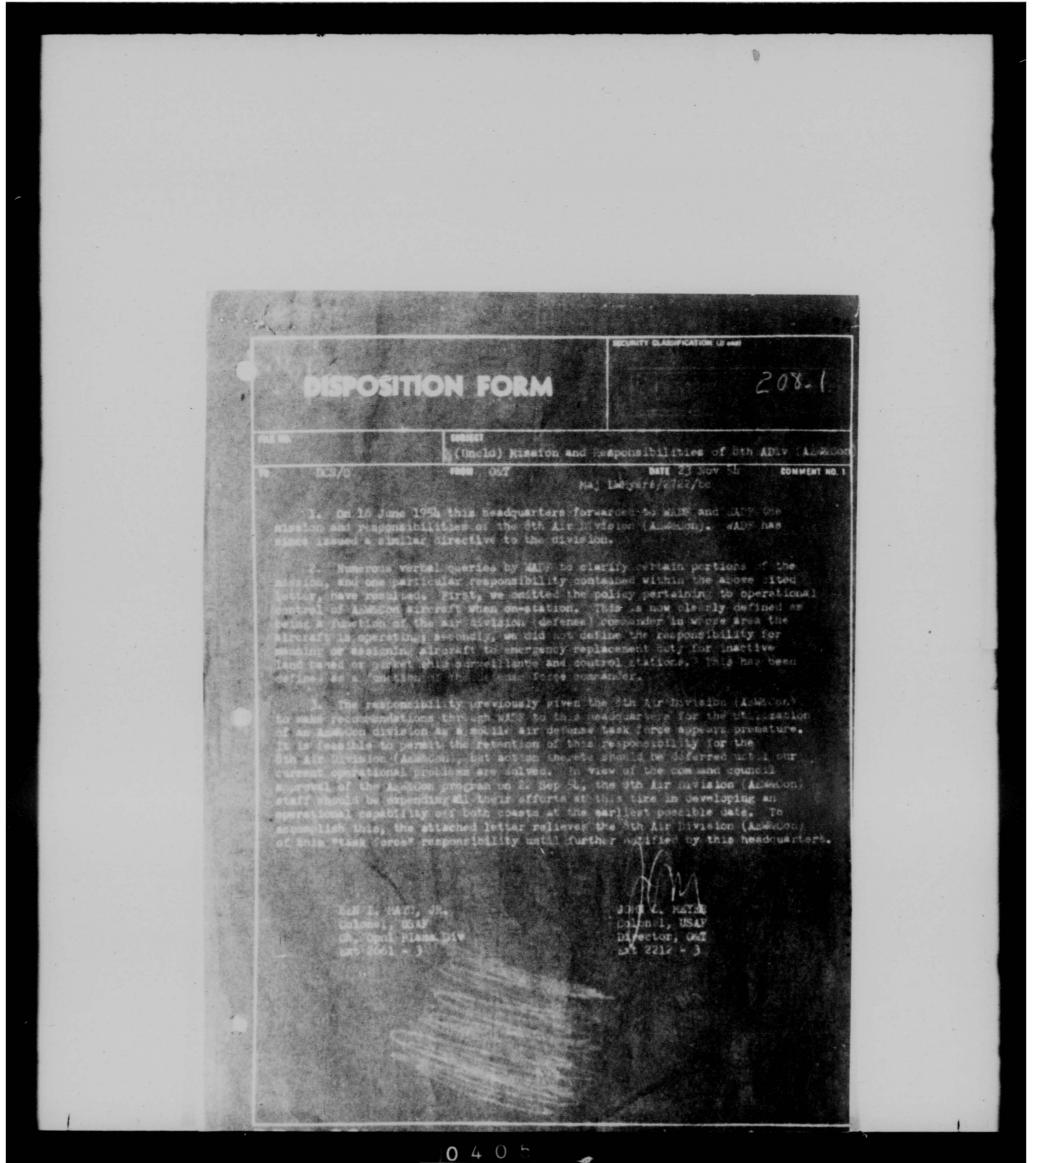

THIS PAGE IS DECLASSIFIED IAW EO 13526

HEADQUARTERS AIR DEFENSE COMMAND BHT AIR FORCE BASE GENERAL ORDERS NUMBER 47 DESIGNATION AND ORGANIZATION OF PROVISIONAL UNITS--1. The Airborne Early Warning and Control Wing, Provisional is designated and organized at McClellan Air Force Base, California, effective 1 January 1955. Concurrent with organization this unit is attached to the 8th Air Division (AEW&Con) for operational and administrative control. BY ORDER OF THE COMMANDER:

HEADQUARTERS
AIR DEFENSE COMMAND
BUT AIR FORCE BASE
COLORADO SPRINGS, COLORADO

GENERAL ORDERS) IUMBER 47)

28 December 1954

DESIGNATION AND ORGANIZATION OF PROVISIONAL UNITS--1. The Aircorne Early Warning and Control Wing, Provisional is designated and organized at McClellan Air Force Base, California, effective 1 January 1955. Concurrent with organization this unit is attached to the 8th Air Division (AEW&Con) for operational and administrative control.

for the Airborne Early Warning and Control units programmed for activation at McClellan Air Force Base.

 Personnel will be attached for duty with this unit from standars type units under the control of the Commander, Western Air Defense Force.

4, Equipment will be furnished from sources under the control of the Commander, Western Air Defense Force.

with Air Force Regulation 20-49.

o. Authority: Air Force Regulation 20-27.

BY ORDER OF THE COMMANDER:

OFFICIAL:

GEORGE F SMITH Major General, USAF Chief of Staff

WALLER W ROBINSON Colonel, USAF Command Adjutant

DISTRIBUTION "A"

CONFIDEN

HEADQUARTERS

8TH AIR DIVISION (AEW & C)

McCLELLAN AIR FORCE BASE

McCLELLAN, CALIFORNIA

SDOPR

SUBJECT: Request for Provisional Organization

7 DEC 15-4

36

To: Commander
Western Air Defense Force
Hamilton Air Force Base

Hamilton, California

1. On 18 December 1954, scheduled activations of the approved ABWAC program, as revised 22 September 1954, will bring about an ABWAC organization structure as indicated on Inclosure #1 to this letter. As shown by that inclosure, at that time this Headquarters, in addition to directing the day-to-day operations of McClellam ABWAC Squadron units, will be engaged in supervising and directing the operation and buildup of a wing structure at Otis Air Force Base.

- 2. As a result, with a current authorization of 27 officers, 52 airmen and 6 civilians, this Headquarters on 18 December must perform all of the functions eventually to be assigned to the 552nd ARWAC Wing, and will be directing an operation which will be just one (1) squadron short of a fully activated ARWAC Wing with assigned tactical and support units. At the same time, the Division Headquarters must continue to accomplish the extensive planning and policy-making actions required for development of a two coast program of airborne early warning and control activities.
- 3. I consider the planning and policy-making functions which must be performed by this Headquarters prior to its scheduled inactivation in August 1955 to be of paramount importance to the future of the AEWAC program. The policies, tactics and procedures placed into being today will exist subsequent to August 1955. Of equal importance is the close supervision and direction of the day-to-day operations of the McClellan units. The procedures, tactics and flight policies now being developed here will provide the basis for all operations policies which will apply to the overall AEWAC program, now and in the future.
- 4. I have found it most difficult under the current organization to employ the Division staff resources in a manner which will permit

B-516-2

SA/DIV 0417

SMAMA Oct 54 5M lp

36

Hq 8th ADiv (AKR&C), SDOPR, Subject: Request for Provisional Organ

the limited number of authorised efficers and airmon to carry out effectively the Wing and Division staff responsibilities required by our mission directive. A functional separation of staff responsibility is required. Furthermore, such a separation must be accompaned by a degree of physical separation of the agencies charged with the Wing and Division type operation.

- 5. It is requested, therefore, that your Meadquarters take action to obtain authorisation for organization of a provisional ARWAC Wing at McClellan Air Force Base.
- 6. The provisional organisation requested will provide a trained staff for the 552nd ANNAC Wing when that organisation is activated in August 1955. In addition, this organisation will be the means whereby it will be possible to accomplish the functional and physical separations referred to in paragraph 4, above.
- 7. Although it is proposed to man the provisional wing erganisation from personnel resources available to the Division, attention is directed to the fact that the Division Headquarters personnel authorisations provide only for a staff consisting of 27 officers, 52 airmen and 6 civilians. The staff functions required of that group now, and under the provisional erganisation proposed, exceed possible limits of personnel performance which can be demanded. Therefore, in addition to the action requested in paragraph 5, it is requested that your Headquarters confirm the proposed action of this Headquarters to overman the 8th Air Division Headquarters as may be required to build up the provisional wing to a personnel position representative and required for wing operation. In this regard, reference is made to the situation described in paragraph 2 above. Additional floor space will not be required.
- 8. Favorable approval of the action requested will result in the following benefits:
- a. In August 1955, there will be in place a trained and effectively operating and complete staff for manning of the 552nd AEW&C Wing when that organisation is activated. I believe that the benefits which will accrue to the Western Air Defense Force AEW&C operation at that point in time are obvious.
- b. The Division staff will be relieved from the responsibility of running the day-to-day aircraft operations of McClellan AEM&C units and can devote a maximum effort to developing the overall AEM&C program as required by mission directive. Again, I believe the benefits are obvious not only as it would pertain to your Headquarters, but to the overall air defense picture and future AEM&C operations.

2

B-516-3

Hq Sth ADiv (AETAC), SDOFR, Subject: Request for Provisional Orga

36

9. Full recognition has been given to conservation of manpower under the proposals made in this communication. I do not consider it necessary to man a Division staff under this concept of organization to the degree that 27 officers, 52 airmen and 6 civilians will be required. I propose instead to staff the previsional structure at Division level as follows: 15 efficers, 17 airmen and 2 civilians. No additional civilian spaces will be required and the remaining four (4) civilian and forty-seven (47) military spaces now authorized will be made available to the provisional wing. A diagrammatic picture of the Division-Wing organization is contained in Inclosure \$3\$ to this letter.

10. Reference is made to the position of Comptroller at Division level as shown on Inclosure #3. It should be noted that under the provisional organisation proposed, that the Comptroller function will be retained in the Division Headquarters. This is required because of the two coast statistical and budget problems which will remain in existence until August 1955. At that point in time, the Comptroller function would revert to the 552nd Ning.

ll. Operation of the previsional wing would be accomplished in the conventional manner. The Division staff, however, because of its limited size will function solely as a planning and policy-making body and in the closest coordination possible in developing all aspects of the program.

12. I consider that the personnel talent, planning and policymaking requirements inherent in developing the concepts of AERAG, require a rank structure for staff personnel above that provided for in
current manning documents. I do not consider it advisable to withhold
from the provisional wing all of the ranking people required to perform the policy and planning which must be accomplished by the Division.
Nor do I consider it advisable to retain for Division functioning, any
of the semior ranks which will be authorized on 18 December for the
551st Wing. At the same time, however, I do believe it necessary that
the three (3) most critical areas of the Division staff; i.e., Operations, Personnel and Materiel be occupied by officers in the rank of
Colonel. In this regard, attention is invited to the Division Unit
Manning Document submitted to your Meadquarters for the El December
1954 cycle. Approval of the rank structure proposed in that document
will man the provisional organization under the concepts proposed.
It is recognized, however, that because of the scheduled inicityation
of the Division in August 1955, that any significant action to provide
required personnel my not be furthering. In such event, it is requested that, in addition to the currently authorized Colonel spaces
now allocated to this commend, that three (3) Colonels be made available
to the Division to perform the Operations, Personnel and Materiel
functions required between now and August 1955.

B-516-4

CONFIDENTIAL

Hq 8th ADiv (AEW&C), 8DOPR, Subject: Request for Provisional Orga

13. Your Headquarters is aware of previous proposals made by this command regarding the possibility of retaining an AEWAC Division Headquarters activity beyond the August 1955 date. Informal information available to this command indicates that there is a possibility of future Headquarters Air Defense Command action to justify retention of a Division activity beyond that time. It is my opinion that, under the present concepts of operation as contained in the AEWAC Operational Plan of 10 March 1954, justification of a Division Headquarters will not be possible, unless its composition is designed under the most austere of manning standards and capable of producing with a small personnel complement planning and policy direction of sufficient value to justify its existence. The manning standards proposed for the Division previsional organisation of 12 efficers, 10 airmen and 2 civilians (personnel remaining after the Comptroller function reverts to the Wing, Ref: paragraph 10), may provide the basic justification should such action be taken.

14. In sussery:

- a. The 8th Air Division Headquarters organisation and personnel authorisations are imadequate to perform the wing functions now required to direct the McClellan AFS AEMAC activities and simultaneously exercise Division policy direction required for the development of a two-coast activity. This dual effort decreases the operating efficiency of the command.
- b. It is requested that action be initiated to authorise the activation of a provisional AERAC Wing at McClellan APS to permit a breakout of the wing functions. In addition, this provisional organisation will provide a trained staff to man the SS?nd AERAC Wing in August 1955.
- e. To staff the Division and Wing structures under this concept of provisional organization, it is requested that authority be granted to overman the Division Meadquarters as required to bring into being a representative I/O Wing structure for McClellan operations.
- d. Under this provisional concept, the Division Mondaurters staff would be reduced to a complement of 15 officers, 17 airms and 2 civiliance the remaining spaces to be unde available to the provisional Wing.
- o. Under this organization, the provisional Wing will have a primary mission of directing for the Nestern Air Befunce Perso all Medician ARMS activities. The Division Medicumbers will be primarily conserved with the policy matters of the development of ARMS on top constant.

5 Inclo 1 - Doc 64 Orga 2 - Aug 55 Orga 5 - Provintenal Orga Brigadler Constal, USAP

B-516-5

CONFIDENTIAL

CONFIDENTIAL

COPI

COPY

30

Hq 8th ADiv (AEWAGon) 8DOFR Subj: Request for Provisional Organisation
WDGDR (7 Bec 5h) lst Ind 10 Bec 195h

HQ WESTERN AIR DEFENSE FORCE, Hamilton AFB, Hamilton, California


TO: Commander, Air Defense Command, Est AFB, Colorado Springs, Colorado

- 1. I am in complete agreement with the proposal contained in basic letter to authorize the organization of a previsional AEURC Wing Head-quarters at McClellan Air Force Base and so recommend this action. This will permit a clear delimention of functions and responsibilities between the 8th Air Division (AEURCon) Headquarters and the Wing Headquarters organization preparatory to activation of the 552d AEURC Wing programmed for August 1955.
- 2. The supervision and operational aspects of this proposal are obvious. It follows the identical action which was taken to organise a provisional AEREC Wing Headquarters at Otis Air Force Base preliminary to activation of the 551st AEREC Wing Headquarters on 18 Becamber 1951. The increased burden now placed within 6th Air Division Headquarters to perform in a dual capacity in that it must supervise the Ming activities at Otis Air Force Base plus those at Hotilellen Air Force Base without benefit of a Wing Headquarters organization at Hotilellan Air Force Base to which Ming problems can be delegated, is both operationally and organizationally unsound.
- 3. No additional manpower authorizations will be required to accomplish the proposed organization of the provisional Wing Headquarters at McClellan Air Ferce Base. Authorizations presently available to Headquarters 8th Air Division will be used for manning required positions in the provisional Wing Headquarters as indicated in paragraph 9 of basic letter. There is a question, however, of sufficient Colonel authorizations being available within present space allocations to permit the procurement of qualified key personnel to accomplish both Division and Wing functions at McClellan. To this extent, I agree with the proposal in paragraph 12 of basic letter that three (3) additional Colonels be made available until activation of the 552d AEWAC Wing Headquarters occurs in August 1955.

h. I consider the development of the AEWAC program to be of as sufficiently high priority and importance to our air defense star? to warrant approval of the proposed action as soon as possible

3 Inels 1 Cy Es Inel w/d S/T WALTER FORML, USAF

B-516-6X

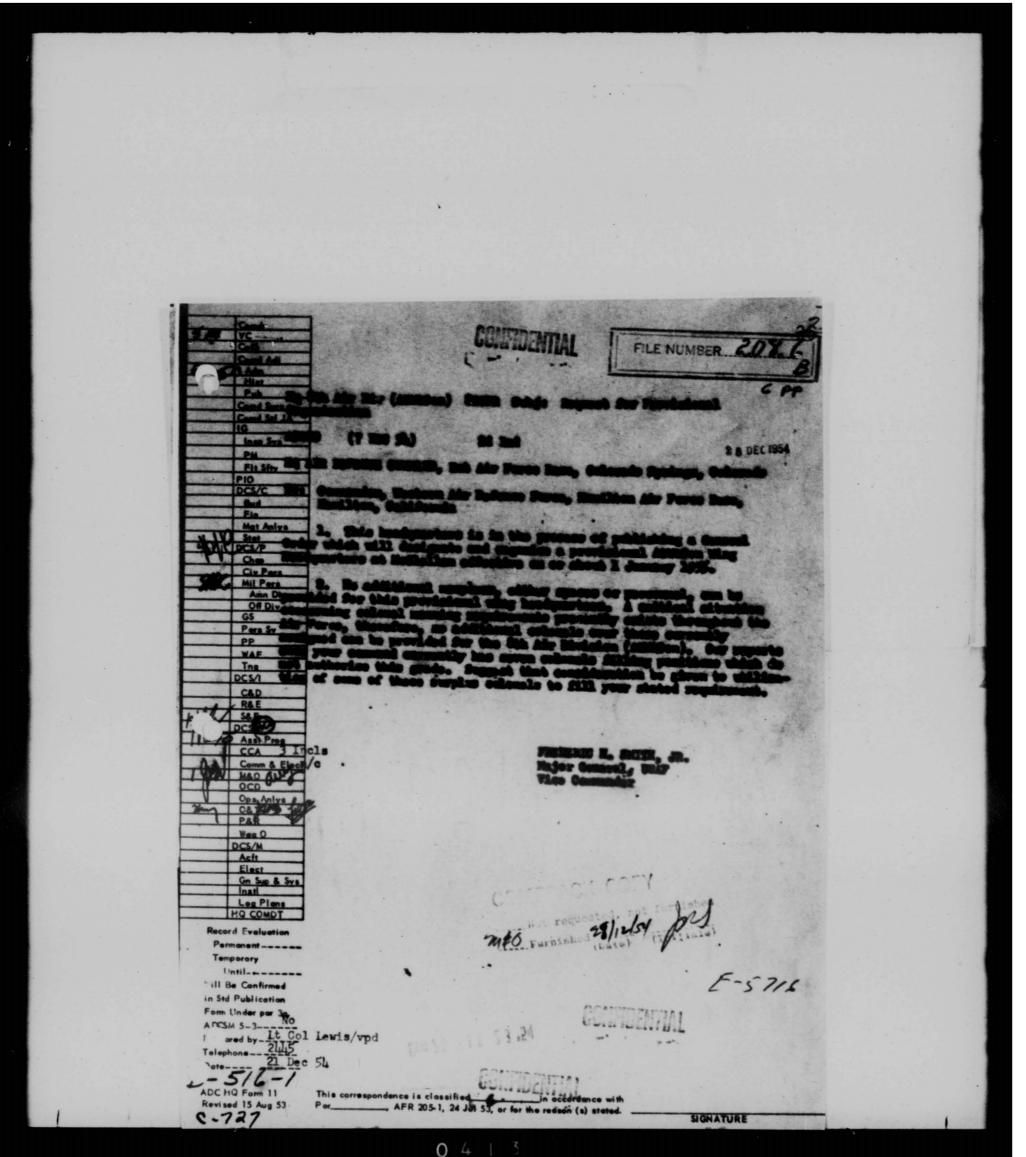

S

3

208.1

Projected ANASC Tragress

DES/N Installations SCS/P DCS/O PAR LBF 23 Sept 54

CAT CAE NAC Comptroller

1. The 1954-1960 study incorporates the expansion of the A UAC progress from 7 equadrons at and F1 56 to 12 aquadrons by end FI 59. Thanking and proposed location of the additional 5 squadrons are charted below:


ADWY


	Yes.	77	57 1/2	Ma.	7 58	1/2	14	Y 50	2/2	PT 60
HoClellam Ctis	1	3	27	-					-	
Prookley Norten NoChord		1.	10	-			-	1	10	
eymour Johnson	1	1	15	1	2	26	1	3	33	(married


- 2. The present RC-121 sireraft production schedule terminates approximately August 1956. At that time we will are sufficient sireraft to excip the 3 squadrons at ReClellem, 3 squadrons at Otia, and 1 squadron at Seymour-Johnson.
- 3. PAR is requesting that Tendquarters USAF approve the ATTAC buildup immediately so that action may be initiated to free the procurement of additional PC-121 aircraft and support facilities.
- 4. Request addressess develop detailed requirements appropriate to their functions so that immediate implementing action may be taken upon receipt of USAF approval.


CLAY TICE, JR. Colonel, USAF Assistant for Programming Ext 2691


E = 18 -7

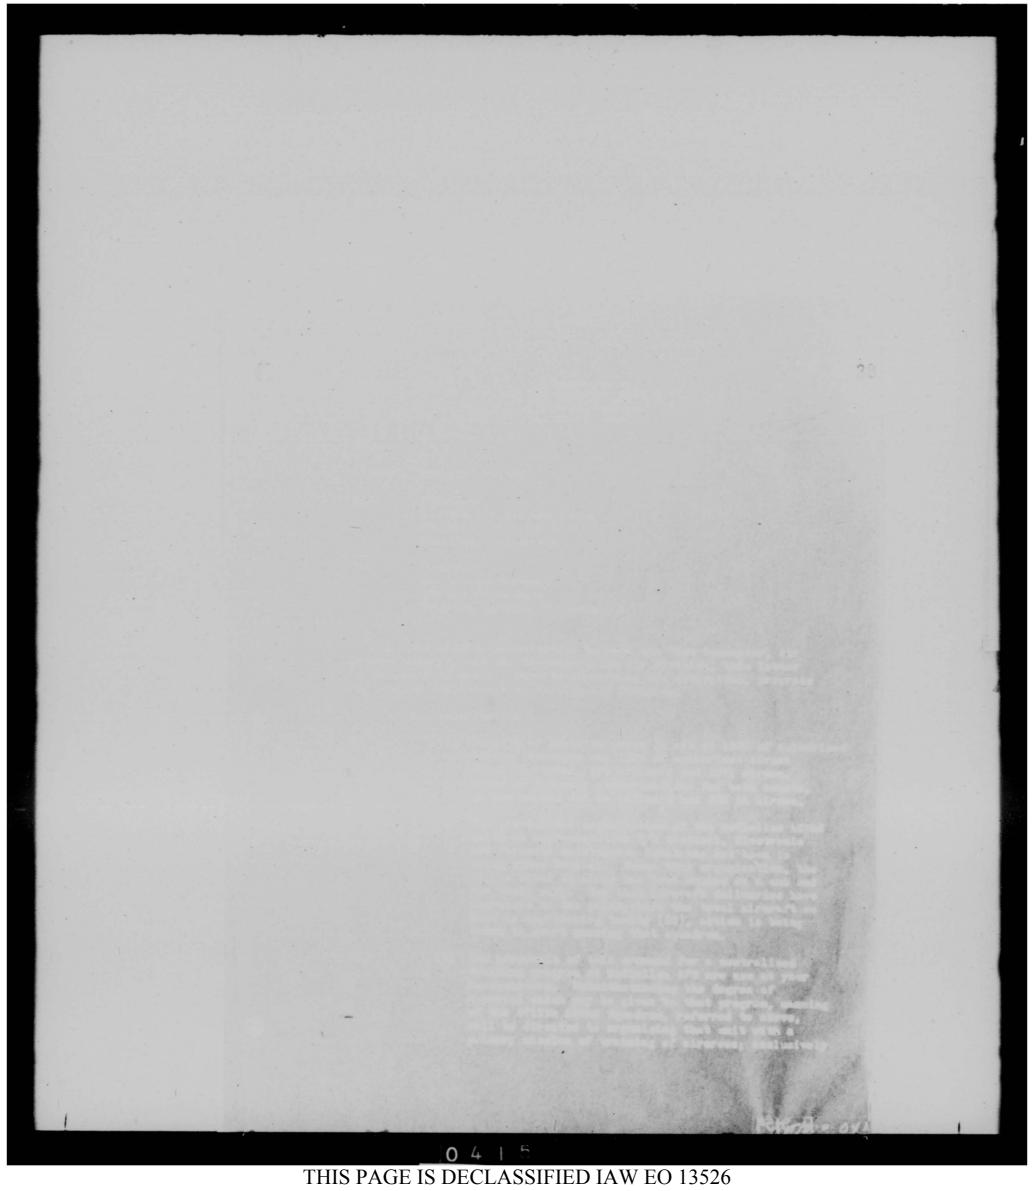


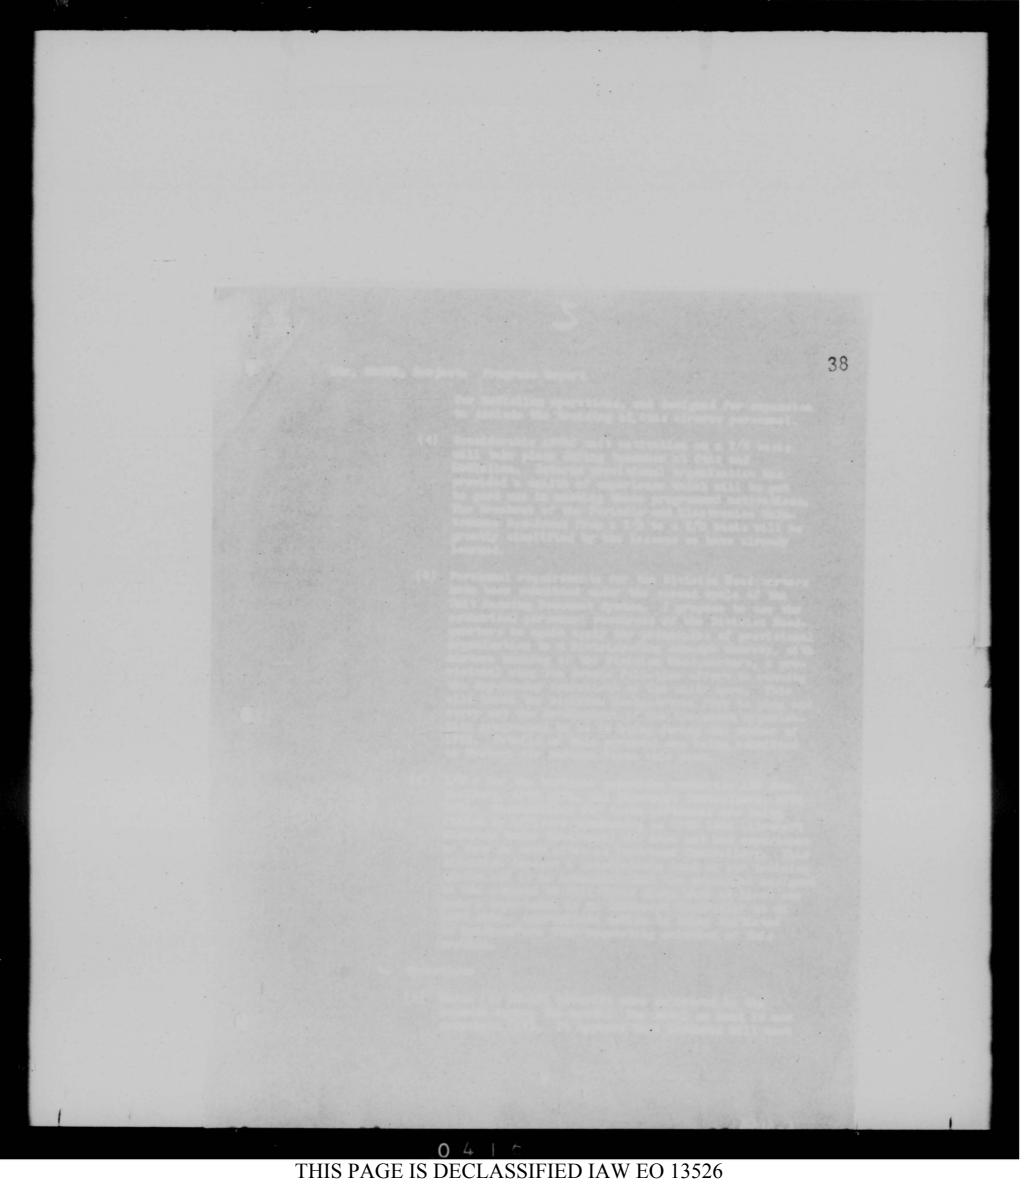


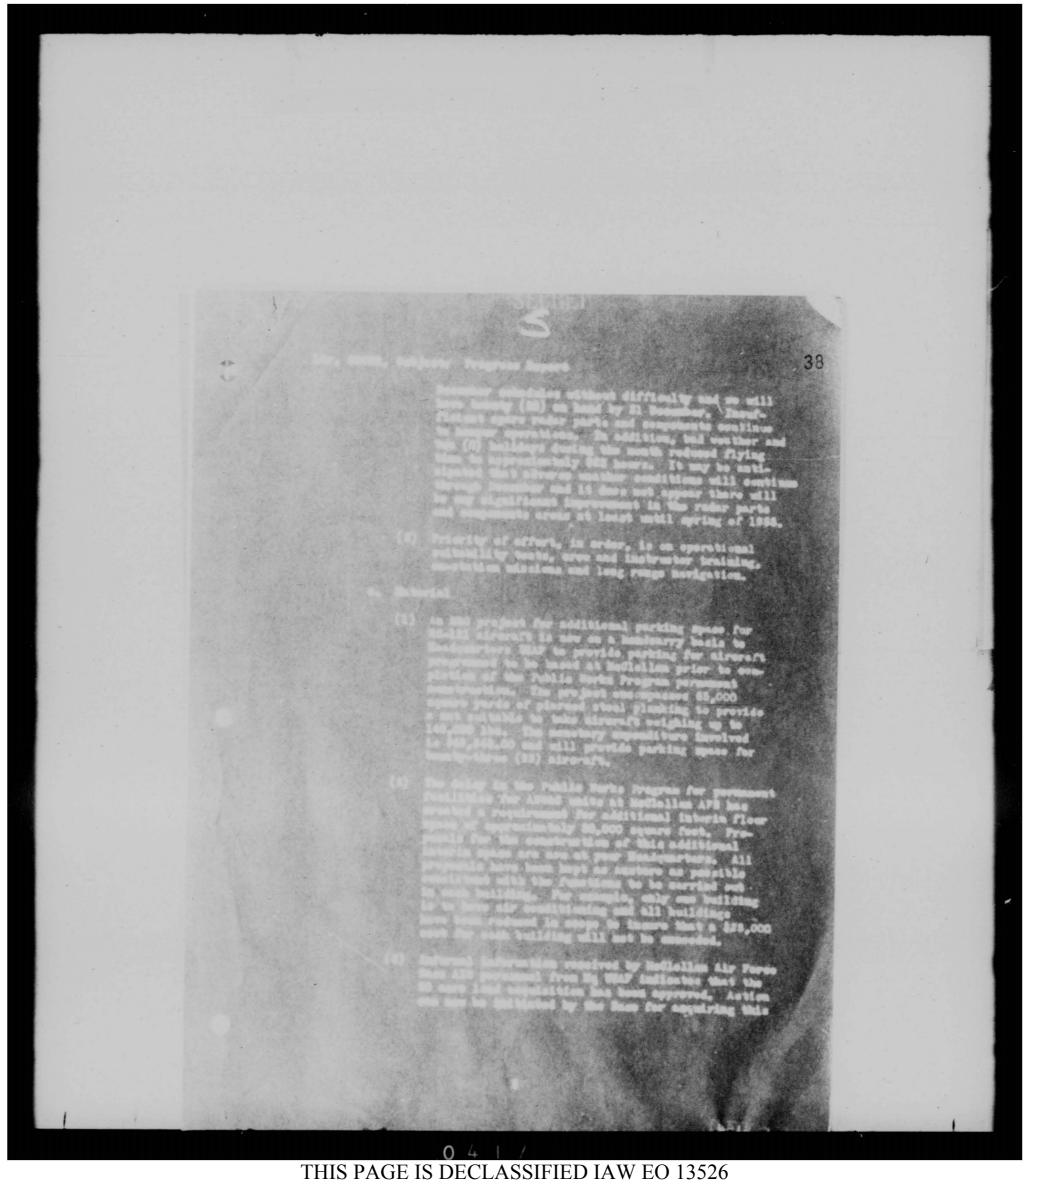


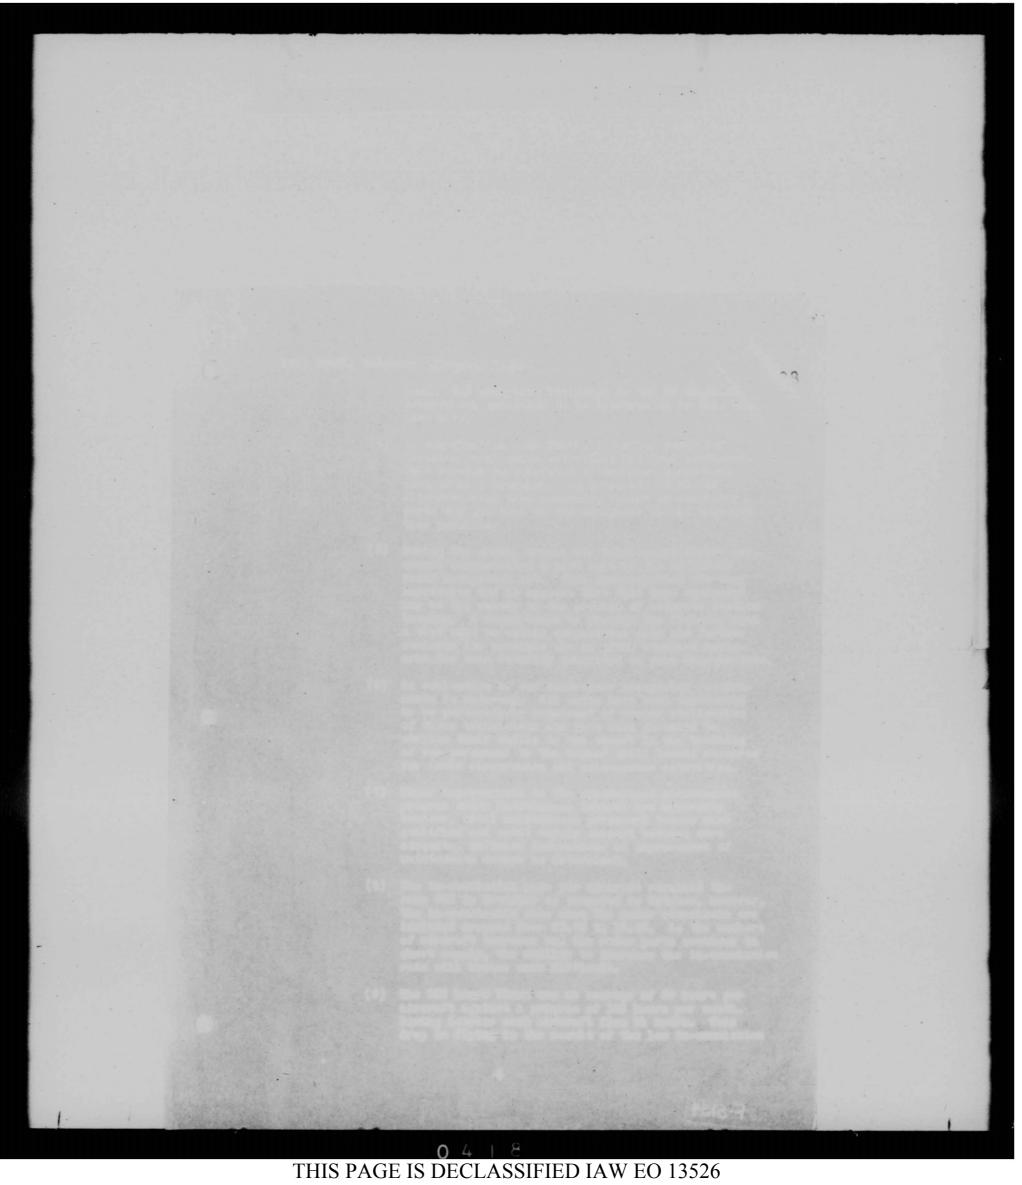


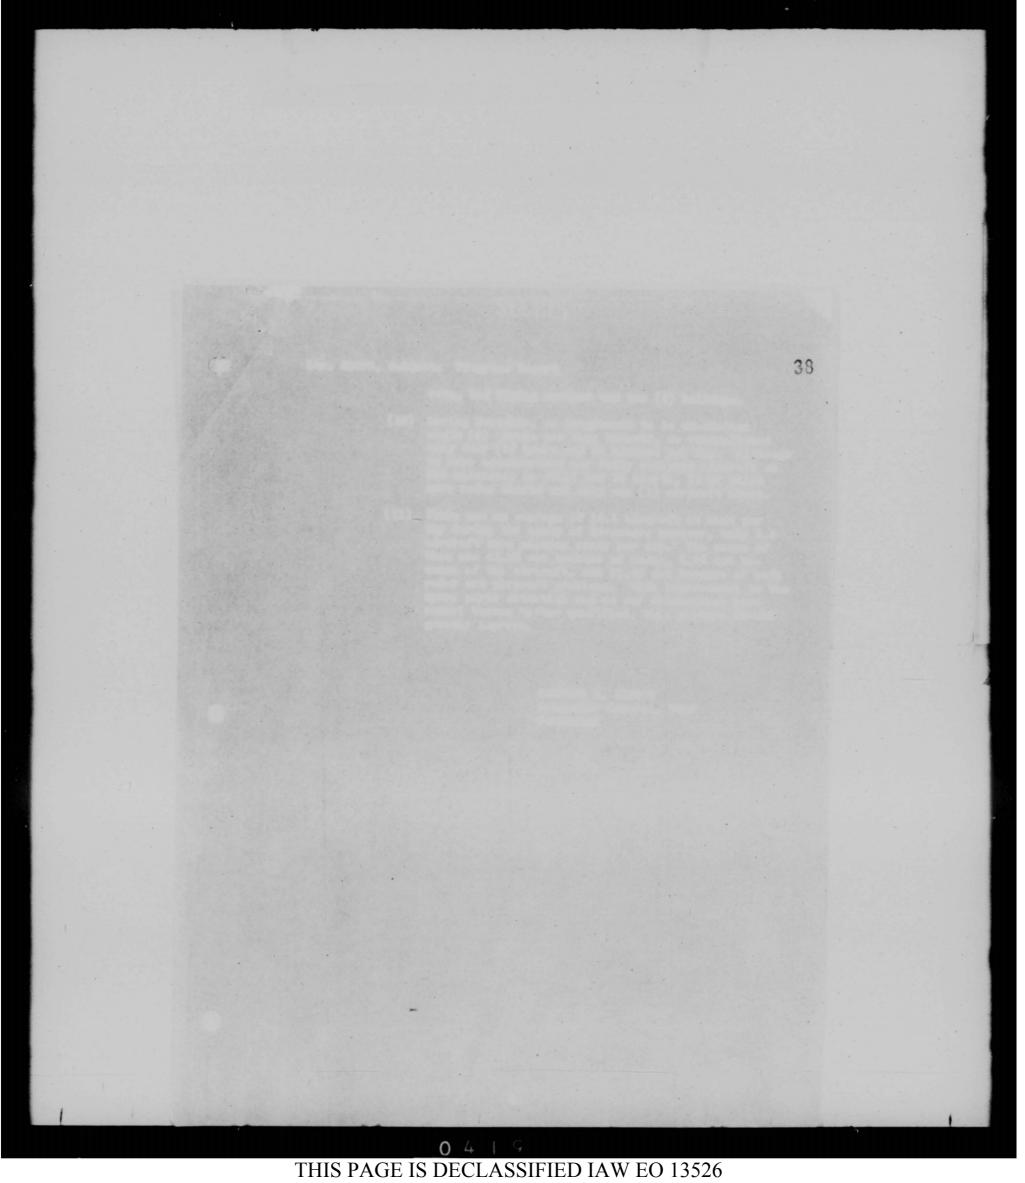

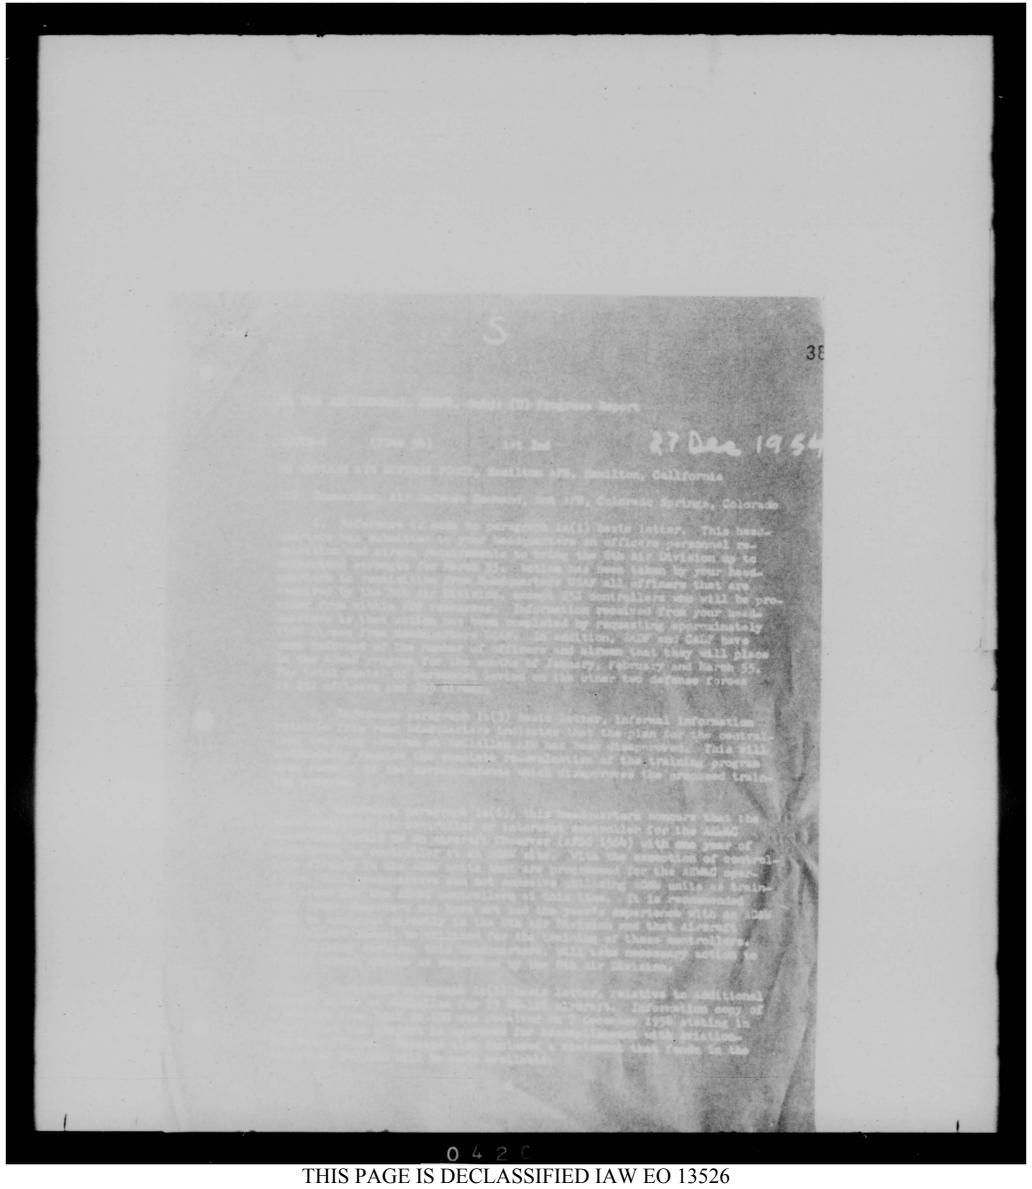


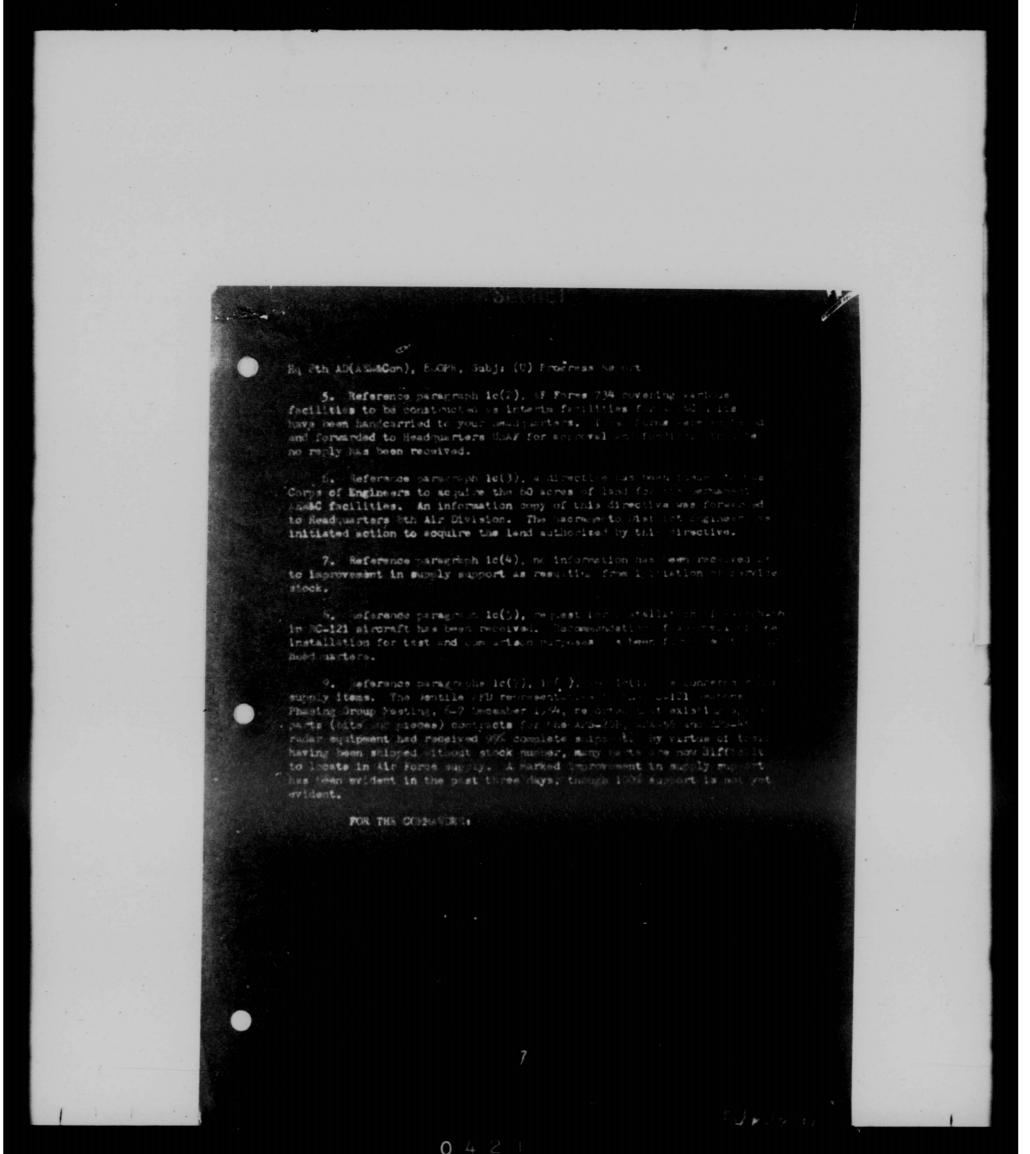

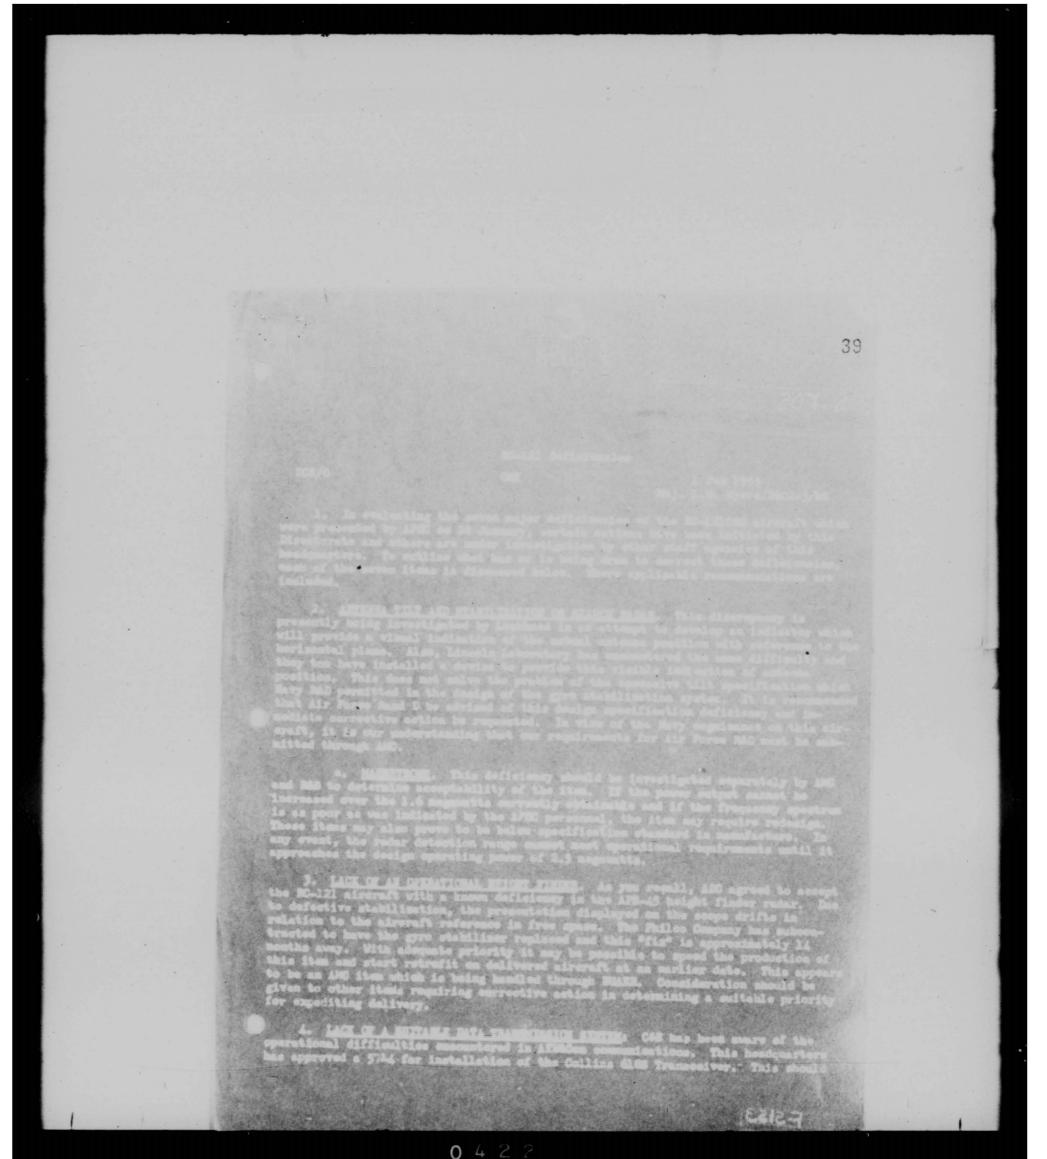

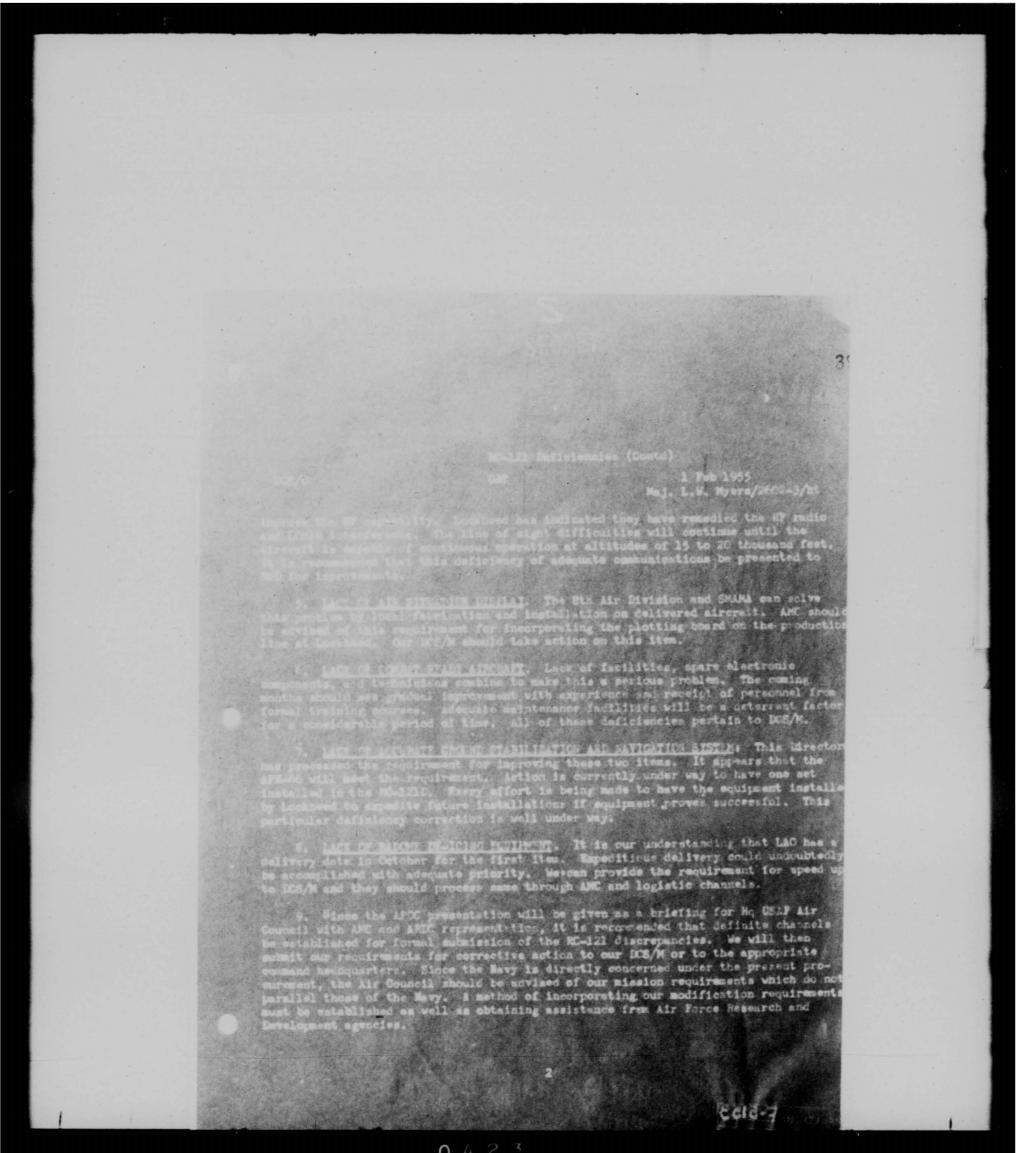

THIS PAGE IS DECLASSIFIED IAW EO 13526

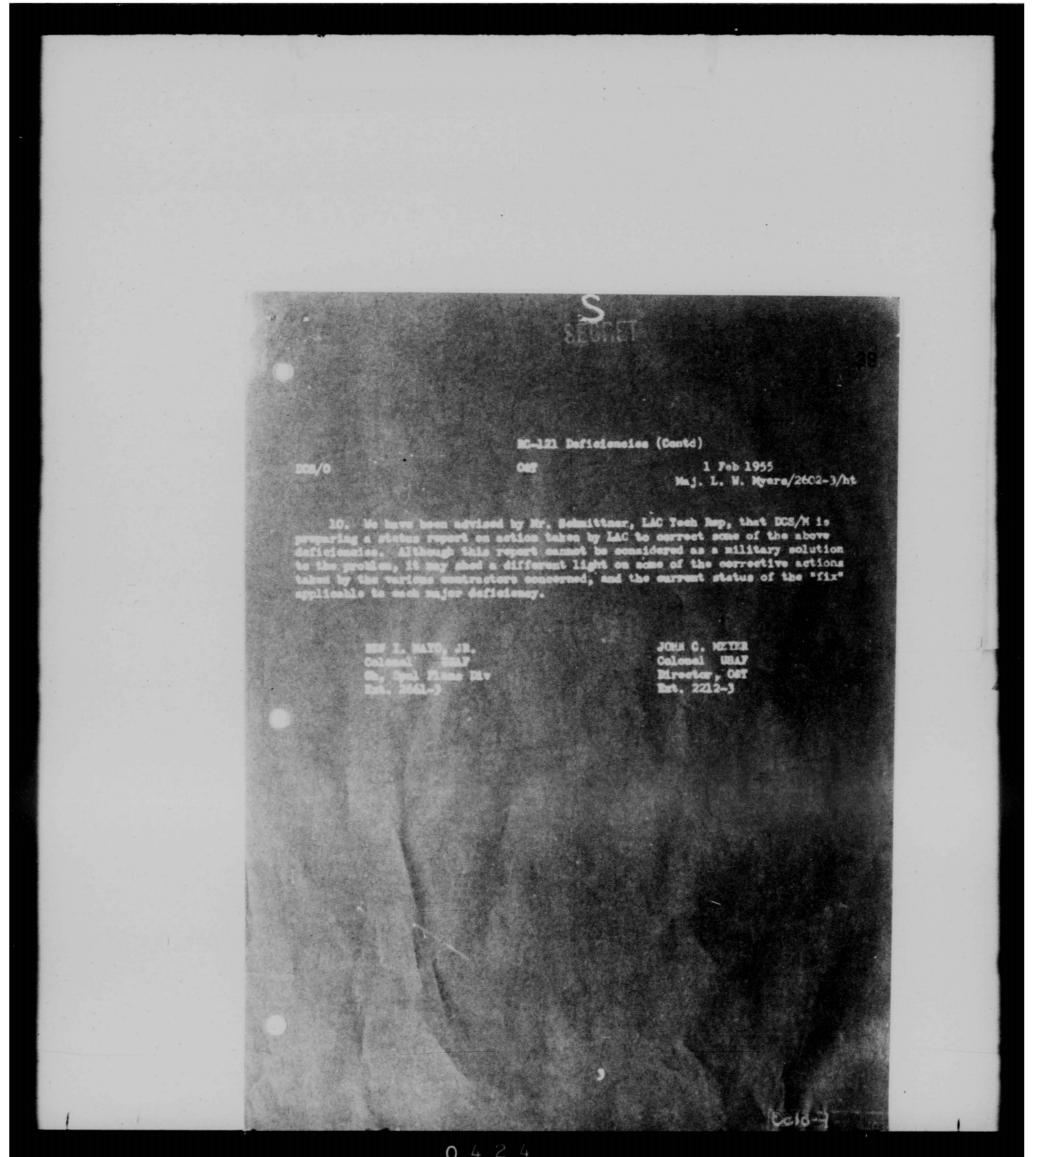

THIS PAGE IS DECLASSIFIED IAW EO 13526

HEADQUARTERS WESTERN AIR DEFENSE FORCE

HAMILTON AIR FORCE BASE

In Realy Refer To: WDOCE-R

SUBJECT: (Unclassified) Monthly AFW&C Air/Ground Communication

TO:

Commander
Air Defense Command
Fint Air Force Base
Colorado Springs, Colorado

208.10

1. A monthly air/ground communication utilization report has been initiated by this headquarters to coordinate and evaluate results of the various communication tests being conducted with AEW&C aircraft. The initial report for the month of November is hereby submitted.

- 2. Radio teletype and single side-band equipment for RATT and SSB testing with AEW&C aircraft is installed at Hamilton Air Force Base. This equipment is operated by the 43rd Communications Squadron. UHF and HF installations at Mill Valley AFS (P-38) provide interim voice communication to support present AEW&C operation.
- 3. No tests have been run on SSB reception as of 30 November. Only one RATT test was run in November. This test was conducted with alternate 30-minute periods of transmission and monitoring on three frequencies. Transmission from the ground station was received garbled but identification was made. During the ground station monitoring periods, no identifiable signals were received. Information received from the 8th Air Division indicates that the aircraft had equipment malfunction throughout the test.
- 4. Total voice operation for month of November between ground station at P-38 and AEW&C aircraft was 48 hours 27 minutes. This time includes transmission and monitoring time on both HF and UHF frequencies. Signal strength varied from fair to good (3-5) in the aircraft and poor to good (0-5) at the ground station receivers. HF communication was approximately 60% effective. UHF was utilized whenever possible as back-up to HF communications. However, UHF communications is limited to line of sight and normal station keeping is beyond UHF range.

B-539-1

5C-0018

CONFIDENTIAL

Hq WADF WDOCE-R Subj: (Unclassified) Monthly AFW&C Air/Ground Communication

- 5. Reasons for not maintaining continuous HF communications were:
- a. HF transmitter in radio operator's position interferes with Loran equipment in navigator's position thereby restricting transmission during periods of Loran navigation.
- b. Station is able to communicate on only one channel or frequency at any one time due to intra high frequency interference in the aircraft. Therefore mission reporting was interrupted several times on each flight in order for radio operator to give position reports as well as answer calls from the airways.
 - c. HF communication equipment malfunction in flight.
- d. Noise level at ground station higher than signal received from aircraft. This was due primarily to atmospheric conditions and low power output of airborne equipment.
- 6. Recommendations for improvement of communications are as follows:
- a. Simultaneous transmission on a minimum of two HF frequencies. Thus allowing the operator to switch circuits to facilitate a possible improved HF channel.
- b. Authorization of additional frequencies to allow greater flexibility in frequency assignments.
- c. An airborne HF transmitter be developed to provide .3KW to .4KW of power output. This additional power recommended to compensate for lack of aircraft antenna efficiency.
- 7. Request this headquarters be advised if future reports are desired.

FOR THE COMMANDER:

P. E. Heupt

CONFIDENTIAL

B-539-2X

2

DOCUMENT NO.4/

THIS DOCUMENT MAY BE FOUND

IN VOLUME \overline{VII} OF THE SUPPORTING

DOCUMENTS TO THIS HISTORY.

HEADQUARTERS

AIR DEFENSE COMMAND

ENT AIR FORCE BASE

COLORADO SPRINGS, COLORADO

271B

ADOOT-B1

8 SEP 1954 12 PF

SUBJECT: Expansion of the Ground Observer Corps

TO: Director of Operations
Headquarters, USAF
Washington 25, D. C.

- 1. A requirement exists for the rapid expansion of the Ground Observer Corps throughout the continental United States. Expansion is required as follows:
- a. An immediate GOC augmentation on the south and west borders of the critical northeastern target complex to insure ground-up identification within ADIZ's planned for this area. This augmentation is planned for the latter part of FY 1955.
- b. Early establishment of a surveillance and identification system along the southern border of the United States and throughout the Rocky Mountain region to meet the enemy's capability of end-running present surveillance systems and flying undetected through areas not programmed for radar cover.
- 2. The Ground Observer Corps has demonstrated its ability to perform identification of aircraft by correlation of flight plans and through a system of obtaining voluntary flight information reports from operators of aircraft exempt from filing flight plans under current CAA regulations. It is, therefore, the desire of this headquarters to exploit fully the capability of the GOC to perform identification as an augmentation of the Aircraft Control and Warning system.
- 3. The present Ground Observer Corps is organized in 36 states of which 27 are operating on a 24-hour basis (reference Incl 1). An expansion of the Corps is required throughout the 12 remaining states and 24-hour surveillance extended to critical peripheral areas and throughout Air Defense Identification Zones (reference Incl 2). Redesignation of ADIZ's and employment of the identification capability of the GOC are components of the identification plan which will be forwarded your headquarters in the near future.

ADOOT-B1

SUBJECT: Expansion of the Ground Observer Corps

- 4. Expansion of the GOC throughout the continental United States is a program which can be implemented with a minimum of additional manpower and funds. This program would require:
 - a. 24 new filter centers (reference Incl 3).
- b. 151 additional officers and 829 additional airmen (reference Incls 4, 5 and 6).
 - c. 4,600 additional observation posts.
 - d. 1,000,000 additional volunteers (reference Incl 7).
- e. \$381,360 for installation of new filter centers (reference Incl 8).
 - f. \$4,056,000 for annual operating costs (reference Incl 8).
- 5. With your concurrence, this headquarters intends to inform the 12 state governors concerned of this program. Further, we would like to present the details of this program to the National Association of State and Territorial Civil Defense Directors at their regularly scheduled meeting to be held in the Drake Hotel, Chicago, Illinois, on 28, 29 and 30 September 1954.
- 6. Request approval for expansion of the Ground Observer Corps as outlined with immediate implementing authority. This program has been reviewed and approved by the Command Council.

8 Incls

1. Map of Present GOC (trip)


2. Map of Expanded GOC (trip)
3. List of New Filter
Centers (trip)

4. Mil Pers Rqr (trip)
5. Sample GO Sq T/D (trip)
6. Sample GO Sq T/D (trip)
7. Volunteer Rqr (trip)


8. Budget Estimates (trip)

EDERICK H. SMITH JR. Major General, USAF Vice Commander

B-87-3

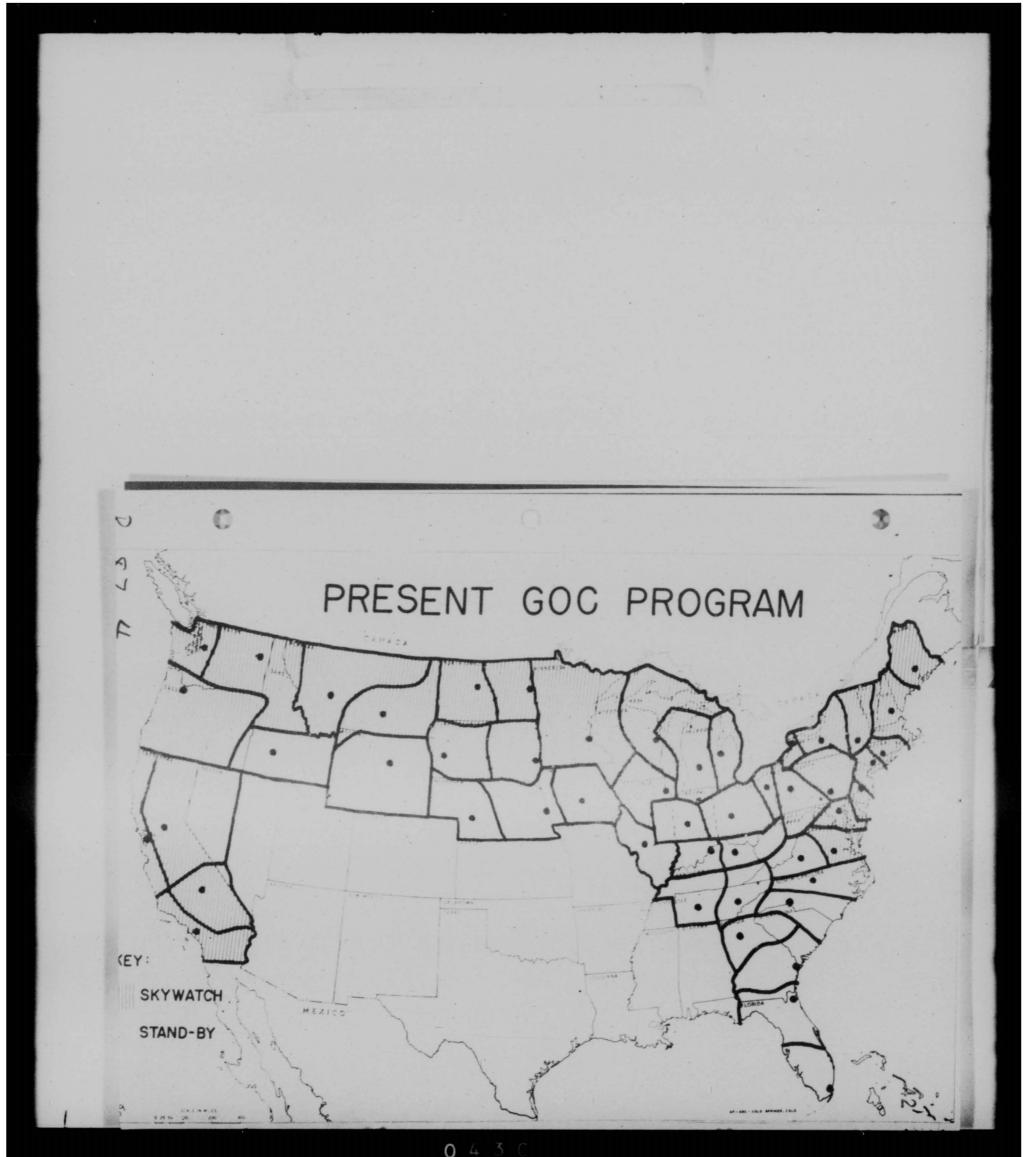

THIS PAGE IS DECLASSIFIED IAW EO 13526

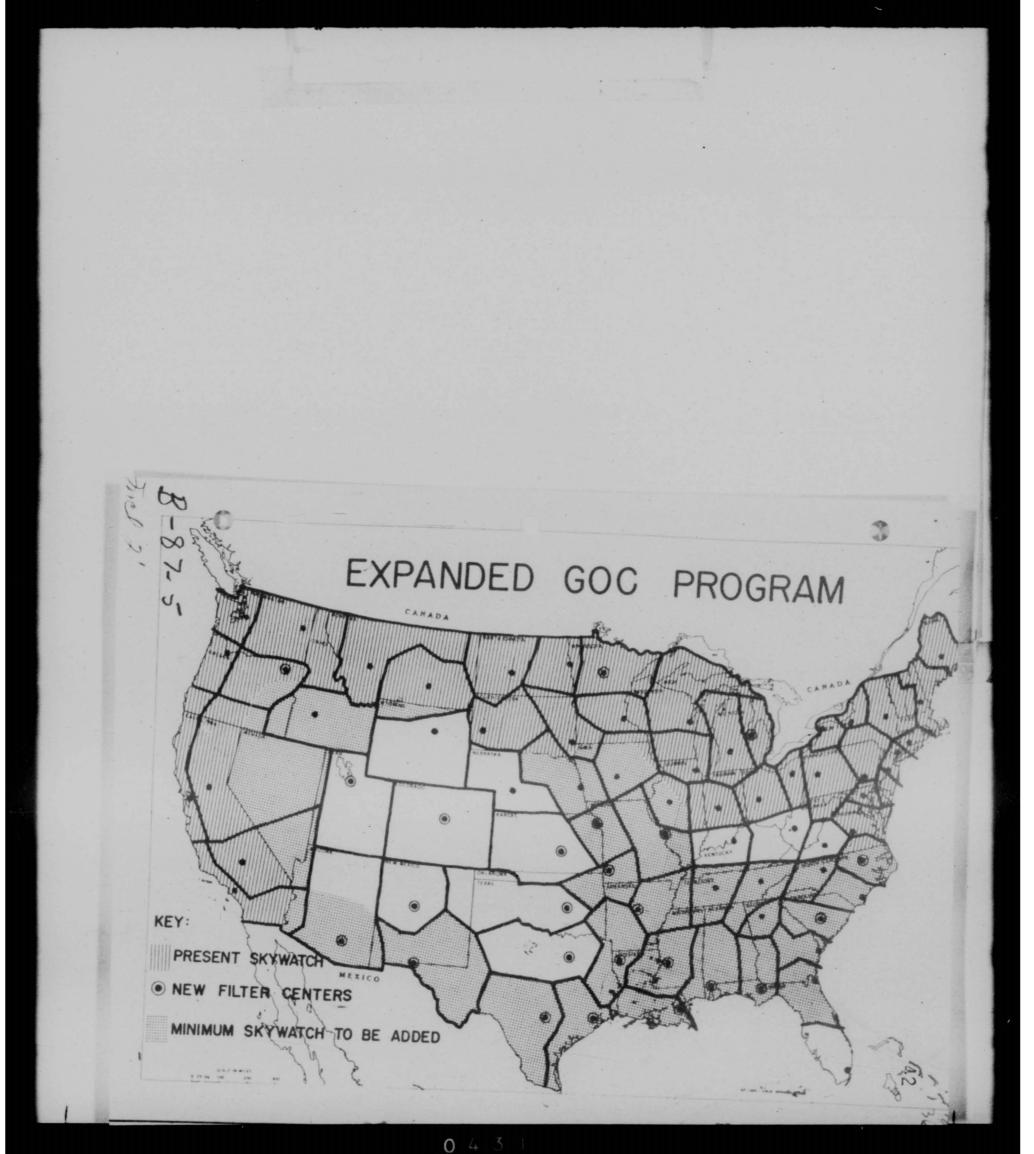

42

NEW FILTER CENTERS FOR EXPANDED GOC PROGRAM

Pendleton, Oregon

Denver, Colorado

Albuquerque, New Mexico

San Antonio, Texas

Dallas, Texas

Wichita, Kansas

Saginaw, Michigan

St. Louis, Missouri

Little Rock, Arkansas

New Orleans, Louisiana

Mobile, Alabama

Columbia, South Carolina

Salt Lake City, Utah

Tuscon, Arizona

El Paso, Texas

Houston, Texas

Oklahoma City, Oklahoma

Bemidji, Minnesota

Kansas City, Kansas

Joplin, Missouri

Schreveport, Louisiana

Jackson, Mississippi

Tallahassee, Florida

Rocky Mount, North Carolina

Moves required of existing Filter Centers:

South Bend, Indiana to Indianapolis, Indiana (in progress).
Santa Ana, California to Bakersfield, California (in progress).
Charlotte, North Carolina to Wilmington, North Carolina.
Lexington, Kentucky to Charleston, West Virginia.

Incl #3

B-87-6

0 4

12 94

MILITARY PROSONNEL REQUIREMENTS FOR EXPANDING GOC

			OP's	Squadrons	Filter Centers	Coord- inators	Total Officers	Total Airmen
FY 1955	lst	Quarter	18,600	9	49	36	366	1199
	2nd	Quarter	18,600	9	49	36	366	1199
	* 3rd	Quarter	20,000	10	56	40	406	1327
	* 4th	Quarter	20,000	10	- 56	40	406	1327
Y 1956	lst	Quarter	24,000	16	73	48	517	2028

^{*} Total personnel requested in our letter, Subject: GOC Manning Standards and Deficiencies, dated 19 July 1954, does not include personnel for the Air Movement Identification Section

R-87-7


^{**} Total program requirements including Air Movement Identification Personnel.


4670 G	tion and location: R(HARRISB CY PA DT (04		40	D.Z	Al		-, -	PERSONI PART II	- ORG	ANIZAT	ION			Mo	3.V.	Date
ection Code	Title	Ident	AFSC	Class	1	Fund Proj No.	ro	t	Tot Off' Tot Amn	Gen	Col'	rength LtCol	' Maj	Capt	Lt	W/0	Renarks
9020	Qualification Section			+	+			1		1	1-7-6-	7-6-	1	-			1
0001	Command	1			1			1									
)	Commander	0	07024	1	-		-	1	1				1	1	1		
,	Administrative Superviso	1	70270	1			1		1	1			1	1			
0091	Adjutant		THE STATE OF	-	1		1	-	-	1		1			1		
	Adjutant	0	07024	1			1		1						1		
	Apprentice Clerk	1	70230		1		1		1				1	1	1		
	Senior Clerk	1	70250	1	1		-	1	1.			1	1	-	1	1	
	Information Specialist	1	72150	1	1			1	1			1			1	1	
71195	Training '			1	1				3			1	1	1	1		
1100	Educational Specialist	0	07524	1			1	1	3					X	23		
	Education Specialist	1	75230	1	1		1	1	3 7			7		X	23		
	Education Technician	1	75270	1					. 5	2	3	1			1		
				1	1		1		12	2	3	7			1		
01701	Opr and Training			1			1	1							1		
	Educational Specialist	0	07524	-	1		1	-	1						1		
	Air Operations Supervisor	1	27170				1	1	1		1	1445			1		*
	Air Operations Specialist		27150	1			1		4		-	2	2				
	Apprn Clerk	1	70230	1	1		1	1	1	18 34		-	-	1			
	Education Specialist	1	75230				1	1	3			3				- 15	
	Education Technician	1	75270	1			1		2	1	1						
1211	Unit Supply			1			1	1	11	1	2	5	2	1			
	Orgn Supply Specialist	1	64151	!	1		1	1	1				1				1000
	S. Sapra apostation	-		-			-	1	1		120		1			191	
9050	Recapitulation	1		1				1				1			1	1	
1	Officers	1		1			1	1	6			a Ball		21	5	-	
	Graded Civilians Off Pos!	-		G	190			1		i						200	
	Airmen	1		-			1	1	28	4	5	13	4	2			
	Graded Civilians Amn Pos	-		G	J.		1	1	1				100	-		Ties and	Di.
11 11 11 11	Other Civilians Amn Pos	1		U			1	-	34	. 1	Time !		100	1	45		100

															-		
P	Organia .	on and locations						NON T	1/0	PERSON	INEL AU	THORIZA	TION	TABL	P.A	V. Da	
	4670 0	ROSQ ROSLYN CY NY		ADC	EAD				17							TI. O.	
1	Section	Title	Ident	AFSC	Class	Fund	Tot	Tot 0	P.F	Gen	Col	Lt Col	Maj	Capt	DE W/	Boms	
Co		11010	Id		0.1	No.	Civ	Tot A	mn	M/Sgt	Col T/Set	3/551	Sgt	Cpl	Pvt	CHOICE	
A	OSOGA	Qualification Section															
1	B0001	Command														1. 1	
7			0	07024				1					1			- 04	
7		Administrative Superviso	1	70270				1		1							
7	B0091	Adjutant															
79			0	07024				1							1		
1		Apprentice Clerk	1	70230				1						1			
	C0020 .	Pers and Admin		20020	1.												
		Apprentice Clerk Clerk	1	70230 70250	1			1					1	1			
		Classification Specialist Personnel Specialist	1	73250 73251				1				1					
1	01301					100000		4				2	1	1			
.	31001	Opr and Training Educational Specialist	0	07524				1			1			1		1 8	
1		Senior Clerk	1	70250				1 1				1		1		1 3	
1	R9050	Recapitulation						1			1	T	1			1 9	
1	1.5000	Officers			1			3	*			1	1	1	1		
1		Graded Civilians Off Pos Airmen			G			7		1	1	3	1	2			
1		Graded Civilians Amn Pos			G	1		1			1		1		16	1	
		Other Civilians Ann Pos	-		0			10		1		3	2	3	1		
-			1	1							1		1			1200	
					1						1		1	-			
			1	1			1	-					1		1.	1 4	
			1								1		-			12	
1			1					1			1		1	_		1	

			42	
0	CIVILIAN VO	MUNTEUR REQUIREMENTS		
	FUE E	PAICED GC		
		Filter Centers	Observation Posts	
	FY 1955 - 3rd quarter	42,500	1,200,000	
	FY 1956 - 1st quarter	46,300	1,300,000	
	- 3rd quarter	54,700	1,440,000	
	Estimated final program requiturnover).	irement: 1,500,000 (not	including	
	0			
0 0 5				
B-87-1				
1 - 1 - 7				

				42
		RUDGET PETTY THE POP CHOINS OF THE		
0		BUDGET ESTIMATES FOR GROUND OBSERVER CORPS EXI FY 1956 (Exclusive of Personnel, Transports and TDY)	PANSION	
			Non-recurring	Danumin
1.	. Co	ommunications:	non-recurring	Recurring
	a	Filter center equipment and associated		
		central office equipment (24 x \$2100 - installation)		
		(24 x \$7200 - annual rental)	\$50,400.00	\$172,800.0
	b.	Moves of existing filter centers		42,2,000,0
		(4 x \$3000 - retermination)	12,000.00	
	c.	Private line local channels of ADCCs to filter centers (TML's)		
		(48 x \$250 - annual rental		12,000.
		(48 x \$20 - installation)	960.00	
	d.	Private line interexchange channels between filter centers and channels to ADCC's. (24 x \$28,500 - annual average rental)		
				684,000.
	e.	Observation Post Telephones: (1) Installation of 500 'phones per quarter: (a) (2000 x \$15.00 - average installation)	70.000.00	
			30,000.00	
		(2) Rental (a) 500 x \$90 - annual rental x 9 months) (b) 500 x \$90 " " x 6 months) (c) 500 x \$90 " " x 3 months)		33,750. 22,500. 11,250.
	ſ.	Aircraft Flash Messages: (3000 additional OP's		44,200.
		at rate of 0.25 calls per OP per hour at average toll rate of 3.45 per call for one year). (3000 x 24 hours x .25 calls per hour x 365 days		
		x \$.45 per call)		2,956,500
2.	Inst	tallations:		
		Filter Center Rental (24 x \$6800 - average annual rental)		163,200
	b.	Constr action of filter map tables and associated equipment		
		(24 x \$3000 - average cost)	72,000.00	
		Alterations, R & U etc. (24 x \$3,000 - average per center)	72,000.00	
P	8	7-11		
)-	0			
Fiel	8			
				-
		0 / 3 /		

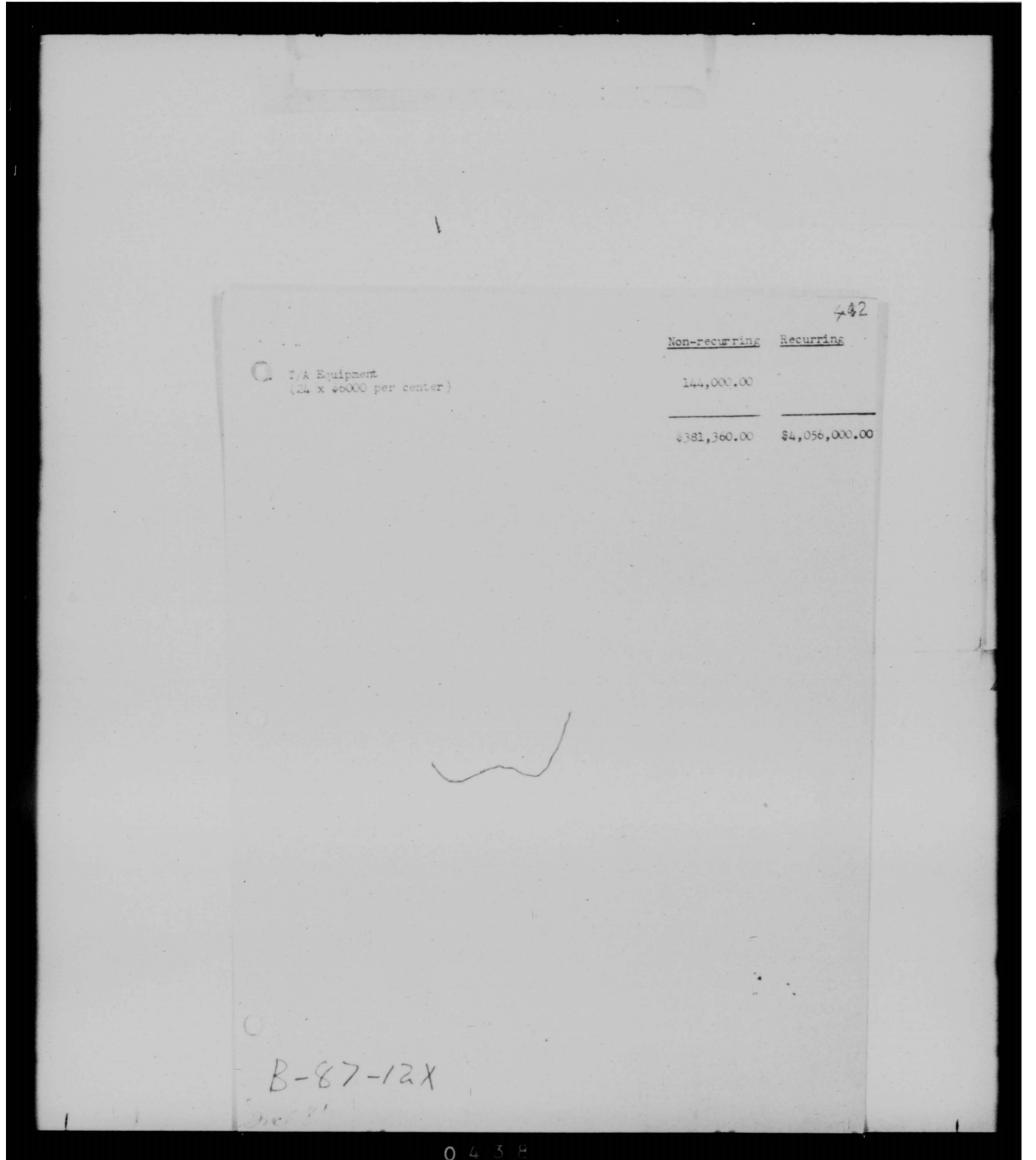

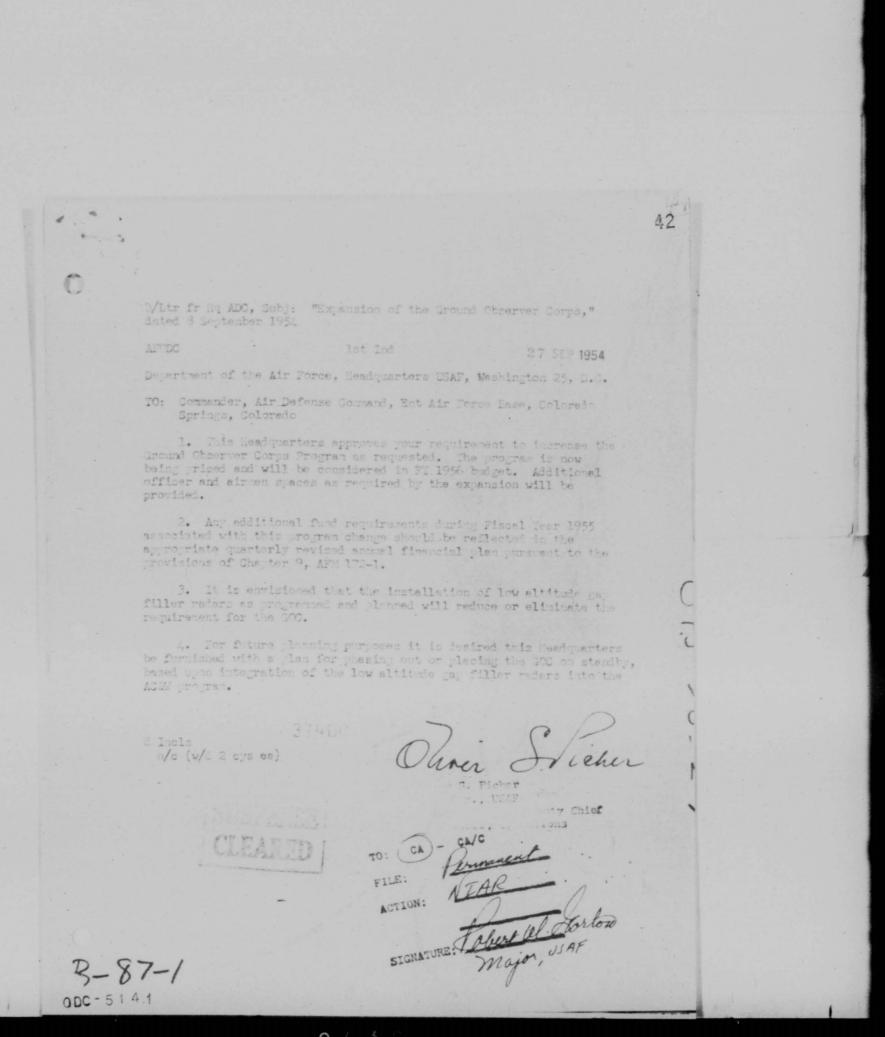

47

HEADQUARTERS AIR DEFENSE COMMAND ENT AIR FORCE BASE COLORADO SPRINGS, COLORADO

43

GENERAL ORDERS) NUMBER 41) 24 November 1954

DESIGNATION AND ORGANIZATION OF NON-TABLE OF ORGANIZATION UNITS -- 1. The following units are designated, assigned as indicated and will be organized under appropriate Unit Manning Documents effective 1 January 1955, at locations indicated.

The state of the s		
UNIT	LOCATION	ASSIGNMENT
4768th Ground Observer Squadron	Tinker AFB, Oklahoma	33d Air Division (Defense)
Detachment #1, 4768th Ground Observer Squadron	San Antonio, Texas	4768th Ground Observer Squadron
Detachment #2, 4768th Ground Observer Squadron	Dallas, Texas	4768th Ground Observer Squadron
Detachment #3, 4768th Ground Observer Squadron	St. Louis, Missouri	4768th Ground Observer Squadron
Detachment #4, 4768th Ground Observer Squadron	Little Rock, Arkansas	4768th Ground Observer Squadron
Detachment #5, 4768th Ground Observer Squadron	New Orleans, Louisiana Capus Chente, Texas	4768th Ground Observer Squadron
Detachment #6, 4768th Ground Observer Squadron	Houston, Texas	4768th Ground Observer Squadron
Detachment #7, 4768th Ground Observer Squadron	Oklahoma City, Oklahoma	4768th Ground Observer Squadron
Detachment #8, 4768th Ground Observer Squadron	Kansas City, Kansas	4768th Ground Observer Squadron
Detachment #9, 4768th Ground Observer Squadron	Joplin, Missouri	4768th Ground Observer Squadron
Detachment #10, 4768th Ground Observer Squadron	Shreveport, Louisiana	4768th Ground Observer Squadron
Detachment #11, 4768th Ground Observer Squadron	Wichita, Kansas	4768th Ground Observer Squadron
4679th Ground Observer Squadron	Kirtland AFB, New Mexico	34th Air Division (Defense)
Detachment #1, 4679th Ground Observer Squadron	Albuquerque, New Mexico	4679th Ground Observer Squadron
		Print

UNIT			LOCATION	ASSIGNMENT
Detachment Squadron	#2, 4679th	Ground Observer	Salt Lake City, Utah	4679th Ground Observer Squadron
Detachment Squadron	#3, 4679th	Ground Observer	Tucson, Arizona	4679th Ground Observer Squadron
Detachment Squadron	#4, 4679th	Ground Observer	Denver, Colorado	4679th Ground Observer Squadron
Detachment Squadron	#5, 4679th	Ground Observer	El Paso, Texas	4679th Ground Observer Squadron
Detachment Squadron	#10, 4671st	Ground Observer	Saginaw, Michigan	4671st Ground Observer Squadro
Detachment Squadron	#9, 4672nd	Ground Observer	Bemidji, Minnesota	4672nd Ground Observer Squadro
Detachment Squadron	#9, 4674th	Ground Observer	Mobile, Alabama	4674th Ground Observer Squadro
Detachment Squadron	#10, 4674th	Ground Observer	Columbia, South Carolina	4674th Ground Observer Squadro
Detachment Squadron	#11, 4674th	Ground Observer	Jackson, Mississippi	4674th Ground Observer Squadro
Detachment Squadron	#12, 4674th	Ground Observer	Tallahassee, Florida	4674th Ground Observer Squadro
etachment Squadron	#13, 4674th	Ground Observer	Rocky Mount, North	4674th Ground Observer Squadro
	#3, 4755th	Ground Observer	Beul, Oregon	4755th Ground Observer Squadro

GEORGE F. SMITH Major General, USAF Chief of Staff

WALTER W. ROBINSON Colonel, USAF Command Adjutant

3. Authority: AFR 20-27.

BY ORDER OF THE COMMANDER:

DISTRIBUTION:

OFFICIAL:

(AF - ADC, Colorado Springs, Colo.)

HEADQUARTERS AIR DEFENSE COMMAND ENT AIR FORCE BASE COLORADO SPRINGS, COLORADO

50

44

GENERAL ORDERS) NUMBER 46)

UNIT

23 December 1954

ASSIGNMENT

AMENDMENT OF GENERAL ORDERS 41, THIS HEADQUARTERS, 1954.

1. So much of paragraph 1, General Orders 41, this headquarters, 1954, pertaining to designation and organization of certain ADC units, as reads:

LOCATION

Detachment #5, Observer Squ	4768th Ground	New Orleans, Louisiana	4768th Ground Observer Squadron
Detachment #12 Observer Square	, 4674th Ground adron	Tallahassee, Florida	4674th Ground Observer Squadron
Detachment #3, Observer Squa		Pendleton, Oregon	4755th Ground Observer Squadron
is amended to	read:		
UNIT		LOCATION	ASSIGNMENT
Detachment #5, Observer Squa	4768th Ground	Corpus Christi, Texas	4768th Ground Observer Squadron
Detachment #12, Observer Squa	4674th Ground	Montgomery, Alabama	4674th Ground Observer Squadron
Detachment #3, Observer Squa		Bend, Oregon	4755th Ground Observer Squadron
2. So muc	ch of paragraph 1	as reads:	
UNIT		LOCATION	ASSIGNMENT
Detachment #13, Observer Squa	4674th Ground		4674th Ground Observer Squadron
is deleted.			10 V

BY ORDER OF THE COMMANDER:

OFFICIAL:

GEORGE F SMITH Major General, USAF Chief of Staff

WALTER W ROBINSON Colonel, USAF Command Adjutant

DISTRIBUTION:

/

HEADQUARTERS WESTERN AIR DEFENSE FORCE

HAMILTON AIR FORCE BASE HAMILTON, CALIFORNIA

45

FUU

WDOCD

SUBJECT: Expansion of Skywatch Area in WALF

TO: Commander

Air Defense Command Ent Air Force Base Colorado Springs, Colorado

1. The Ground Observer Corps system in Western Air Defense Force is fully manned and ready for expansion in accordance with published ADC plans. It is requested that approval be granted to organize and place on Skywatch all of the WALF area. This expansion will involve the stand-by Boise Filter Center area of Idaho, Eastern Nevada and parts of Uteh and Arizona.

- 2. The placement of these new areas on Skywatch at this time will facilitate the recruitment of civilian volunteers and improve the operational effectiveness of the GOC in WARF. The anticipated difficulty in obtaining sufficient volunteers in desired localities of these sparsely populated states would be materially reduced by concerted assistance from state civil defense directors. The publicity campaign which will be conducted in conjunction with the increase in Skywatch area is expected to provide the impetus needed to obtain full state support.
- 3. Of equal importance is the necessity for providing the Ground Observer Corps a "head start", so that when the double perimeter concept is fully operational the GOC will be organized, manned and operating effectively.
- 4. Upon receipt of approval, this headquarters will initiate action for installation of required wire facilities. The target date for expansion of Skywatch in WADF is tentatively established as 1 February 1955.


CONTRACT. Cart.

H1 AA4

USAY.

FOR THE COMMANDER:

B-83-2X

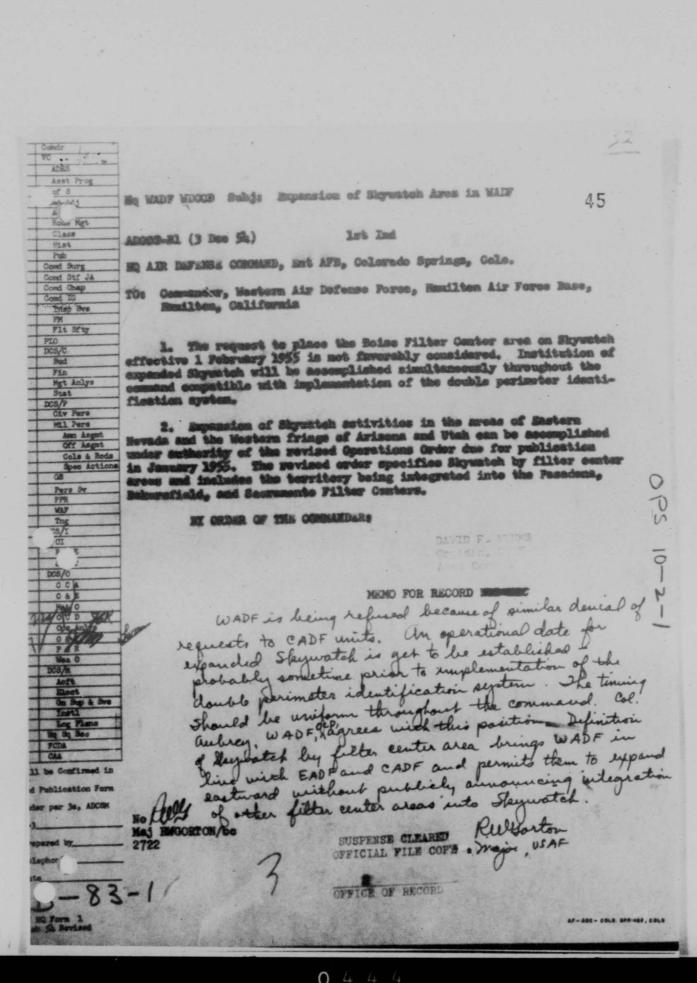

SECRET

OPERATIONS ANALYSIS TECHNICAL MEMORANDUM NO. 14

TEST OF IDENTIFICATION OF GROUND OBSERVER CORPS TRACK
AT THE SACRAMENTO FILTER CENTER

by

Richard H. Jordan

and

Robert Deane Branstetter

Approved

Philip S. Ball, Jr. Chief, Operations Analysis Office

This material contains the results of analyses performed by Operations Analysts. It does not necessarily express ADC policy.

29 July 1954

Operations Analysis Office
Deputy Chief of Staff for Operations
Headquarters Air Defense Command
Colorado Springs, Colorado

SECRET

605-13

46

0 4 4 4

	SECRET	4
	TABLE OF CONTENTS	e
I.	SUMMARY	
II.	INTRODUCTION	
III.	DISCUSSION	
	A. Identification Procedures	
	B. Results Not Substantiated Statistically	,
	1. Improvement in Interest and Morale	
	2. Identification as an Aid to Filtering 5	
	C. Results Substantiated by Data	
	1. Number and Percent of Unknown Aircraft 5	
	2. Number of Flight Plans Correlated 6	
	3. Time Required to Make Identification 6	
	4. Amount by Which Aircraft Missed ETAs Along Proposed Routes of Flight	
	5. Number and Accuracy of Observations Giving the Number of Engines	
	D. Training	
	E. Additional Personnel	
IV.	CONCEUSIONS	
٧.	RECOMMENDATIONS	
APPEN	DICES	
	A. Tables 1 and 2 1. Times Required to Identify 2. Amount by Which Aircraft Missed ETA	
	B. Report of Test of Flight Plan Correlation by the Ground Observer Corps (Unclassified)	
SECUR	ITY ANNEX	

SECRET

SECRET

I. SUMMARY

This paper describes a test to determine the feasibility of identifying Ground Observer Corps tracks at the Ground Observer Corps filter centers rather than at the radars as under existing procedures. The test was conducted at the Sacramento Filter Center from 15 January through 4 February 1954.

An identification section, manned by civilian personnel under the direction of a military supervisor, was established on the dais overlooking the operations plotting board. Flight plans were received by monitoring the communications line between the Oakland CAA Air Route Traffic Control Center and the Mather (Sacramento) radar. All identified tracks, unknown and friendly, were forwarded to the Mather radar.

Basic procedures now in practice at the radars were used for identification at the filter center; that is, the identification was performed by flight plan matching. The actual position of the aircraft as reported by the observer was compared with the position as anticipated by the pilot on his flight plan and subsequent position report, using the standard correlation tolerances of 15 minutes and 10 miles.

The identification process was highly successful. This plan appears feasible in areas of medium and heavy traffic to solve in a large measure the problem of effective identification of Ground Observer Corps tracks without making somewhat difficult changes at present necessary to handle this function in the direction centers. These changes within the direction centers would include construction and manning of plotting boards to display Ground Observer Corps tracks for identification purposes, division of the pre-plot boards to accommodate the increased load, increased manning of the identification section, and increased space necessary for these expanded operations.

Furthermore, the availability of flight plans at the filter center aided the filtering process by supplying altitude, route, speed and type of those aircraft on flight plan. This information was not given to the filterers but was used on the dais to correct obvious filtering errors. This aid was of considerable importance as a partial solution to the filtering problem, one of the most difficult of the Ground Observer Corps operational problems.

Filter center personnel received the identification work enthusiastically. The knowledge of the identity of aircraft caused a marked increase in interest by giving meaning to hitherto unidentified tracks and thus a better understanding of the action on the plotting board.

Eleven percent of the filter center tracks were designated unknown, 59% of the flight plans received were correlated with aircraft, and tracks were identified in an average of 1.8 minutes. These figures compare favorably with radar operation and it is very probable that they can be improved with practice. The correlation figure should increase markedly under conditions of maximum manning of observation posts.

SECRET,

48

Fifty percent of the observer post reports included the number of engines. Eight-four percent of these were reported and plotted correctly according to the flight plans with which they were matched. Effort should be made to improve the accuracy of post observing and reporting because of its great importance to over-all AC&W identification effectiveness.

It is recommended that similar data be gathered at the other filter centers adopting these procedures in the Western Air Defense Force to substantiate these results; that an attempt be made to determine the accuracy of the identification of tracks called friendly; and that every effort be made to improve the accuracy of reporting number of engines.

2

II. INTRODUCTION

Past studies of aircraft identification in Air Defense Command radars have shown a limited capability under conditions of medium to heavy traffic. During periods of light traffic the problem of correlating flight plans with plotted tracks is not particularly difficult and the results are quite accurate. As traffic increases the problem becomes more difficult, with the result that the number of aircraft designated unknown rises at a rate considerably higher than the traffic build-up. Introducing Ground Observer Corps tracks for identification approximately doubles the correlation load. This additional burden, even during times of relatively light traffic, reduces overall accuracy; to introduce it during heavy traffic periods can seriously affect identification capability. This loss in capability accounts in part for the limited use made of Ground Observer Corps tracks in many direction centers.

SECRET

It is immediately apparent that the situation just described can be improved either by enlarging and modifying the identification sections within the direction centers or by placing identification sections in the filter centers so that the Ground Observer Corps can identify their own tracks.

Difficulties are foreseen if identification of Ground Observer Corps tracks at the direction center is considered as the answer to the problem. First, Ground Observer Corps tracks must be plotted at the radar for identification purposes. This additional plotting increases chances for error, thus increasing the number of aircraft designated unknown that should otherwise be called friendly, and, what is perhaps worse, increasing the number of aircraft designated friendly that should be called unknown. Second, the plotting of Ground Observer Corps tracks at the direction center requires a board that can be seen by the identification personnel. This board requires one or more persons for plotting. Third, the identification pre-plot board should be sub-divided and the correlation work in each sub-division handled by a separate person or team if the workload is at all heavy. Fourth, the plan calls for additional identification personnel. Finally, all of the above modifications call for more space and space is at a premium in direction centers.

On the other hand, identification of Ground Observer Corps tracks at the filter center does not require additional plotting for identification. Space generally is not a problem and it was believed that civilian personnel might absorb a major part of the load. Only unknown tracks need be sent forward to the direction center in times of heavy load. In this case the unknown tracks could be placed directly on the vertical plotting board at the radar without the identification section being required to plot them first.

Because of these apparent advantages, it was decided to test the feasibility of identifying tracks in the Ground Observer Corps filter Center. The test described in this paper was initiated jointly by OOA and the Plans Section of Operations, Air Defense Command.

The 4772d Ground Observer Squadron, under whose direct supervision the test was conducted, is complimented on the spirit and efficiency with which they carried out the project. Their report of the test is found in Appendix B.

SECRET

0

III. DISCUSSION

A. Identification Procedures

- 1. An identification section similar in all essentials to that of a radar section was established on the dais over-looking the filter center plotting board. A listening drop with loudspeaker was placed on the line from the Oakland Air Route Traffic Control Center to the Mather (Sacramento) radar and flight plans were copied as passed on this line. Filter center personnel could not talk to the ARTCC over this line, and thus could not question CAA if flight plan information was not understood or was missed. The flight plan data was written on standard CAA flight strips placed in holders on racks common to ARTCC operation. Flight plan and position reports were correlated with actual aircraft positions using the standard correlation tolerances of $\frac{1}{2}$ 5 minutes and $\frac{1}{2}$ 10 miles.
- 2. All identified tracks, unknown and friendly, were forwarded to the Mather radar.

B. Results Not Substantiated Statistically

The test yielded certain results that were not measured statistically but were none the less important:

l. Improvement in interest and morale. The establishment of the identification section permitted filter center personnel to gain a far better understanding of the operation, as shown by the display on the filter center board, than was possible previously. They were able to determine which aircraft were commercial, military, or actual unknowns. This understanding stimulated interest and contributed measurably toward a sense of accomplishment. Furthermore, the identification processes themselves proved to be a definite stimulus because of mental activity involved.

2. Identification as an aid to filtering. The availability of flight plan data concerning speed, altitude, routes, and type of aircraft, aided the process of filtering, that is, it helped in constructing tracks out of individual observer reports. The flight plan information was not an to the filterers but was used by the identification section to correct obvious filtering errors. This aid to filtering is of considerable importance in that this process is one of the most difficult of Ground Observer Corps operations.

C. Results Substantiated by Data

1. Number and percent of unknown aircraft

a. Of the 758 tracks from 20 January through 4 February, 82, or 11%, were designated unknown by the filter center identification section. This capability compares favorably with that of radar identification. No intercepts were made in order to determine the accuracy of the identifications and all inbound flights which faded outside the ADIZ were eliminated in the data analysis. Of the 82 unknowns, 25 (30%) were designated unknown because they missed the ± 5 minutes identification tolerance. None was reported unknown because of missing the ± 10 mile distance. Fifty-seven (70%) were designated unknown because they could not be correlated with any flight plan.

b. It is probable that most of these 57 unknowns were aircraft rlying low to take advantage of the regulation which allows them to fly below 1000' without a flight plan. Others may well have been aircraft too far off their estimated times to be correlated with certainty with existing flight plans. Still others were aircraft on which flight plans were forwarded to the radar on emergency circuits not monitored by the filter center. Data were not collected to show the percentages attributed to each of these causes.

2. Number of flight plans correlated

a. According to the report of the test submitted by the Sacramento Filter Center, 1534 flight plans were received on aircraft penetrating the Red Bluff and Reno areas. Of these 906, or 59%, were correlated with aircraft. Breaking this down it was shown that 766 were received from the Red Bluff area and 596 (78%) were correlated; 768 were received from the Reno area and 310 (10%) were correlated. The relatively poor showing made in the Reno area undoubtedly came about because of an insufficient number of manned observer posts. It was believed that adequate manning of posts would have raised the number of tracks correlated appreciably. This capability can be compared with radar capability using statistics collected by 00A ADC at Mather radar (Sacramento) in 1952. These data showed that the radar identification section correlated 83% of their flight plans in the Red Bluff area and 62% in the Reno area, or for both areas 75%. Other figures from radars in various parts of the country indicate correlations ranging from 60% to 80%.

3. Time required to make identification

The average time from the establishment of a track to the time of completed identification was 1.8 minutes, with a standard deviation of 2.8. (The cases were eliminated in which flight plans were delayed.) In 64% of the cases, identification required 1 minute or less; in 78% it required 2 minutes or less. Again, this compares very favorably with time taken for identification within radars. Details are shown in Table 1, Appendix A. It should be noted that GOC observation posts are very often located at or near aircraft reporting points. Because of this situation, computations for correlation are generally not necessary as in radar identification where aircraft commonly are

SECRET .

45

detected at some distance from the point at which their position is reported.

Thus, it is assumed that identification of GOC tracks will be more rapid than

identification of radar tracks.

4. Amount by which aircraft missed ETAs along proposed routes of flight

Sixty-eight percent were within one minute of the estimates, 86% within two minutes, and 96% within five minutes. These results are shown in detail in Table 2 of Appendix A. It should be pointed out that these figures are subject to an error, probably small, introduced by the observer's estimate of elapsed time between his actual observation and the time taken for him to go to the phone and make his report. These results are of particular interest in that no statistics have been available up to this time to show the amount by which aircraft miss their estimates within the United States. Radars are not required to keep records on this point and no published figures of such studies have been available.

5. Number and accuracy of observations giving the number of engines

These data are not included as an argument for feasibility of identifying within filter centers as the utilization of reports on number of engines can be used equally well within radar identification sections. They are included because they throw light on the possibility of using number of engines to improve the over-all AC&W identification capability. The argument is that single and bi-motor aircraft do not constitute a threat at present and, if the number of engines can be reported accurately, these aircraft can be declared friendly without recourse to flight plan matching. This procedure eliminates the work as well as the errors inherent in flight plan identification. The GOC, in possessing this capability, has a distinct advantage over radar and has the potential of contributing

immeasurably toward improving over-all identification. The results reviewed below indicate, at least at Sacramento, that accuracy of reports must be improved to take full advantage of the procedure. These results are as follows:

a. Of the 834 observations on which the number of engines were studied, 419 (50%) reported the number of engines. This included both day and night observations.

b. Of these, 580 observations were made during the day (0700 to 1700), with 385 (66%) of the daytime reports giving the number of engines; and of the 254 made at night, 34 (13%) reported the number of engines.

c. There were 357 observations on which the correctness of reports was based. The accuracy was determined by comparing reports listed on the filter center teller's log (as copied from the raid stand on the plotting table) with the correlated flight plans. It will be noted that this method does not show the source of the error, only that certain reports as displayed were incorrect on the filter center board. The error may have resulted because the observation was incorrect; or because an error was introduced in reporting or displaying the observation; or because the aircraft was correlated with the wrong flight plan.

d. Of the 357 observations, 298 (81%) were correct as they appeared on the plotting table. This included both day and night reports. When these figures were broken down by day and night, it was found that of the 330 day observations, 277 (81%) were correct; and of the 27 at night, 21 (78%) were correct. Because the number of night cases is small, the figure should not be used without further substantiation. As might be expected, 92% of the incorrect day observations were on aircraft reported as high or very high. SECRET

45

e. A further breakdown showed that 171 aircraft were reported as four-engined. Of these, 116 (85%) actually were four-engined according to the flight plans with which they were correlated; 15% were single or bi-motor.

D. Training

Methods used in training GOC personnel in identification, and the results of this training, are found in Appendix B, "Report of Test of Flight Plan Correlation by Ground Observer Corps," as submitted by the 4772d Ground Observer Squadron, Sacramento, California.

E. Additional Personnel

It was found that one military supervisor should be on duty at the identification section at all times. At Sacramento this supervisor should be added to the regular complement of military personnel. For details see report of the 1772d Ground Observer Equadron in Appendix B.

IV. CONCLUSIONS

- 1. Identification at the Sacramento Filter Center was highly successful using civilian personnel under direct military supervision.
- 2. Identification of Ground Observer Corps tracks in the filter center makes it possible to solve in a large measure the problem of identifying Ground Observer Corps tracks in areas of medium to heavy traffic without making somewhat difficult changes within the identification sections of direction centers.
- 3. Identification at the filter center aided the filtering process by making available information on altitude, speed, route of flight, and type of aircraft. This aid to filtering was of considerable importance as a partial solution to the difficult filtering problem.
- 4. The establishment of an identification section in the filter center caused a marked increase in filter center morale by giving meaning to the tracks on the plotting board and by contributing to a sense of responsibility.
- 5. The filter center identification section designated 11% of their tracks unknown. This appears to compare very favorably with radar identification. More testing is required to determine the accuracy of this identification.
- Red Bluff areas were correlated with aircraft. This should not be considered a measure of the effectiveness of the identification process but is more closely related to the detection capability of the GOC. This capability compares rather closely with that shown by the Mather radar in a 1952 OOA study in which it was shown that radar correlated 75% of their flight plans

in the Remo and Red Bluff areas. Radars country-wide usually correlate between 60,s and 80% of their flight plans.

45

- 7. Fifty percent of the observations included the number of engines; 66% during the day, 13% at night. Of those observations which included number of engines, 81% were reported correctly according to the available figures. Efforts should be made to improve this accuracy because of the great importance this information can play in improvement of the over-all AC&W identification effectiveness.
- 8. An average of 1.8 minutes was required to make identification.

 This time probably can be reduced with practice to the one minute prescribed by regulation for radar identification.

V. RECOMMENDATIONS

It is recommended that:

- 1. These identification procedures be tested in CADF and EADF in addition to the proposed tests in other sites in WADF.
- 2. During these tests, similar data be gathered at filter centers adopting these procedures to substantiate these results. During these tests it is recommended that efforts be made to determine the accuracy of the identification of those aircraft designated friendly.
- 3. Instructions be issued to stress the importance of accurate reporting of the number of engines on aircraft observed. Further, in this matter, it be stressed that it is better to make an unknown report than to guess if the observation is in doubt.

Richard H. Jordan Operations Analyst

Robert Deane Branstetter, Operations Analyst

Philip S. Ball, Jr., Chief, Operations Analysis

48

APPENDIX A

TABLES 1 AND 2

TABLE 1

TIME REQUIRED TO IDENTIFY

45

Time	Frequency	Cumulative Frequency	Cumulative Percent
0	285	285	1,0.3
1	169	454	64.2
2	100	554	78.4
3	35	589	83.3
4	39	628	88.8
5	14	642	90.8
6	16	658	93.1
7	12	670	94.8
8	12	682	96.5
9	3	685	96.9
10	7	692	97.9
11	14	696	98.4
12	1	697	98.6
13	1	698	98.7
14	4	702	99•3
15	1	703	99.4
17	1	704	99.6
20	.2	706	99•9
214	_1	707	100
	707		
	-		

SECRET

THIS PAGE IS DECLASSIFIED IAW EO 13526

ALLE 2

45

AMOUNT BY WHICH AIRCRAFT MISSED ETA

Time	Frequency	Cumulative Frequency	Cumulative Percent
± 0	459	459	68.2
1	68	527	78.3
2	54	581	86.3
3	29	610	90.6
4	22	632	93.9
5	14	646	96.0
6	5	651	96.7
7	1	652	96.9
8	7	659	97.9
9	3	662	98.4
10	5	667	99.1
11	2	669	99.4
12	2	671	99•7
13	1	672	99•9
14	_1	673	100
	673		

SECORT

0 4

APPENDIX B

REPORT OF TEST OF FLIGHT PLAN CORRELATION BY THE GROUND OBSERVER CORPS

(The raw data submitted as Inclosure #2 of the letter has been omitted)

OCO

26 February 1954

SUBJECT: Report of Test of Flight Plan Correlation by the Ground Observer Corps

TO: Commander
Air Defense Command
Ent Air Force Base
Colorado Springs, Colorado

- l. Reference is made to ADC ADOOT-B1, subject as above, dated 9 December 1953 and 1st Indorsement thereto, Headquarters WADF, file WDOCO, dated 23 December 1953. The test proposed in the above letter was conducted by Detachment 2, 4772d Ground Observer Squadron, Sacramento, California, from 15 January through 4 February 1954.
- 2. By concurrence of Colonel W. H. Earle, Director of Civil Defense, Western Air Defense Force and Dr. Richard H. Jordan, ADC Analyst, the following report is submitted direct.
- 3. Procedures: The procedures adopted for the receipt of flight plans from AMIS and the correlation of the plans with tracks established at the Filter Center paralleled those used at a Direction Center as closely as possible. A rack was constructed for the handling of flight strips, slides were borrowed, and a pre-plot board was built. All procedures were developed after consultation with representatives of the 668th AC&W Squadron and were adopted with their approval. Operations Bulletin 53-7 (Attachment #1) was published to explain these procedures.

4. Instruction and Training:

a. Lecture: A training lecture of one and one half $(l\frac{1}{2})$ hours duration was given to a key group of the civilian volunteers (team, floor, and balcony supervisors) at the Filter Center. This lecture consisted of an introduction explaining the purpose of the movements identification position, familiarization with the San Francisco ADIZ and the airways leading into the area, types of the flight strips, time and distance limits placed on aircraft filing flight plans, time limits in which correlation was to be performed,

Hq 28th ADiv (Def) Subject: Report of Test of Flight Plan Correlation by the Ground Observer Corps

and an explanation of the sequence to be followed in telling the information to the Air Defense Direction Center.

- (1) Aircraft were correlated with plans only if they were within five (5) minutes and ten (10) miles of the penetration time and point.
- (2) The lecture would have been more effective if practice in receiving flight plans from recorded AMIS calls had been possible. This can now be done and will be incorporated into future training programs should the movements identification section become permanent.
- (3) Training Aids which were utilized included a map of the 28th Air Division (Defense) Area which showed the ADIZ and airways, and enlargement of a flight strip, and a flight strip rack and slides. Instruction was also provided, by demonstration, in the use of a 1:500,000 timer-divider to aid in pre-plotting.
- b. After completing the lecture, the volunteers were placed at the movements Identification Position as they came in for their regular shifts. Some volunteers were able to receive flight plans almost immediately; others required more time and practice. The average person was able to take all flight plans after about six (6) hours of practice. To become proficient in correlating flight plans and tracks, however, required an additional three hours. Much of this time was shortened by practice during the training lecture. Shortage of military personnel did not permit as close supervision as desired, and perhaps contributed too to the longer time for complete training. The group of key personnel trained for the position definitely showed themselves capable of learning and applying the procedures required, although many would require slightly longer than the three (3) weeks provided for the test.
- c. The test has indicated beyond doubt that a military supervisor should be present at the movement identification position at all times. This airman should be in addition to the one assigned to Filter Center Operations, thus resulting in a total requirement of ten (10) men assigned to Filter Center Operations shifts, working in teams of two (2). It is believed that two men (2) on each operations shift are necessary even without the Movements Identification Section. This is required because of lectures which must be given, visitors to

Hq 28th ADiv (Def) Subject: Report of Test of Flight Plan Correlation by the Ground Observer Corps

be greeted and administrative duties, all of which often take the airman off the operations floor. The movements identification supervisor is necessary in order:

- To train volunteers and provide on the job taining in all phases of the movements identification section.
- (2) To insure accuracy of decisions on correlations by volunteers.
- (3) To man the section in the event of a shortage of civilian volunteers.
- (4) To make the transition between volunteer shifts easier.

L. Accuracy of correlation between reports of Ground Observer Corps observers and flight plans received was considered to be very good, particularly in the area north of the ADIZ. An average of about seventy-eight percent (78%) of the flight plans received in the Red Bluff Area were correlated with tracks. Insufficient observation post coverage prevented an even greater percentage. Flight Plan Correlation in the Reno Area fell below fifty percent (50%) because of lack of observer posts. The Reno Post operates only about eight (8) hours daily and other posts on Green Three (3) Airway (outside the Local Traffic Area) operate a maximum of twelve (12) hours daily. Only a very few posts are operative in the vicinity of Mono Lake, which is a fairly high traffic region, considered as part of the Reno Area.

a. Three thousand eight hundred and ninety seven (3,897) Flight Plans of all types (all areas, Big Photos, and Mather Round Robins) were received. Eight hundred and seventy-nine (879) of these flight plans were correlated. However, the great majority of these plans were for Fresno or Coalinga penetrations. This detachment was unable to correlate any of these since the Sacramento Filter Center Area ends approximately forty (10) miles north of the southern boundary of the San Francisco ADIZ. The breakdown of flight plans received in the Reno and Fresno Area are given below:

- (1) Red Bluff flight plans received were seven hundred and sixty-six (766) of which five hundred and ninety-six (596) were correlated.
- (2) Reno flight plans received were seven hundred and sixty-eight (768) of which three hundred and ten (310) were correlated.

Hq 28th ADiv (Def) Subject: Report of Test of Flight Plan Correlation by the Ground Observer Corps

- b. The time required for correlation varied with the amount of air activity in the area. During relatively slack periods, correlation was made almost immediately after the plane was reported or the flight plan received, whichever was later. Even during the busier times, correlation rarely required more than two or three (2 or 3) minutes.
- c. Failure to correlate tracks to flight plans was almost invariably caused by lack of observation posts. In some cases tracks were established which could not be identified with flight plans. Nearly all of these were single or bi-motored, flying low or very low. There were also cases of this kind caused by the transmission of flight plans by an alternate means to the Direction Center while the primary AMIS line was out of service.
- provide the flight plans and still eliminate the need for additional work on the part of AMIS through repetition during a period of large scale training. The nose level of the loudspeaker and other filter center activities often worked against each other, however, making all operations difficult. It is believed that a two (2) way line connected to a hand telephone (as in an Air Defense Direction Center) or headset would be preferable to the present system for permanent installation of the movements identification position. Either the headset or handset would reduce the noise level and a two (2) way line would help insure that no flight plans were missed. It is not anticipated that the request for repetition would be much more numerous from the Filter Center than from the Direction Center after the initial training has been completed.
- 6. The interest shown by civilian volunteers in the Filter Center has shown great improvement as a result of the addition of the movements identification section. Many volunteers came in and spent time practicing above and beyond their regular duty hours. It is believed that interest will increase to an even higher degree if the position becomes permanent in the Filter Center.
- 7. Inclosed are the logs maintained during the test period showing all tracks which were penetrating the ADIZ, and type, ownership, and number of aircraft. The abbreviations used in the remarks column included are:
 - a. RBL Red Bluff
 - b. RNO Reno
 - c. ADDC Identified by the Air Defense Direction Center

Hq 28th ADiv (Def) Subject: Report of Test of Flight Plan Correlation by the Ground Observer Corps

- d. F or FR Friendly
- e. FT Friendly tell issued by ADDC

8. It is recommended that the movements identification section be made a permanent part of the Filter Center. The results indicate that civilian volunteers can definitely be trained in correlation procedures. Further, the accuracy of correlation between reports of the Ground Observers and Flight Plans was found to be high. With sufficient ground observation posts, and well trained observers, filter centers may be expected to identify aircraft.

FOR THE COMMANDER:

2 Incl l. Det 2 Ops Bulletin 53-7 2. Test Log MARION R. McCANN Major USAF Adjutant

Detachment 2
4772d GROUND OBSERVER SQUADRON
Memorial Auditorium
15th & J
Sacramento, California

OPERATIONS BULLETIN)
NUMBER 53-7)

16 January 1954

SCHOOLS

SCHOOL TRAINING FOR F/C PERSONNEL

1	Purpose
2	Test
3	
4	Records

- 1. This bulletin is to set up a standing operation procedure on the Movements Identification Section of the Sacramento Filter Center for the twenty-one (21) day test period beginning 0001 hours 15 January 195h. We must remember that this is a test and even though we are able to identify our own tracks, our mission is still to give the ADDC early warning plus any other information they request.
- 2. During the test period all flight plans will be taken which are passed from Lost Sheep (CAA) to Radar (Overlay) with special emphasis placed on all northern flights which are south bound and eastern flight plans which are west bound which are penetrating the San Francisco ADIZ (Air Defense Identification Zone) or the target Area (Sacramento and the SF Bay Area). Flight plans which are taken in the Fresno (Southern) Area may be removed from the flight strip containers and filed immediately to relieve overcrowding the flight strip rack.
- 3. All tracks will be told to ADDC as in the past (former rules still apply).
- a. When we have a flight plan correlation on the track, that will be told to ADDC (along with the usual track information) at the end of the report. EXAMPLE: "New Track, NL 4205, South, GN 405, at 19, one, multi, 10 thousand. We have correlated this track as United 601-DC3."
- b. When an unknown is detected (a track with no flight plan correlation which must be identified immediately) it will be told to ADDC as first priority. An unknown will be told in accordance with current SOP for radar telling and adding at the end of the report that "we have no flight plan correlation on this track". EXAMPLE: "New track, NKLISB, South, CNL17, at 25, one, bi, 20 thousand, unknown, no flight plan correlation.
 - 4. In addition to the current radar telling log, an Identification

Det #2, 4772d Grd Obsr Sq, Ops Bul 53-7, 16 Jan 54

record will be kept. The information on this record will be used to determine the success of the Test. With this in mind, the Identification Record should be kept as accurately as possible. The Identification Record will contain the following information by column heading:

- a. Track No-All track numbers which require identification will be recorded or all tracks which are not automatically friendly in accordance with current SOP's.
- b. Reported Altitude-The altitude will be recorded just as the observer calls it in and it is displayed on the raid stand.
- c. Time Flight Plan Received-If a track is orrelated by Flight Plan the time that the flight plan was received from CAA will be logged.
 - d. Time Track Established-Same as time on raid stand.
- e. $\underline{\text{Time Identified}}$ -The time identification is actually made on track.

f. Identified by Flight Plan:

- (1) Amount missed:
 - (a) Time-the difference between the track time and the estimated time of penetration.
 - (b) Distance-The difference between the track position and the estimated point of penetration on the flight plan.
- (2) Number of Engines: This will be taken from the type of aircraft on the raid stand whether single, bi, multi, etc; in reference to type of motor.
- g. Identification:
 - (1) Aircraft ownership-taken from flight plan.
 - (2) Aircraft type-taken from flight plan.
 - (3) Aircraft number-taken from flight plan ID No.
- h. Identified:
 - (1) Friendly: If we identify the aircraft as friendly, record the time we identify it friendly-if we do not identify it friendly leave this column blank.

Det #2, 4772d Grd Obsr Sq, Ops Bul 53-7, 16 Jan 54

(2) Unknown: If we have no flight plan which will correlate-our identification will be unknown and we will call it to ADDC as such. If they identify it as friendly then put in remarks column that ADDC identified it as friendly and give time they identify it: EXAMPLE: "Friendly - ADDC - 1123." Leave the time we actually make it unknown recorded.

i. Remarks:

- (1) If we have a correlation the area or the flight will be recorded-whether Red Bluff or Reno.
- (2) If we have no correlation ADDC will be called. If they identify the track friendly-paragraph h, (2) above will apply, if they do not identify the track as friendly but leave it unknown, the reason why no identification was made will be explained in this column.

BY ORDER OF THE COMMANDER:

OFFICIAL:

GARELD F KRIEG 2Lt, USAF Adjutant


/s/t/ GALELD F KRIEG 2Lt, USAF Adjutant

SECURITY ANNEX

- l. This document is classified SECRET as it reveals important intelligence operations and is vital to national defense.
- 2. This material contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, U.S.C., Sections 793 and 794, the transmission or revelation of which in any manner to an unauthorized person is prohibited by law."
- 3. This document may be reproduced providing reproduction will be made only when necessary to satisfy actual military or other official Governmental requirements.

DISTRIBUTION LIST (Cont'd)

Comdr, Air Research and Development Command	3
Comdr, Air Force Cambridge Research Center	1 1
Comdr, Rome Air Development Center	1
Comdr, Wright Air Development Center	1
6562d Research and Development Gp, Mather AFB, ATTN: AC&W Opr Research Branch	1
Dept of Defense, Office of Asst Secretary of Development,	. 1
ATIN: Dr Charles M. Mottley Weapons System Evaluation Gp, Off of Sec of Def, Hq USAF	2
Air University Library	2
Joint Air Defense Board	2
RAND Corp, 1700 Main St, Santa Monica, Calif	2
Institute for Air Weapons Research, Univ of Chicago	14 2 2 2 2 2 1 2
Project Lincoln, MIT, Cambridge, Mass.	2
Airborne Instrument Laboratory, ATTN: G. Comstock	2
Armed Services Tech Info Agency, Document Services	1
Center, Knott Bldg, Dayton 2, Ohio	
CAA, Washington, D.C., ATTN: Mr Fred L. Smith, Air Defense Liaison Branch	1
Comdr, AAA	2
CNO. U.S. Navy	5 2
Air Officer Commanding, ADC, RCAF, St Hubert, Que, Canada	2
Chief, Operational Research Group	
Defence Research Board, Temporary Bldg A	
Cartier Square, Ottawa, Ont, Canada	2
Administrator, FCDA, 1930 Columbia Road, N.E.	
Washington 25, D.C.	1
	93
	73
	56
TOTAL	149

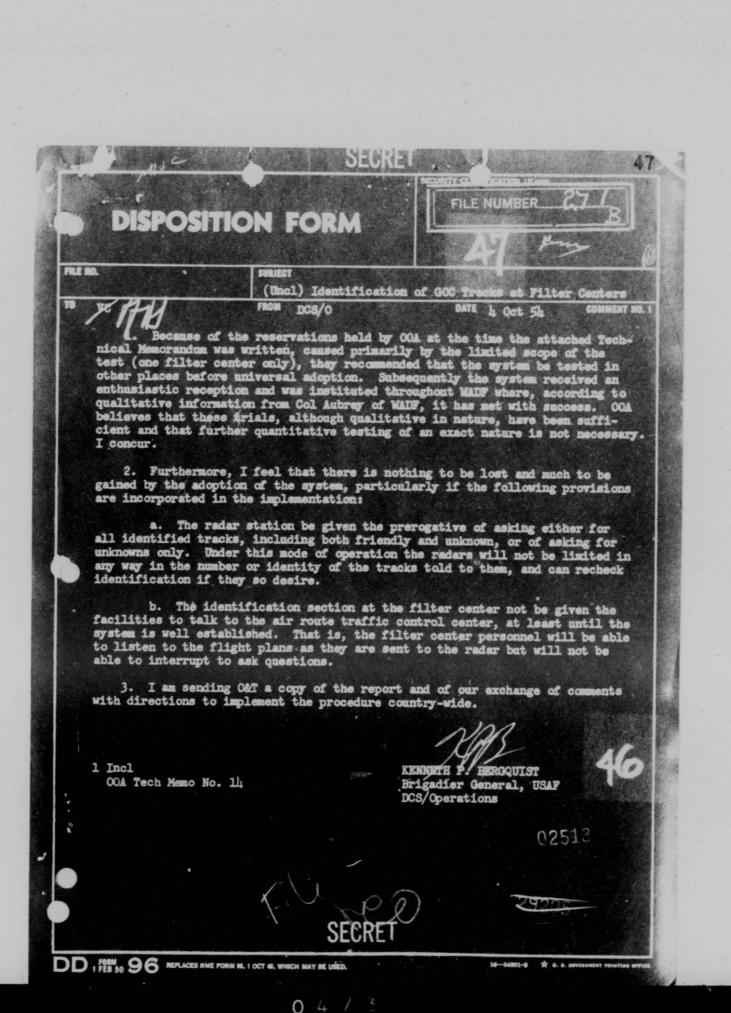

COPY

SECKET

HEADQUARTERS
29TH AIR DIVISION (DEFENSE)
Great Falls Air Force Base, Montana

CRE

18 August 1954

.0

SUBJECT: (Secret) Possible Use of Passive Detection to Gap-fill Present 29th Sector Radar Coverage

TO: Commander
Central Air Defense Force
Grandview Air Force Base
Grandview, Missouri

- 1. Present plans program the AN/FPS-14 radar to gap-fill the 29th Sector radar coverage for detection of low flying aircraft. An alternate and back-up method for air detection is Passive Detection (PD).
- 2. FD is often referred to as Early Early-Warning (MEW). Tests conducted by the UK resulted in PD intercepts consistently 25% greater than radar intercepts within the same EW system even when the frequency of the striker's blind bombing and navigation radar was unknown. The 'low probability of interception' of electromagnetic waves has been solved by ARDC for airborne detection (ECM Reconnaissance) using 'Alfred' horns and crystal-wideo receivers (AN/ARD-4 and -6).
- 3. An intruder, penetrating the 29th Sector at low altitude (500 to 5000 ft) to evade or delay detection by the permanent radar sites, would rely on his blind bombing and navigation radar to maintain a track to his IP, and would then become susceptible to detection by PD. During times of jamming, PD with its wide-open receiver, will see the strobe of jamming. The permanent radars will see a strobe of the same jamming because the radar detection range is increased when jammed even though the jamming source is at low altitude, and is in the radar shadow. The jamming source then can be pinpointed through triangulation of the LOPs. Therefore, during intruder jamming, PD becomes 'active' in the defense system.
 - 4. The advantages of PD over reder related to Air Defense are:
 - a. Lower initial and sustaining costs.
 - b. Ease of maintenance. No timer, modulator, or transmitter.
- c. Fewer supply and logistical problems. Equipment can be completely mobile and be driven to the parent organization for maintenance.
 - d. Longer interception range. UK tests conclusively proved this.

V. 30-2

STUME

COPY

SEGRET

48

CRE Subj: (Secret) Possible Use of Passive Detection to Gap-fill Present 29th Sector Radar Coverage

- e. The use of PD as a gap-filler precludes the intruder radarnavigation, and will force him to a higher altitude within the detection capability of the permanent radar.
- f. PD, as a 'gap-filler', is not interested in range and asimuth, but in asimuth and early warning of pending attack only.
 - 5. The disadvantages of PD over radar as related to Air Defense ares
- a. PD is 'dead' if the intruder does not radiate electromagnetic waves. As stated in paragraph 3, an intruder must radar-mavigate under all but CAVU conditions. 'Rear' navigation does not demy PD. (Back lobe radiation).
- b. Low 'probability of interception' of electromagnetic waves. The use of 'Alfred' horns and crystal-video receivers resolve this disadvantage.
- 6. It is recommended that use of PD as 'gap-fillers' be evaluated for possible use in the 29th Sector of responsibility.

FOR THE COMMANDERS

s/t/THOMAS M. CAFFERTY Captain, USAF Adjutant

SECRET

V-30-3

SECKEI



Bq 29th ADiv GRE, Subj: (Secret) Possible Use of Passive Detection to Gap-fill Present 29th Sector Radar Coverage

POSE-R (18 Aug 54)

let Ind

13 SEP 1954

MEADQUERTERS CENTRAL AIR DEFENSE PORCE, Grandview Air Force Base, Grandview, Missouri

70: Commander, Air Defense Command, Ent Air Force Base, Celerado Springs, Celerado

1. This headquarters believes that a requirement exists for passive detection facilities at "outer ring" radars on the perimeter. However, it is not believed that such facilities should replace or negate the requirement for gap-filler radars.

2. Information available to this headquarters concerning the passive detection program is as follows:

a. Present passive detection equipment in operation at certain locations is unsatisfactory. ADC has established a requirement for development of better equipment. This project is being hamiled by Rome Air Development Center.

b. Requirements for communications and personnel for passive detection installations are being held in absyance until a future date.

e. There are possibilities of using passive detection facilities of other commands.

3. Request this headquarters be advised of current programming of passive detection facilities.


FOR THE COMMANDER:


MILTON A. HENDERSON Capt. USAF Asst Adjutant

1 30-4×

SECRET

ADF 5621-54

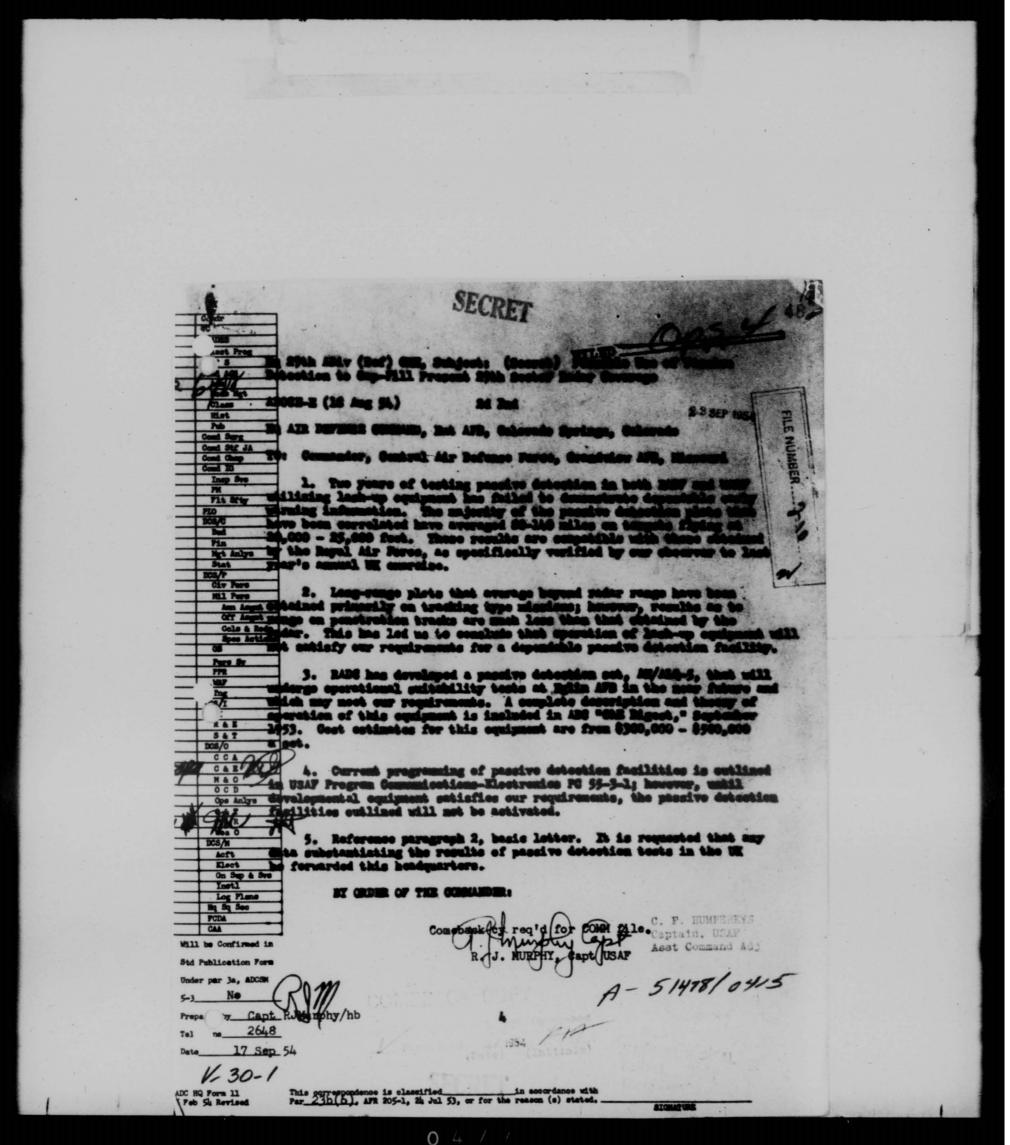

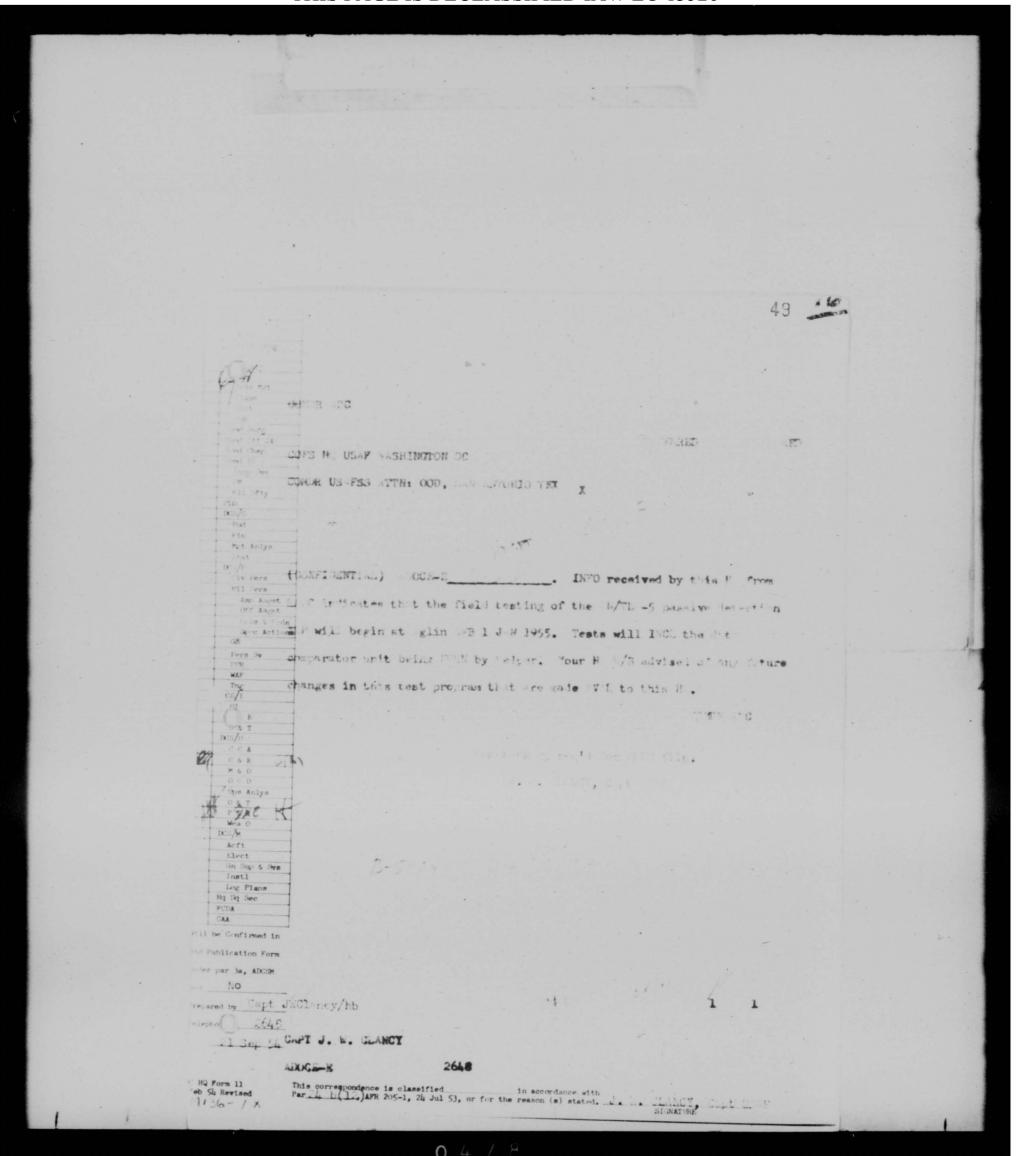

JELKEI

50

280C -2

SUBJE CT: (Unclassified) Electronic Passive Detection

701

Commander Western Air Defense Ferse Hamilton Air Ferse Base Hamilton, Galifornia

- 1. Communications facility paskage MB-ID-I is programed in the USAF PC for installation during FT-57 at ACM sites P-2, M-96, P-37, and P-33. One (1) MB-ID-I facility is presently installed at Hamilton Air Force Base (P-48) on a standby status.
- 2. The passive detection network tested in this Division during 1952-1953 utilizing three (3) HB-1D-1 units at sites P-36, P-37, and P-33, proved unsuccessful. Attached as Inclosure 1 is an evaluation report of this system detailing the following deficiencies:
 - a. Airborne equipment not suitable for continuous operation.
- b. Low probability of detection using rotating ambenua systems and receive frequency tuning.
- e. The extremely small advantage in ranges over search radar severage.
- 3. Based upon the attached report, it is recommended that the equipment listed in the SPEL for the HB-ID-1 facility package be deleted and replaced by equipment giving more desirable results.
- A. This headquarters will request that one (1) each HD-1D-1 facility be included in the next PC revision for station P-30 to increase the capability of the outer constal perimeter passive detection network.
- 5. He action has been taken by this bradgesphere in the planning of wire or radio communications for the procise detection system and will be held in absymme pending receipt of operational requirements.

SECRET

M-4-2

28C-3405 280CE/C.200 HEDAIRDIVDEF 28 280CE-2 Subject: (Unclassified) Electronic Passive Detection

6. It is requested that this headquarters be provided the current and planned policies concerning passive detection to enable proper planning, programming and engineering of this facility.

FOR THE COMMANDER:

1 Incl: HEDAIRDIVDEF 28 Ltr, 280CE-3A 413.44 19 Nov 52 (trip)

WDOCE_P (15 Oct 54)

lst Ind

. B NOV TOE

HQ WESTERN AIR DEFENSE FORCE, Mamilton AFI, Mamilton, California

- TO: Commander, Air Defense Command, Ent Air Force Hase, Colorado Springs, Colorado
- 1. Reference paragraph 2 basic communication, deficiencies cited are correct, and the value of a Passive Detection Facility utilizing airborne equipment provided by Standard Facility Package ID-1D-1 is questionable.
- 2. To provide a reliable Passive Petection System capable of 24-hour operation and providing optimum coverage, it is recommended that the airborne equipment currently listed in the Standard Facility Package MB-ID-1 be deleted and replaced with Fixed Flant type of equipment.
- 3. Reference paragraph 5 and 6 basic communication, it is requested that this headquarters be provided an Operational Flan and policies concerning this system to facilitate planning, programming, and engineering of wire and emergency radio communications required in support of the system.
- 4. Request this headquarters be advised of action taken to obtain suitable Fixed Plant equipment to replace unsatisfactory airborns equipment currently listed in the Standard Pacilities (quipment List.

POR THE COMMANDER:

1 Incl
n/c(1 cy w/d)
ccs Comdr 28th ADiv (D)

2

M-4-

			*
		A SEC TO SECURE A CONTRACT OF SECURE	A. A
Comdr VC ADES Asst Prog		x 221 glm 5	0
of S			
Reds Mgt	Div (Def) 2800E-2, Subj: (Uncl) Electronic Passive Detection	
1 00	(15 Oct 54) 2d Ind		
Pub	CFRISK COMMAND IN-A APP CO	Samuel Control	
C	FENSE COMMAND, Ent AFB, Co		
Cond IG TOS Comm	ander, Western Air Defense	Force, Hamilton AFB, Calif.	
PM 1.	This headquarters is cogni	sant of the deficiencies of the	
DTO SEE D	restan defection programs	Agtion to assument to bedone Asland	
Bud In procur	ement of a suitable facili	assive detection system due to delay ty and due to existing and programmed	
Mgt Anlys	grams,	and he all manual	
Stat DCS/P 2.	Upon approval of this acti	on, a revision will be incorporated	
The same of the sa	TOTAL CHIES CHENCE . N	nd Instructions will be issued	
Off Asgnt	arelegation of bresent ed	ulpment.	
Cols & Reds	BY ORDER OF THE COMMANDER:		
Q8 Pera Sw			
PPR MEMO	FOR RECORD:		
Tng 1 Incl	to withdraw the reg	rector of Requirements, Hq USAF, quirement for a passive detection	
OI w/d 1 or	system is currently	being coordinated through the	
S & T	headquarters. Dele	etion of this requirement will	
DCS/O	equipment.	r interim passive detection	
MAO NA			
Oge Anlys av	* BMM 7B		
10 De la	A MINITED		
Wea 6			
Acft Elect			
Gn Sup & Svs			
Log Plans Hq Sq Sec			
PCDA CAA			
il be Confirmed in	With the Late of t		
Publication Form			
der par 3a, ADCSM			
No.			
	ib		
by Capt RJMurphy/h			
by Capt RJMurphy/h			
by Capt RJMurphy/h		3 Lit who is	

0 4 8



DEPARTMENT OF THE AIR FORCE
HEADQUARTERS UNITED STATES AIR FORCE
WASHINGTON 25, D. C.

519V

AFCOP OP D

11 OCT 1954

SUBJECT: (Uncl) Mid Canada Early Warning System

TO:

Gommander Air Defense Command Ent Air Force Base Colorado Springs, Colorado

PILED OPS 4

- l. Transmitted herewith is the Final Report of the Systems Engineering Group for the Mid Cameda Early Marning Line, dated 27 August 1954 (Incl 1).
- 2. Review of the report and establishment of a USAF position was accomplished during the period of 1-3 September 1954, with representatives of your ecommand in attendance.
- 3. The following ecuments summarise the position established by this Headquarters and transmitted to the RGAF on 20 September 1954.
- a. The USAF concurs in the SEC and RCAF selection of the MK II Deppler System for that segment of the line extending from Hopedale to Dauson Creek, with identification reders at necessary dense traffic points and across James Bay. Initial installation of a composite line of radars for this segment is not recommended unless the test circuit shows the MK II system to be operationally deficient. To safeguard against slippage in this eventuality, reder siting, procurement and logistics planning should be conducted consurrently to permit early implementing action upon a decision to employ radars.
- b. The terget date of 1 January 1957 meets URAF requirements. Earlier siting of some doppler stations, allowing some construction and installation at doppler sites in 1955, would provide added assurance of meeting the terget date by reducing the magnitude of construction planned in the summer of 1956.
- o. The WAT concers with the MAT recommendation that the western segment of the line fallow the existing chain of raters from Doucen Grock (Saskuteen Mountain) to Helberg, Vancouver Island, In view of the inter-governmental agreement on the MV line, and its possible availability within a year following the Mid Constation, the deletion of the Alaskan link is varrented. This chain will require augmentation to be compatible with the operational capability of the root of the line. It was proposed to the ROAF that the two Mr Defense Commands determine the requirements for

on future action. Succession Find Roy Roy AT 20147

Letter to Commander, ADC, Subj: "(Uncl) Mid Canada Early Warning System" (Cont)

d. The UBAF foncurs in the SEQ*s recommendation that a minimum number of gap filler redars be added to the MEAC radar system from Hopedale to Cape Race for the eastern segment of the line. The specific number of radars to be installed will need to be determined by further site survey. Further study is required of the gap left in the Strait of Belle Isle area. It was proposed that this segment of the line be considered as a U.S. gap filling problem and that the entire project, including procurement, construction and operation be undertaken by the USAF.

4. Early actions are being taken to obtain necessary approvals and authorisation to initiate implementing actions. Particular emphasis will be placed upon early authorisation to conduct site surveys for such portions of the Mid Canada Line as may become UEAF responsibilities. Canadian decision on this matter is currently being awaited.


BY ORDER OF THE CHIEF OF STAFF:


1 Incl SEG Rpt (6 cys) R.E. Koon


R. E. KOCN
Brig. Ceneral, USAF
Deputy Director of Operations
Legaty Chief of Staff, Operations


SECRET


V-1-2x

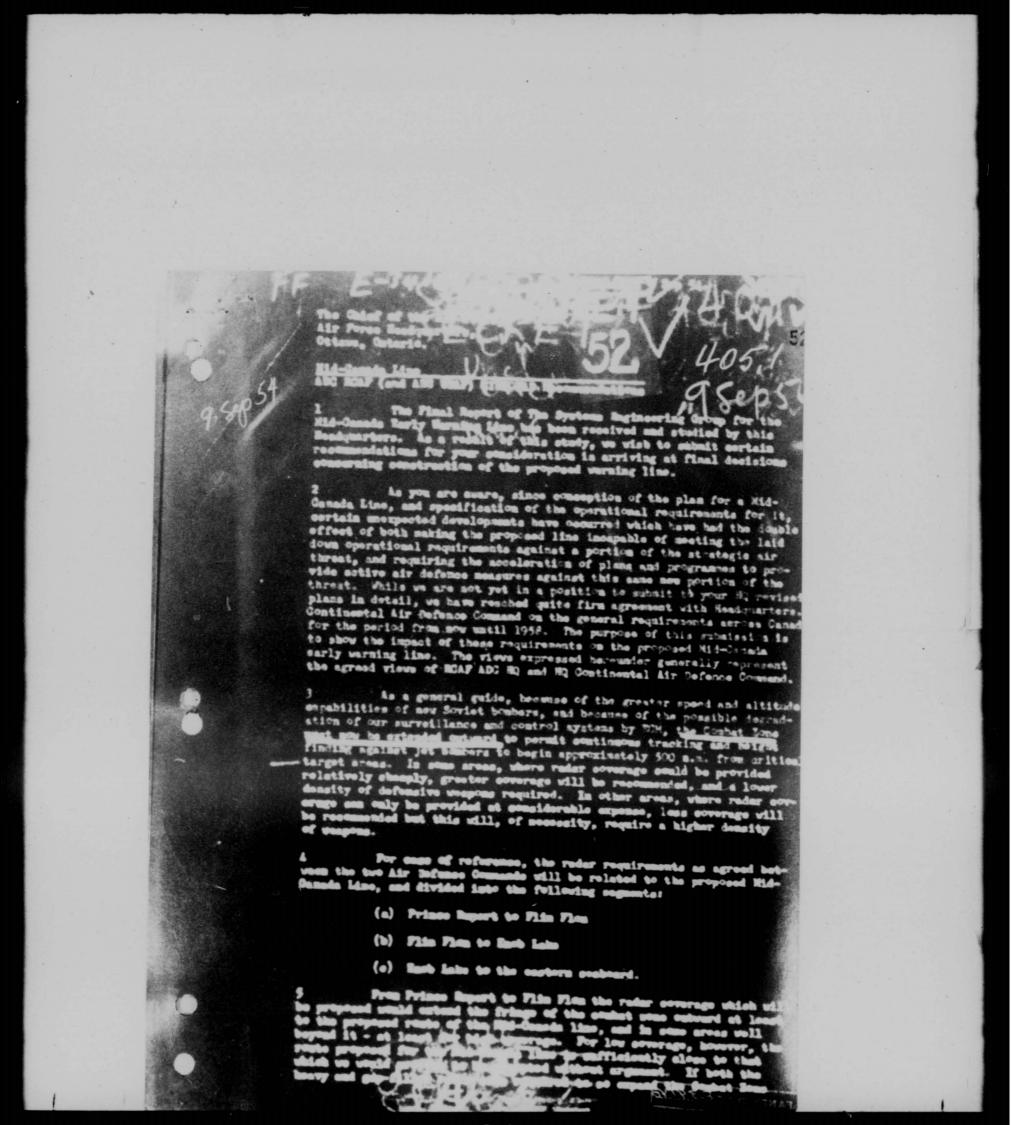


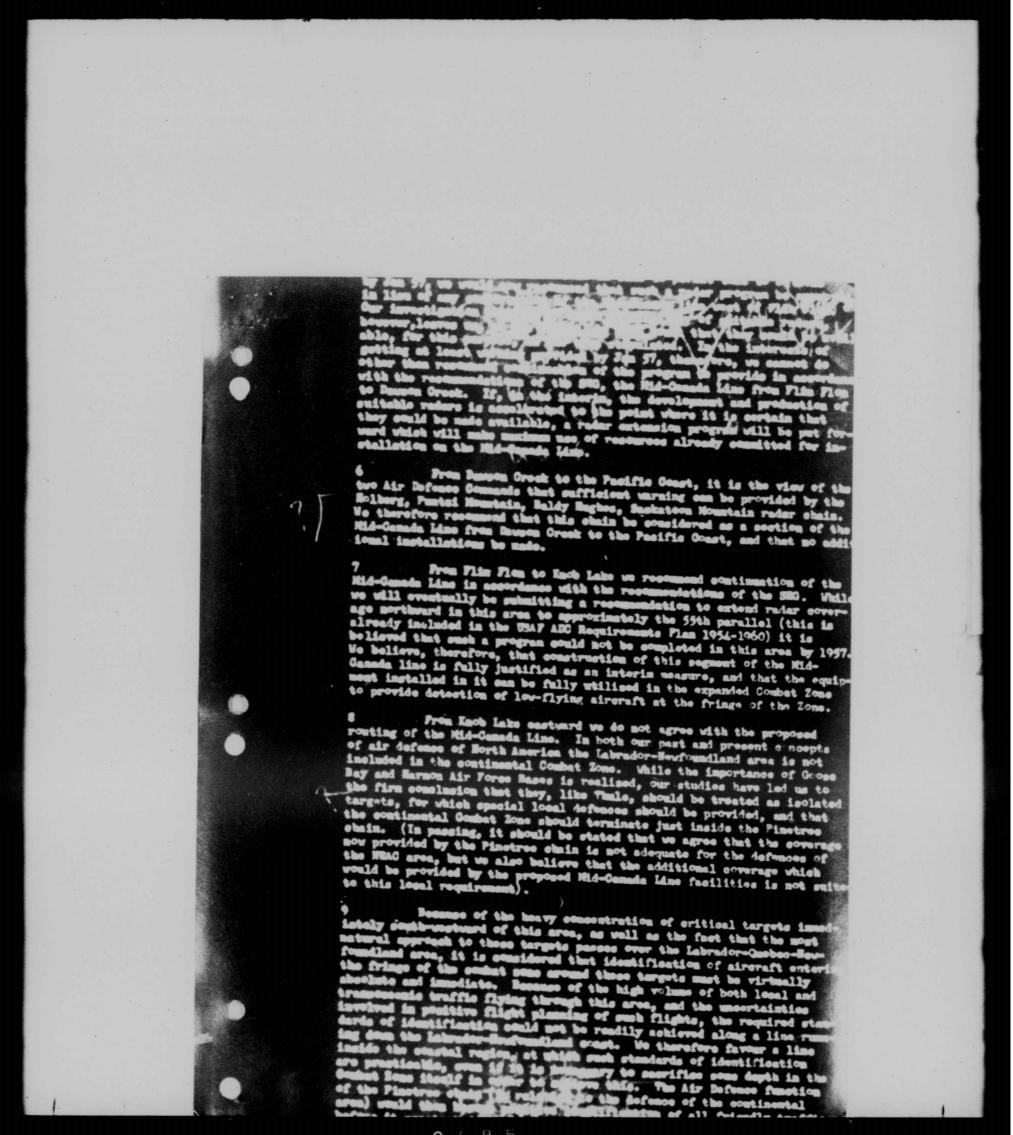

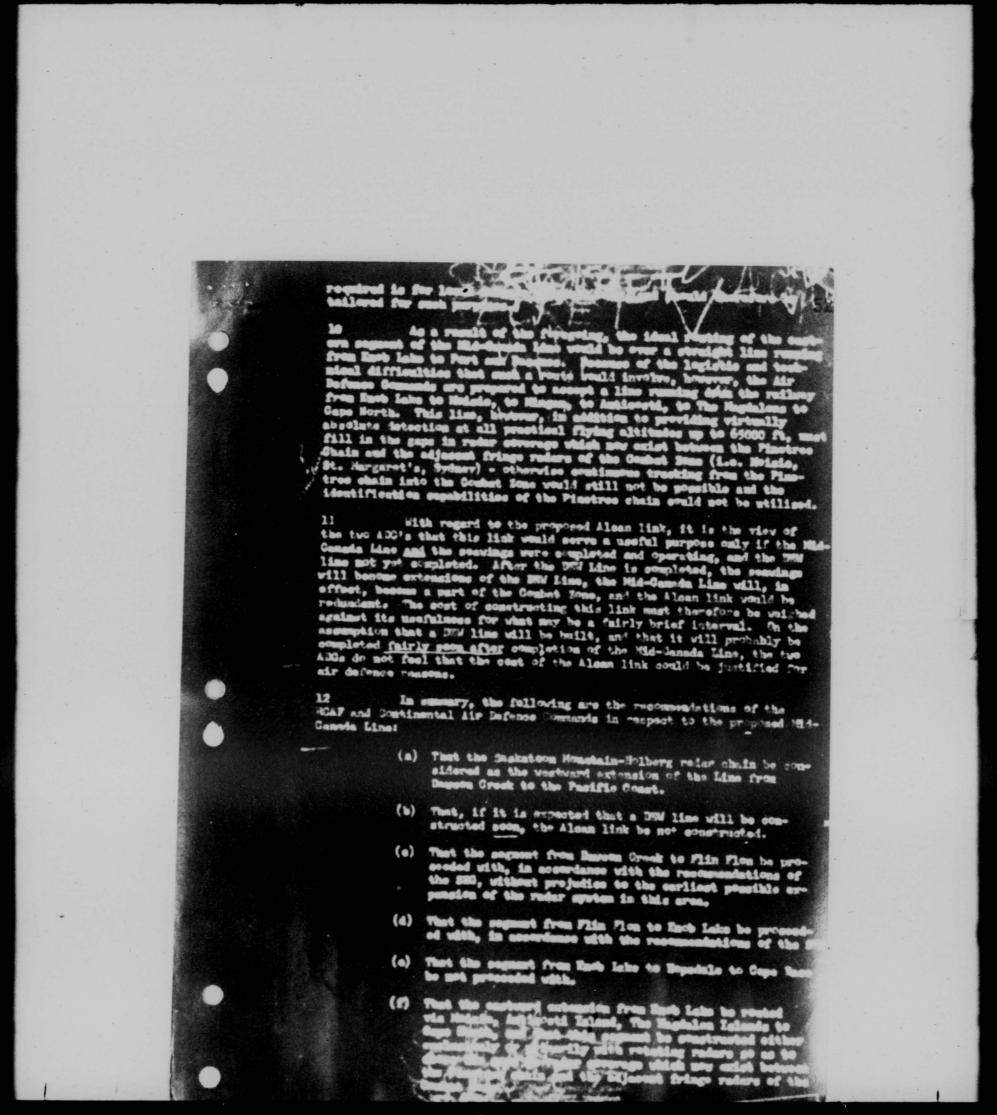


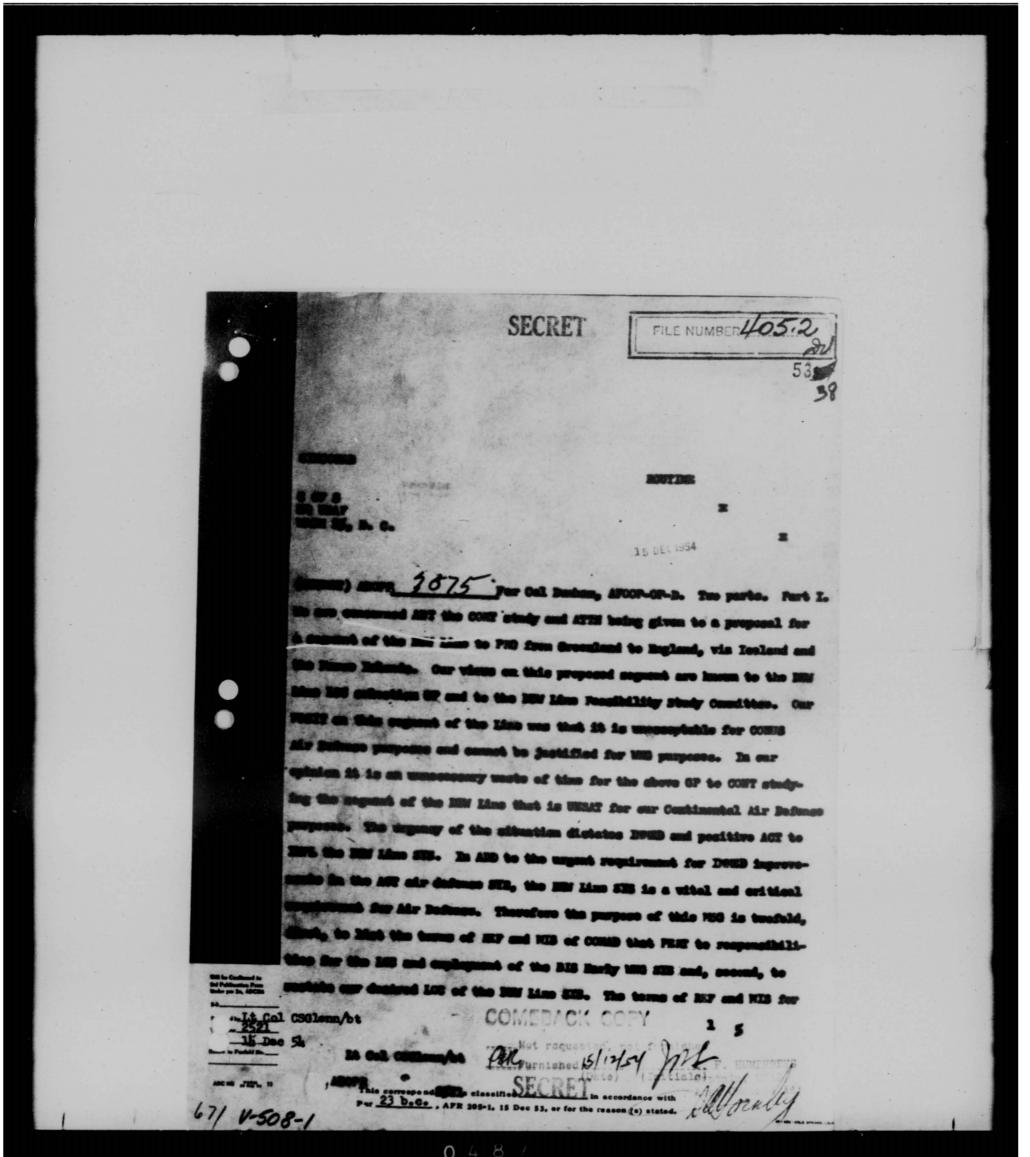

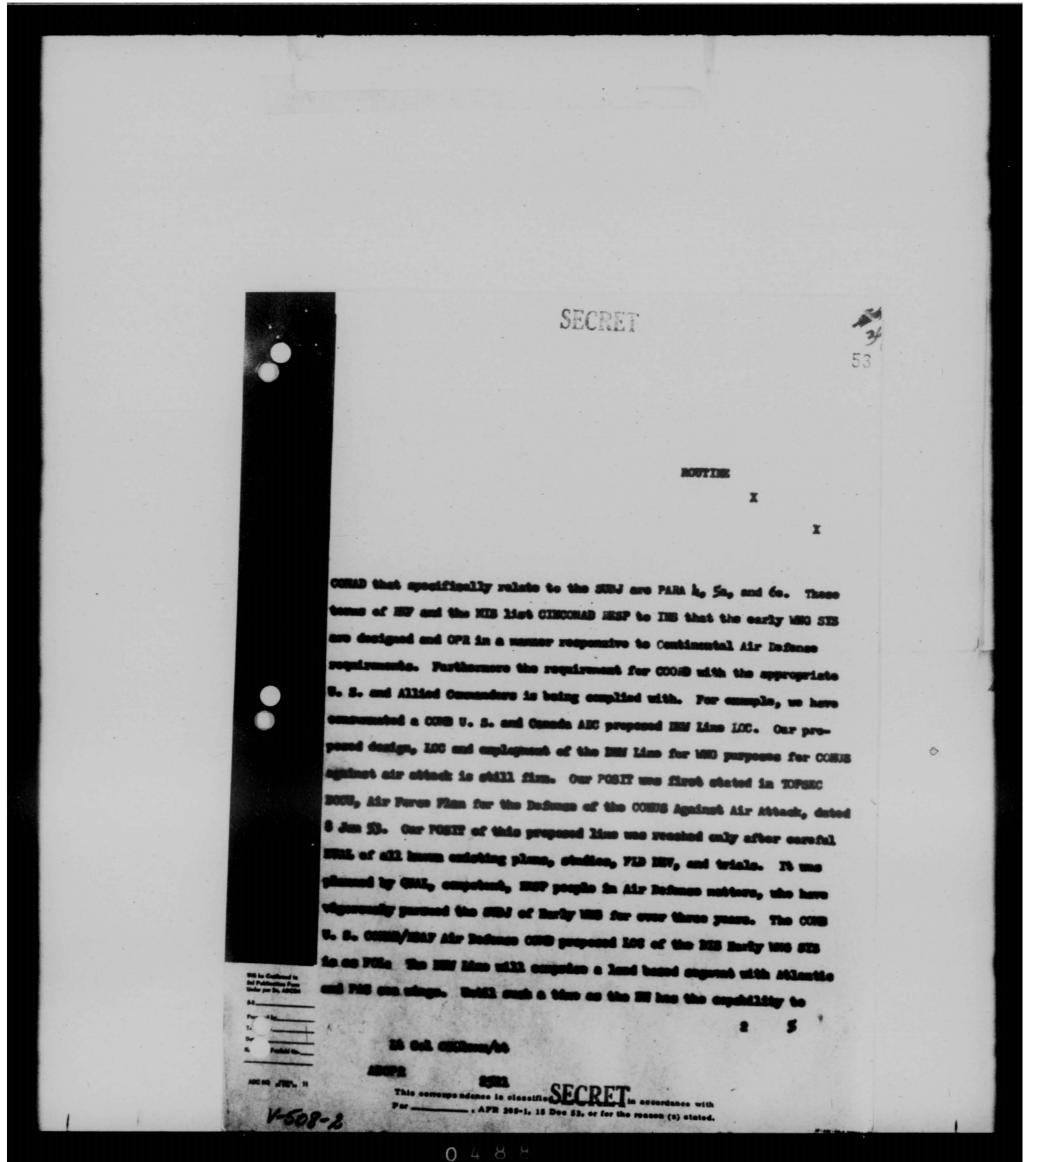


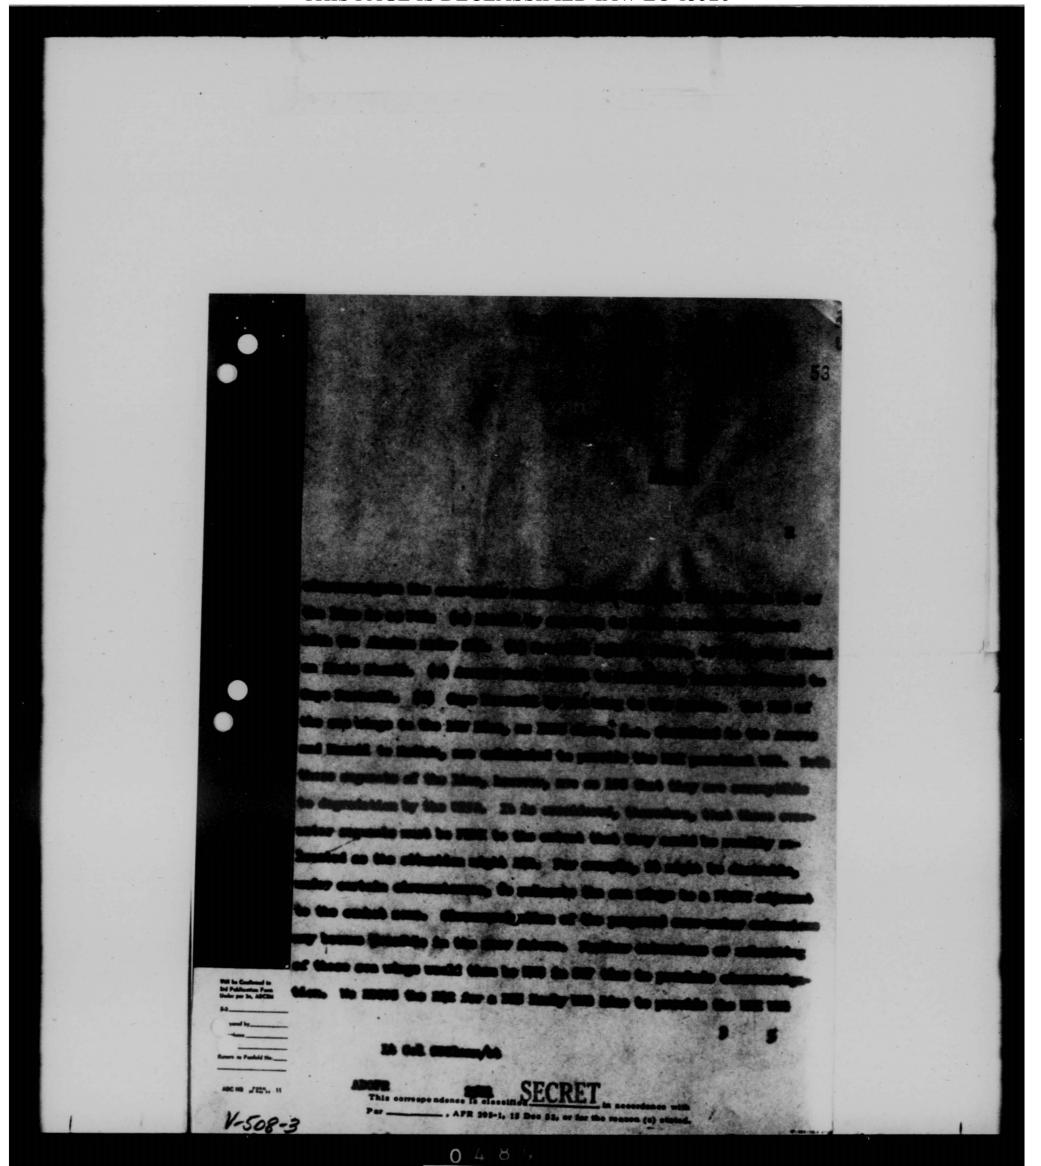


THIS PAGE IS DECLASSIFIED IAW EO 13526

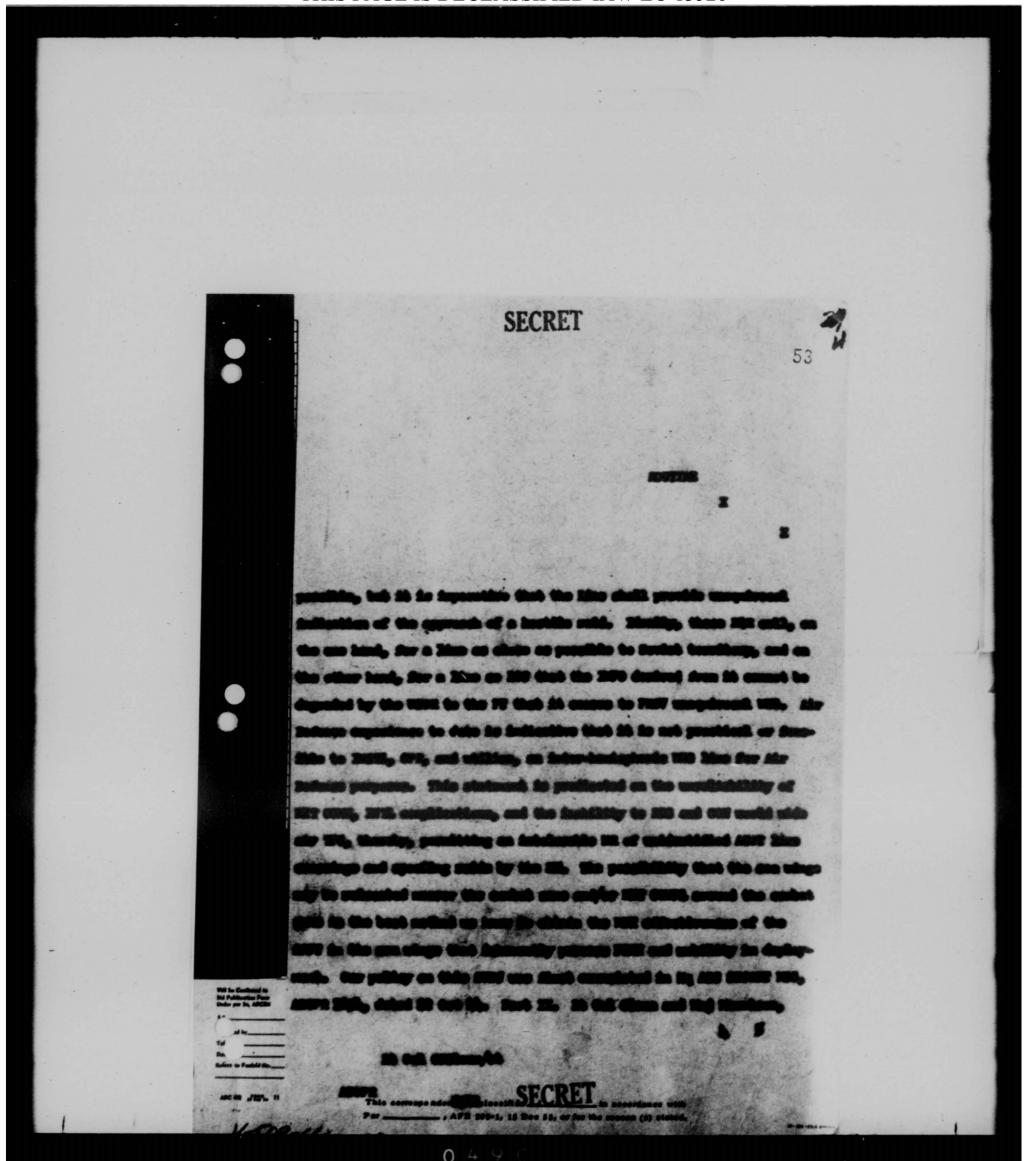


THIS PAGE IS DECLASSIFIED IAW EO 13526

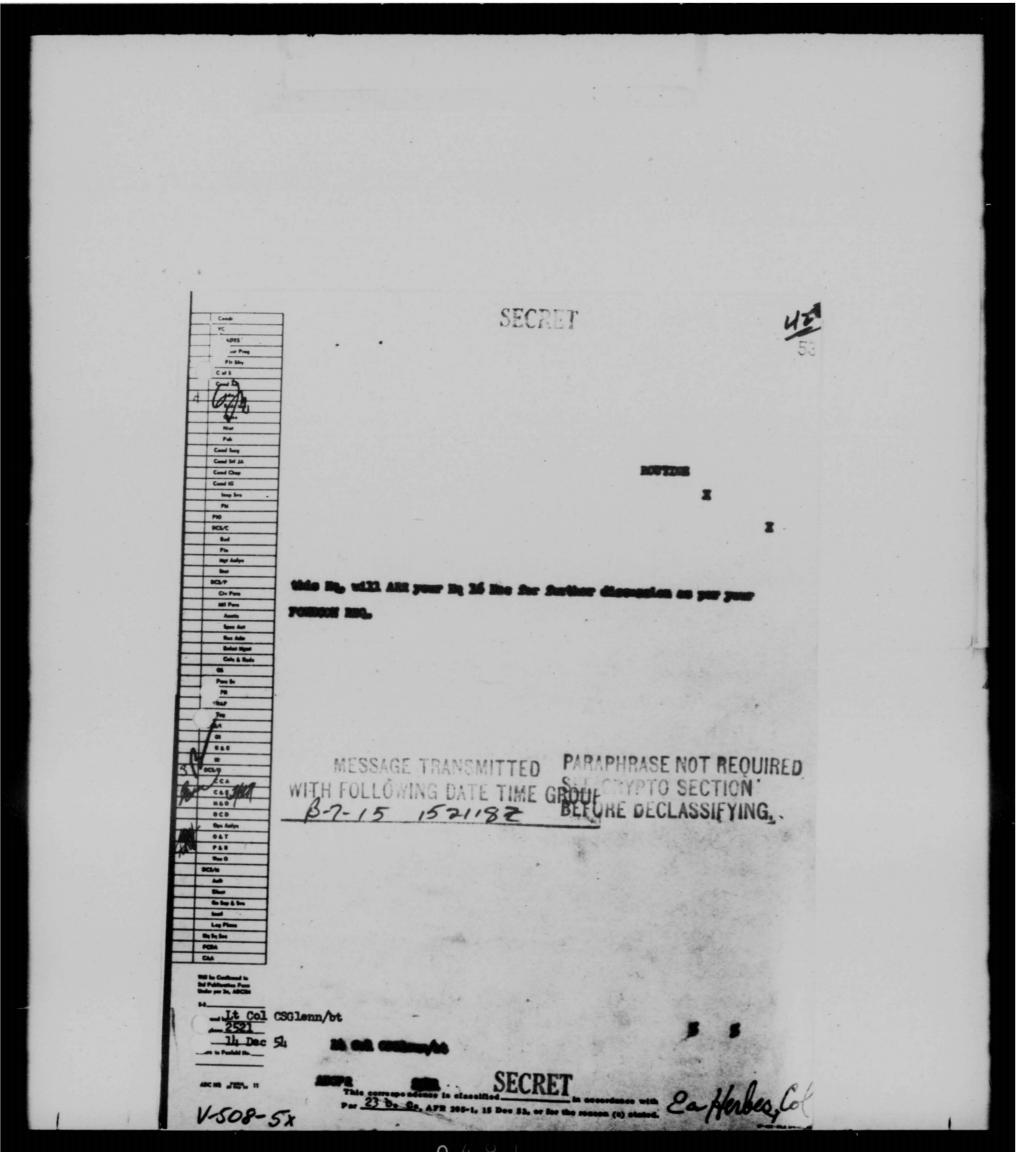

THIS PAGE IS DECLASSIFIED IAW EO 13526

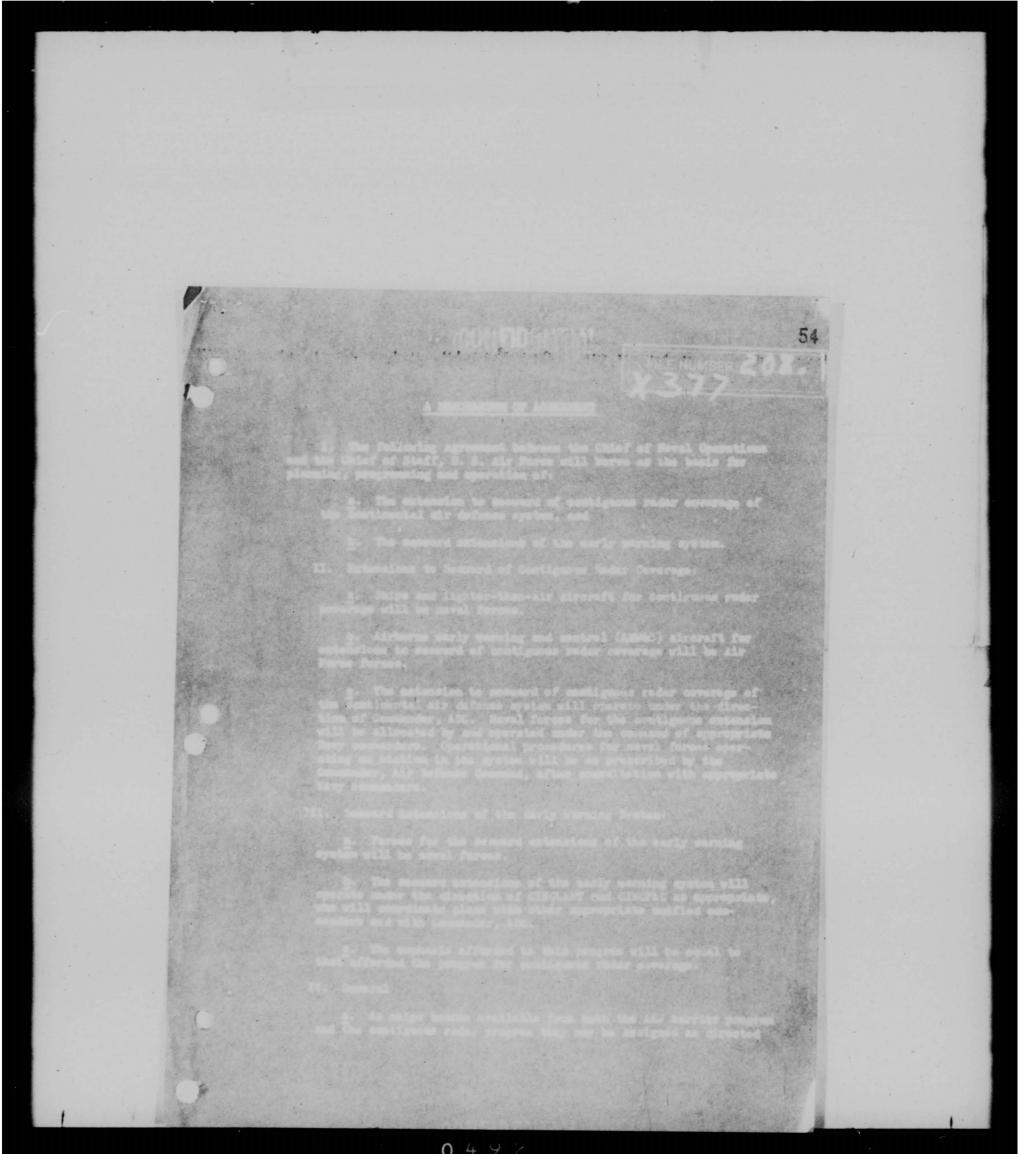

THIS PAGE IS DECLASSIFIED IAW EO 13526

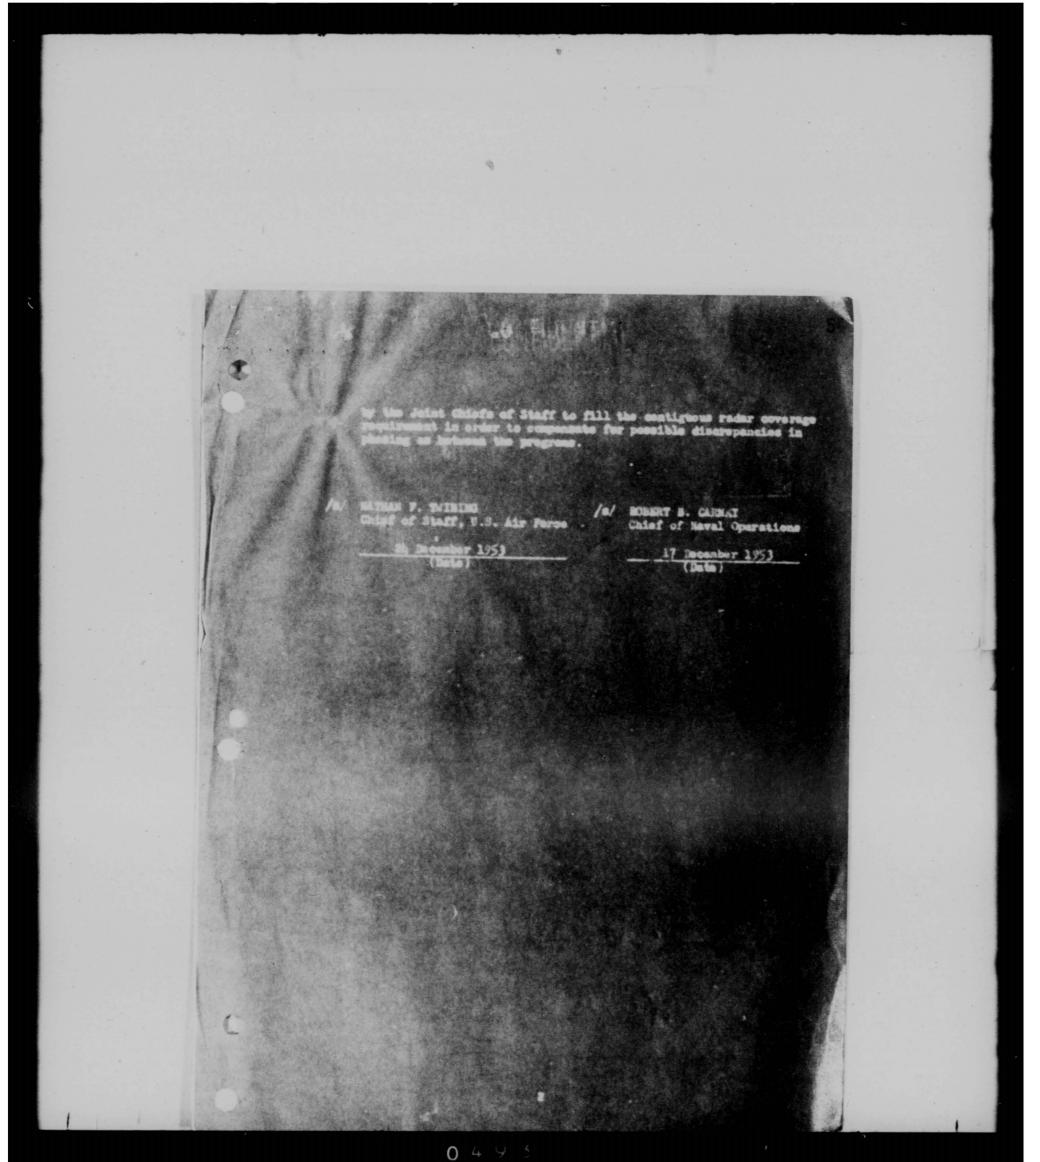

THIS PAGE IS DECLASSIFIED IAW EO 13526

CONFIDENTIAL

CONFIDENTIAL

55

THE JOINT CHIEFS OF STAFF Washington 25, D.C.

8M-688-54 2 August 1954

MEMORANDUM FOR: Chief of Staff, U.S. Army
Chief of Naval Operations
Chief of Staff, U.S. Air Force
Commandant of the Marine Corps
Subject: Continental Air Defense Command

- 1. Under the authority of the Secretary of Defense, the Continental Air Defense Command (CONAD) is established, effective 1 September 1954, as a Joint Command for the air defense of the continental United States, with headquarters at Ent Air Force Base, Colorado Springs, Colorado. The Secretary of Defense has designated the Department of the Air Porce as the executive agency for this command.
- 2. The Joint Chiefs of Staff designate General Benjamin W. Chidlaw as Commander in Chief, Continental Air Defense Command (CINCONAD).
- 3. The mission of CONAD and the terms of reference for the commander are contained in the Annex hereto. CINCONAD will submit to the Joint Chiefs of Staff for approval, revisions to the attachments as experience dictates.

Info copies to:
 Commander in Chief, U.S. European Command
 Commander in Chief, Far East
 Commander in Chief, Pacific
 Commander in Chief, Atlantic
 Commander in Chief, Caribbean
 Commander in Chief, Alaska
 Commander in Chief, U.S. Northeast Command
 Commander, Strategic Air Command
 Commander in Chief, U.S. Navul Porces,
 Eastern Atlantic and Mediterranean
 Commander in Chief, U.S. Air Forces in Europe.

CONFIDENTIAL

CONFIDENTIAL

CONFIDENTIAL

55

- 4. The following forces are initially allocated to CONAD:
 - a. The U.S.A.F. Air Defense Command.
 - b. The U.S.A. Antiaircraft Command.
 - c. Naval forces of the contiguous radar coverage system.
- 5. Initial press releases regarding the establishment of this command will be made by the Secretary of Defense.
 - 6. Addressees are directed to take action as necessary.

EDWIN H. J. CARNS, Brigadier General, USA, Secretary.

C MFIDENTI.L

CONFIDENTIAL

AHNEX

TERMS OF REFERENCE AND MISSION

1. The Continental Air Defense Command (CONAD) is established as a joint command for the defense of the continental United States against air attack. The Department of the Air Force in been designated as the executive agency therefor. Headquarters USAF Air Defense Command is additionally designated as Headquarters, CONAD, the staff of which will be augmented by appropriate representation from all Services.

2. The Commander in Chief (CINC) CONAD will exercise operational control# over all forces assigned or otherwise made available by the Joint Chiefs of Staff or other proper authority, for defense of the continental United States against air attack.

The command will be established in accordance with the appropriate provisions of Joint Action Armed Forces (JAAF), and the directives contained herein. The command shall consist initially of the U.S. Air Force Air Defense Command, the U.S. Army Antiaircraft Command, and a Naval Command composed of the naval forces of the contiguous radar coverage system. During the periods that augmentation forces of the Army, Navy/Marine Corps, and Air Force are employed in air defense of the continental United States, operational control of such forces shall be temporarily vested in CINCONAD.

3. The CINCONAD will be a U.S. Air Force general officer who will be designated Commander, U.S. Air Force Air Defense Command.

The Commanding General, Antiaircraft Command, will be the principal advisor to CINCONAD on Army matters pertaining to the CONAD. An appropriate Naval Command, under a flag officer, will be

"Operational control" wherever used in this paper is as defined in Tob "D" hereto

O MIDENTL.L

CONFIDENTIAL

inner:

C MPIDUNTIAL

CONFIDENTIAL

contablished with headquarters at ENT Air Force lase and the Commander will also be the principal advisor to CINCONAD on Navy matters pertaining to the CONAD. An appropriate Marine Corps representative will be assigned to the Staff of CINCONAD as principal advisor on Marine Corps matters pertaining to the CONAD. In the absence of the Joint Commander, the Senior Component Commander will assume temporary command.

4. Forces and operations of the seaward extensions of the early warning system will continue under the Commander in Chief, Atlantic (CINCLANT), and the Commander in Chief, Pacific (CINCPAC), and early warning installations in Alaska and the Northeast Command under the Commander in Chief, Alaska (CINCAL) and the Commander in Chief, Northeast Command (CINCNE). However, the above commanders will support CINCONAD in accordance with plans approved by the Joint Chiefs of Staff and mutual agreements by the Commanders concerned, to insure that plans for, and the operations of, these elements of the early warning system will be responsive to the needs of CINCONAD.

- 5. The mission of the CINCONAD will be to:
 - a. Defend the continental United States against air attack.
- <u>b.</u> Support CINCPAC, CINCLANT, CINCARIB, COMSAC, CINCAL and CINCNE in their missions to the maximum extent consistent with the primary mission outlined in subparagraph <u>a</u> above.
- 6. In carrying out his mission, CINCONAD will:
- a. Conduct operations to the limit of the capabilities of available forces in the defense of the continental United States against air attack.
- b. Prepare joint plans and requirements for the defense of the continental United States against air attack and submit these plans and requirements to the Joint Chiefs of Staff for approval.

COMPIDENTIAL

CONFIDENTIAL

nnex

C METITATION

c. Implement Jos approved plans, through the appropriate empenent commands; and exercise such emergency powers as may be delegated to him by proper authority.

d. Coordinate plans, operations and exercises with appropriate United States Commanders and with Canadian and Mexican Commanders in accordance with agreed Canada-United States and Mexico-United States defense policies.

C. In coordination with# appropriate U.S. and allied commanders, plan for early warning systems and procedures which will provide early warning of air attack for the defense of the continental United States to insure that there systems are designed and operated in a manner responsive to continental air defense requirements and in consonance with national policy.

r. In coordination with commanders concerned, establish procedures and methods of operation for all forces allocated, attached or otherwise made available for the air defense of the continental United States.

g. In coordination with commanders concerned, prepare and submit to the Joint Chiefs of Staff for approval, plans for the full utilization of all military forces, including reserve forces, which have an air defense capability and which can temporarily augment the air defense forces in event of emergency.

h. When there exists an imminent threat of mir attack upon the continental United States, or in case such an attack develops, assume operational control of those forces specifically having been made temporarily available from other commands (sugmentation forces). Such operational control over forces having been made temporarily available from other commands, will be relinquished when the imminence of the

"In coordination with" whenever used in this paper is an defined in the "Dictionary of U.S. Military Terms for Joint Usage (February Newstaton)."

C WEIGHTILL.

25-

Annex

C. INTIDENTIAL

CONCIDENTAL

threat has disappeted ar when the attack is ended. In the count that the ecomonder who made the forces available should consider that his primary mission requires their return to their permanent command assignments, he should first make appropriate requests to the Air Defense commander; if such request is not granted his next recourse is to the Joint Chiefs of Stoff.

- 1. Flan for and conduct air defense exercises, including participation by augmentation forces, coordinating plans as appropriate with other U.S. commands and military agencies of Canada and Mexico.
- 1. Plan for, train, exercise and operate in coordination with appropriate authorities a Ground Observer Corps of necessary military personnel, and civilian volunteers.
- k. Coordinate with appropriate military governmental and non-governmental agencies in the development of plans, policies and procedures for the security control of air traffic, the control of electromagnetic radiations, and the control of illumination and, when appropriate, initiate implementing actions therefor in the defense of continental United States against air attack.
- 1. Coordinate with the Federal Civil Defense Administration, State Civil Defense agencies, and other non-military agencies on matters of participation in air defense.
- 7. Based on missions or tasks assigned by CINCONAD in consonance with JCS approved plans, detailed planning as to forces and their deployments will be accomplished by component commanders coordinated as necessary with other commanders of their Services.
- 8. In matters not covered by JCS approved joint plans, doctrines or procedures, interim directives, premulgated by CINCONAD
 C. NEIGHATIAL Annex

5巻 7

C. NFIDENTIAL

CONFIDERALL

will govern all Air Defense operations. These will be formulated in consonance with existing inter-Service and inter-Command agreements and decisions of the Joint Chiefs of Staff.

9. Responsibilities of component commanders relating to the participation of the forces provided by each Service for air defence of the continental United States are contained in the appendices to these terms of reference:

Tab "A" - Air Force Forces

Tab "B" - Army Porces

Tab "C" - Naval Forces

Tob "D" - Command Arrangements

Tab "E" - Command Chart.

C'NFIDENTIAL

Annex

C : "TY MTL.L.

CONFIL.

TAD ".."

PLESTONSIBILITIES OF THE COMMANDER, AIR FORCE/

- 1. Serve as the Commander of the Air Force component command of the CONAD.
- 2. Command all Air Force forces assigned or otherwise made available for air defense of the continental United St tes.
- 3. Coordinate with the other Service component commanders on matters of mutual interest.
- 4. Or anize, administer, equip, train, and prepare for combat, units and combat crews of the Air Force as may be designated, assigned or attached to the Air Defense Command.
- 5. Recommend plans and policies for the employment of the military reserve forces of the Air Force in the air defense of the United States.
- 6. Develop tactics, techniques, and recommend equipment employed by Air Force forces in defense against air attack.
- 7. Participate in disaster relief and other domentic emergencies as required.
- 8. Propore combat Air Force oir defense units for overseas deployment as required, to include organizing, training, and equipping.

Conmender, UCAF ADC is also CINCONAD

C ... T. T.

T. ..

S STIPLINTINE.

Chilleman

Tai) "-"

55

HUSPONSIBILITIES OF THE COMMANDING GENERAL,

- 1. Serve as the Commander of the Army Component of the CONAD.
- 2. Command all Army forces assigned or otherwise ande available for air defence of the continental United States.
- 3. Provide above forces for perstional control by the CINCONAD, in accordance with Tab "D", on the basis of JCS approved plans, doctrines and procedures pertaining to the air defense of the continental United States.
- 4. Develop detailed plans for Army forces and their deployments allocated for the air defense of the United States based on mission or tasks assigned by the CINCONAD in consonance with approved JCS plans.
- 5. Organize and establish a suitable headquarters and subordinate headquarters and commands as deemed necessary to accomplish the assigned missions or tasks.
- 6. Farticipate in ground defense, harbor defense, disaster relief, and other demestic emergencies when such participation will not interfere with the air defense mission.
- 7. Coordinate with the Department of the Army and other Army agencies on matters pertaining to the support, administration, organization, and equipping of Army units assigned or otherwise made available for the air defense mission.
- 8. Prepare combit Army air defense units for overseas deployment as required, to include organizing, training, and equipping.

2 INTELL

9 4

Thb "B"

CONFIDENTIAL

LITHETIAL

55

"C"_

RESPONSIBILITIES OF THE CONTANDER, NAVAL FORCES

- 1. Or anize a suitable command under a flag officer with appropriate headquarters necessary to meet the requirements set forth by higher authority.
- 2. Serve as the Cormander of the Naval component command of the CONAD.
- 3. Coordinate with the ther Service component commanders on matters of mutual interest.
- 4. Command all Naval forces assigned or otherwise allocated for employment in the contiguous radar coverage of the continental United States air defense system.
- 5. Coordinate with appropriate fleet and training command for provision of naval augmentation forces for continental air defense.
- 6. Provide above forces for operational control by the CINCONAD in accordance with Tab "p", on the basis of JCS approved plans, doctrines and procedures pertaining to the air defense of the United States.
- 7. Provide appropriate Air Defense Commanders with required information relative to the status and operating characteristics of all Neval forces allocated for the air defense of the continental United States, and Naval augmentation forces and facilities capable of emergency employment in air defense of the United States.
- 8. Frovide for the control of fire of the Antiaircraft batteries of vessels in port by the Air Defense Commander through the local Army, Antiaircraft Control Center, if one is established, other-vise through a Navy AA Control Center.

2 THUTLL

To: "C"

C INTERNIAL

COMP

55

T... "D"

COMMAND ARRANGEMENTS

SECTION I

Operational Control

- 1. The operational control exercised by CINCONAD over all forces assigned or otherwise made available, will consist of the following:
 - a. Direct the conduct of the tactical sir battle including the engagement and disengagement of air defense weapons.
 - b. Control of fighters.
 - c. Specify the conditions of alert.
 - d. Station the early warning elements of the command and their control elements.
 - e. Locate and deploy the combat elements of the command in accordance with plans approved by the Joint Chiefs of Staff.

SECTION II

Implementation of Operational Control

- 2. Operational control as defined above will be implemented in accordance with the chart, shown in Tab "E", in the following manner.
 - a. When reporting on station, naval forces in contiguous radar severage system come under operational control of the appropriate regional headquarters through the appropriate naval regional component channel.
 - b. Navel surface forces made available in case of emergency will report for operational control to the Commander in Chief through the appropriate Naval Regional Component Commander.

 Limitations on the deployments of these surface forces may be prescribed by the fleet commander making the forces available.
 - g. Mayal aviation authentation forces, provided in case of emergency, will report for operational control to the

O DETTUTE.L

_ Tab "p"

C HOTFHTI.L

55

appropriate Air Division Command. The First or Novel Air Training Command Commander making the forces available will prescribe whether such forces may be deployed to other than home bases.

d. Operational control, as defined in paragraph 1 Section I, above, will be exercised by the joint air defense communders in accordance with the chart in Tab "F".

g. Operational control will be exercised over all forces assigned or otherwise made available in a geographical area by the appropriate joint regional or sector air defense commander thereof.

f. Army entisirereft units will pass to the operational control of the appropriate air defense commander upon deploy ment to tactical oir defense positions.

SECTION III

Organization and Command Arrangements

1. The mission of air defense is a functional mission carried out on a geographical basis. Since time of reaction to the threat is all-important, successful Air Defense must be predicated upon decontralization of control. The United States is now divided into three Air Defense regions which are further subdivided into sectors; each region having an Air Defense Force Commander responsible for the defense of his area against air attack and utilizing all available forces of the military establishment which have an air defense capability.

2. The existing organization of the USAF Air Defense Command, with its air defense system for surveillance, warning and control, and combat is the basic structure which will be utilized for the Joint Command. Each USAF headquarters from command down to air division level will be additionally designated as a Joint headquarters commanded by an Air Force officer and with appropriate representation from each Service. The Army Antistrement

C IN T. PRETAL

- 10 - Teb "D"

the state of the s

the months the Meval Command will parallel this organization
the months regional level and with a Component Commander or
about representation below regional level as experience dictates.
The numbers of personnel who will represent each component
commander at the Joint Regional Air Defense Force level will be
a matter for agreement between him and the Commander, Joint
Regional Air Defense Force.


3. The Chart, Tab "E", shows the lines of operational central and command as set forth in Tab "P".


4. The Service component commanders at regional or lower levels, in addition to their uni-service functions, shall be Army Deputy and Navy Deputy, respectively, to the joint commanders for matters of concern to their Services.


5. The Component Commanders will be responsible for the military command of their components in accordance with directives and procedures of their Services. Logistic and administrative support of the Service components will be provided as directed by the Service concerned.

6. The Joint manufact of the staff of the Commander in Chief, due to the proximity of the headquarters of the component commands should be kept to a minimum. Thus, sugmentation of the Command will be approximately as follows:


	ARMY	NAVY	MARINE
Operations and Training	1	1	-
Operations Analysis	1	1 .	
Communication and Electronics	1	1	
Hlans and Requirements	1	5	-
Assistant to the DCS/O	. 1	1 .	1
Intelligence-	1	1	-
Methetal		1	
Tomate ther		1	
Anformation Services	1	1_	-
1	7	10	1
CATESTIAL - 13	-	T-1 "T	n .

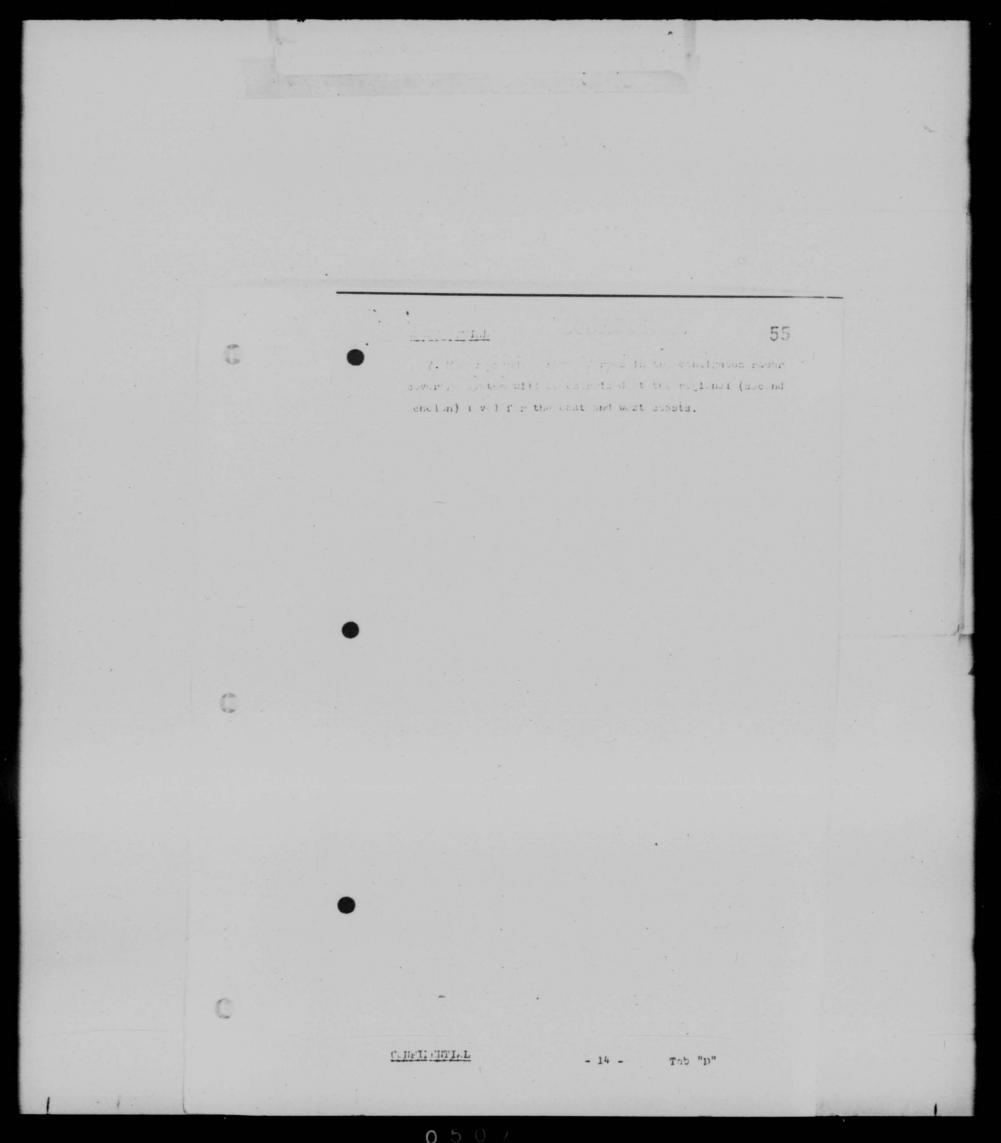


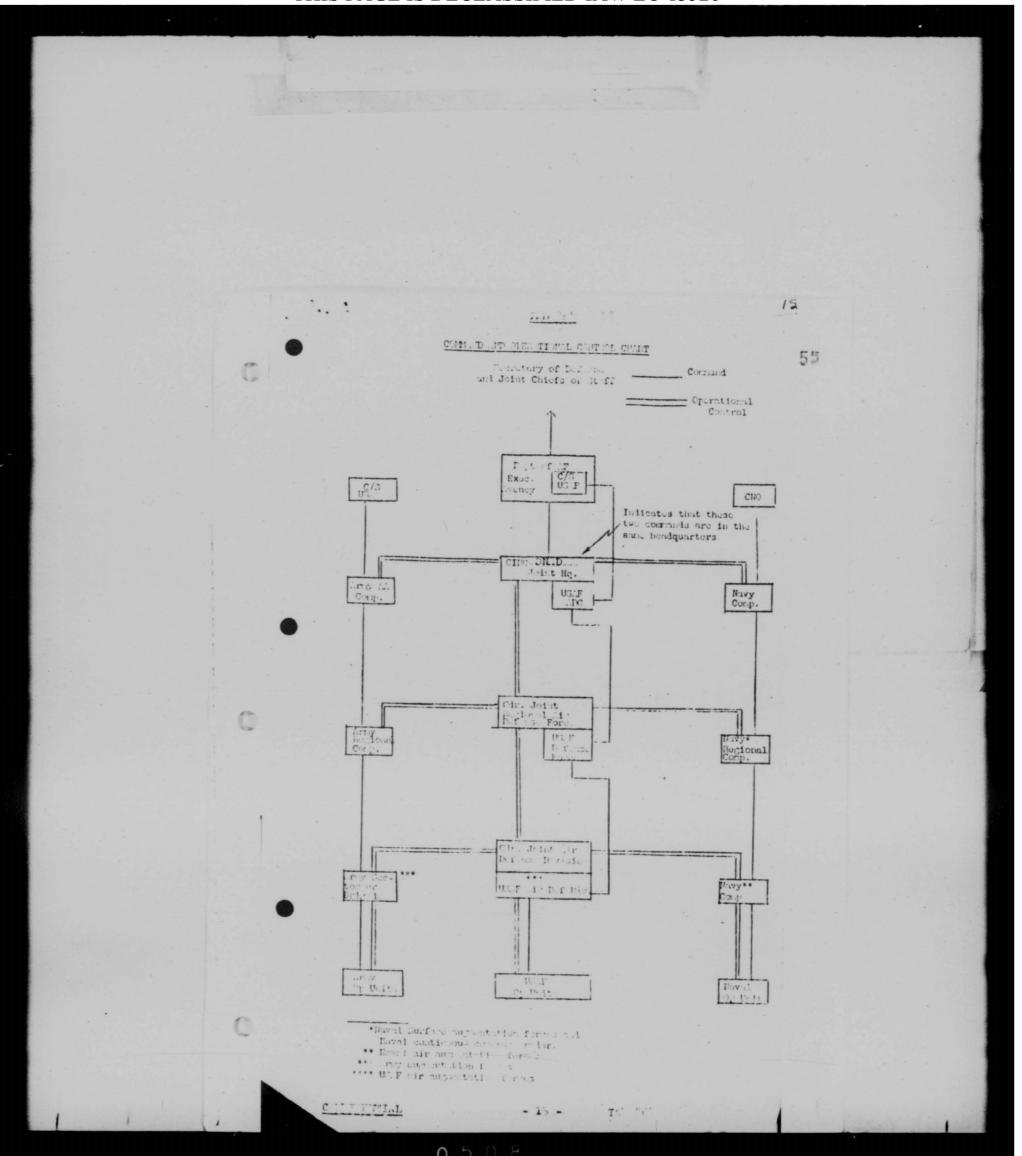

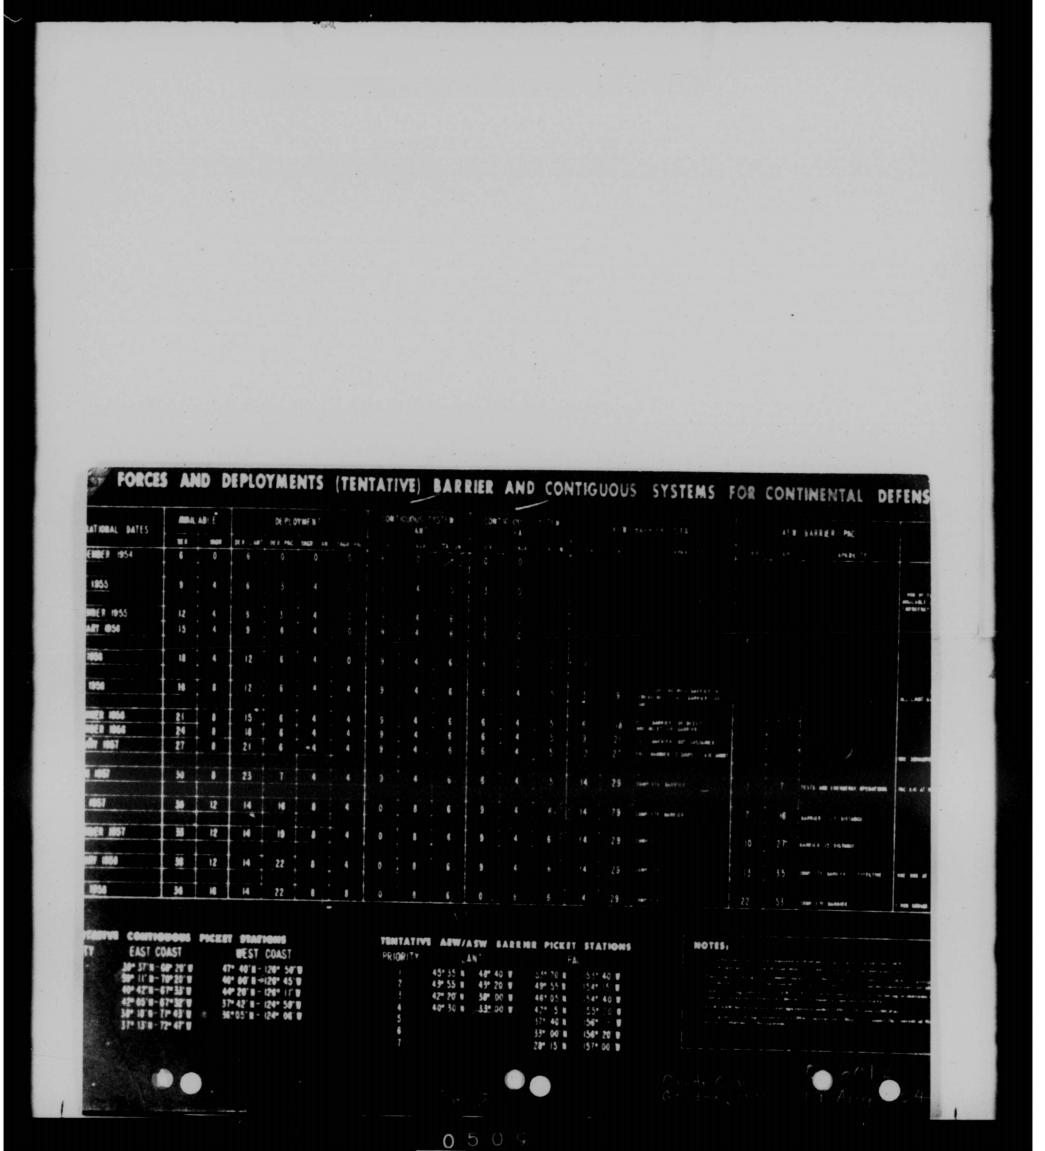



THIS PAGE IS DECLASSIFIED IAW EO 13526

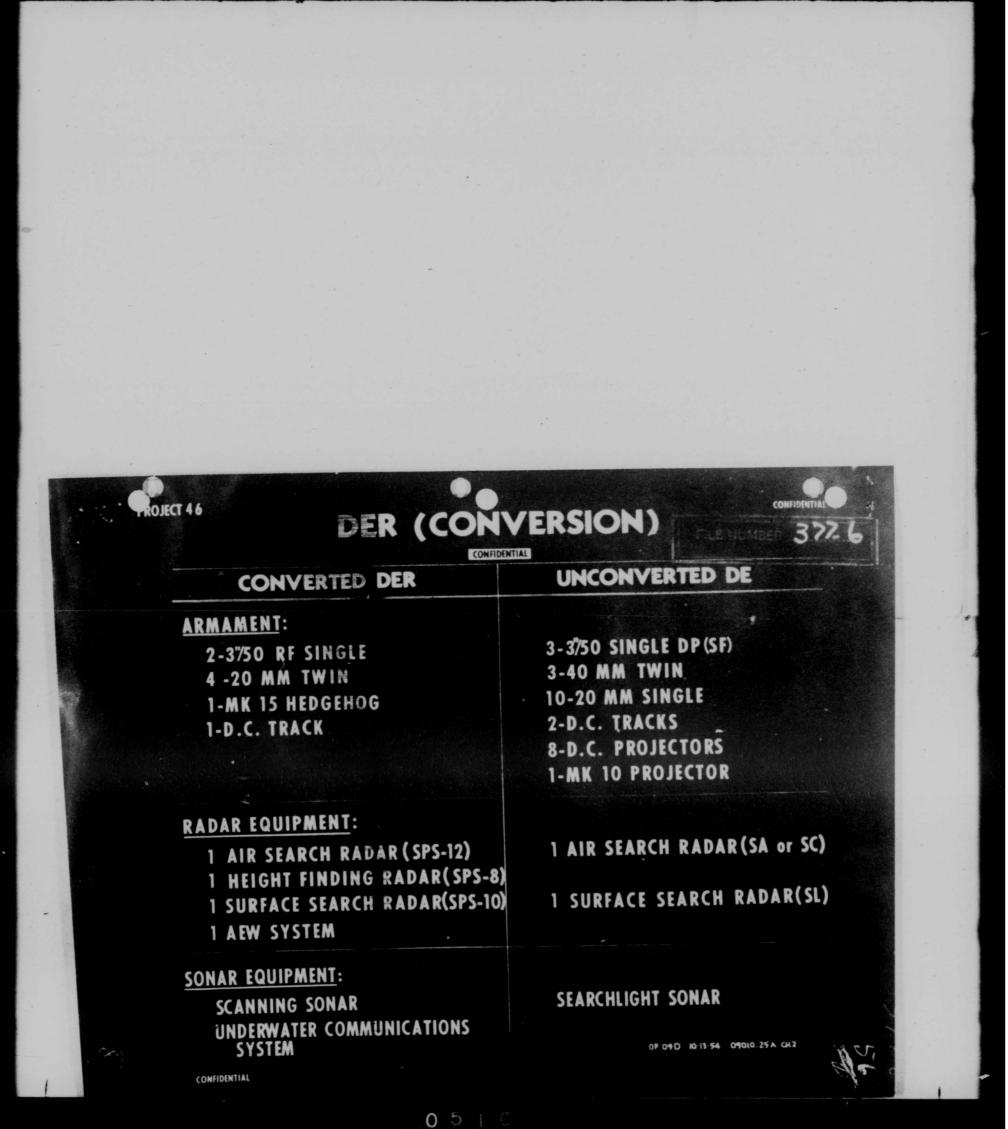

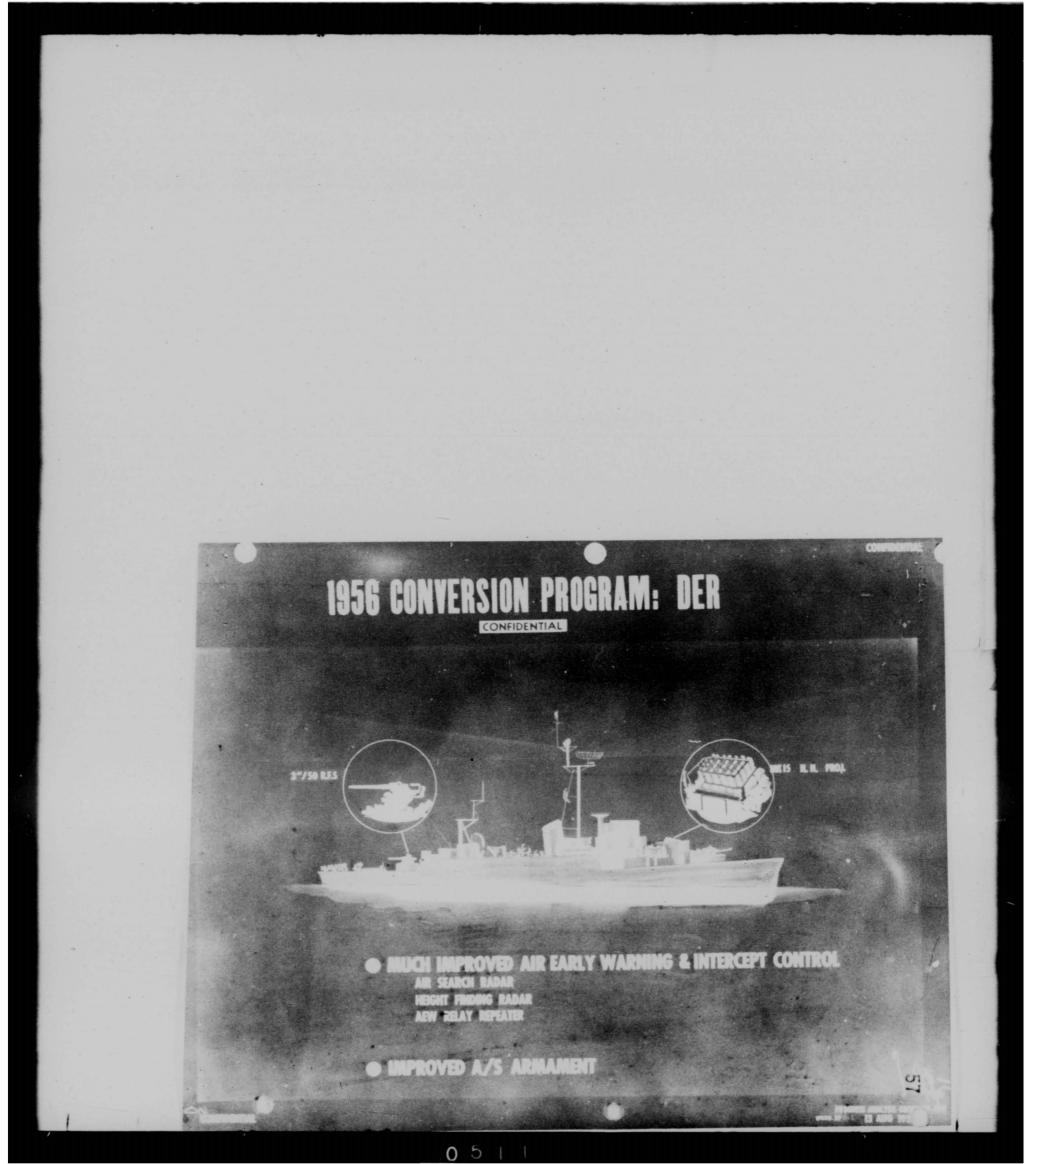

THIS PAGE IS DECLASSIFIED IAW EO 13526

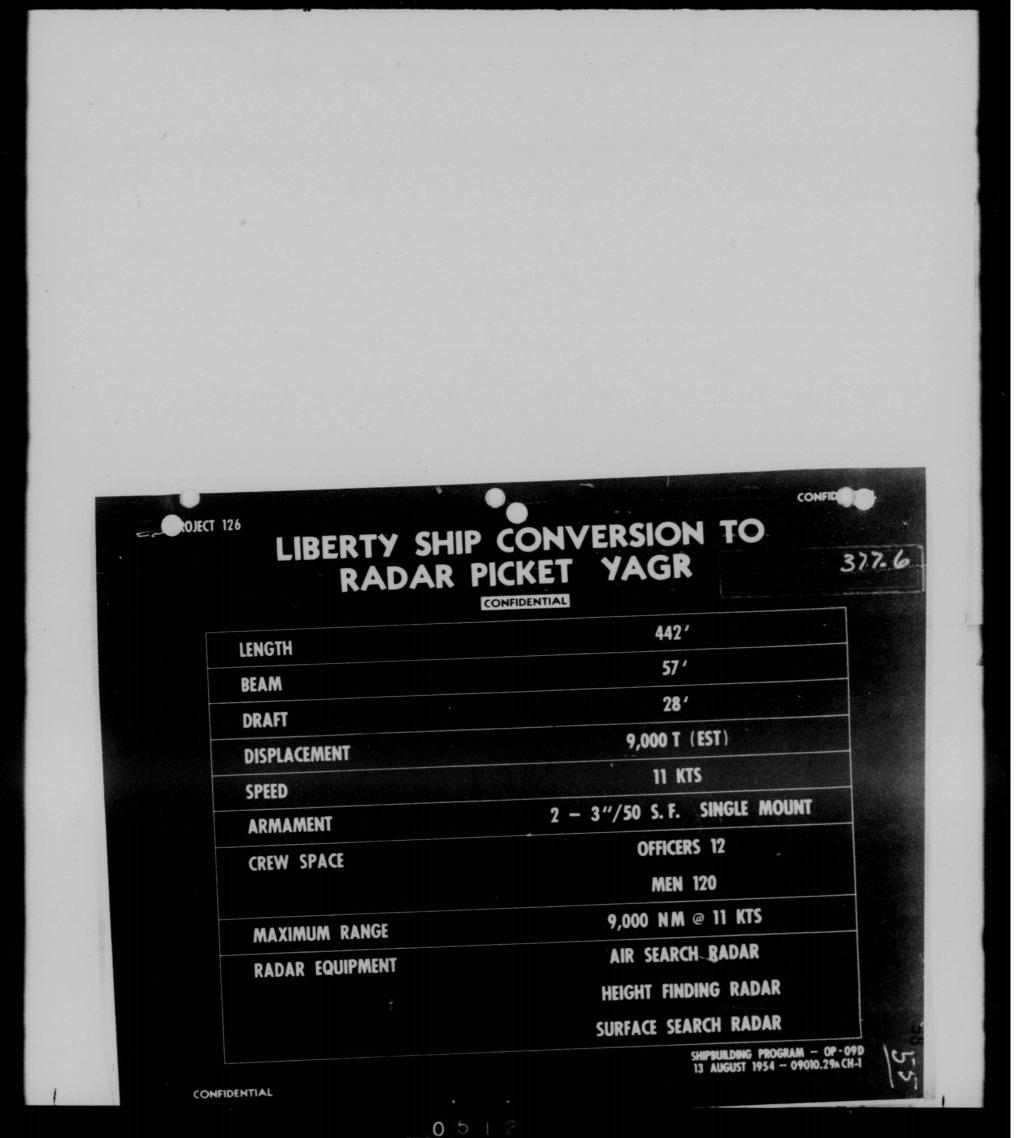

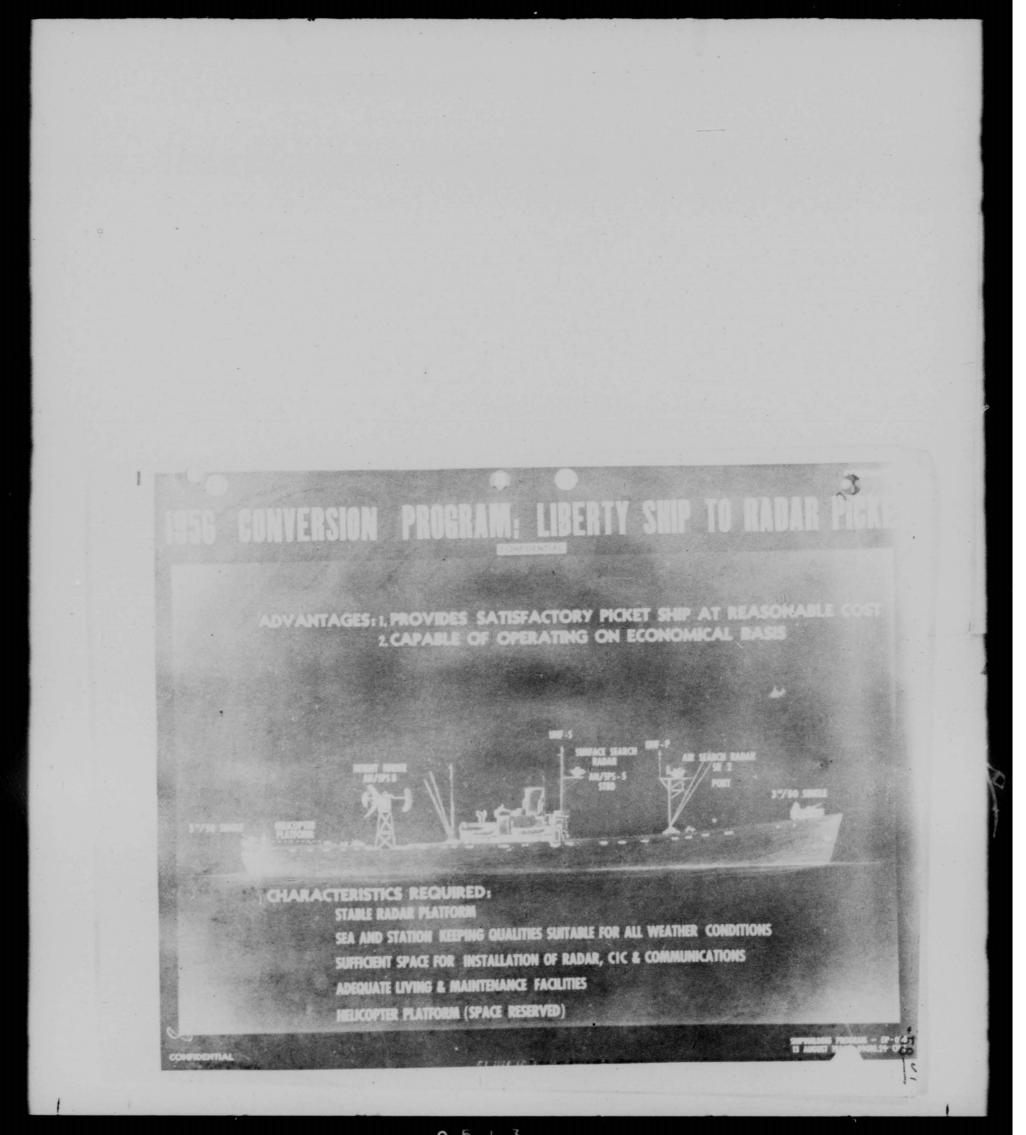

SECKEI

COPY

FILE HUME IN 209

FROM: COMER ADC ENT AFB COLORADO SPRINGS COLO 5

5 Jun 1954

TO: COMER EADP STEWART AFB NEWBURCH, NEW YORK

ADC requirement for Picket Vessel stations on East Coast is five (5),
REF LTR ADC, SUBJ: (U) Requirement for Seaward Extension of Contiguous Radar Coverage, 1954-56, dtd 11 Feb 54. Planning indicates
Picket Vessel requirements on East Coast may be reduced to four (4)
stations upon integration of AEWAC and Texas Towers. Based on programmed operational dates, this could occur APPROX mid-1956. Your has
will be advised when firm concept of operations is developed for time
period after 1956.

SECRET

SELKEI


COPY 55

FROM: HQ EADF STEWART AFB MEMBURCH MY FO: COMER ADC ENT AFB COLO SPOS COLO 27 May 1954

whether our curr remt for Picket Vessel stations on the East Coast is 5 or 6. We are forwarding to your by separate ltr a list of refs which establish our remt as being 6 stations and have planned and operated on that figure since Dec 1950. Req the following info fr your hq: A. Do you cour present rest for 6 Picket Vessel stations.

B. Based on Texas Tower and AEWAC integration, will the rest for Picket Vessel stations be reduced fr now through the 1960. If so, when and in what number. This info is required in order to coordinate our planning with that of your hq.

SECRET

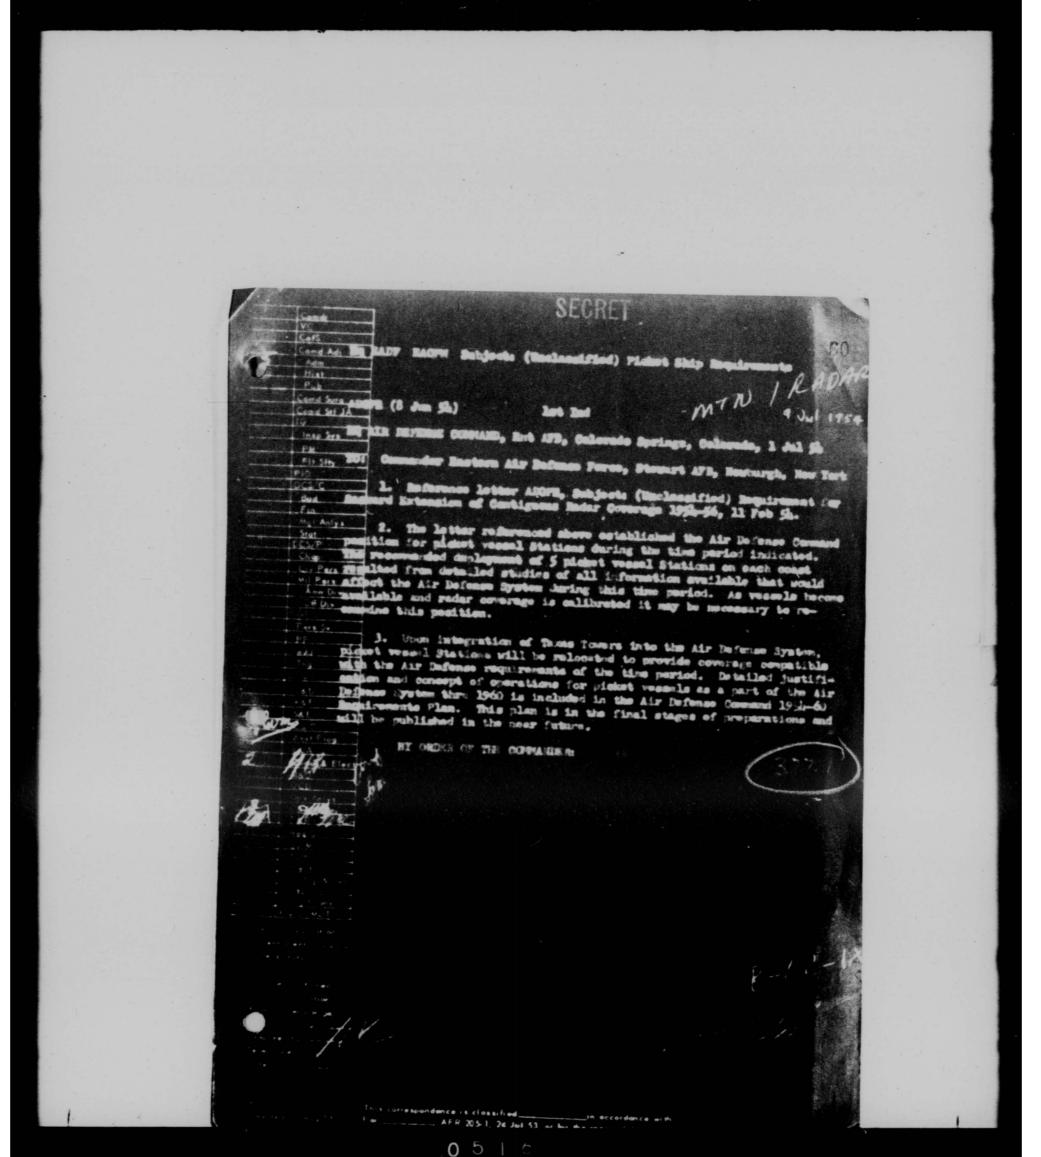

THIS PAGE IS DECLASSIFIED IAW EO 13526

51

COMMINENTAL AIR DEPONSE CONTINUENTAL AIR DEPONSE CONTINUENTAL AIR FORCE Pase
Colorado Springs, Colorado

CONFIDENTIAL

19 November 1952

PRIBLING

PICKET VESSEL COLLUNICATIONS

The picket vessels with which we are particularly concerned, and over which this command will exercise operational control, are those whose function will be "the extension to seaward of contiguous radar coverage". "Contaguous" means "in contact" or "near, though not in contact". Contiguous radar coverage, in Air Force parlance, refers directly to the extension of radar coverage from land based radars off the East and West coasts.

Our picket vessels them, are being added to a system already in existence. The Air Force looks upon these ships as an extension of the radar coverage of thet system. Therefore in discussing picket vessel communications, it will be necessary to have an understanding of the air force communications system to which the picket vessels will be tied. Here it is:

(Show Chart 1)

We need not concern ourselves with the adequacy of the Air Force landline nets between Direction Centers, Control Centers, and higher communication. This system is truly a complex, with provision to meet almost any eventuality. This schematic diagram of the communications system within a single sir division will reveal this better than further discussion.

Show blueprint of typical Air Division Communications Net)

In interpreting Chart I we must remember that the air battle is conmusted from the direction center. The higher schelons of the Air Defense
Command (Air Division, Air Force, and Air Command) coordinate and shift
forces as the situation may dictate, but so long as the battle proceeds
the intercept, is left at the direction center level. Experience in recent
defense exarcises has confirmed this doctrine and until the "SAGE" system
goes into operation, control will remain in the Direction Center. In
teeping with this concept picket vessels are tied directly to direction
the direction centers. For example, all identification is to be accomplished
aircraft movements is available. Later such responsibilities may be passed
to the picket.

COMPTODITION

61

CONFIDENTIAL

PIGRET VESSEL COMMUNICATIONS (Continued)

In the operation of our picket vessels, as in other military operations, communications have posed the most difficult problems. The original Navy concept, that communications could be handled on the Navy ship-to-shore system, was found to be erroneous. A number of systems have been tried, including CW, radio-teletype, and voice, with various links between the PV and the Direction Center. For some time it has been obvious that the only acceptable system, with present equipment, is direct HF voice communications between the two. This is the system now in use on the Mastern seaboard,

During the prolonged tests of PV-DC communications the Deavertail Radar Facility at Newport was used as a relay and monitoring station. The need for a monitoring station to control the circuit was clearly apparent and the present system of direct HF voice from PV to DC retains Deavertail as the monitor.

Referring again to our chart, each PV talks to one primary station, indicated by the solid lines connecting the PV and DC. The dotted lines indicate the secondary, or standby, circuit, to be used in case of a casualty at the primary D.C. At present, with DERs on picket station, only one HF circuit is used for "telling" and control traffic. During exercises two circuits for each ship-to-shore link can be established.

These ship-to-shore HF voice circuits provide direct communications between the picket CIC and the Direction Center. The positions of all aircraft contacts are continuously reported by the PV over the "telling circuit" so that, in effect, the status board in the DC displays all of the information obtained by the picket. Information required by the picket such as identification of contacts, and directions for taking or relinquishing control of interceptors, comes back over the other HF circuit, known as the "Control Circuit",

Mineteen high frequencies are now assigned for these communications. These are on loan from CNO and, eventually, permanent frequencies must be assigned. This question of frequencies is critical, but more of that later.

In addition to the one or two NF PV-DC circuits, each PV is required to monitor and be prepared to transmit on the following VHF circuits:

2. GCI/Joint USAF/Canada/USN/UK, etc.

Pickets are also required to monitor and be prepared to transmit on the UHF air control circuit plus the emergency and AICC commons. Each picket vessel, then, has 3 UHF circuits for normal "one-controller" operations. If additional intercepts are to be conducted simultaneously, an additional UHF circuit must be provided for each additional air controller.

51

COMPTUBNITIAL

PICKET VESSEL COMMUNICATIONS (Continued)

In summary, the system now in use on the East Coast requires, for operations with the Air Force, 2 high frequency circuits, 2 VHF circuits, and 3 or more UHF circuits. It should be remembered that these ships will also be required to maintain a listening watch on 500 KC and a watch on the emergency frequency, 8364 KC, as well as operate on any other naval circuits required. The communications load for around-the-clock operations is already high.

Communications for West Coast pickets will be under a slightly different system than those for the East Coast. This chart shows the net planned for operations in the immediate future,

(Show Chart 2)

Center at McChord, also the location of 25th Air Division Headquarters. The southern pickets communicate through Hamilton AFE to the nearby direction center at Mill Valley. This centralization of picket control on the West Coast is a departure from the single PV reporting to a single parent DC on the Bast Coast. We understand that the mountanous terrain on the West Coast creates problems in HF radio reception which require costly engineering solutions, hence the need to handle the pickets through as few shore stations as possible. It should be noted that all of our experience has been gained on the East Coast. Perhaps the plan will be changed in the light of West Coast operating experience.

We have gone into some detail on the present communications system because its the one with which we are now living. Of equal importance to us is the concept, now in the planning stage, for the ultimate communications network.

Under this concept the number of high frequency circuits per ship has been increased to 3, 1 for control and 2 for telling. The air force expects the picket vessels to be able to operate on 6 UMF circuits simultaneously. These requirements may be controversial but they are based on the principal that communications must be 100% reliable if the picket vessels are to realize their full potentiality. To this end ADC has requested the allocation of 60 migh frequency channels by USAF for the exclusive use of the PV to DC communications on the East Coast. The same number is required for West Coast operations. This number was arrived at by assigning two day and two night frequencies to each of the 3 circuits, a total of 12 frequencies per ship. In justification for the request it should be remembered that seasonal variations in radio propagation and varying degrees of interference from stations abroad may, through the year, require the use of all 60 frequencies. Since frequencies must be assigned well in advance, ADC considers the allocation of so many as fully justified.

61

CONFIDENTIAL.


LICKET VESSEL CONTINICATIONS (Continued)


The requirements of UHF circuits have been increased to 6, with 4 allotted to the 4 air controllers for control, leaving the AICC and emergency circuits still guarded. This, again, may appear to be an unreasonable requirement but one which can be justified if the picket vessels are to be fully effective.

While it may not be possible to provide communications equipment which would neet these requirements for DER's and other fleet units which may be temporarily assigned to the contiguous early warning system, we should have no trouble in building them into the YAGR's.

CNO has scheduled the phasing of naval units into the extension of the contiguous radar system. By July 155 we will be manning 5 stations in the Atlantic with 4 YAGR assigned and 6 DER diverted to this mission. By July 157 the YAGR will have taken over all East Coast stations with 8 in commission for this. The Air Force plans require only 5 stations on the East Coast so it may be possible to anticipate the date when all of these will be manned by YAGR.

On the West Coast we will operate one DER picket next year but YACR will not be phased into the system until the middle of *56. In July *58 all Pacific contiguous pickets will be YACR.

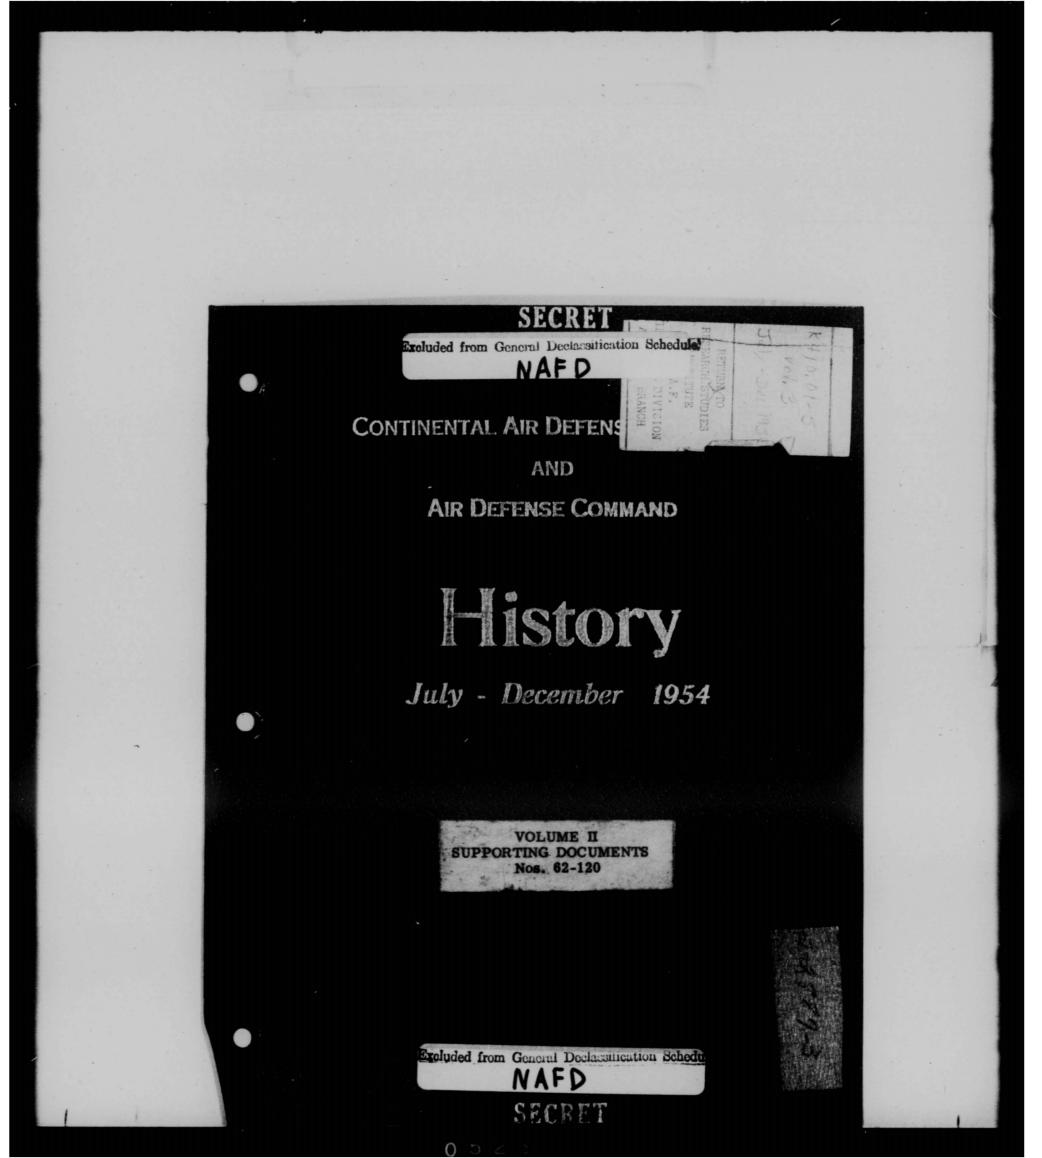

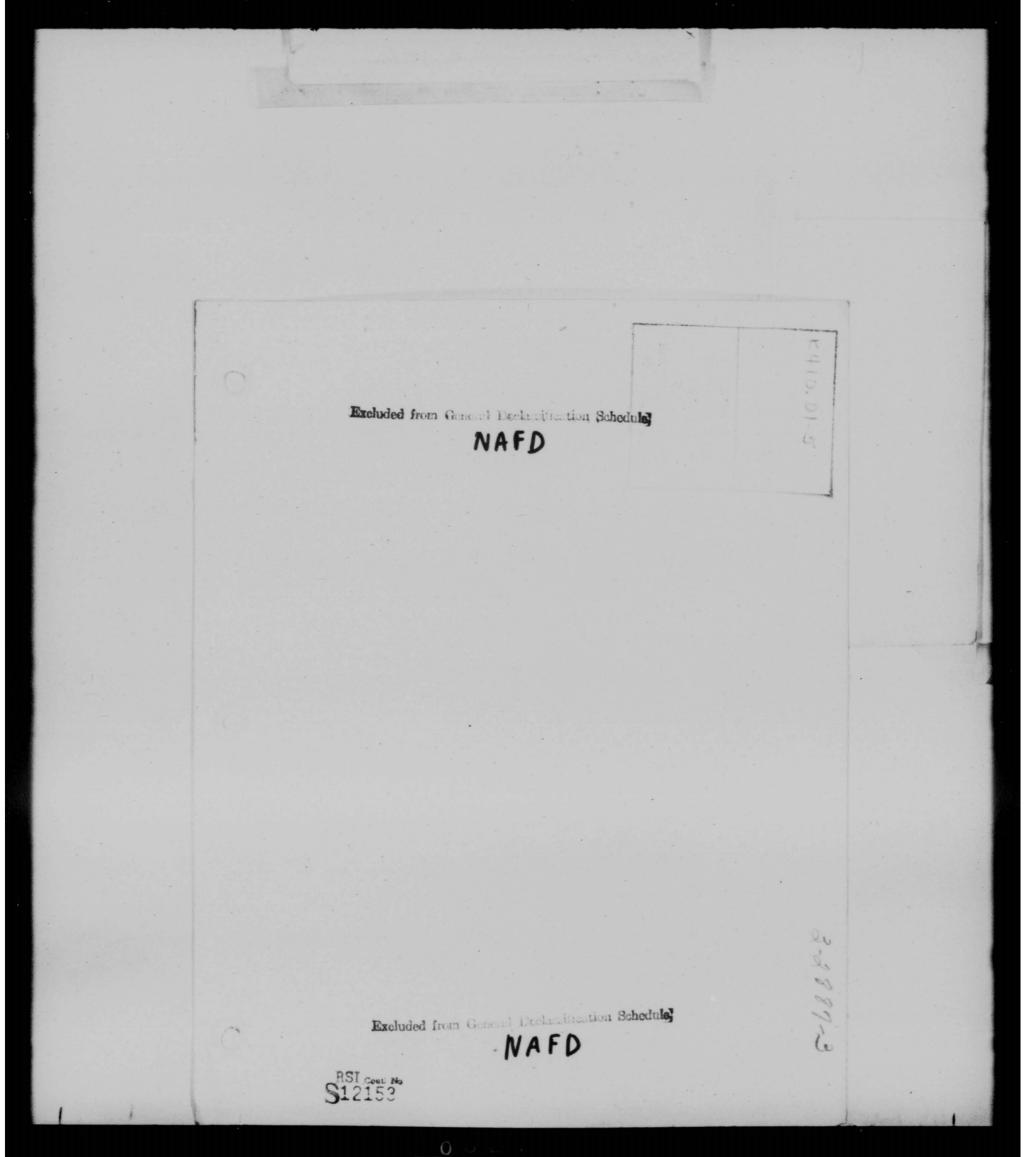

EASTERN AIR DEFENSE FORCE STEWART AIR FORCE BASE, NEWBURGH, N.

26 JUN 1954

EAOCE-C

TO:

SUBJECT: (Unclassified) Plan for Central Communications Facilities to Support Picket Vessel and AEN&C Operations

Commander Air Defense Command Ent Air Force Base Colorado Springs, Colorado

FILED Com Ser

1. General: A high frequency radio communications system, utilizing equipment installed at six (6) ADDC's, has been established to provide reliable communications for picket vessel operations and to provide communications with aircraft carriers and other fleet units for flight plan reporting. With the added requirement to support ABRC operations, the HF radio system must be augmented beyond the expansion capability of existing facilities. It is planned therefore, to establish two (2) radio stations, one in the 26th Air Division Area and one in the 32nd Air Division Area to combine communications facilities for all operations off the east coast.

2. Assumptions

a. AEW&C operations will be in accordance with the Air Defense Command Concept of Operations as outlined in the document titled "Operational Concept of Seaward Extension of Radar Coverage", dated 1 February 1953.

b. Picket Vessel operations will be conducted in accordance with RAIF publication "SOP for Radar Picket Vessels in RAIF Region", dated 9 June 1952 with the exception that only five (5) picket vessel stations will be required instead of six (6). Picket Vessel stations No. 1 and No. 2 as outlined in the SOP will be combined and designated station No. 2 as shown on Appendix No. 1.

c. The Bell Telephone Company will provide equipment to accomplish remote voice operation of radio facilities from the ADDC's.

NAR


62 67

Hq EADF, EACCE-C, Subject: (U) Plan for Central Comm Facs to Support Ficket Vessel and AEW&C Operations

- d. Communications will be required between AEN&C aircraft and their home base.
- e. Radio facilities will be established at Fort Dix, New Jersey and Camp Edwards, Massachusetts.
- f. Picket wessel and AEW&C stations will be located as indicated on Appendix No. 1 hereto.
- g. Since HF radio is the only means of communications available with these units, some provisions must be made to provide emeragency communications in the event of the failure of the primary system.

3. Operational Concept

- a. U.S. Naval unit will man five (6) designated picket vessel stations approximately to the second of the east coast. Radar information received by these uses the massed directly and reliably to a parent ADUC. Due to the providing wire facilities and the lack of line communications must be by means of HF radio voice channels. Each picket vessel requires a minimum of three simplex voice channels between plotter/teller and controller positions.
- b. USAF AEW&C aircraft will establish four (4) AEW&C positions approximately 250 miles off the east coast. Each aircraft will be equipped to transmit and receive on two (2) HF voice channels for the passing of radar information to a parent ADDC.
- q. Circuits will be established as required from naval aircraft carriers to provide an expeditious channel for the passage of flight plans to the air defense system for carrier based operations. This information is required to preclude the unnecessary scramble of Air Defense Command fighter aircraft to identify friendly naval aircraft.
- d. Air/Ground communications between AEW&C aircraft and their parent unit is required for the passage of flight information while the aircraft is enroute to and from their designated station.
- e. Upon installation of the Lincoln System the information passed from all units will be routed to the computer sites instead of the ADDC's.



8-25-2

DELKEI

68 68

Hq EADF, EACCE-C, Subject: (U) Flan for Central Comm Facs to Support Picket Vessel and AEW&C Operations

f. Alternate communications in the event of the failure of the central communications stations or of the computer site will be provided by utilizing the radio facilities programmed for the ADDC's picket wessel requirement.

g. Communications stations at Camp Edwards and Fort Dix will provide radio facilities for the units to carry out individual operational responsibilities listed below:

- (1) Camp Edwards:
 - (a) P-10 North Trure
 Picket Vessel Station No. 3
 Picket Vessel Station No. 4
 AEW Station No. 1
 Secondary AEW Station No. 2
 - (b) P-13 Brunswick NAS Secondary Picket Vessel Station No. 4 Secondary AEW Station No. 1
 - (c) P-45 Montank, New York
 AEW Station No. 2
 Secondary Picket Vessel No.
 - (d) AEW&C Group
 - (e) Headquarters 32nd Air Division
 - (f) Computer Sites Sectors No. 2 and No. &
- (2) Fort Dix:
 - (a) P-45 Montauk, New York Picket Vessel Station No. 2
 - (b) P-9 Highlands, New Jersey
 Picket Vessel No. 5
 Secondary AFW No. 3
 Secondary Picket Vessel No. 2

SECRET

B-25.3

SEURET

52 3t

Hq EADF, EACCE-C, Subject: (U) Plan for Central Comm Facs to Support Picket Vessel and AEW&C Operations

- (c) P-5h Palermo, New Jersey
 AEW Station No. 3
 Secondary Picket Vessel Station No. 5
 Secondary Picket Vessel Station No. 6
 Secondary AEW Station No. 6
- (d) P-56 Custis, Virginia AEW Station No. 4 Picket Vessel Station No. 6
- (e) AEW&C Group
- (f) Headquarters 26th Air Division
- (g) Computer Sites Sectors No. 1 and No. 3

4. Mission: The mission of the proposed communications stations will be to provide the radio facilities necessary to support all seaward units of the air defense system.

5. Special Measures:

a. Radio

- (1) All radio equipment will be remotely operated by the designated ADDC or the AEW&C parent unit.

 Sufficient equipment will be required to provide three (3) channels to each picket vessels station, two (2) channels for each AEW&C station, one (1) channel for carrier reporting and one (1) channel for AEW&C operations.
- (2) AN/FRT-15, 3 KW transmitter equipment will be used at communications stations.
- (3) Class "G" rhombic transmitter antennas will be used with AERC stations.
- (b) Because of relatively short distances involved, rhombic transmitter antennas are not deemed necessary for picket vessel and carrier operations.

SECRET

B-25-4

623

Hq EADF, EACCE-C, Subject: (U) Plan for Central Comm Facs to Support Picket Vessel and AEM&C Operations

(5) Dual diversity reception utilizing uni-directional, high gain antennas and employing multicouplers will be used on all circuits to assure reliability.

b. Wire

- (1) Wire requirements at each communications station will vary with the number of circuits operated and the number of ADDC's served. Generally the requirement will be as follows:
 - (a) Three (3) pair voice control to the designated ADDC for each picket vessel station.
 - (b) Two (2) pair voice control to the designated ADDC for each ABMC station.
 - (c) One (1) pair voice control to each ADDC for carrier operations.
 - (d) One (1) pair to each ADDC for technical control.
 - (e) One (1) pair to AEMAC operations control.
 - (f) One (1) pair voice control to the secondary ADDC for each picket vessel station.
 - (g) One (1) pair voice control to the secondary ADDC for each AEM&C station.
 - (h) One (1) pair technical control and coordination to the ADCC.
 - (i) Upon integration of the Lincoln System an undetermined number of circuits will be required to two (2) computer sites.

c. Frequencies

(1) A total of 9k HF frequencies in the 2-11 mcs band is required. These will provide two (2) day and two (2) night frequencies per circuit with the exception of the carrier flight plan reporting and AEMAC enroute circuits. Frequencies will be utilized as follows:

SÉCRET

B-25-5

SMI SAI

62-87

Hq EADF, EACCE-C, Subject: (U) Plan for Central Comm Facs to Support Picket Vessel and AEM&C Operations

Service	Circuits	Day	Night	Total
Picket Vessel	15	30 16	30 16	60
AEW&C Enroute	71	17	17	32 2 81

(2) Frequencies for carrier operations will be provided by the U.S. Navy from JANAP 195C.

6. Administration and Logistics:

- a. This plan will require twenty-seven (27) AN/FRT-15 transmitters. It has been indicated that twenty-five (25) AN/FRT-15 transmitters will be made available to EADF as prime equipment for this function. The Wilcox 96D equipment programmed for installation at the ADDC's will be used as an interim measure and will revert to an emergency system upon completion of these stations.
- b. Preliminary studies indicate a requirement for approximately fifty (50) acres of land and 1500 square feet of operating space at the transmitter sites. This will require a standard type "D" communications building plus an extension of 32 feet. It is recommended that due to the large number of high power transmitters to be installed, these buildings be completely air conditioned.
- c. Receiver sites will require approximately thirty-five (35) acres for antenna installations with a standard type "B" 1070 square foot building.
- d. An actual survey of the Fort Dix area conducted by personnel of this command, and a map survey of the Camp Edwards area indicate that sufficient land is available on the military reservations to establish these facilities. Personnel at these stations will be housed and administered by Air Defense Command units at Otis Air Force Base and McGuire Air Force Base.
 - e. Power requirements.
 - (1) Primary power will be extended from the base power source. Three (3) phase 220 velts will be required at the transmitter building. Single phase 120 velts will be required at the receiver building.

6

SECRET

8-25-6

Hq EADF, EACCE-C, Subject: (U) Plan for Central Comm Facs to Support Picket Vessel and AEW&C Operations

> (2) Emergency power will be provided by locally installed power generators. Transmitter building - 200KW 3/phase 220 volts. Receiver building - 50KW 1/phase 120 volts.

f. Cable Support

- (1) Additional cable will be required in the Fort Dix area however, initial studies by Western Electric in conjunc-tion with the Lincoln Transition System indicate sufficient capability for expansion in this area. Com-mercial microwave is also available in the Fort Dix area.
- (2) The New England Bell Telephone Company has indicated that considerable cables are available in Camp Edwards area. Additional entrance cable will be required to the telephone exchange.

g. The following number of personnel will be required at each station to provide 24 hour operation of these facilities:

- (1) Twenty-six (26) airmen ground radio maintenance technician = 301 career field.
- (2) Ten (10) airmen vehicle and motorized equipment engine mechanic - 471 career field.
- (3) Three (3) airmen 6hl career field for tech supply.
- (h) Two (2) officers 3034 career field.

7. The contents of this letter is classified SECRET in accordance with paragraph 23c AFR 205-1.

FOR THE COMMANDER:

4 Incls:

1. App #1 Area Coverage Chart

2. Comm Circuit Ror Chart

3. Prim and Secondary Picket Vessel Circuits


4. Prim and Secondary AEW&C Comm Circuits

Info Copy: Hq 26th Air Division

Hq 32nd Air Division

B-25.7X





EASTERN AIR DEFENSE FORCE STEWART AIR FORCE BASE, NEWBURGH, N. Y.

EAOCE-CR

16 NOV 1954

SUBJECT: (Uncl) Operations Plan for Picket Vessel and AFM&C Communications

TO:

Commander
Air Defense Command
Ent Air Force Base
Colorado Springs, Colorado

- 1. Attached is an alternate plan to the Operational Plan for Picket Vessel and AEW&C Communications forwarded to your headquarters on 26 June 1954. The original plan provided two major communications stations, located at Fort Dix, New Jersey and Camp Edwards, Massachusetts, as shore terminals for all HF radio circuits seaward. Circuits were extended to direction centers by landline, and emergency facilities were provided by establishing a minimum number of radio circuits from the seaward units direct to the controlling direction center.
- 2. The original plan is still recommended by this head-quarters for the following reasons:
- a. Increased efficiency since the functional units operating the central communications stations would be charged only with the responsibility of providing reliable communications.
- b. The trend towards seaward expansion of the air defense system may require additional communications facilities which can more economically and effectively be provided by the central stations rather than continual addition and construction to already overtaxed facilities.
- c. Additional construction of building space, cable facilities, and antenna farms must be performed to fulfill the present requirement at each of the rive (5) direction centers concerned.
- d. Increased effectiveness of available personnel since technicians can be concentrated at two sites with standardization of equipment types and facilities.

63

Ng BALF, LAUGE-CR, Subj: (Uncl) Operations Plan for Picket Vessel and AtWec Communications

- 3. Energency radio facilities at direction centers proposed under the previous plan could be provided by interim equipment presently installed at those direction centers but scheduled for replacement by more modern types.
- the attached revised plan utilizes the same number of frequencies as the original plan, and a like amount of equipment as previously required to operate the two central stations. However, the overall system is considered to be less reliable because of antenna site limitations and for the reasons outlined in Faragraph 2, above.
- 5. It is the understanding of this headquarters that twenty-five (25) each AM/FRT-15 type transmitters have been allocated to this program. Our review indicates that, while the transmitter as such is tunable over the frequency range 2-30 Mcs, each of the individual channels is restricted to a small band rather than the complete range. Since the frequencies currently in use for picket wessel operations range from 2.5 to 8.7 Mcs, and the most reliable are from 2.5 to 5.0 Mcs, it appears that only one or two of the channels available in this equipment could be pre-tuned to assigned frequencies. For this reason it is strongly recommended that a like quantity of Wilcox 96D type transmitters be programmed in lieu of the presently allocated AM/FRT-15 equipment.
- 6. It should be noted at this time that the estimated building, land, and power augmentation or expansion, as contained in the attached plan, is predicated only on the Picket Vessel AEW&C Program equipment requirement. Future requirements for the Texas Tower, SAGE, and 1 KW UHF Amplifier Programs have not been considered in this plan.
- 7. The contents of this letter are classified SECRET in accordance with Paragraph 23.c., AFR 205-1.

FOR THE COMMANDER:

1 Encl (dup)
Alternate Plan to
Opnl Plan for PV
and AEM&C Comm w/5 Atchmts
in dup

Info cys to: Comdr, 26th ADiv w/Encl Comdr, 32nd ADiv w/Encl Bu & Fronted

BEN D. MOORHEAD 1st Lt, USAF Asst Adjutant

and by the to

Radio C+E Baldwin

SUBJECT: Operations Plan for Picket, Vessel and AS &C Communications

1. GENERAL. The effective utilization of picket vessels and AEM&C aircraft is completely dependent upon rapid and reliable communications.

picket vessel priority stations off the east coast of the United States to provide seaward extension of contiguous radar coverage. ALC AEVAC aircraft will operate four (4) designated stations to provide further extension. Three (3) channels of HF voice or CW will be required to each picket vessel station and two (2) channels HF voice, CW or MATT, will be required to each AEMAC aircraft from designated shore stations. Two (2) channels HF voice or CW will be required at Otis Air Force Base as in-flight communications with AEMAC aircraft enroute to and from their home station.

3. CONTUNION FICES.

a. Picket vessel communications will be conducted directly between concerned picket vessels and ADDC's with netting as follows:

Unit

Picket Vessel Station #1

654th ACEW Squadron (P)

762d AC&W Squadron (S)

Picket Vessel Station #2

762d AC&W Squadron (P)

654th AC&W Squadron (S)
Picket Vessel Station #3

773d AC&W Squadron (P)

770th AC&W Squadron (S)

Picket Vessel Station #4

770th AC&W Squadron (P)

771st AC&W Squadron (S)

Location

42° 45' N - 68° 12' W

Brunswick NAS, Maine

North Truro, Mass.

41° 00' N - 68° 00' W

North Truro, Mass.

Brunswick NAS, Maine

40° 00' N - 70° 00' W

Montauk, L.I., N.Y.

Palermo, New Jersey

38° 56' N - 72° 05' W

Palermo, New Jersey

Cape Charles, Virginia

Location 370 41' N - 730 00' W Cape Charles, Virginia

Palermo, New Jersey

Location

Cape Charles, Virginia

Palermo, N. J.

b. AEW&C communications will be conducted with netting as follows:

Unit

Picket Vessel Station #5

-771st ACRN Squadron (P)

AEW&C Station #4

771st ACAW Squadron (P)

770th ACEW Squadron (S)

770th AC&W Squadron (S)

Unit 420 15' N - 640 02' W AEW&C Station #1 Brunswick NAS, Maine 654th ACW Squadron (P) North Truro, Mass. 762d AC&W Squadron (S) 39° 28' N - 66° 48' W AEW&C Station #2 North Truro, Mass 762d ACEW Squadron (P) Brunswick NAS, Maine 654th AC&W Squadron (S) 47º 01' N - 69º 46' W AEW&C Station #3 Palermo, New Jersey 770th ACMW Squadron (P) Cape Charles, Virginia 771st ACEN Squadron (S) 350 15' N - 730 12' W

E_UIPMENT RE UIRENTS: This headquarters has been advised that twenty-five (25) AN/FRT-15 transmitters have been allocated to meet these requirements. Distribution of this equipment to the ADDC's based on circuit requirements will be as follows:

Unit	No. of Equipments
654th AC M Sq, Brunswick NAS, Me. 762d AC&W Sq, North Truro, Mass. 773d AC&W Sq, Montauk, L.I., NY 770th AC&W Sq, Palermo, New Jersey 771st AC&W Sq, Cape Charles, Va. 564th Air Def Gp, Otis AFB, Mass.	5 5 3 5 5 2

63

5. SPECIAL MEASURES:

- a. Radio.
 - (1) Voice operation of all equipment will be from positions in the direction center. A CW operating and technical control position will be established at the remote receiver site.
 - (2) Due to the flexibility required and the smaller land area required, the Engineering agency has recommended Discone transmitting antennas instead of Rhombics.
- b. Wire.
 - (1) No additional cable will be required off base.
 - (2) On-base cable for remote operation of the equipment will have to be augmented in all cases.
- c. Frequencies.

A total of 94 HF frequencies in the 2-11 Mc Band will be required to provide a primary day and primary night frequency with suitable secondary frequencies for each circuit. Since IF radio is the only means of communications available, secondary frequencies are considered essential. These frequencies will be utilized as follows:

Service	Circuits	Day 30	Night	Total
Picket Vessel	15		30	60
AEW&C	8	16	16	32
Enroute	1 24	47	47	94

- 6. Additional building, land and power requirements for individual stations are listed in Attachment +1-5.
- 7. This correspondence is classified SECRET in accordance with paragraph 23c, AFR 205-1.
- 5 Atchmts
- 1. Palermo AFS
- 2. Montauk AFS
- 3. North Truro AFS
- 4. Brunswick N.S
- 5. Cape Charles AFS

Polerno Air Force Station

1. That sime simi.

- a. Antenna Farm. Area approximately 500' by 750' must be procured to provide sufficient space. Area couthwest of existing property boundary is considered cuitable. Site cannot be extended to the south, since worden State Parkway runs by that end of site.
- b. Building Sequirements. Transmitter building must be extended minimum of twenty (20) feet in lengthwise direction toward fence. This will provide only sufficient space for five (5) each AN/FRT-15 transmitters and four (4) control racks (72" racks).
- c. Power lequirements. Present high line, transformers and low line are designed to carry load at 45 kVA. This system must be expanded to carry minimum of 112.5 kVA (3 each 37.5 kVA transformers). Existing main circuit breaker must be replaced as well.
- d. Control Cable. Present 51 pair telephone catle from transmitter building to main frame in Operations Center cannot carry additional control requirements. Approximately nine (9) pairs are available. It will be necessary to install minimum of eleven (11) additional (26 preferred) cable pairs to carry additional circuit requirements. This figure only approximate. Type of transmitting equipment utilized will determine actual cable requirement.

2. RECEIVER SITE.

- a. Antenna Farm. Area approximately 300' by 1000' must be procured to provide sufficient space for receiving antennas, installed for space diversity reception. Area to the Northwest of the site was considered suitable for the antenna farm.
- b. Building Pequirements. Present receiver building must be extended a minimum of 15 to provide space for radio control consoles. This extension should be sound-proofed. This will provide space for seven (7) HF radio control positions. The VHF/UHF monitoring position should be relocated to this room. There will be sufficient space in the present equipment room for the additional receiving equipment.
- c. Power Requirements. Present power system capable of carrying 22.5 KVA load (3 each 7.5 KVA transformers). No additional power will be required for radio equipment.
- d. Control Cable. Present 51 pair telephone cable to the main frame, at the Operations Center, nearly saturated. Will require minimum 26 additional cable pairs to satisfy control requirements.

Atchmt #1

.ECRET t. Prilities requirements. Additional transmitting equipment can be installed in present building, nowever, this will utilize all available fillow space, and make further expension impossible. It is promised that transmitter building equipment room be entended (approximately 20 feet) to provide for suitable installation. c. Hower Acquirements. Same as Faregraph L.c., Attachment (1. A Cable: Same as Paragraph L.d., Attachment gl. a. Antenna larg. to a multional space required. b. Building Requirements. Present building must be extended minimum of 10-15 feet to provide space for radio control room. This room should be cound-precised. The additional space will be utilized for the installation of five (5) HP redic control positions. The ME/MEP conitoring position should be placed in this room. There will be sufficient space in the equipment room for the additional receiving equipment. c. Power Requirements. Same as Paragraph 2.c., Attachment #1. . Control Cable. Same to Paragraph 2.d., Attachment #1. Atchmt #2 SECRET

53

North Truro Air Force Station

1. TRANSMITTER SITE.

- a. Antenna Farm. Additional area must be acquired. The only area suitable would be directly west of the existing transmitter site boundary. The main access road and high tension lines to the installation run diagonally across this area.
- b. Building Requirements. The transmitter building must be expanded approximately 400 square feet to accommodate the necessary equipment for this plan.
- c. Power Requirements. Power is being increased sufficiently to take care of this requirement.
- d. Control Cable. Additional on-base cable (26 pair minimum) must be furnished.

2. RECEIVER SITE.

- a. Antenna Farm. The only possible expansion is in a southerly direction. The land is not particularly suited for this purpose, however, as it is heavily wooded and very irregular, covered with prominent knolls and deep gullies.
- b. Building Requirements. The receiver building must be extended approximately twenty (20) feet to provide a technical control and operating room separate from the equipment room.
 - c. Power Requirements. Power is adequate.
- d. Control Cable. Additional control cable (26 pair minimum) must be provided.
- 3. REMARES. In view of the considerable expansion foreseen at this station (in support of this plan, SAGE, and Texas Towers), it is recommended that an off-base transmitter site be constructed of a size necessary to fill all requirements. Upon approval of such action, it is further proposed to relocate the receiver facilities to the vacated transmitter site to gain the receiver space required without additional construction.

Atchmt #3

63

Brunswick NAS


1. TRANSMITTER SITE.

- a. Antenna Farm. Sufficient space is available for expansion of the transmitter antenna farm only in the direction of the receiver antenna farm. This area is on base, but very heavily wooded.
- b. Building Requirements. The existing transmitter building is not satisfactory. The foundation of this building is sinking and it has been necessary to brace to roof in several places to prevent sagging.
 - c. Power Requirements. Power is adequate.
- d. Control Cable. Control cables (26 pair minimum) will be required.

2. RECEIVER SITE.

- a. Antenna Farm. The same problem exists as in Paragraph l.a., above. Expansion is limited to the direction of the transmitter site. The area is very heavily wooded.
- b. Building Requirements. The existing building must be extended approximately twenty (20) feet to provide sufficient space for technical control and operating positions.
 - c. Power Requirements. Power is adequate.
- d. Control Cable. Additional control cables (26 pair minimum) will be required.
- 3. REMAPKS. It is recommended that a new transmitter building be erected with adequate space to support all foreseen communications requirements at this station (in support of this plan, SAGE, and Texas Towers). This base is very small however, and an off-base site is recommended.

Atchet of

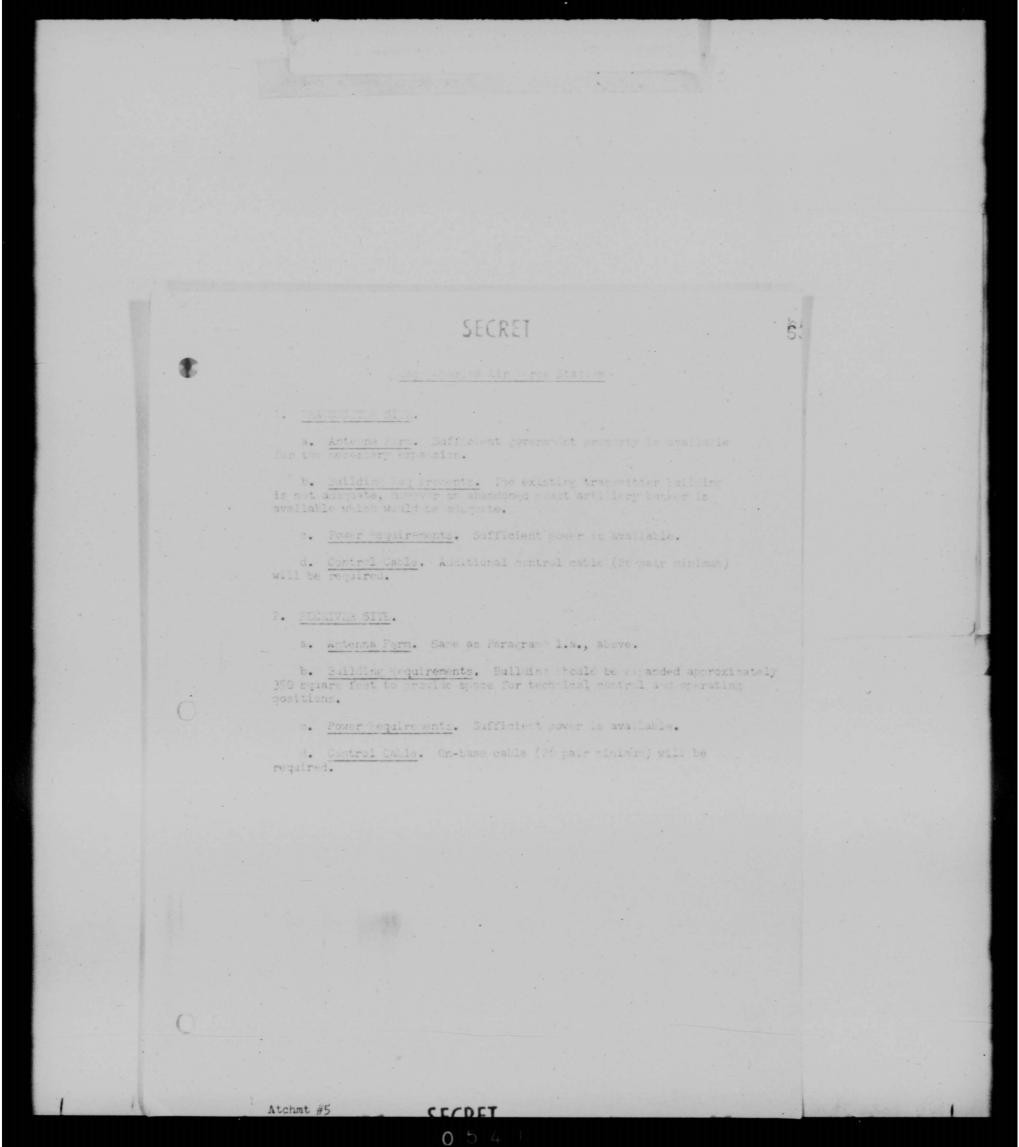

16 Covember 1994. In consideration of all factors affecting and pertions and company rations plans will be based upon the alternate plan 2. Leference paragraph 3, basic letter. Mercency radio equipment presently installed, with such replacement equipment as programed, will be considered to be alequate for back-up to primary circuits. 3. Deference paragraph 5. Wenty-five transmitters, ANVINT-15, have been approved by Nq MSAF for installation at East Coast stations. heview of the Manufacturers! Handbook on this equipment decement indicate 5 that the transmitter is capable of tuning any channel over the entire frequency range 2.0 to 30.0 mcs. Any of the pre-set channels can be tuned to any frequency desired. If your headquarters has information to the contrary, request such be forwarded to this headquarters.

63 60

CONFIDENTIAL

- h. Reference paragraph 6. Each of the five ACKW sites will require 2 each 1 KW amplifiers. Space criteria etc, will be forth-
- 5. Reference paragraph 2, Operations Plan for Picket Vessel and
 AEM&C Communications
- a. This headquarters has specified that only reliable voice circuits will satisfy the pre-SAGE communications requirements. The sentence, "Three (3) channels of HF voice or CW will be required to each picket vessel station and two (2) channels HF voice, CW or RATT", etc, and the sentence following referencing HF voice or CM, is believed, therefore, to be in error. CW capability will be reflected as being required for alternate or emergency use in the event of unsatisfactory voice communications. Nadioteletype is a requirement for operation when the
- b. The requirement for 2 each AN/MHT-15 transmitters with associated receivers, etc, to be installed at Otis AFB is not considered necessary. Aircraft, alon becoming airborne out of Otis AFB could communicate with an appropriate direction center and secure any flight

COMPONENTAL

CONFIDENTIAL

53

either the UHF or HF emergency frequencies. Furthermore, it is extremely doubtful that sufficient numbers of frequencies could be secured to provide acceptable communications with aircraft flying to and from all four operating locations. It is recommended that one each AN/FHT-15 be installed at North Truro-F-10, and Cape Charles - F-56. This arrangement will afford better utilization of equipments and enable the direction center to communicate with the aircraft while en route to and from the operating location. Additional channels not used for en route reporting etc, could be used as spare back-up channels for the other HF frequencies.

MANIA, Clasted AFD, Middletown, Fa., is being advised to increase the number of AM/FHT-15's to total 6 at North Truro - F-10 and Cape Charles,

-56. Your headquarters will be information addressee on this message.


This headquarters will take action necessary to reflect changes in the

Coortaining to radio equipments at the five selected direction centers.


Copies of chances will be forwarded to your headquarters.

6. An up-to-date CONAD Operations Flan for picket vessels will be published approximately 1 December 1956. This plan will reflect the

concept outlined in the alternate plan submitted by your headque ters. Some of the detailed operations will be forthcoming in an amen ment or change to the Plan. 7. Request your headquarters take necessary action to provide facilities and utilities, as outlined in the attachents to your alternate plan, in the most expeditious manner possible. Also rougst this headquarters be advised as actions are taken.

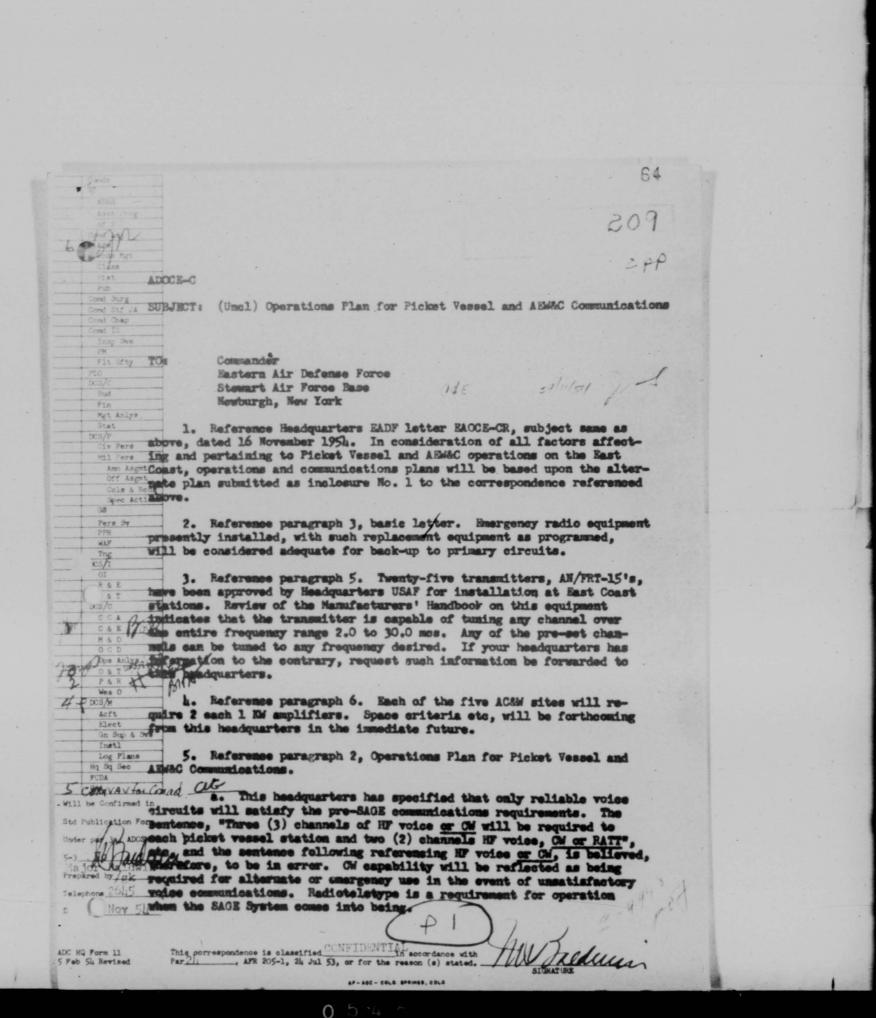

-		T
Condr	53	
100 cm		
ADES		
Asst Prog		
of S		
	ADOCE-C Subje (U) Operations Plan for Picket Vessel and ABM&C	
E des		
Rods Mgt Commo	misations	
Class		
Hat		
Pub	b. The requirement for 2 each AN/FRT-15 transmitters with	
Comd Surg	dated receivers, etc, to be installed at Otis AFB is not considered	
Comd Stf JA EMBOC	lated receivers, etc, to be imposited at octs are is not committed an	
Comd Chap Inches	sary. Aircraft, upon becoming airborne out of Otis AFB could	
Comd IO	micate with an appropriate direction center and secure any flight	
Insp Svs	mation required. Emergency communications could be conducted on	
PM Add box	r the UHF or HF emergency frequencies. Furthermore, it is extreme-	
Fit Sfty #15/08	the one of the medical and make an of free months a smild be seemed to	
PIO ly do	mbtful that sufficient numbers of frequencies could be secured to	
Bud Provi	de acceptable communications with aircraft flying to and from all	
four	operating locations. It is recommended that one each AN/FRT-15 be	
Mert Anlys Inste	illed at North Truro, P-10, and Cape Charles, P-56. This arrange-	
Stat mont	will afford better utilisation of equipments and enable the direc-	
DCS/P	center to communicate with the sircraft while en route to and from	
Civ Pers	Control to Communicate alor and alors and	
Mil Pers Gise G	perating location. Additional channels not used for en route re-	
Amm Assymtporti	ng stc, could be used as spare back-up channels for the other HF	
Off Asgmt	encies. MAAMA, Olmsted AFB, Middletown, Pa., is being advised to ase the number of AN /FRT-15's to total 6 at North Trure, P-10 and	
Cols & Roce	ase the number of AN /NRT-15's to total 6 at North Trure, P-10 and	
OS Cape	Cherles, P-56. Your headquarters will be information addresses on	
08	message. This headquarters is taking action to correct PC entries	
Pers Sv this	mossage, fills meanquarters is taking as citin to dot tot of the	
WAF TO	flect the requirement for one (1) additional AN/FRT-15 at P-10 and	
Ing P=50.	Copies of changes will be forwarded to your headquarters.	
78/1		
T I	6. An up-to-date COMAD Operations Plan for picket vessels will be	
R & E	6. An up-to-date COMAD Operations Plan for picket vessels will be shed approximately 1 December 195h. This plan will reflect the	
RAE Publi	shed approximately 1 December 1954. This plan will reflect the	
RAE Publication of the publicati	shed approximately 1 December 1954. This plan will reflect the pt outlined in the alternate plan submitted by your headquarters.	
R&E publication of the publicati	shed approximately 1 December 195h. This plan will reflect the pt outlined in the alternate plan submitted by your headquarters. of the detailed operations will be forthcoming in an amendment or	
R & E Publication of the Control of	shed approximately 1 December 1954. This plan will reflect the pt outlined in the alternate plan submitted by your headquarters.	
R & E Publication of the control of	shed approximately 1 December 1954. This plan will reflect the pt outlined in the alternate plan submitted by your headquarters. of the detailed operations will be forthcoming in an amendment or to the plan.	
R & E Publication of the Control of	shed approximately 1 December 1954. This plan will reflect the pt outlined in the alternate plan submitted by your headquarters. of the detailed operations will be forthcoming in an amendment or to the plan.	
R & E S & T DCS/O C C A C & E M & O C C B C C A C C B C C B C C C B C C C C C C C C C C	shed approximately 1 December 1954. This plan will reflect the pt outlined in the alternate plan submitted by your headquarters. of the detailed operations will be forthcoming in an amendment or to the plan. 7. Request your headquarters take necessary action to provide	
R & E S & T DCS/O C C A C & E H & O O C D C D C A A T C A E	shed approximately 1 December 1954. This plan will reflect the pt outlined in the alternate plan submitted by your headquarters. of the detailed operations will be forthcoming in an amendment or to the plan. 7. Request your headquarters take necessary action to provide ities and utilities, as outlined in the attachments to your alter-	
R & E S & T DOS/O C C A C & E H & O O C D Ope Anly s O 4 T P & R Wea O	shed approximately 1 December 1954. This plan will reflect the pt outlined in the alternate plan submitted by your headquarters. of the detailed operations will be forthcoming in an amendment or to the plan. 7. Request your headquarters take necessary action to provide ities and utilities, as outlined in the attachments to your alterplan, in the most expeditious manner possible. Also request this	
T	shed approximately 1 December 1954. This plan will reflect the pt outlined in the alternate plan submitted by your headquarters. of the detailed operations will be forthcoming in an amendment or to the plan. 7. Request your headquarters take necessary action to provide ities and utilities, as outlined in the attachments to your alter-	
R & E S & T DCS/O C C A C & E M & O C D D C D C D C D C D C D C D C D C D	shed approximately 1 December 1954. This plan will reflect the pt outlined in the alternate plan submitted by your headquarters. of the detailed operations will be forthcoming in an amendment or a to the plan. 7. Request your headquarters take necessary action to provide ities and utilities, as outlined in the attachments to your alterplan, in the most expeditious manner possible. Also request this warters be advised as actions are taken.	
R & E S & T DCS/O C C A C & E M & O O C D Cpe Anlye O 4 T F & R Wea O DCS/M Aeft Rlect	shed approximately 1 December 1954. This plan will reflect the pt outlined in the alternate plan submitted by your headquarters. of the detailed operations will be forthcoming in an amendment or to the plan. 7. Request your headquarters take necessary action to provide ities and utilities, as outlined in the attachments to your alterplan, in the most expeditious manner possible. Also request this	
R & E S & T DCS/O C C A C & E M & O C C D C C A C & E M & O C C D C C A C & E M & O C C D C C C A C & E M & O C C D C C C A C & E M & O C C D C C C C C C C C C C C C C C C C C	shed approximately 1 December 1954. This plan will reflect the pt outlined in the alternate plan submitted by your headquarters. of the detailed operations will be forthcoming in an amendment or a to the plan. 7. Request your headquarters take necessary action to provide ities and utilities, as outlined in the attachments to your alterplan, in the most expeditious manner possible. Also request this warters be advised as actions are taken.	
R & E S & T DOS/O C C A C & E M & O O C D Ope Anly s O A T F & R Wea O DOS/M Acft Elect On Sup & Swe Insta	shed approximately 1 December 1954. This plan will reflect the pt outlined in the alternate plan submitted by your headquarters. of the detailed operations will be forthcoming in an amendment or a to the plan. 7. Request your headquarters take necessary action to provide ities and utilities, as outlined in the attachments to your alterplan, in the most expeditious manner possible. Also request this warters be advised as actions are taken. EI CEDER OF THE COMMANDER:	
R & E S & T DCS/O C C A C & E M & O C D C D C D C D C D C D C D C	shed approximately 1 December 1954. This plan will reflect the pt outlined in the alternate plan submitted by your headquarters. of the detailed operations will be forthcoming in an amendment or a to the plan. 7. Request your headquarters take necessary action to provide ities and utilities, as outlined in the attachments to your alterplan, in the most expeditious manner possible. Also request this warters be advised as actions are taken. ET ORDER OF THE COMMANDER: FOR RECORD: The referenced letter from EADF was to have been a final	
R & E S & T DCS/O C C A C & E M & O C D C D C D C D C D C D C D C	shed approximately 1 December 1954. This plan will reflect the pt outlined in the alternate plan submitted by your headquarters. of the detailed operations will be forthcoming in an amendment or to the plan. 7. Request your headquarters take necessary action to provide ities and utilities, as outlined in the attachments to your alterplan, in the most expeditious manner possible. Also request this warters be advised as actions are taken. ET ORDER OF THE CORMANDER: FOR RECORD: The referenced letter from EADF was to have been a final irm operations plan for PV & ARMEC operation. The new plan was to	
R & E S & T DCS/O C C A C & E M & O C C B M & O C C C B M & O C C C B M & O C C C C C C C C C C C C C C C C C C C	shed approximately 1 December 1954. This plan will reflect the pt outlined in the alternate plan submitted by your headquarters. of the detailed operations will be forthcoming in an amendment or to the plan. 7. Request your headquarters take necessary action to provide ities and utilities, as outlined in the attachments to your alterplan, in the most expeditious manner possible. Also request this warters be advised as actions are taken. ET CEDER OF THE COMMANDER: FOR RECORD: The referenced letter from MADF was to have been a final irm operations plan for PV & ADMEC operation. The new plan was to seed upon utilizing 5 DC shore based stations to operate with PV & seed upon utilizing 5 DC shore based stations to operate with PV &	
R & E S & T DCS/O C C A C & E M & O C C B M & O C C C B M & O C C C B M & O C C C C C C C C C C C C C C C C C C C	shed approximately 1 December 1954. This plan will reflect the pt outlined in the alternate plan submitted by your headquarters. of the detailed operations will be forthcoming in an amendment or to the plan. 7. Request your headquarters take necessary action to provide ities and utilities, as outlined in the attachments to your alterplan, in the most expeditious manner possible. Also request this warters be advised as actions are taken. ET CEDER OF THE COMMANDER: FOR RECORD: The referenced letter from MADF was to have been a final irm operations plan for PV & ADMEC operation. The new plan was to seed upon utilizing 5 DC shore based stations to operate with PV & seed upon utilizing 5 DC shore based stations to operate with PV &	
R & E S & T DGS/O C C A C & E M & O C D C D C D C D C D A T P & R We A DCS/N Acft Elect Gn Sup & Svs Tinstl Log Plane M M Hq Sq Sec C FCDA C A C & E DCS/N AC T Elect C D C Sq Sec C FCDA C A C A C A C A C A C A C A C A C A C A	shed approximately 1 December 1954. This plan will reflect the pt outlined in the alternate plan submitted by your headquarters. of the detailed operations will be forthcoming in an amendment or to the plan. 7. Request your headquarters take necessary action to provide ities and utilities, as outlined in the attachments to your alterplan, in the most expeditious manner possible. Also request this warters be advised as actions are taken. BY ORDER OF THE CORMANDER: FOR RECORD: The referenced letter from EADF was to have been a final irm operations plan for PV & ARMEC operation. The new plan was to sed upon utilizing 5 DC shore based stations to operate with PV & which was to cancel their previous plan that called for two ground	
R & E S & T DGS/O C C A C & E M & O C D C D C D C D C D C D C D C D C D C D	shed approximately 1 December 1954. This plan will reflect the pt outlined in the alternate plan submitted by your headquarters. of the detailed operations will be forthcoming in an amendment or to the plan. 7. Request your headquarters take necessary action to provide ities and utilities, as outlined in the attachments to your alterplan, in the most expeditious manner possible. Also request this warters be advised as actions are taken. ET CRDER OF THE COMMANDER: FOR RECORD: The referenced letter from EADF was to have been a final irm operations plan for PV & ARMEC operation. The new plan was to sed upon utilizing 5 DC shore based stations to operate with PV & which was to cancel their previous plan that called for two ground stations. Camp Physics & Ft. Dix. After consulting with both PF H	
R & E S & T DGS/O C C A C & E M & O C D C D C D C D C D A T P & R Wea O DCS/N Acft Elect Gn Sup & Svs Instit Log Plans M O Hq Sq Sec and f FCDA C AA be Confirmed in PAPCO Publication Formal C	shed approximately 1 December 1954. This plan will reflect the pt outlined in the alternate plan submitted by your headquarters. of the detailed operations will be forthcoming in an amendment or to the plan. 7. Request your headquarters take necessary action to provide ities and utilities, as outlined in the attachments to your alterplan, in the most expeditious manner possible. Also request this warters be advised as actions are taken. BY ORDER OF THE COMMANDER: FOR RECORD: The referenced letter from EADF was to have been a final irm operations plan for PV & ARMEC operation. The new plan was to sed upon utilizing 5 DC shore based stations to operate with PV & which was to cancel their previous plan that called for two ground stations, Camp Swards & Ft. Dix. After consulting with both PF # & T, ADC, it was decided to adopt MADF's alternate plan. Only minor	
R & E S & T DGS/O C C A C & E M & O C D C D C D C D C D A T P & R Wea O DCS/N Acft Elect Gn Sup & Svs Instit Log Plans M O Hq Sq Sec and f FCDA C AA be Confirmed in PAPCO Publication Formal C	shed approximately 1 December 1954. This plan will reflect the pt outlined in the alternate plan submitted by your headquarters. of the detailed operations will be forthcoming in an amendment or to the plan. 7. Request your headquarters take necessary action to provide ities and utilities, as outlined in the attachments to your alterplan, in the most expeditious manner possible. Also request this warters be advised as actions are taken. ET CRDER OF THE COMMANDER: FOR RECORD: The referenced letter from EADF was to have been a final irm operations plan for PV & ARMEC operation. The new plan was to sed upon utilizing 5 DC shore based stations to operate with PV & which was to cancel their previous plan that called for two ground stations. Camp Physics & Ft. Dix. After consulting with both PF H	
R & E S & T DGS/O C C A C & E M & O C D C D C D C D C D A T P & R Wea O DCS/N Acft Elect Gn Sup & Svs Instit Log Plans M O Hq Sq Sec and f FCDA C AA be Confirmed in PAPCO Publication Formal C	shed approximately 1 December 1954. This plan will reflect the pt outlined in the alternate plan submitted by your headquarters. of the detailed operations will be forthcoming in an amendment or to the plan. 7. Request your headquarters take necessary action to provide ities and utilities, as outlined in the attachments to your alterplan, in the most expeditious manner possible. Also request this warters be advised as actions are taken. BY ORDER OF THE COMMANDER: FOR RECORD: The referenced letter from EADF was to have been a final irm operations plan for PV & ARMEC operation. The new plan was to sed upon utilizing 5 DC shore based stations to operate with PV & which was to cancel their previous plan that called for two ground stations, Camp Swards & Ft. Dix. After consulting with both PF # & T, ADC, it was decided to adopt MADF's alternate plan. Only minor	
R & E S & T DGS/O C C A C & E M & O C D C D C D C D C D A T P & R Wea O DCS/N Acft Elect Gn Sup & Svs Instit Log Plans M O Hq Sq Sec and f FCDA C AA be Confirmed in PAPCO Publication Formal C	shed approximately 1 December 1954. This plan will reflect the pt outlined in the alternate plan submitted by your headquarters. of the detailed operations will be forthcoming in an amendment or to the plan. 7. Request your headquarters take necessary action to provide ities and utilities, as outlined in the attachments to your alterplan, in the most expeditious manner possible. Also request this warters be advised as actions are taken. BY ORDER OF THE COMMANDER: FOR RECORD: The referenced letter from EADF was to have been a final irm operations plan for PV & ARMEC operation. The new plan was to sed upon utilizing 5 DC shore based stations to operate with PV & which was to cancel their previous plan that called for two ground stations, Camp Swards & Ft. Dix. After consulting with both PF # & T, ADC, it was decided to adopt MADF's alternate plan. Only minor	
R & E S & T DGS/O C C A C & E M & O C & E M & O C D C D C D C D C D C D C D C D C D C D	shed approximately 1 December 1954. This plan will reflect the pt outlined in the alternate plan submitted by your headquarters. of the detailed operations will be forthcoming in an amendment or to the plan. 7. Request your headquarters take necessary action to provide ities and utilities, as outlined in the attachments to your alterplan, in the most expeditious manner possible. Also request this warters be advised as actions are taken. BY ORDER OF THE COMMANDER: FOR RECORD: The referenced letter from EADF was to have been a final irm operations plan for PV & ARMEC operation. The new plan was to sed upon utilizing 5 DC shore based stations to operate with PV & which was to cancel their previous plan that called for two ground stations, Camp Swards & Ft. Dix. After consulting with both PF # & T, ADC, it was decided to adopt MADF's alternate plan. Only minor	
R & E S & T DGS/O C C A C & E M & O C & E M & O C D C D C D C D C D C D C D C D C D C D	shed approximately 1 December 1954. This plan will reflect the pt outlined in the alternate plan submitted by your headquarters. of the detailed operations will be forthcoming in an amendment or to the plan. 7. Request your headquarters take necessary action to provide ities and utilities, as outlined in the attachments to your alterplan, in the most expeditious manner possible. Also request this warters be advised as actions are taken. BY ORDER OF THE COMMANDER: FOR RECORD: The referenced letter from EADF was to have been a final irm operations plan for PV & ARMEC operation. The new plan was to sed upon utilizing 5 DC shore based stations to operate with PV & which was to cancel their previous plan that called for two ground stations, Camp Swards & Ft. Dix. After consulting with both PF # & T, ADC, it was decided to adopt MADF's alternate plan. Only minor	
R & E S & T DCS/O C C A C & E M & O C D C D S Anly s O & T P & R Wea O DCS/N Acft Elect Gn Sup & Svs Instl Log Plans M Hq Sq Sec and f FCDA CAA be Confirmed in PAPC Publication Formal G Publication Formal G	shed approximately 1 December 1954. This plan will reflect the pt outlined in the alternate plan submitted by your headquarters. of the detailed operations will be forthcoming in an amendment or a to the plan. 7. Request your headquarters take necessary action to provide ities and utilities, as outlined in the attachments to your alterplan, in the most expeditious manner possible. Also request this warters be advised as actions are taken. BY ORDER OF THE COMMANDER: FOR RECORD: The referenced letter from MADF was to have been a final irm operations plan for PV & AEM&O operation. The new plan was to seed upon utilizing 5 DC shore based stations to operate with PV & which was to cancel their previous plan that called for two ground stations, Camp odwards & Rt. Dix. After consulting with both Pf of the provious of the alternate plan are anticipated in the future.	
R & E S & T DGS/O C C A C & E M & O C & E M & O C D C D C D C D C D C D C D C D C D C D	shed approximately 1 December 1954. This plan will reflect the pt outlined in the alternate plan submitted by your headquarters. of the detailed operations will be forthcoming in an amendment or to the plan. 7. Request your headquarters take necessary action to provide ities and utilities, as outlined in the attachments to your alterplan, in the most expeditious manner possible. Also request this warters be advised as actions are taken. BY ORDER OF THE COMMANDER: FOR RECORD: The referenced letter from EADF was to have been a final irm operations plan for PV & ARMEC operation. The new plan was to sed upon utilizing 5 DC shore based stations to operate with PV & which was to cancel their previous plan that called for two ground stations, Camp Swards & Ft. Dix. After consulting with both PF # & T, ADC, it was decided to adopt MADF's alternate plan. Only minor	
R & E S & T DGS/O C C A C & E M & O C & E M & O C D C D C D C D C D C D C D C D C D C D	shed approximately 1 December 1954. This plan will reflect the pt outlined in the alternate plan submitted by your headquarters. of the detailed operations will be forthcoming in an amendment or a to the plan. 7. Request your headquarters take necessary action to provide ities and utilities, as outlined in the attachments to your alterplan, in the most expeditious manner possible. Also request this warters be advised as actions are taken. BY ORDER OF THE COMMANDER: FOR RECORD: The referenced letter from MADF was to have been a final irm operations plan for PV & AEM&O operation. The new plan was to seed upon utilizing 5 DC shore based stations to operate with PV & which was to cancel their previous plan that called for two ground stations, Camp odwards & Rt. Dix. After consulting with both Pf of the provious of the alternate plan are anticipated in the future.	
R & E S & T DCS/O C C A C & E M & O C D C D C D C D C D C D C D C	shed approximately 1 December 1954. This plan will reflect the pt outlined in the alternate plan submitted by your headquarters. of the detailed operations will be forthcoming in an amendment or a to the plan. 7. Request your headquarters take necessary action to provide ities and utilities, as outlined in the attachments to your alterplan, in the most expeditious manner possible. Also request this warters be advised as actions are taken. BY ORDER OF THE COMMANDER: FOR RECORD: The referenced letter from MADF was to have been a final irm operations plan for PV & AEM&O operation. The new plan was to seed upon utilizing 5 DC shore based stations to operate with PV & which was to cancel their previous plan that called for two ground stations, Camp odwards & Rt. Dix. After consulting with both Pf of the provious of the alternate plan are anticipated in the future.	

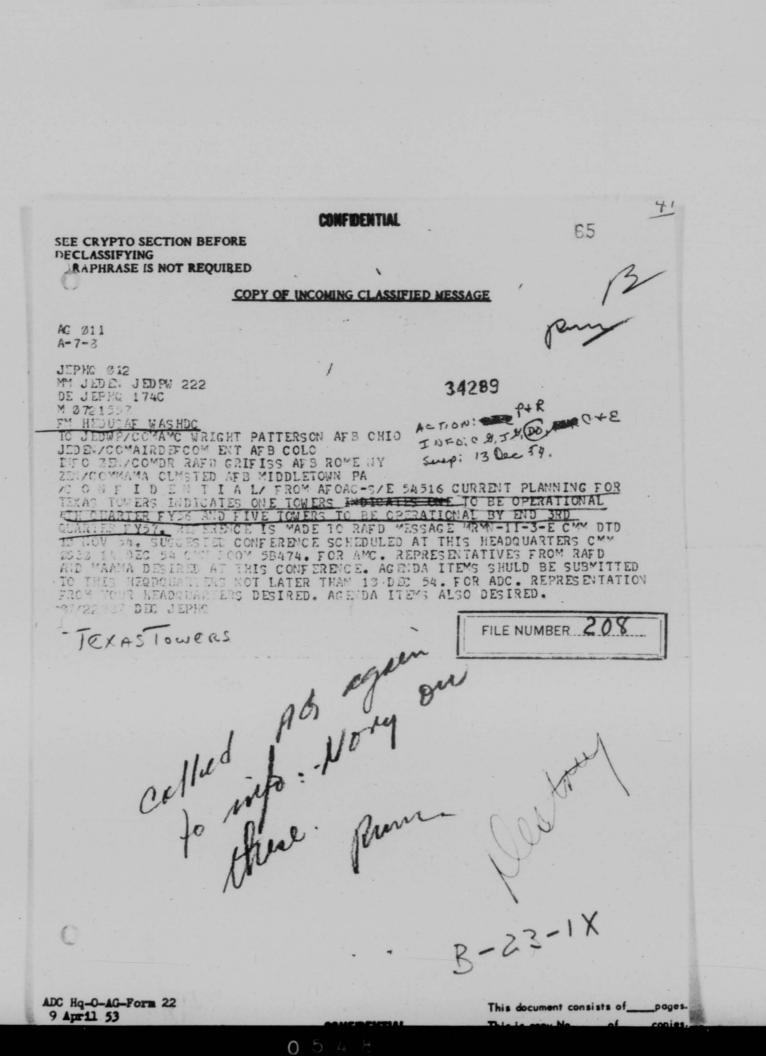

FILE NUMBER Doe 66

HISTORICAL OFFICE Cross Reference Sheet

DATE: 20 Jul 54

FROM:

TO:

SUBJECT: Operations Blan for Leyons Novemen

CLASSIFICATION:


NO. OF PAGES:


FANFOLD NO:

HISTORIAN: Buso


REMARKS:


HIST SVS, Form 3 19 May 1952

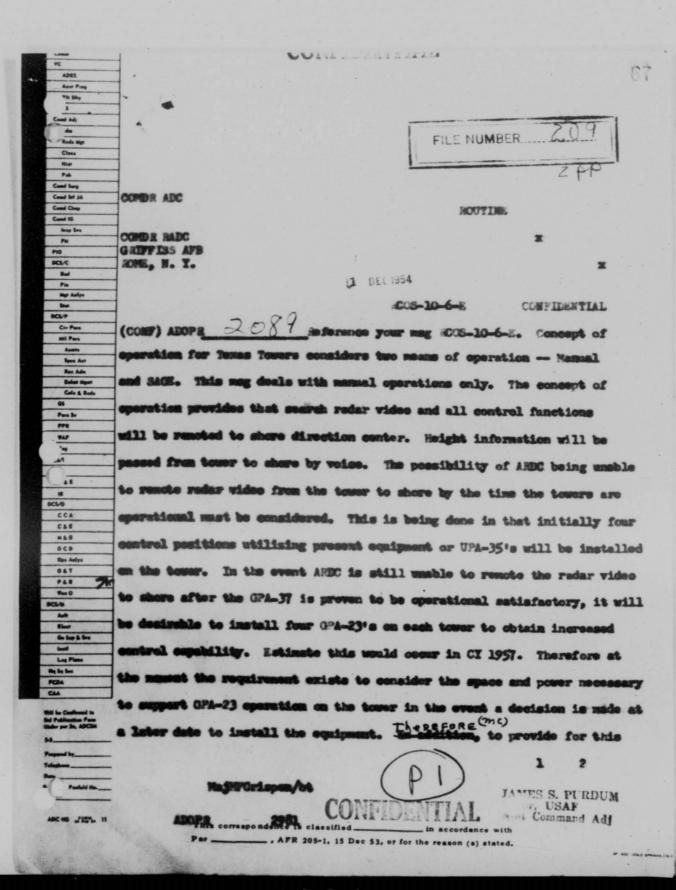


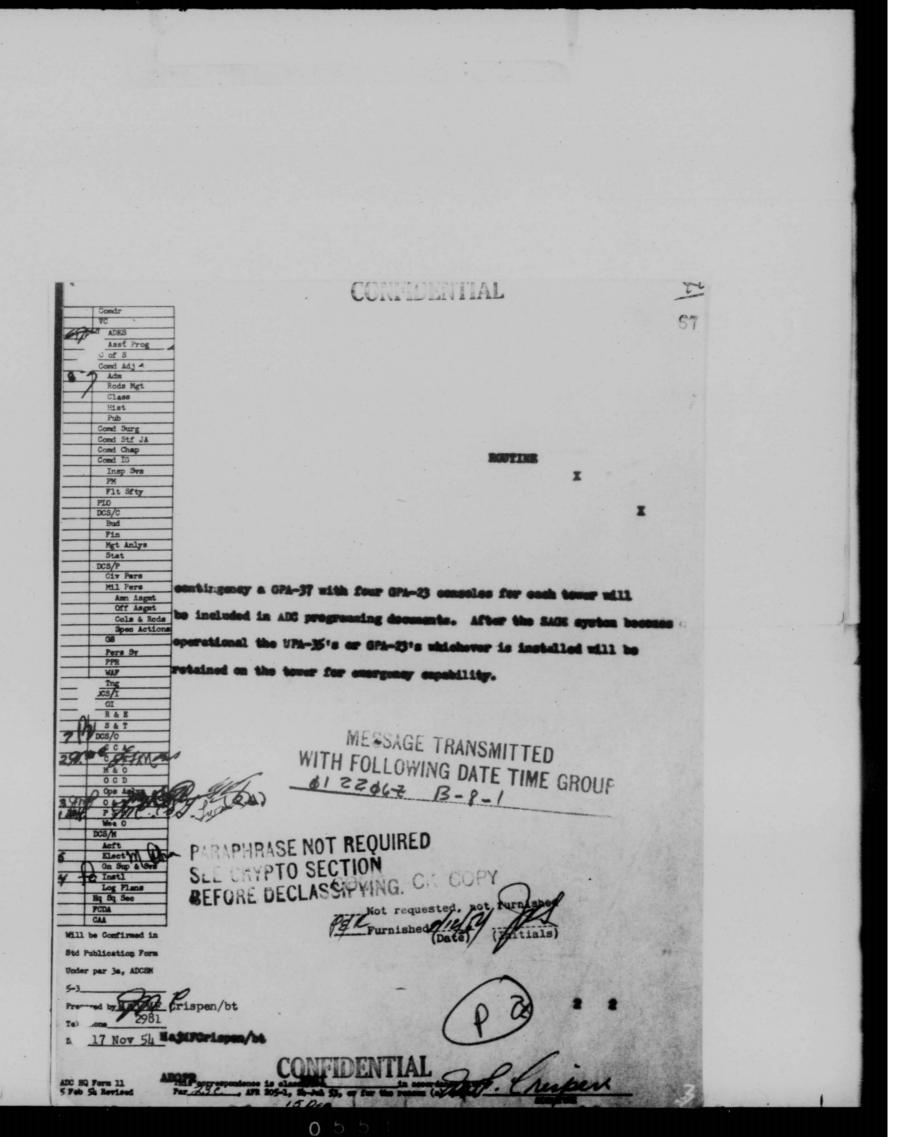


THIS PAGE IS DECLASSIFIED IAW EO 13526

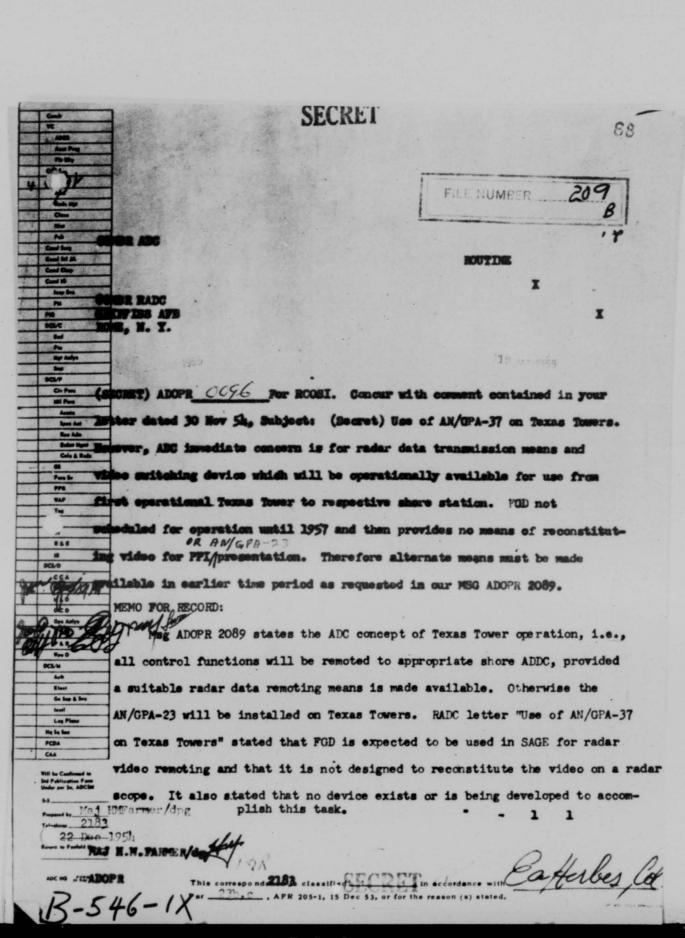

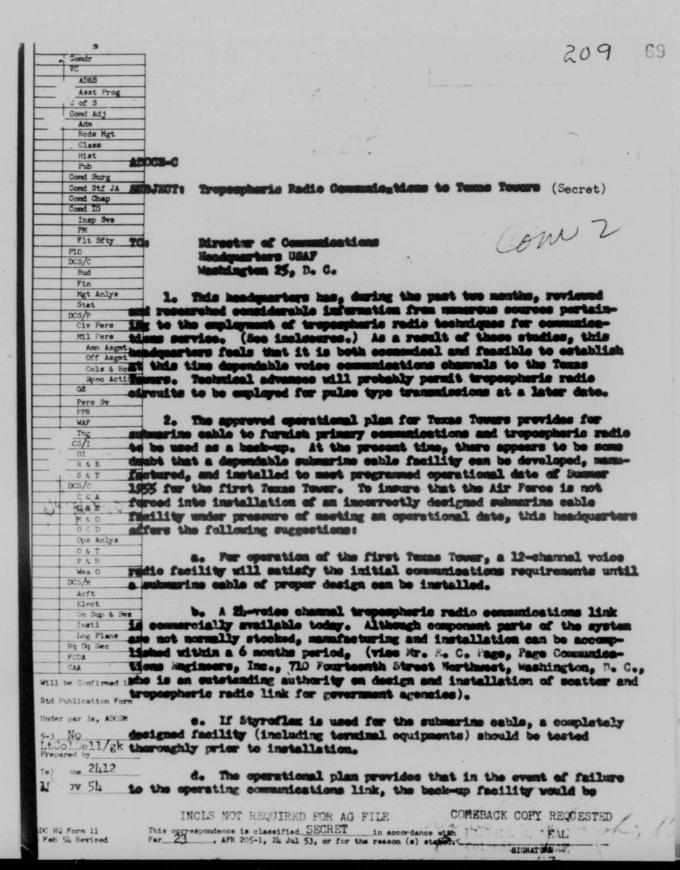

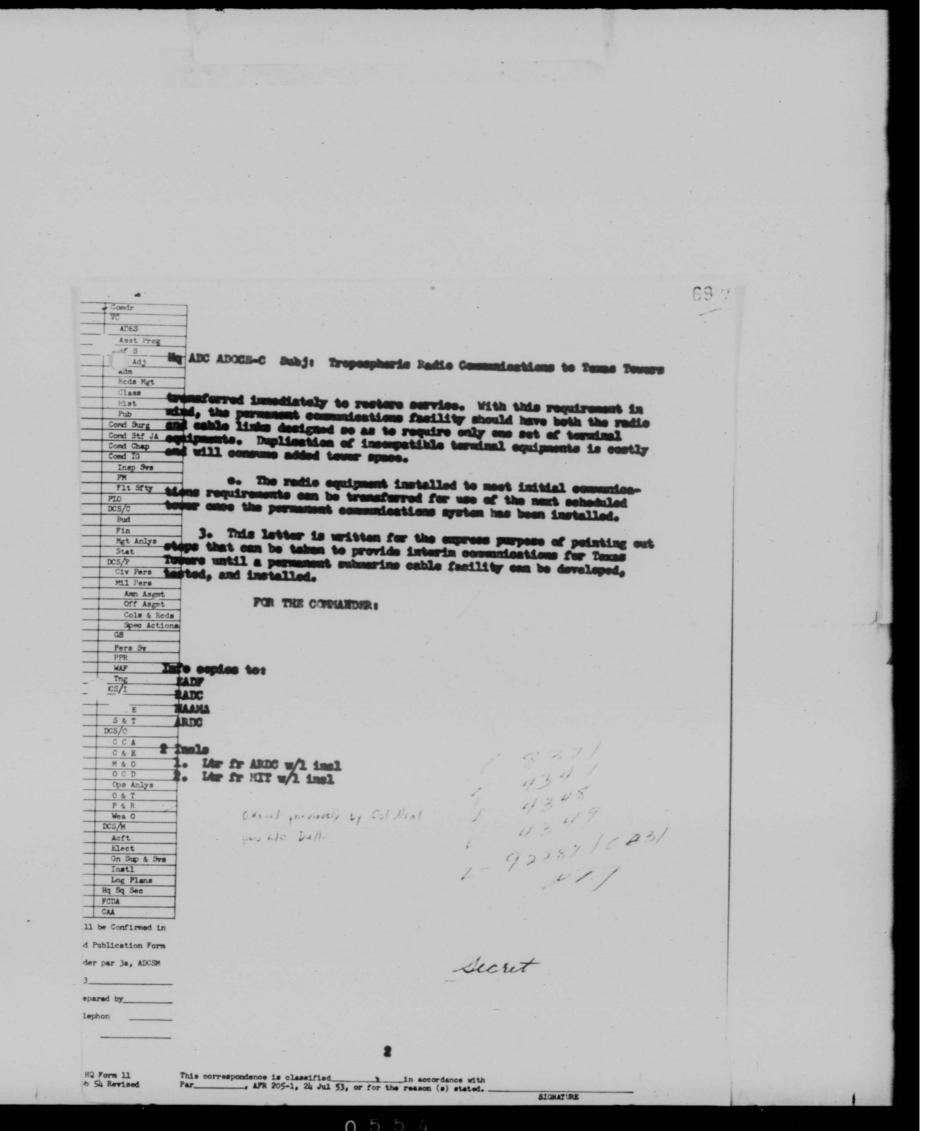

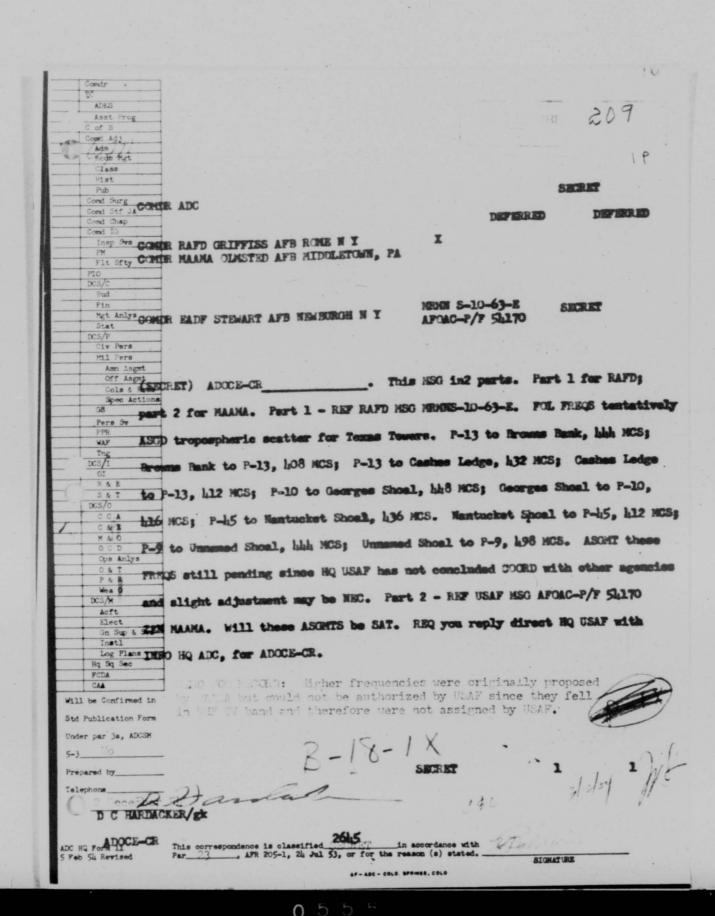

165-39

ADMINO

SUBJECT: (Unclassified) Cross-Servicing Agreement for Texas Towers

TO: Director of Supply and Services
Headquarters USAF
Washington 25, D. C.

l. The first of the Texas Towers is scheduled for beneficial occupancy by this command approximately 1 September 1955.. In view of the fact that r considerable portion of the logistic support, services, and other support functions will be accomplished by the Department of the Navy, it will be necessary for the Department of the Navy and the Air Force to enter into a cross-servicing agreement for support of the Texas Towers. The proposed cross-servicing agreement will include the following areas of support responsibilities:


a. Mavy.


- (1) Installations (R&U)
- (2) Transportation including emergency delivery of supplies and evacuation of personnel.
- (3) Common items of supply such as: subsistence, POL, and housekeeping supplies.
- (4) Services (PX or ship store).
- (5) On shore facilities (if required).
- (6) Items of equipment to be Mavy-furnished.
- (7) Submarine detection and protection.


b. Air Force.


- (1) Peculiar Air Force items.
- (2) Air Force personnel.

R-528-2X

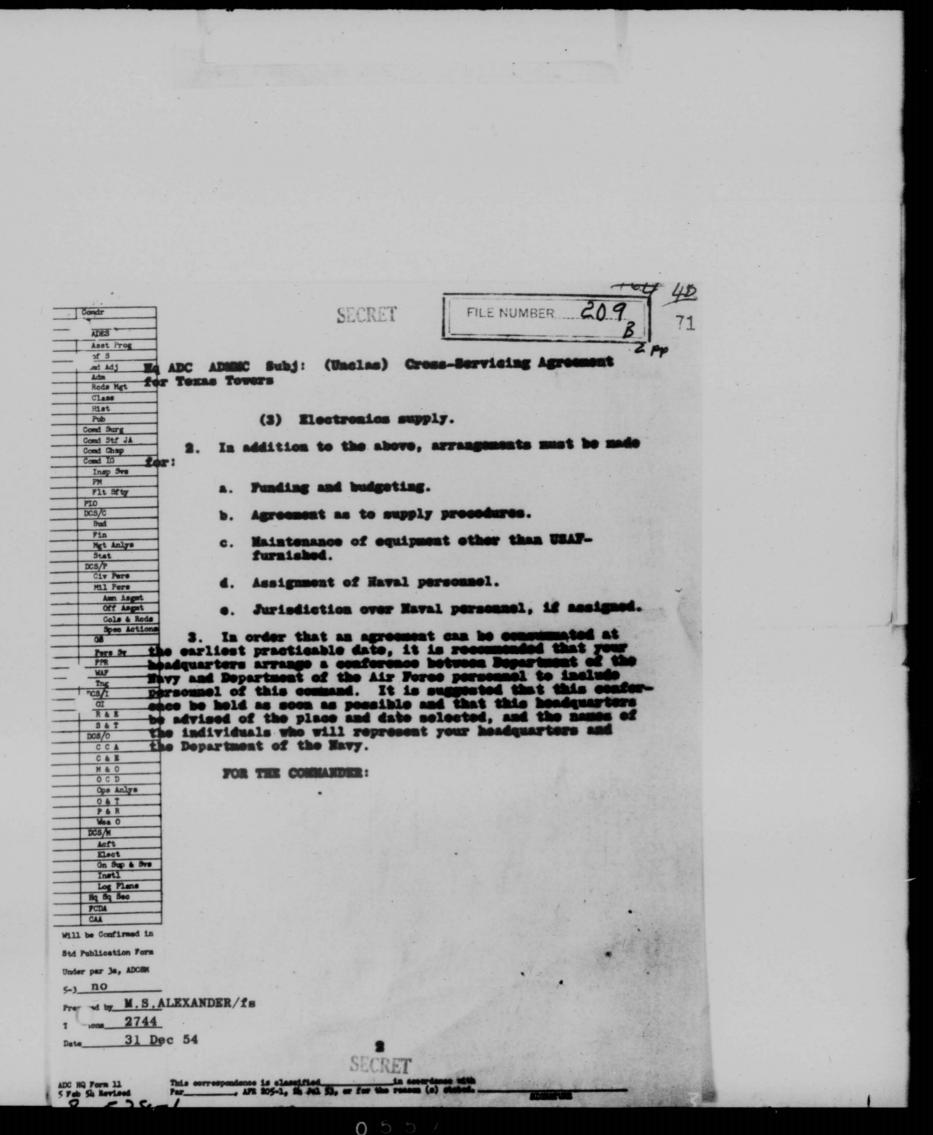

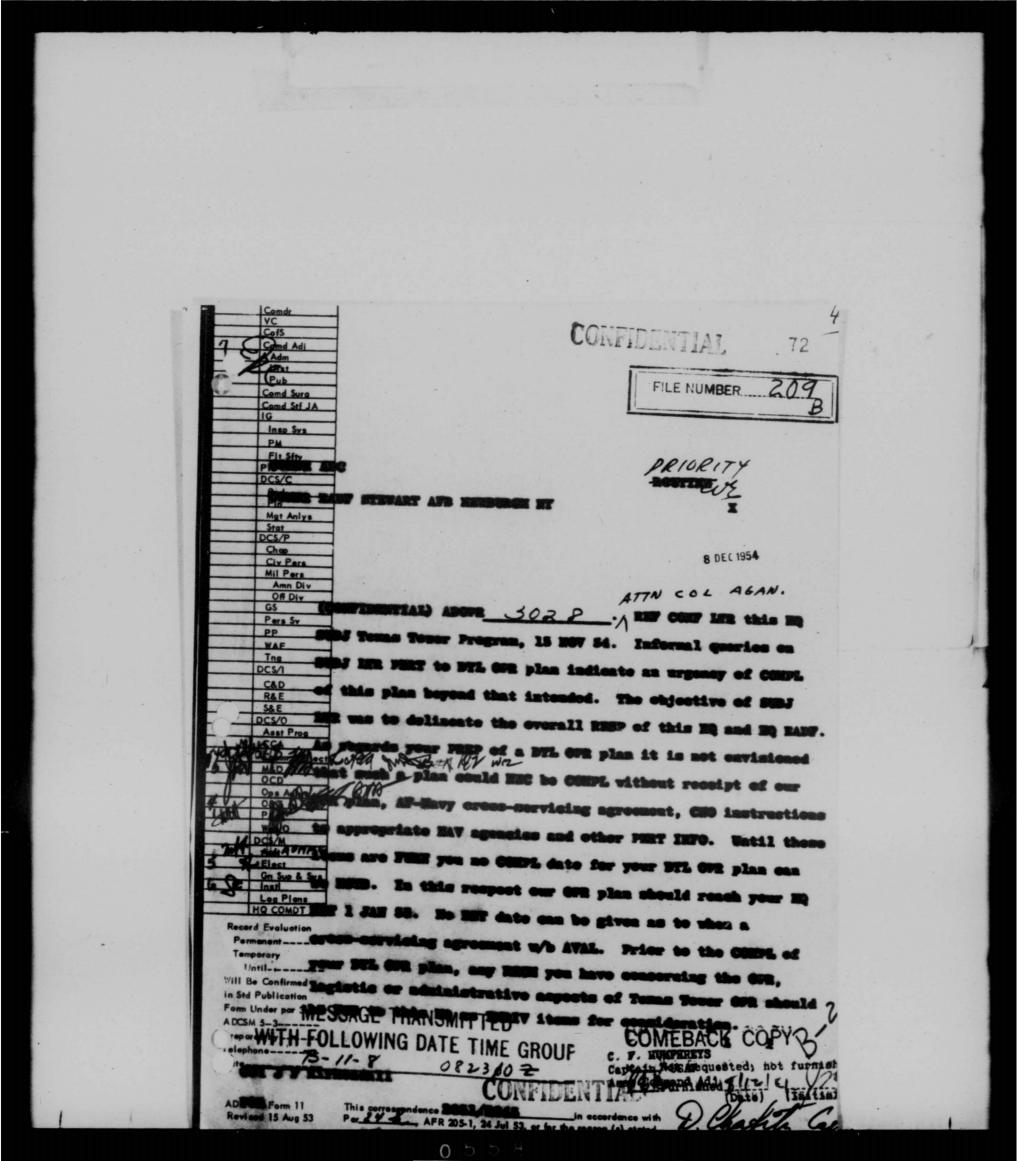

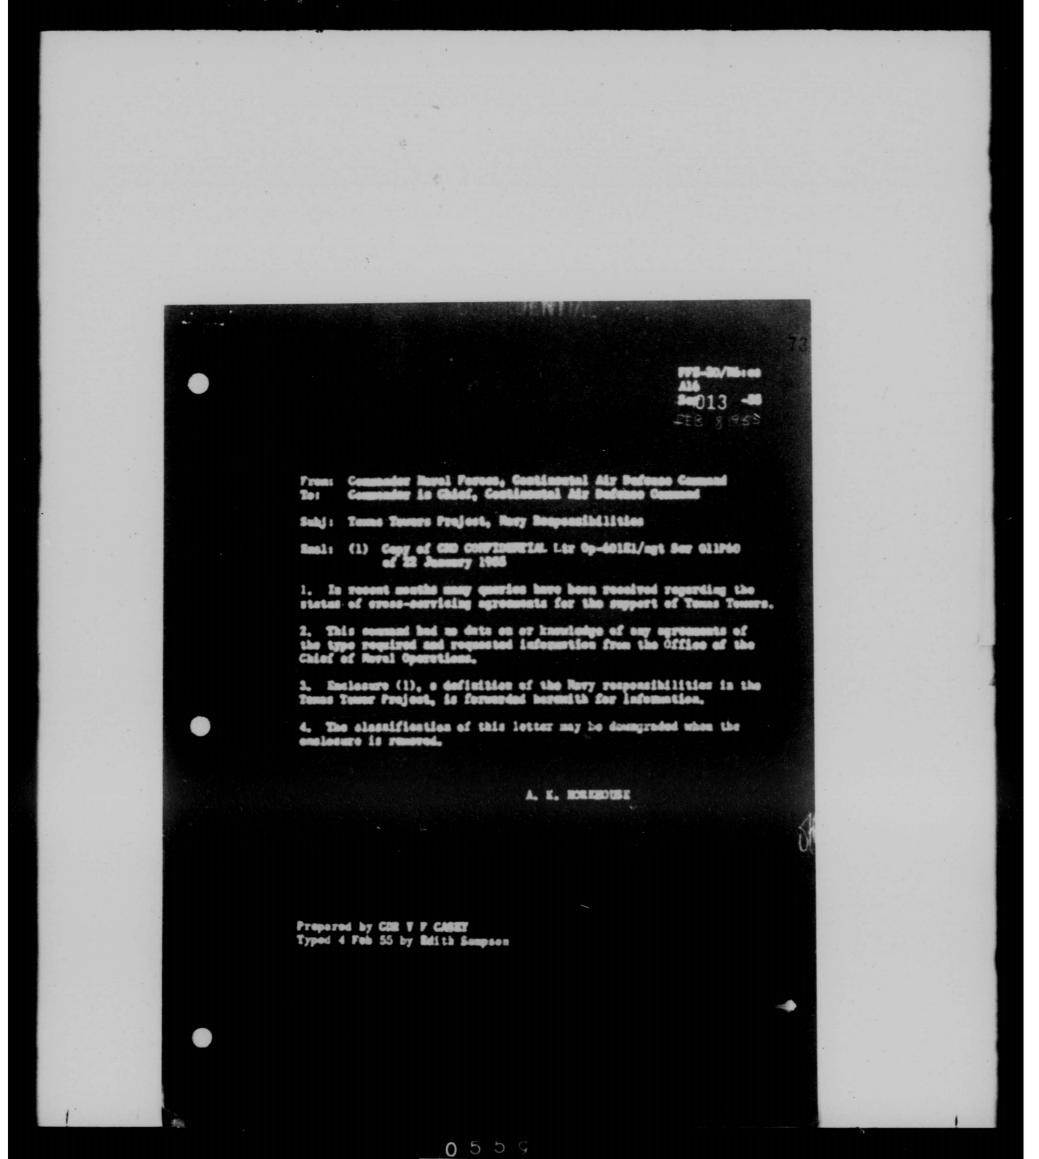

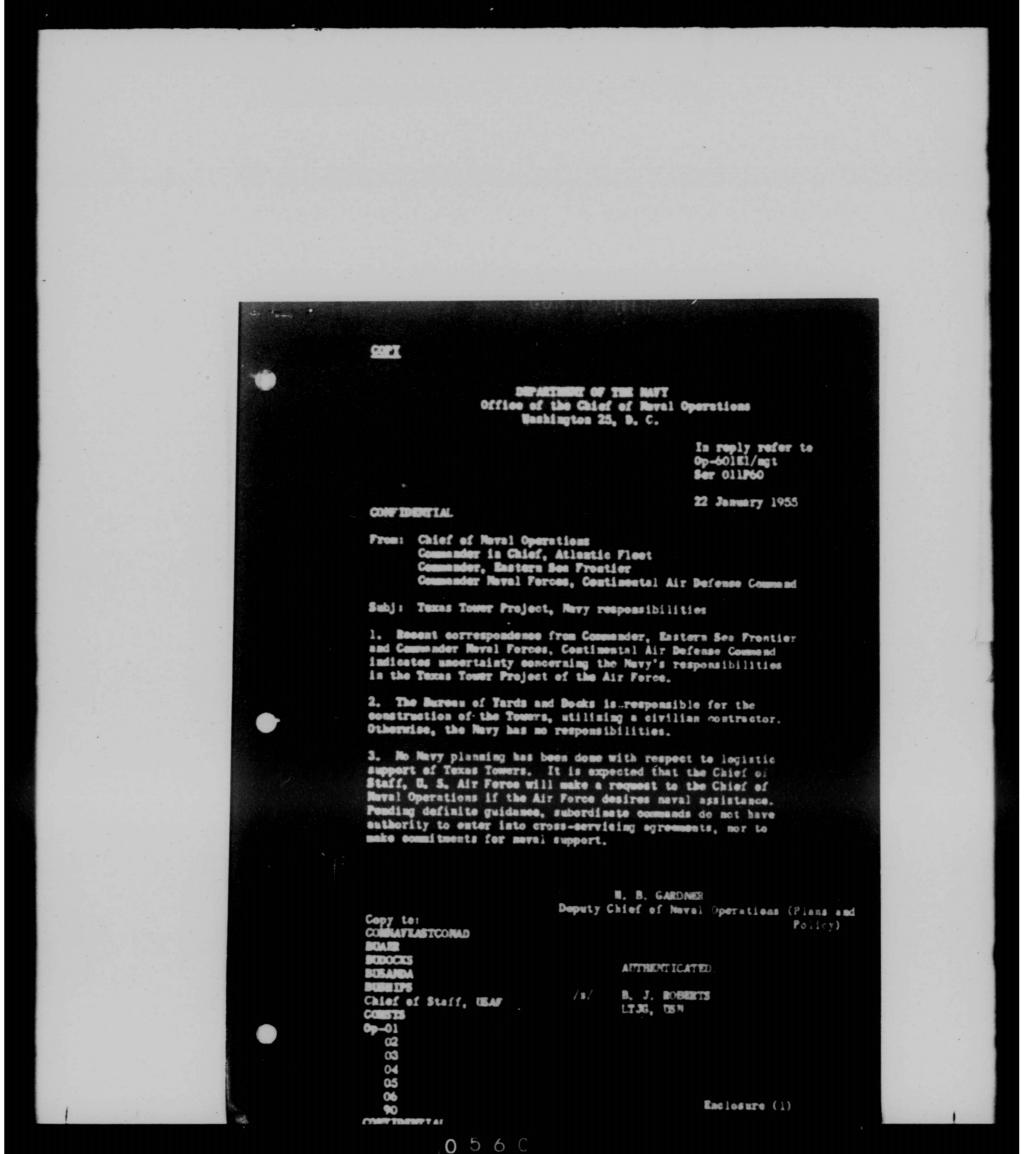



DOCUMENT NO. 74


THIS DOCUMENT MAY BE FOUND

IN VOLUME VII OF THE SUPPORTING

DOCUMENTS TO THIS HISTORY.

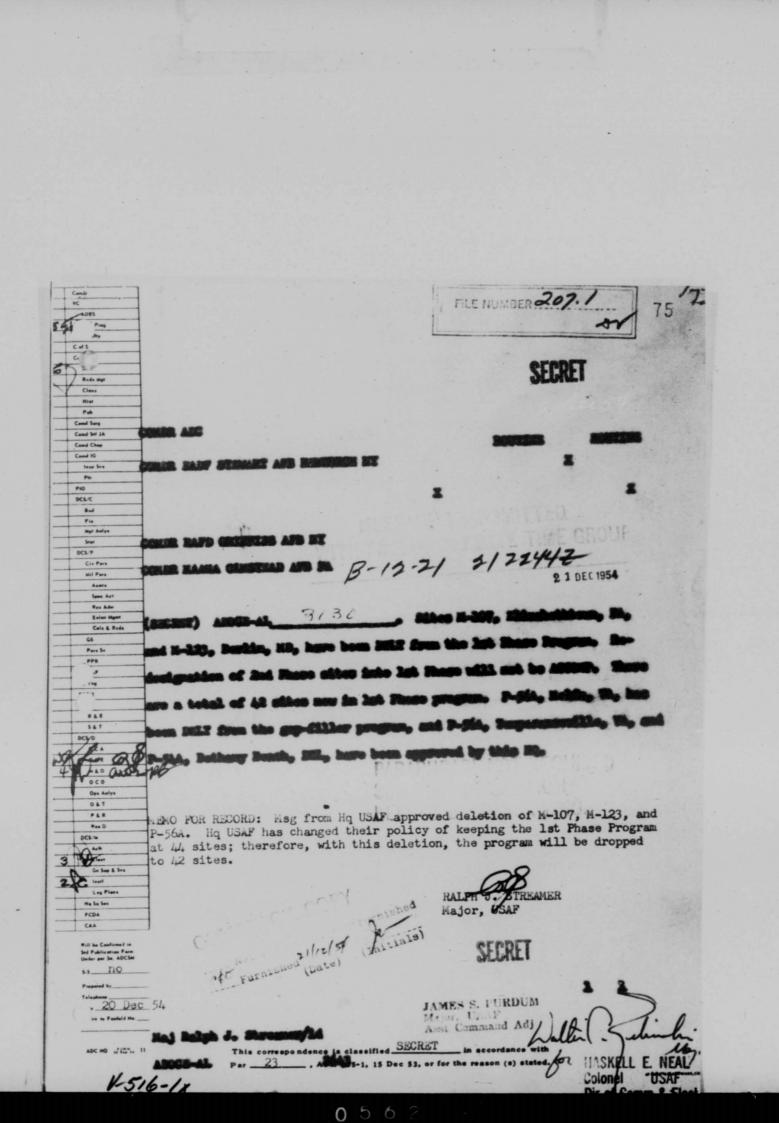

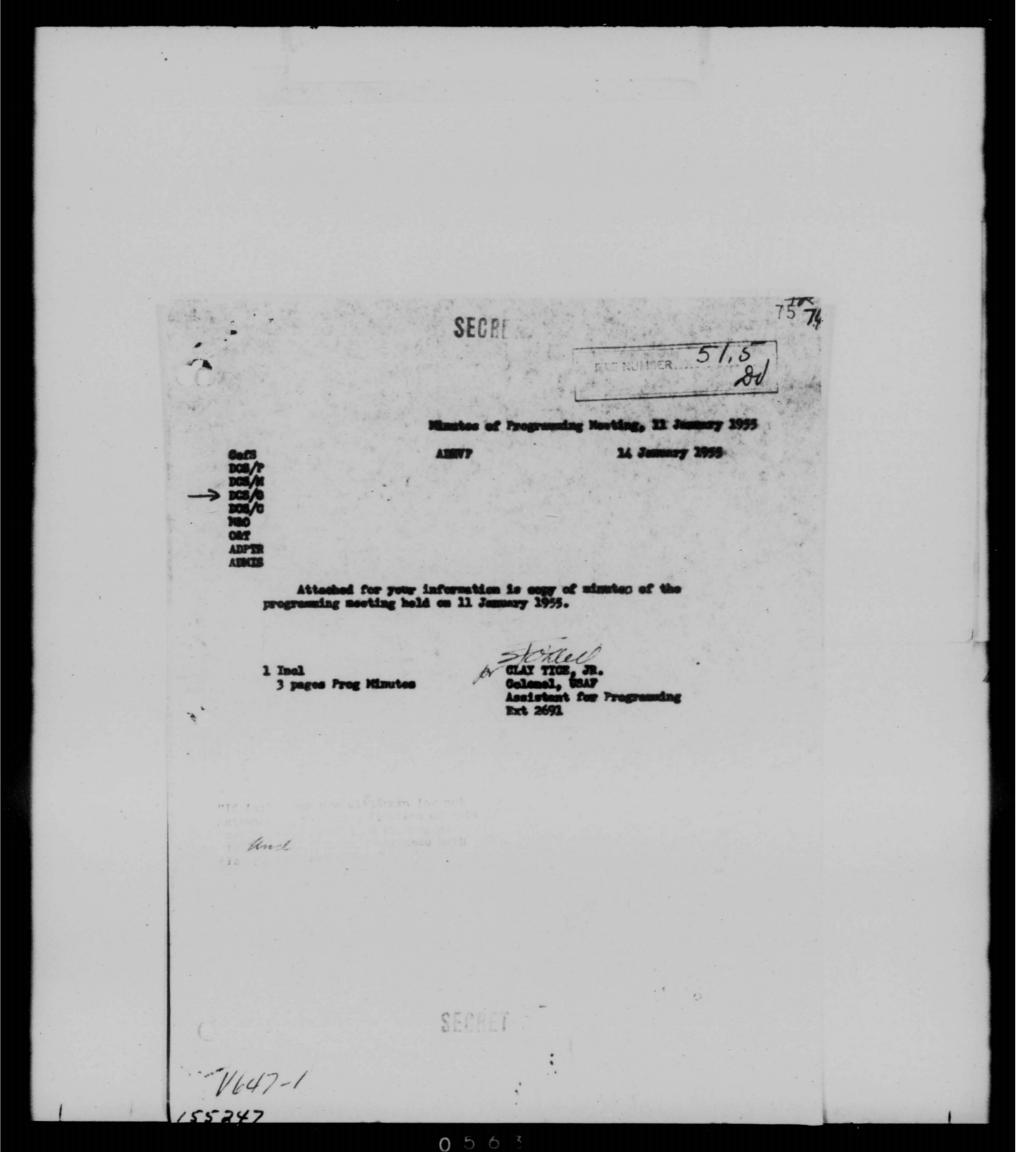

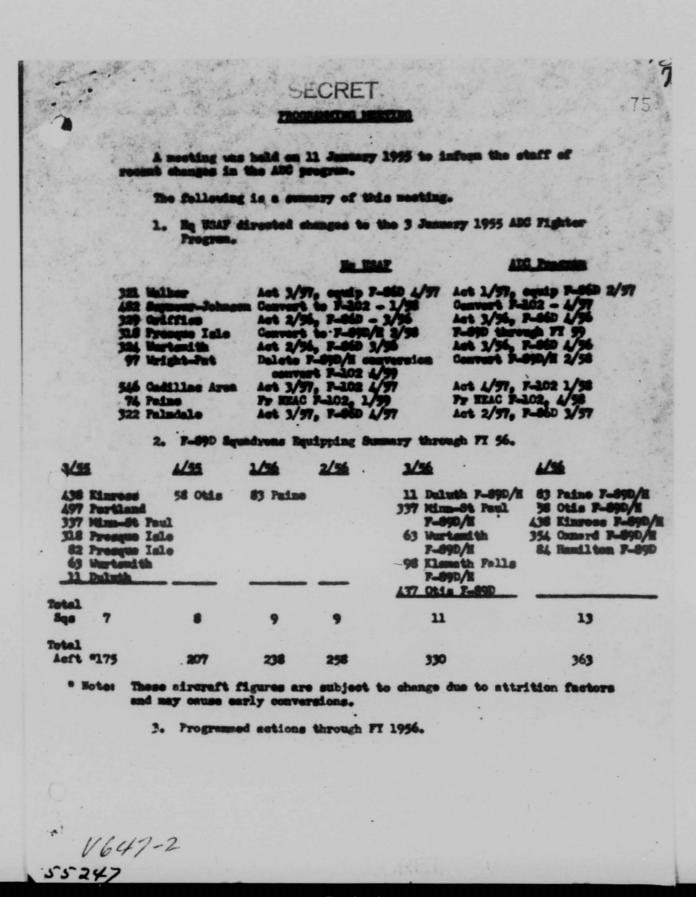

0 5 6 4

```
75 76
               1/56
                                    3/36
                                                              3/56
                                                                                        4/36
                                                              11 Duluth F-89D/H 76 Dover F-94C
337 Minn-St Faul 482 Segment-Johnson
F-89D/H F-86D
              83 Paine F-89D
                                    49 Hansoom F-86D
                                    319 Westover F-86D
                                                             P-86D
                                                                                       354 Oxnard F-89D/H
                                                              327 K. I. Sauyer
                                                             F-94C
498 Bunker Hill
F-94C
                                                              98 Elamath Falls
F-89D/H
538 Castle F-86D
   Note: Above indicates equippage of units. Activation and reorganization dates should precede equippage by at least 90 days.
          4. Changes in end FY 58 position by type aircraft.
          93 Kirtland
         98 Elsmath Palls
84 Hamilton
37 Burlington
49 Hammoos
         118 Presque Isle
97 Wright-Patters
  5. Information from Hendquarters USAF indicates an increase of five
              3 squadrons to be programed by end PT 58
2 additional squadrons by end PT 60 or sec
of aircraft possite.
         6. Missiles.
              TAIOS: 2 squadrons programed by end FT 58
5 squadrons programed by end FT 59
                The 10-cite consept for 5 TAIOS equadrons is not yet approved by Eq USAF.
              noming: 1 squadron programmed by end FI 5
V647-3
```

7. ACEN.

Air Divisions: 37th and 58th scheduled to activate Sep 55 (1/56) 85th and 20th scheduled to activate Nov 55 (2/56)

These activations dependent on BO dates which are currently estimated for Nov and Dec 55 respectively

Division boundary changes estimated to be effected March 1956.

First Phase ACSN: Reduced to a total of 41 sites, all to be operational by end FY 56.

Reduced to a total of 23 sites, 21 to be operational by end FT 56 and remainder in FT 57. Second Phase:

12 to be operational by end FY 56 and total of 24 by end FY 57. Third Phase:

Informal information from Hq USAF indicates approval of 21 Canadian sites, estimated to be operational by end FY 58. Fourth Phase:


Cap Fillers:

125 by end FY 56 268 by end FY 57 423 by end FY 58

Texas Tovers: 1 by end FY 56 and all 5 by end FY 57

All phases on schedule. First direction center will be activated May 1956, to be operational March 1957. Locations for 16 DC's and 4 CC's SAGE Programs

have been approved by Hq USAF.

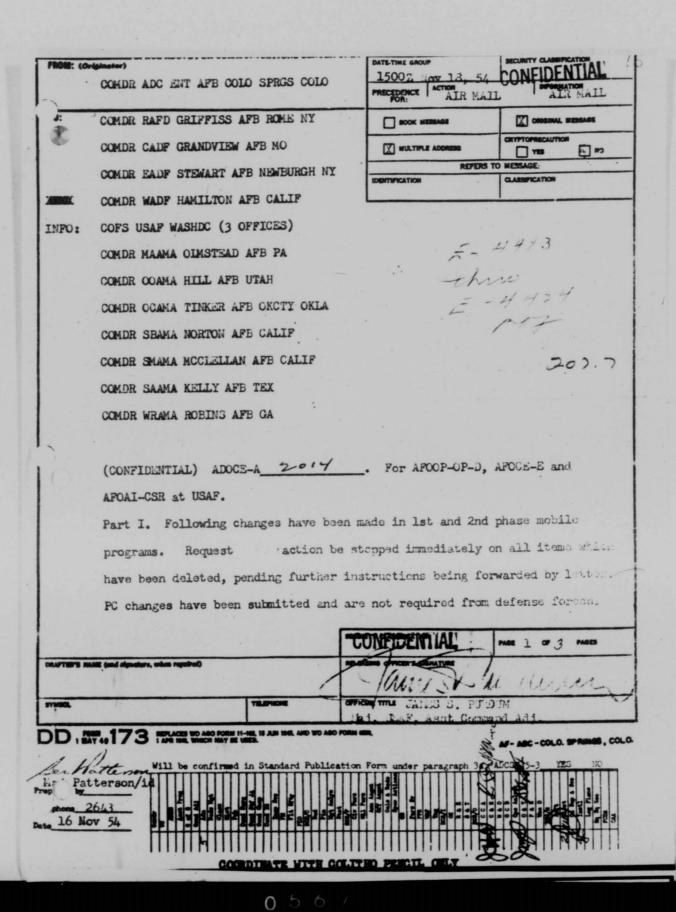

M-111

M-113

1 ea TPS-10D

1 ea TPS-10D

76

	ADOCE-A_	CONFIDENTIAL				
*						
2	Site	Delete	Add			
	M-89	1 ea AB-396 for MPS-11	1 ea AB-397, with 25 ft AB-16 for MPS-11			
	M-92	1 ea Temp TWR for MPS-7	1 ea Arctic TWR for MPS-7			
	M-102	l ea MPS-ll (Arctic) l ea TPS-lOD l ea Temp TWR for TPS-lOD l ea Temp TWR for TPS-lD	l ea FPS-3A (Arctic) l ea FPS-6 (Arctic) l ea Arctic TWR for TPS-10D l ea Arctic TWR for TPS-1D			
	M-114	l ea MPS-11 (ADC) l ea TPS-1D	l ea FPS-8 (Navy) l ea FPS-8, with AB-397 and 75 ft AB-16 l ea MPS-14, with AB-258 and 75 ft AB-16			
	M-120	l ea TPS-1D l ea TPS-1OD l ea Temp Tower for TPS-1OD	l ea MPS-11 (Arctic), with AB-313 l ea FPS-4 (Arctic) l ea Arctic Tower for TPS-10D			
	SM-139	l ea Temp Tower for FPS-4	l ea Arctic TWR for FPS-4			
	SM-149	l ea MPS-11 (Arctic)	1 ea MPS-7			
	SM-153	l ea MPS-7 l ea MPS-14 l ea MPS-11 (Arctic) l ea Temp TWR for TPS-10D	l ea FPS-3A (Arctic) l ea FPS-6 (Arctic) l ea FPS-8 (Arctic) l ea Arctic Tower for TPS-10D			
	SM-157	l ea TPS-1D	1 ea MPS-11			
	Part II.	Following changes in radars will n	not require installation stoppage.			
		changes required.				
	Site	Delete	Add			
	M-95	1 ea TPS-10D	1 ea MPS-8			
	M-96	1 ea TPS-IOD	1 ea MPS-8			

page 2 of 3 pages

1 ea MPS-8

1 ea MPS-8

CONFIDENTIAL

CONFIDENTIAL

COMPANY CONTRACTOR PROPERTY.	
Delete	Add
1 ea TPS-10D	1 ea MPS-8
1 ea MPS-14	1 ea FPS-6
1 ea TPS-10D	1 ea MPS-8
1 ea TPS-10D	1 ea MPS-8
l ea TPS-10D (ADC)	1 ea MPS-8 (ADC)
l ea TPS-10D	1 ea MPS-8
1 ea TPS-10D	1 ea MPS-8
1 ea TPS-10D (ADC)	1 ea MPS-8 (ADC)
1 ea TPS-10D	1 ea MPS-8
1 ea TPS-10D	1 ea MPS-8
1 ea TPS-10D	1 ea MPS-8
1 ea TPS-10D	1 ea MPS-8
	l ea TPS-10D l ea MPS-14 l ea TPS-10D l ea TPS-10D l ea TPS-10D (ADC) l ea TPS-10D

page 3 of 3 pages

CONFIDENTIAL

CONFIDENTIAL

HEADQUARTERS
AIR DEFENSE COMMAND
Ent Air Force Base
Colorado Springs, Colorado

FILE MUMDER 214

ADOCE-A

24 November 1954

SUBJECT: (Unclassified) ADC Revised Radar and Radar Tower Requirements

TO: All Recipients

1. The attached revised radar and radar tower requirements for permanent and semi-mobile radar programs are forwarded for information. This headquarters has submitted PC changes to authorize all equipment shown. Changes to the PC are not required from defense forces.

- 2. Defense forces will take immediate action to determine if additional real estate is needed at sites where radars have been added. Action will be initiated by defense forces to procure such land.
- 3. The Permanent Program equipment list included two AN/FPS-6 radars for each direction center in the first SAGE sector. AN/FPS-6's will be added later for subsequent SAGE sectors.
- 4. In addition to the radars listed, one AN/TPS-10D will be installed as interim equipment at M-116, Cherry Point MCAS, N. C., and M-117, Roanoke Rapids, N. C. This radar has been included in the PC. All interim height finders programmed for P-sites will remain in use until all programmed permanent height finders are operational. At that time, defense forces will request disposition instructions for the interim equipment.
- 5. Towers for the following radars are to be installed by AMC unless the defense force, the AFIR and the AMA concerned agree that the Corps of Engineers can install the towers without delaying the programmed operational date:

Radar

M-96, Almaden, Calif.			1		AN/	FPS-8
M-103, N. Concord, Vt.			1		AN/	FPS-6 (Arctic
M-112, Hunter AFB, Ga.			1	-	AN	FPS-8
M-113, Charleston AFB, S.	C.		1	-	AN	FPS-8
M-115, Ft Fisher, N. C.						MPS-11
M-116, Cherry Point MCAS,	N.	C.	1	ea	AN	/FPS-6
M-117. Roanoke Rapids. N.						FPS-6

BY ORDER OF THE COMMANDER:

8 Incls (see next page)


V-765-1x


Site


JAMES S. PURDUM Major, USAF


CONFIDENTIAL

7101

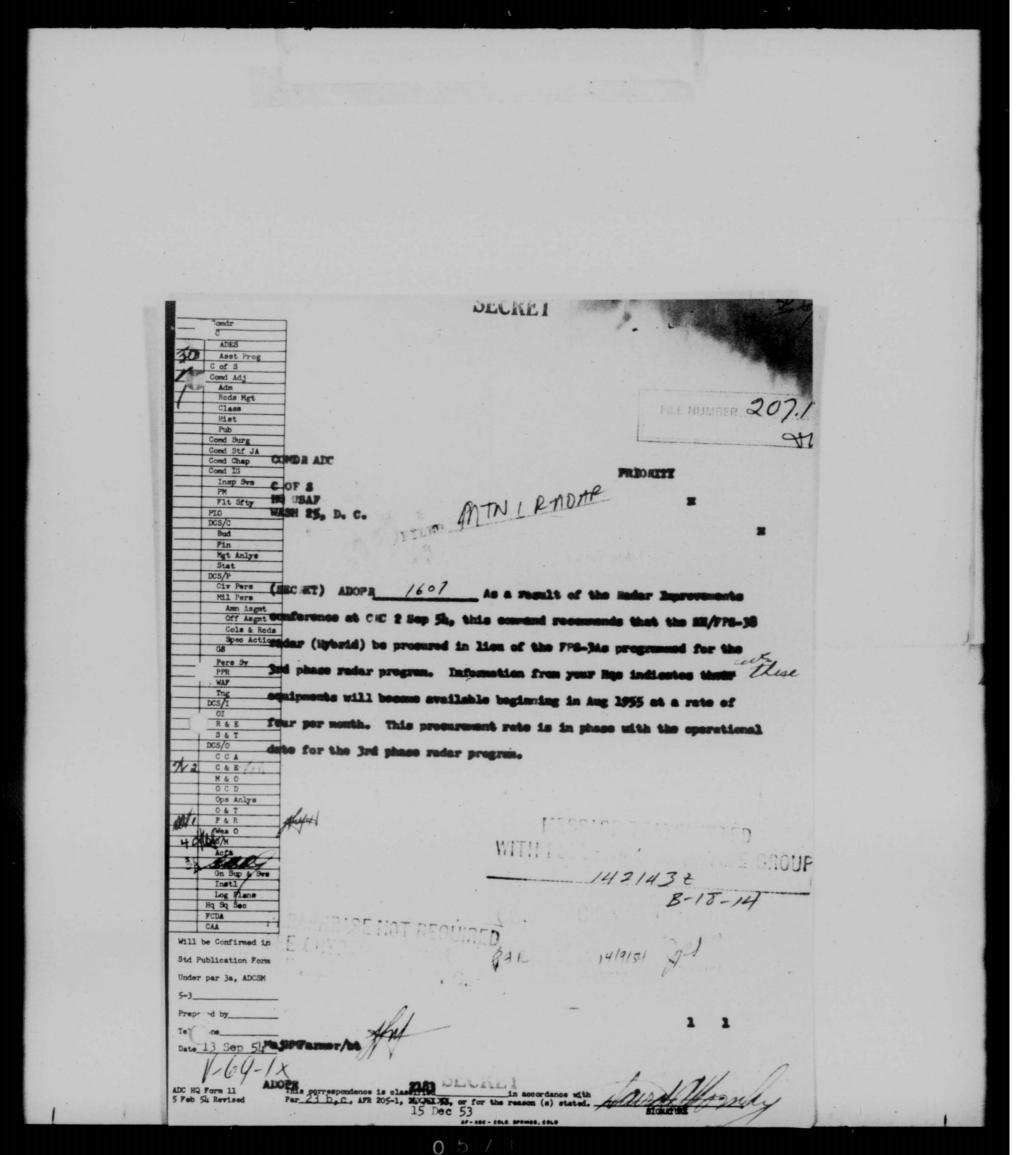


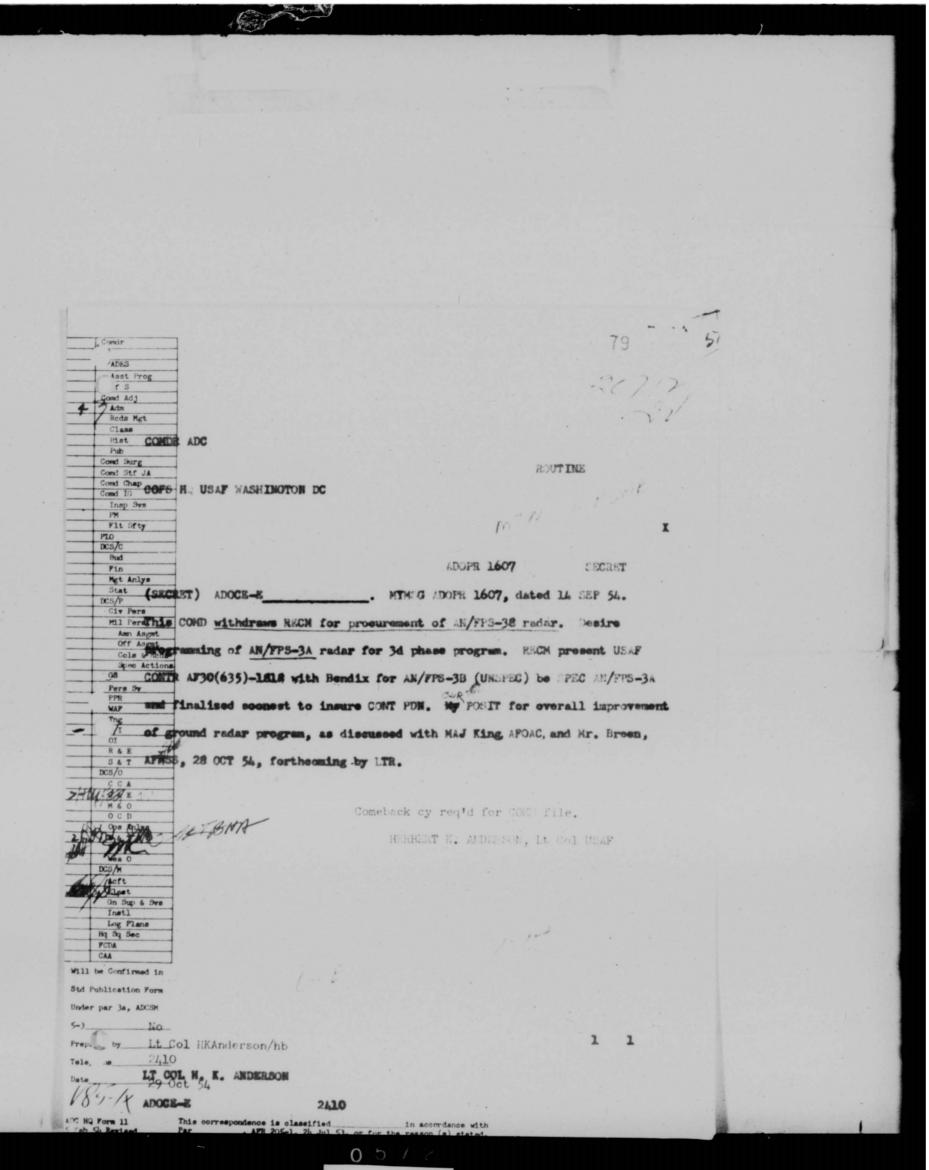


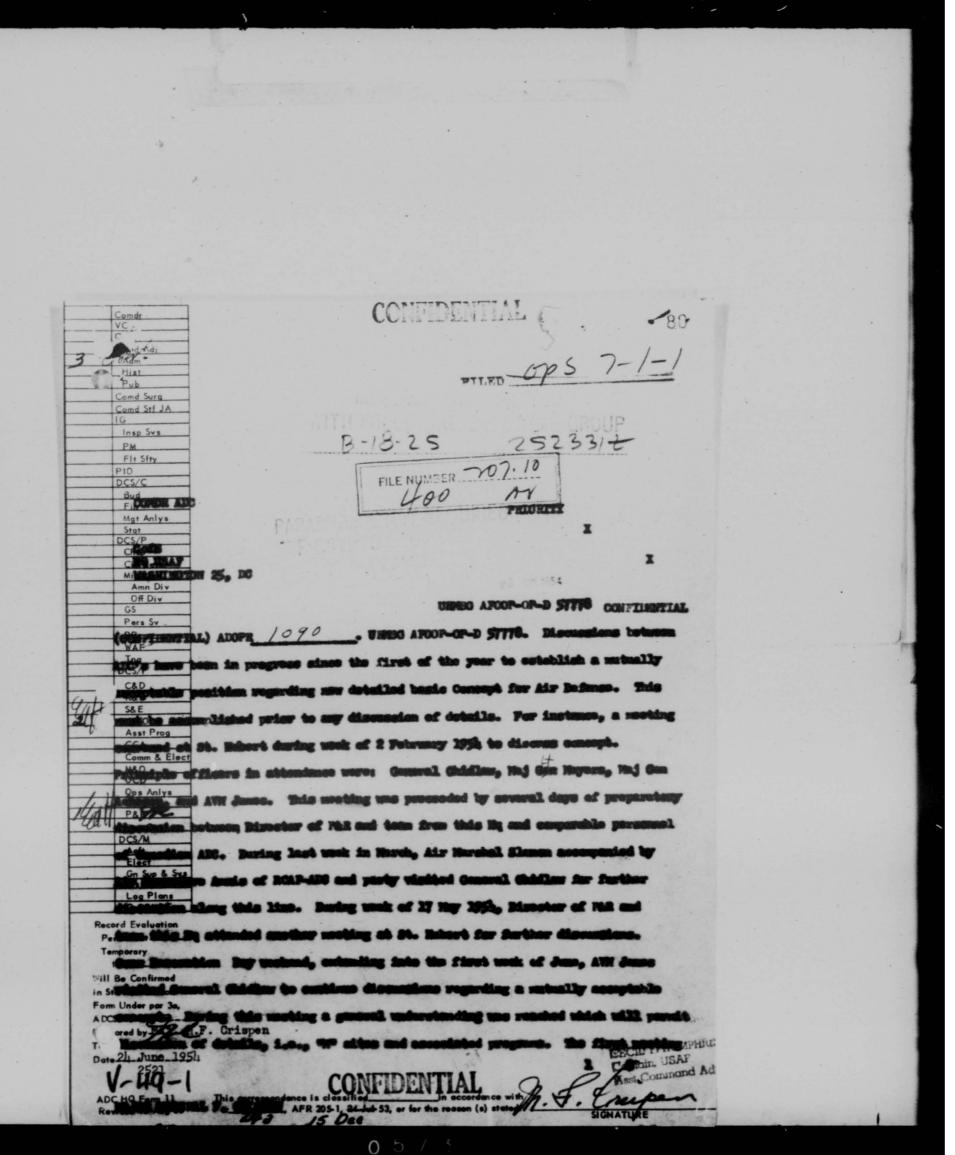

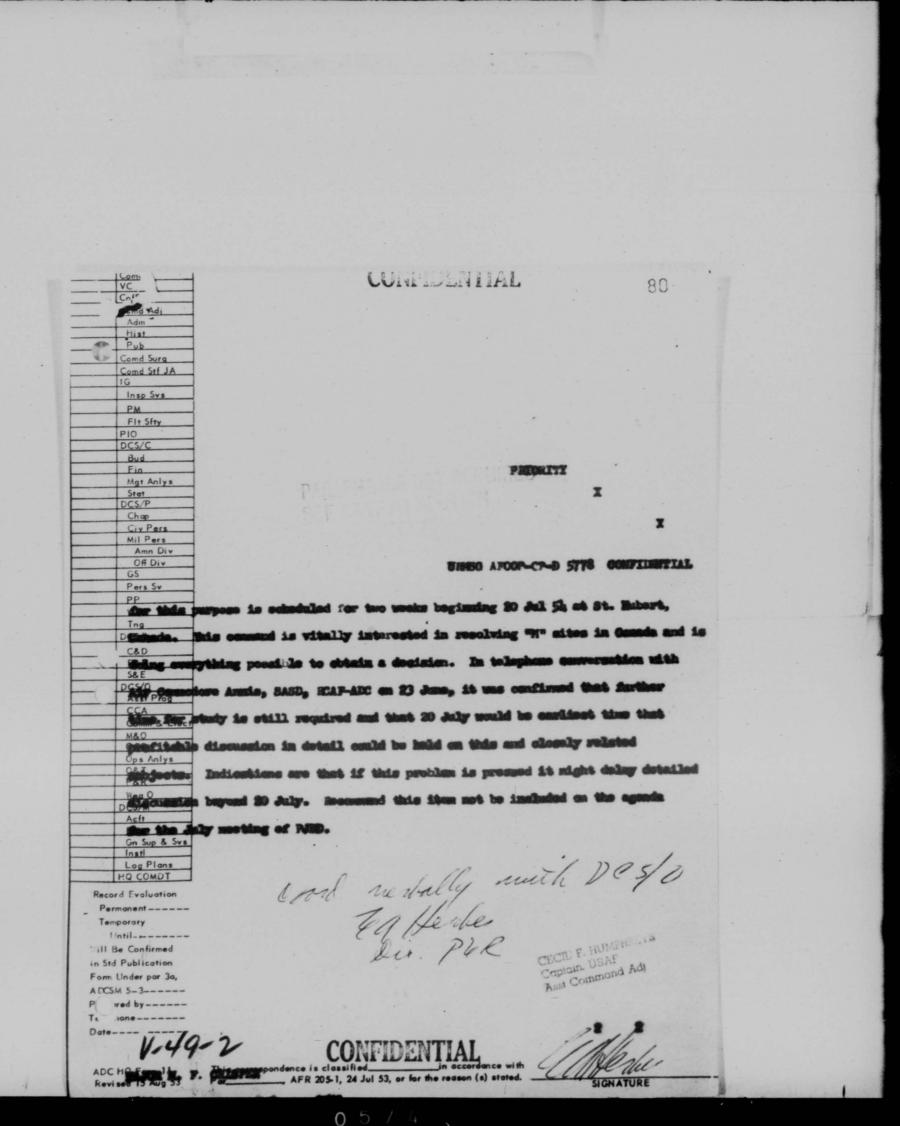


			2 <
	CONFIDENTIAL SIZE OF SECTION DEFORE	80	
	SIME, CRYPTO SECTION BEFORE CLASSIFYING PARAPHRASE IS NOT REQUIRED A CLASSIFY INC.		
	COPY OF INCOMING CLASSIFIED	i	
	COPY OF INCOMING CLASSIFIED	MESSAGE	
	The Paris Control of the Control of		
	of the state of th		
	26. 26. La 1. 11 (12 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		
		23	
	100 001		
	1-44-3x		
	ADC Hq-O-AG-Form 22 9 April 53	This is	
1	9 April 53	This document consists ofpa	

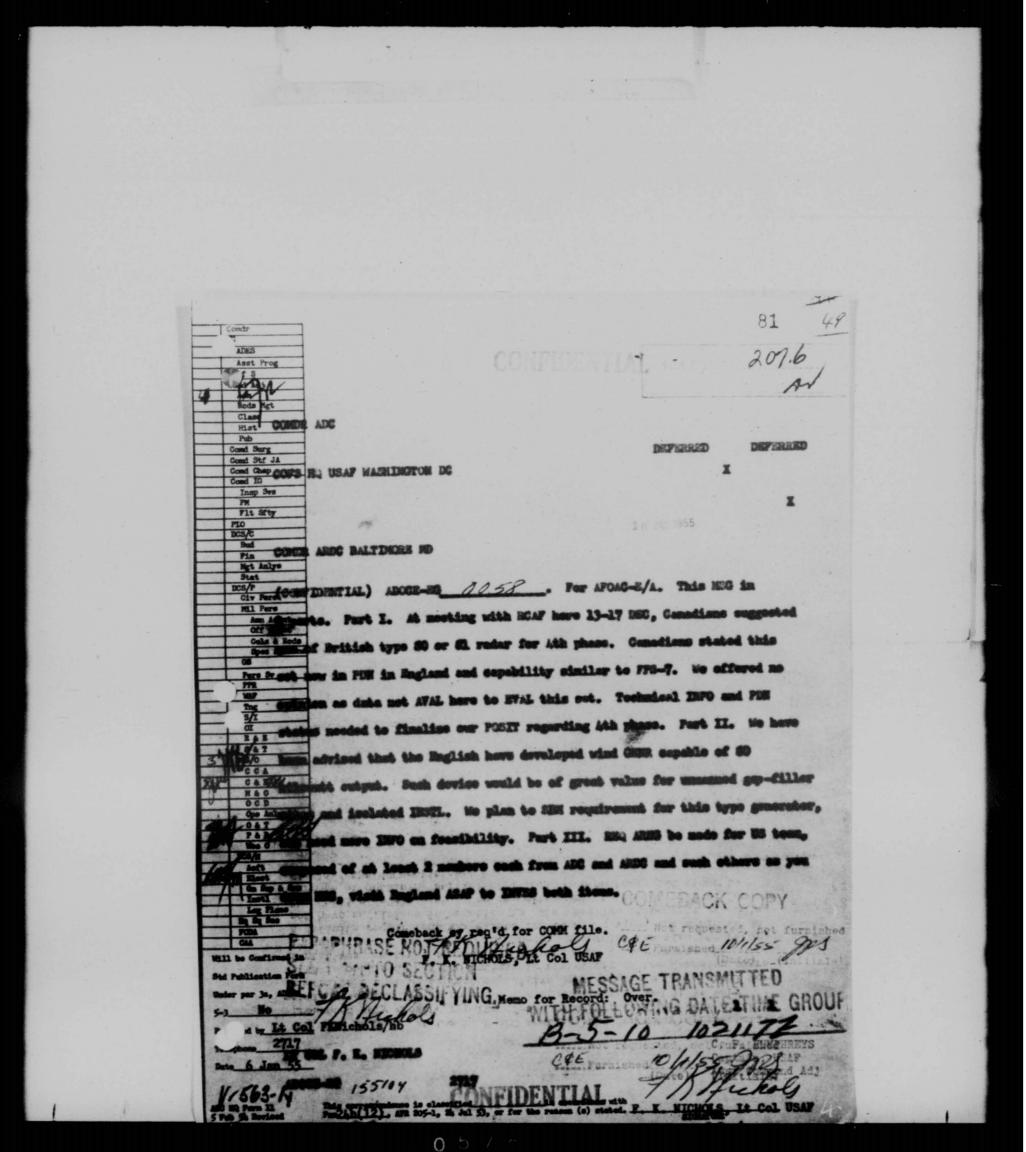

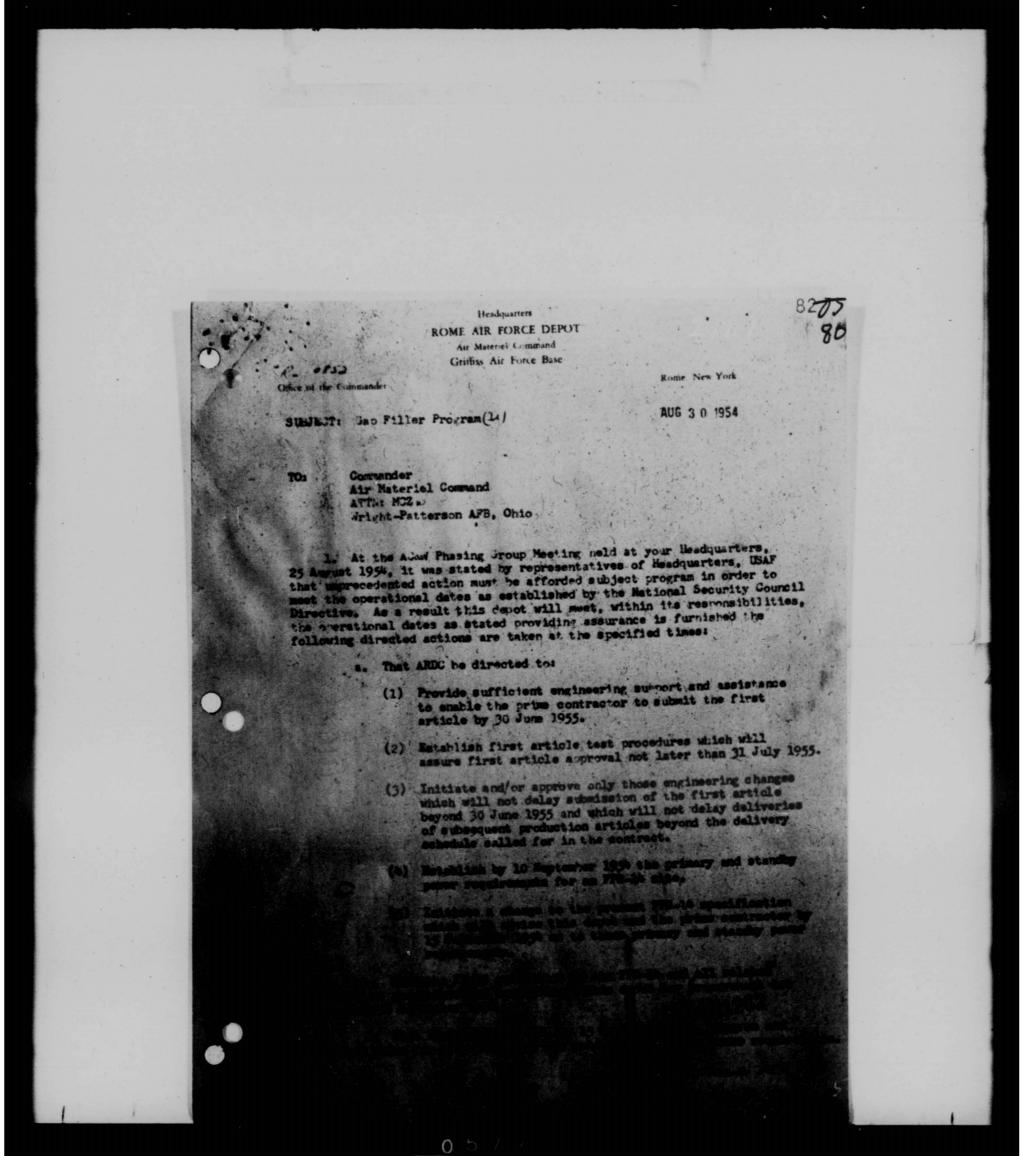

THIS PAGE IS DECLASSIFIED IAW EO 13526

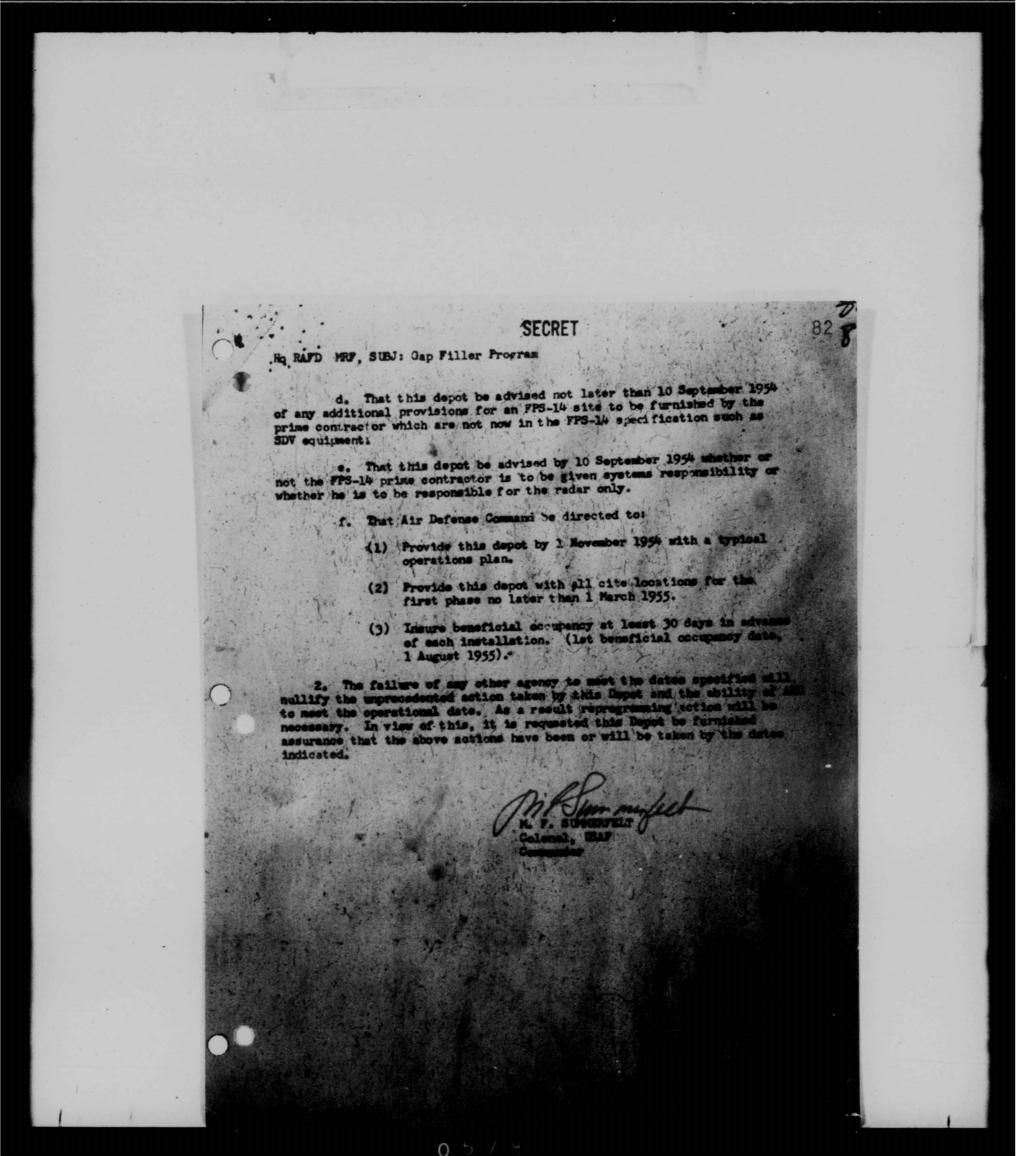

THIS PAGE IS DECLASSIFIED IAW EO 13526

· Je.

SECRET

82 82

HQ HAFD, TO COMDR, AND 30 Aug 54 Subj: (U) Gap Filler Program

MOSWIT

lst Ind

SEP : 1914

H. AVC, Wright-Patterson Air Force Hase, Chio, & September 1954

TO: Director of Communications, Headquarters, USAF, Attn: AFOAC-B/A, Mashington 25, D. C.

- 1. Basic communication is forwarded for necessary action in accordance with agreements of 25 August 1954 at A.C. F. W. Phasing Group meeting, H.J. A.C. and 2 September 1954 meeting at Cambridge Research Center, Bedford, Massachusetts.
- 2. Request H. ACC be advised of action to be taken on power equipment requirements. Reference paragraph 19(4) and (5) of basic communication, Home Air Force ... that been sivised to proceed with procurement of FPS-14 in accordance with present specifications which do not include power units, Slower Lown Video or other system responsibilities.
- 3. Request % AMC to advised at the earliest possible date if ARDC and ADC can comply with the requests in basic letter.

FOR THE COMMANDER:

Fucher & Ufiller of Manual or Programming

SECREI

DEUTEL

82

B/Mar for Ma RAPD, Oriffine AFB, M.Y., Subj: "(U) Cop Filler Program", dated 30 Aug 54

AFORC-E/A .

2nd 2nd

Dopt of the Air Ferce, Hq UMF, Washington 25, B. G. 2

24 SEP 1954

TO: Commander, Air Material Command, Wright-Sutterson Air Force Base, Chio

- 1, Air Research and Development Command and the Air Defence Command have been queried, under separate exprespondence, as to their expeditation to complete the required artisms by the dates indicated in prospection 1.a.,(1), (2), (3), and 1.f.,(1), (2), and (3), backs correspondence. In view of the ungrant of this and other Air Defence programs, direct confidence with other commands must be established in order that programs dates one to not. This backquarters should be kept advised of the programs resulting from those coordinated offerts.
- 2. The primary and standby power requirements for an FRS-14 site are as follows:
- a. there reliable commercial power is available one (1) standby diesel unit will be provided.
- b. Where marginal or unreliable commercial power is available two (2) dissel units will be provided.
- e. Where commercial power is not available three (3) dissel units will be provided.
- The procurement specifications for the FFS-L4 are being emended to implude two (2) suitable dissel power units per set.
- 3. This headquarters believes that a "Rainge Concept" is especial in the Cap Piller Index Program. At the 2 September 1954 sweting at Air Perce Contridge Research Contex such a package concept was discussed. This concept covisions a supplementary agreement with the AN/FIS-14 contractor to provide the following:
- a. Engineering Services This would provide that the contractor will assume responsibility for the initial integration of the electronic, electrical, and power driven equipment which will be housed within the building at the Gap Filler site.
- b. <u>Dissel Generators</u> Recommend from the Air Force standard family, a modified dissel-driven generator of suitable especity to entisty the power requirements of the Cap Filler station. In this commention,

00000002

V-56-6

SEGRET

B/Itr fr Hq RAFD, subj: "(U) Gap Filler Program", dtd 30 Aug 54 (1st Ind Contd)

a 60-KW unit should be furnished if it is found that this supply can be made to operate adequately with the magnetron FPS-14. If this is found technically impractical, a 30-KW unit will be used for the magnetron sets, to be replaced with 60-KW units as the klystron modification program becomes available.

4. ARDC and ADC have been requested to furnish the information as outlined in pargraph 1 direct to your headquarters.

BY ORDER OF THE CHIEF OF STAFF:

 Inels
 Cy ltr to ARDC, subj as abv
 Gy ltr to ADC, subj as abv

When inclosurers to. Blate is (are withdrawn or not blacked, the classification or influence, the will be changed to confidential in accordance with par 25e. FR 205-1

V156-7

82 .

24 SED 1954

APOAC-E/A

SUBJECT: (U) Gap Filler Radar Program

TO: Commander

Air Defense Command Ent Air Force Base

l. Your attention is invited to Inclosure #1, basic letter from Rome Air Force Depet (RAFD), subject: "Gap Filler Program", dated 30 August 1954 with two (2) indorsements.

- 2. In order that programmed dates established for subject program can be met request Headquarters Air Materiel Command (AMC) be furnished the following information:
- a. Typical operations plan for a Gap Filler Radar Station by 1 November 1954.
- b. Site locations for first phase (125 stations) by 1 March 1955.
- c. Insurance that benificial occupancy can be effected at least thirty (30) days in advance of each installation. (First B.O. date, 1 August 1955).
- 3. Further, request courtesy copy of information furnished Air Materiel Command (AMC) be forwarded this headquarters.

BY ORDER OF THE CHIEF OF STAFF:

2 Incls
1. B/ltr fr RAFD to
AMC, w/2 Inds
2. Cy ltr to ARDC,
subj: as abv

control to Confidential in

new with pur 20+, All 03-1

0004365

V-56-2

SECHEL

APOAC-S/A

SUBJECT: (U) Gap Filler Radar Program

TO

Germander
Air Research and Development Command
P.O. Hox 1395
Baltimore 3, Maryland


- l. Your attention is invited to Inclosure Al, basic letter from Rome Air Force Depot (MAFD), subject: "Cap Filler Program", dated 30 August 1954 with two (2) indorsements.
- 2. In order that programmed dates established for subject program can be met request Headquarters Air Materiel Command (0.0) be furnished the following information:
- a. Assurance that all possible engineering support and assistance will be given to enable the prime contractor to submit the first AM/FPS-LL by 30 June 1955.
- b. Assuming first article delivery by 30 June 1955 establishment of first article institution of test procedures which will assure first article approval not later than 31 July 1955.
- c. Assurance that only these engineering changes will be approved which will not delay submission of the first article beyond 30 June 1955, and which will not delay deliveries of subsequent production articles beyond the delivery schedule called for in the contract.
- 3. Further, request courtesy copy of information furnished Air Material Command (AMC) be forwarded this headquarters.


BY OF DEF OF THE CHIEF OF STAFF !


2 Incls
1. B/ltr fr RAFD to
AMC, w/2 Inds
2. Gy ltr to ADC,
subj: as abv


July 1-56-8x


SECRET

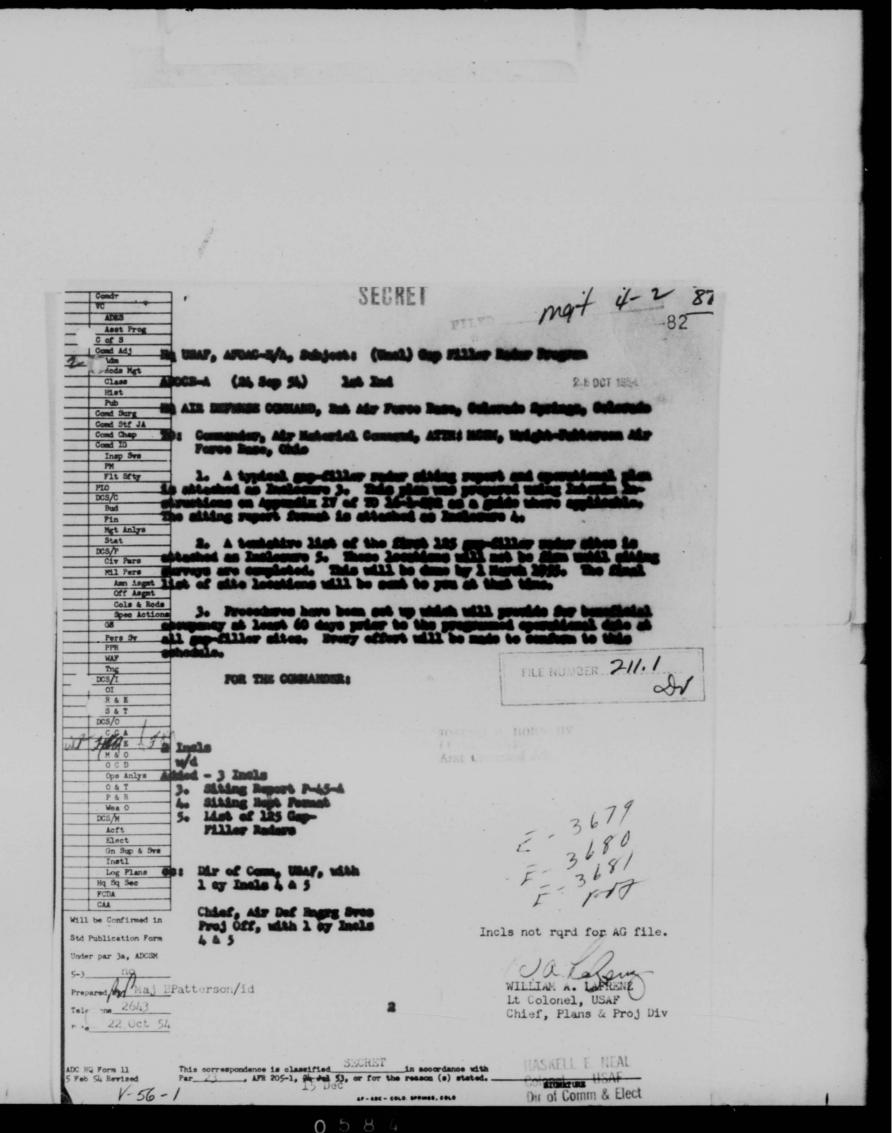

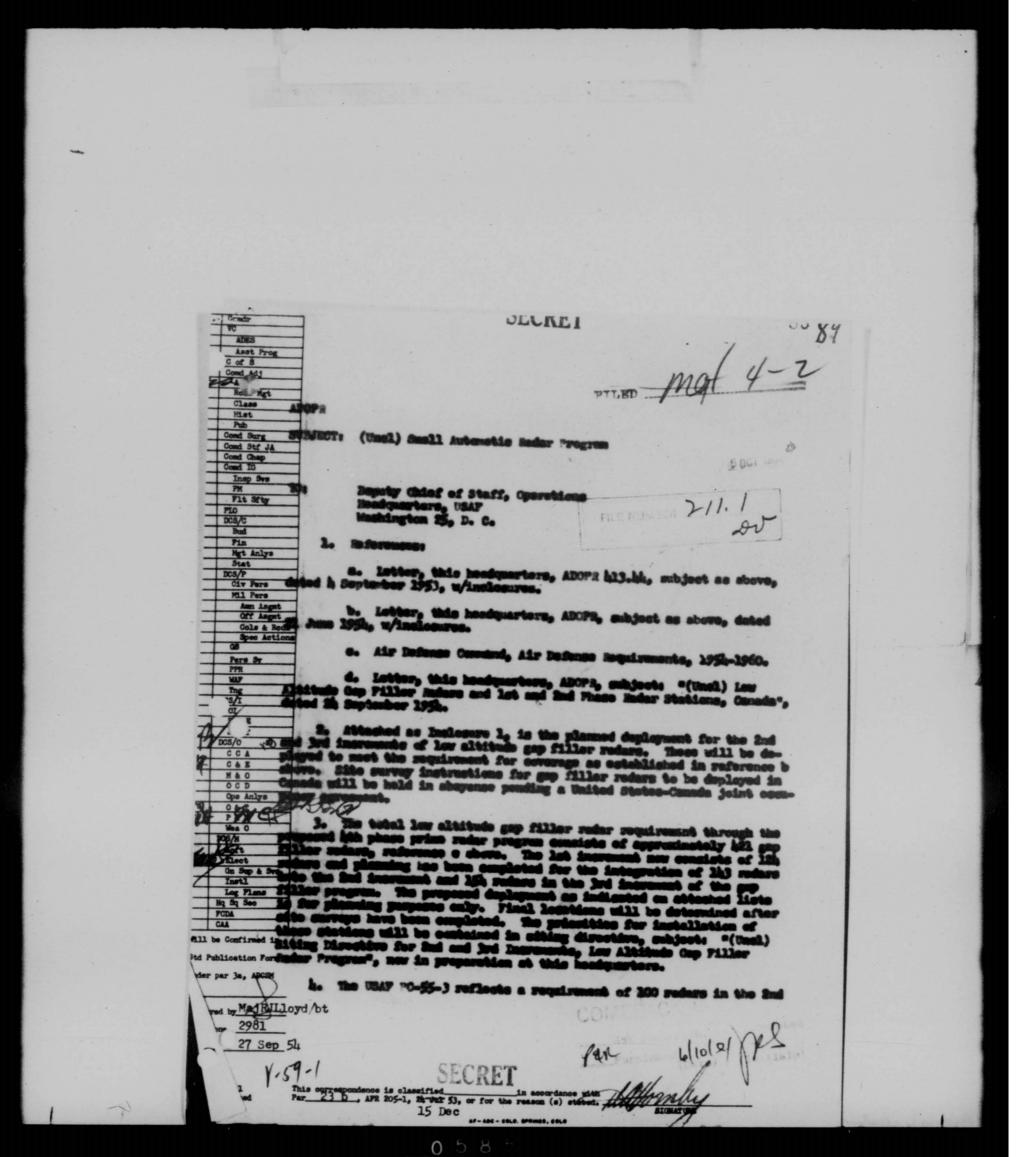


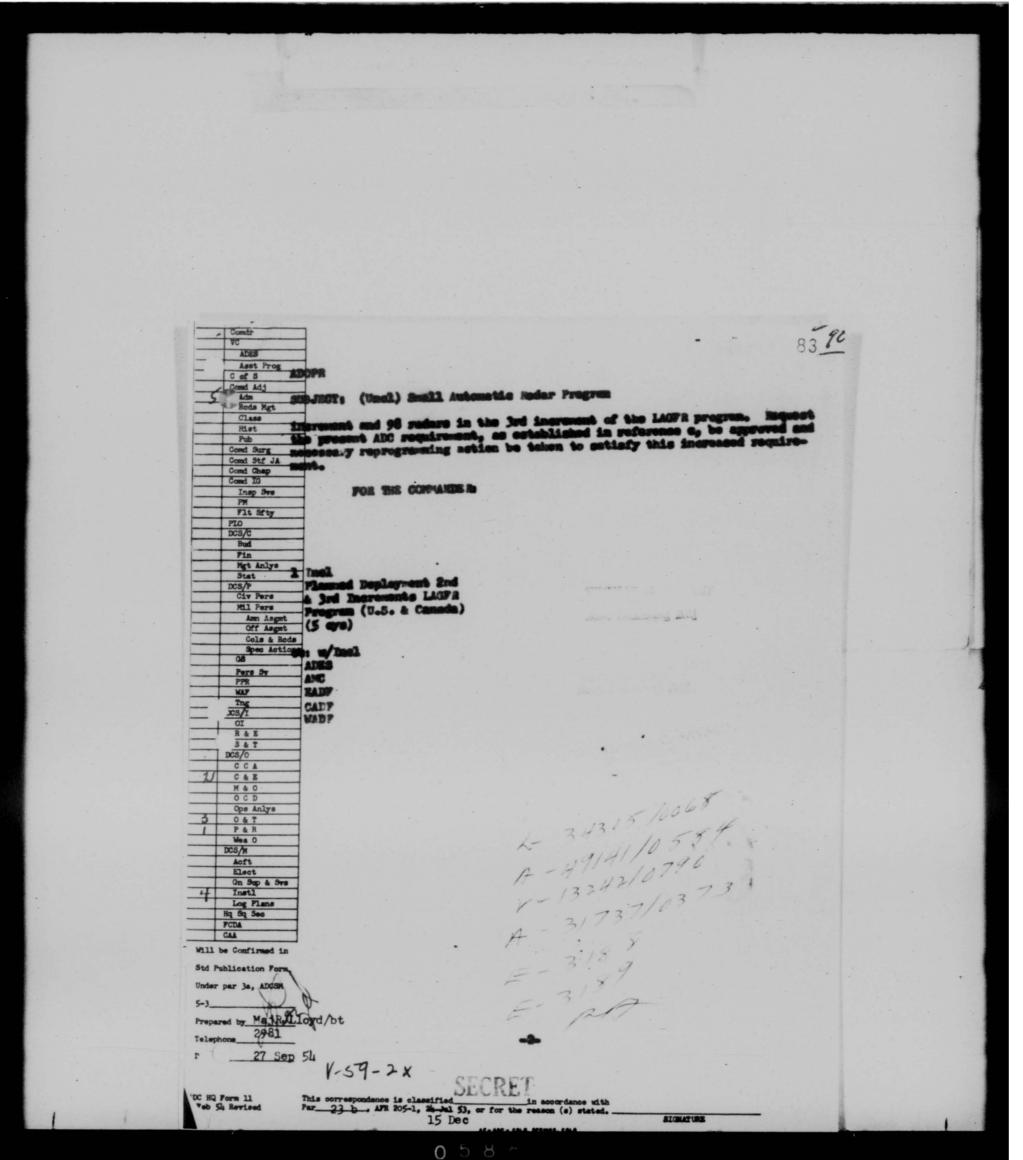


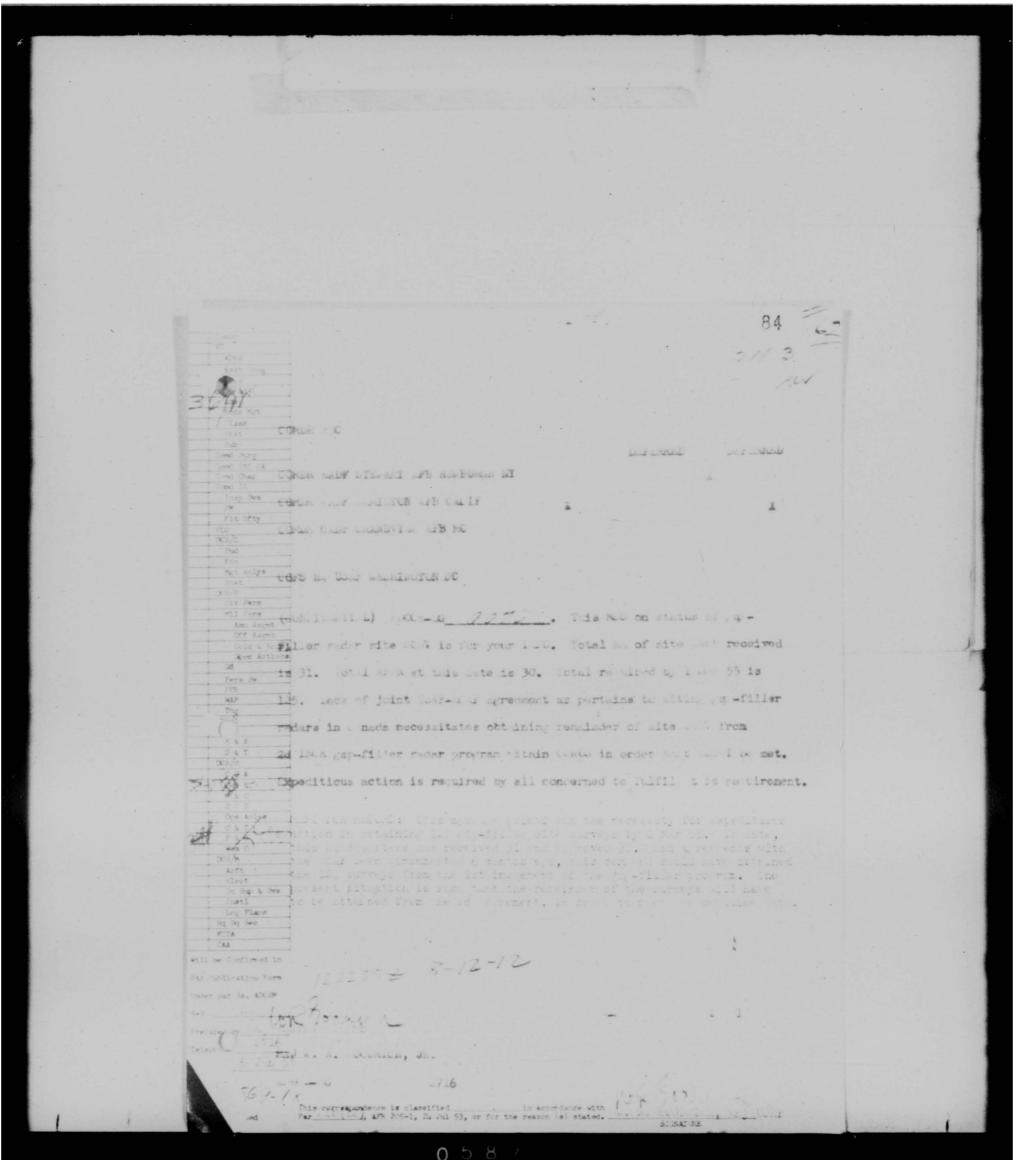


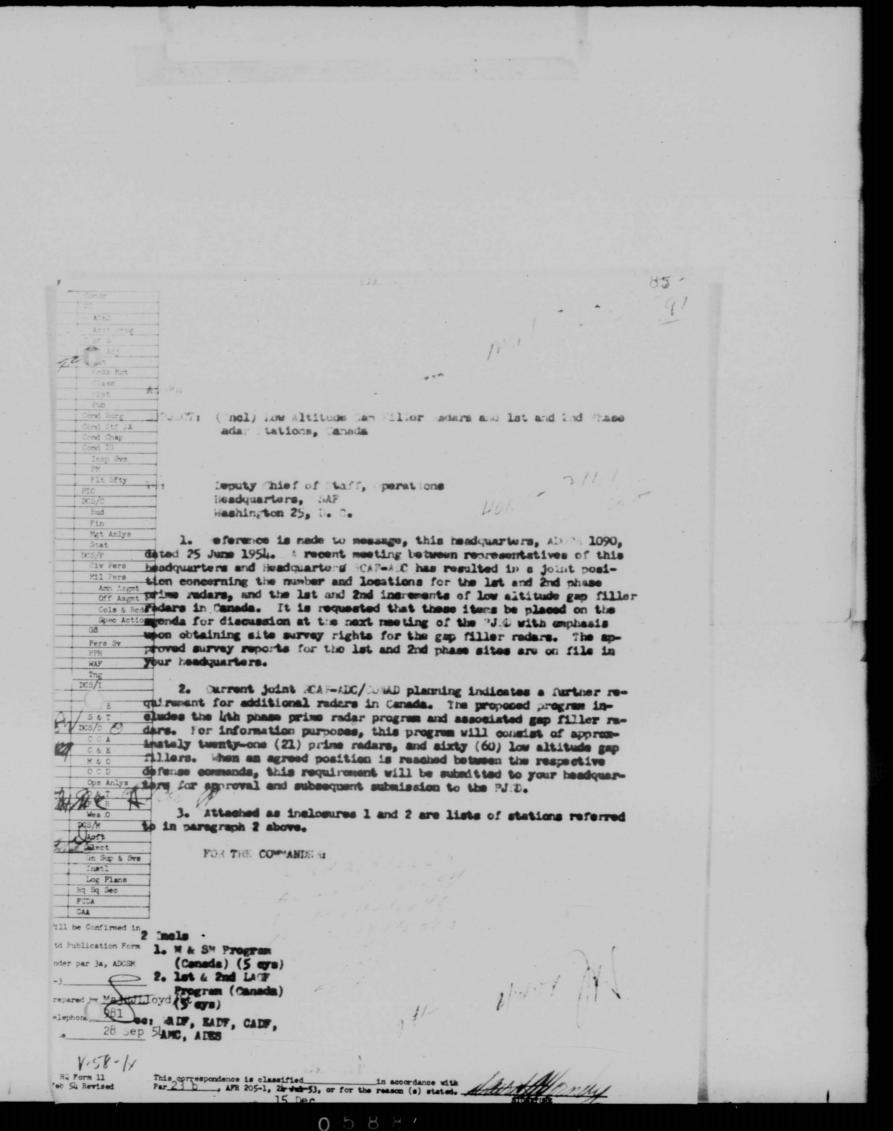

THIS PAGE IS DECLASSIFIED IAW EO 13526

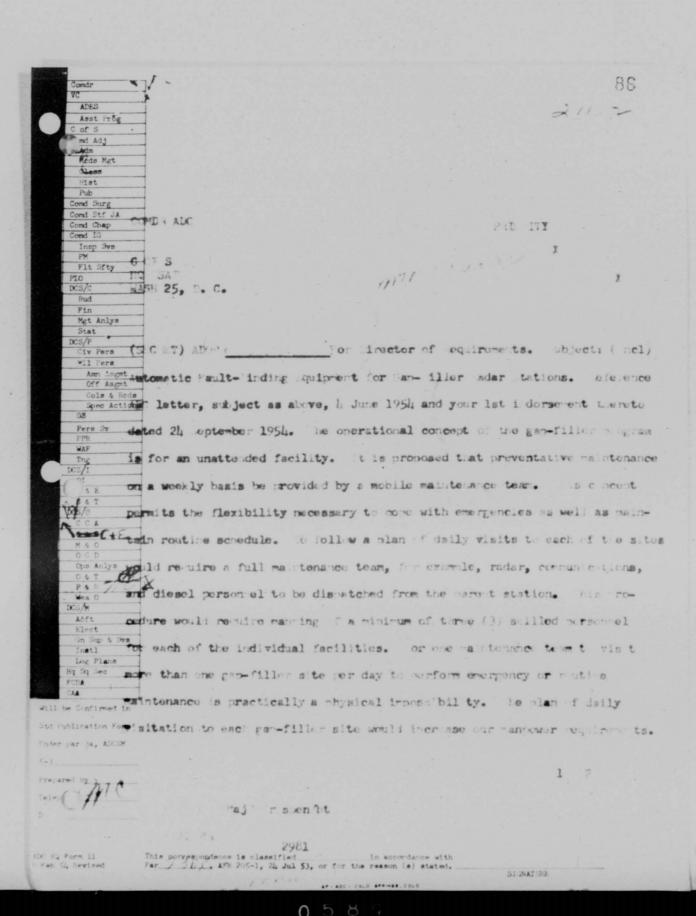

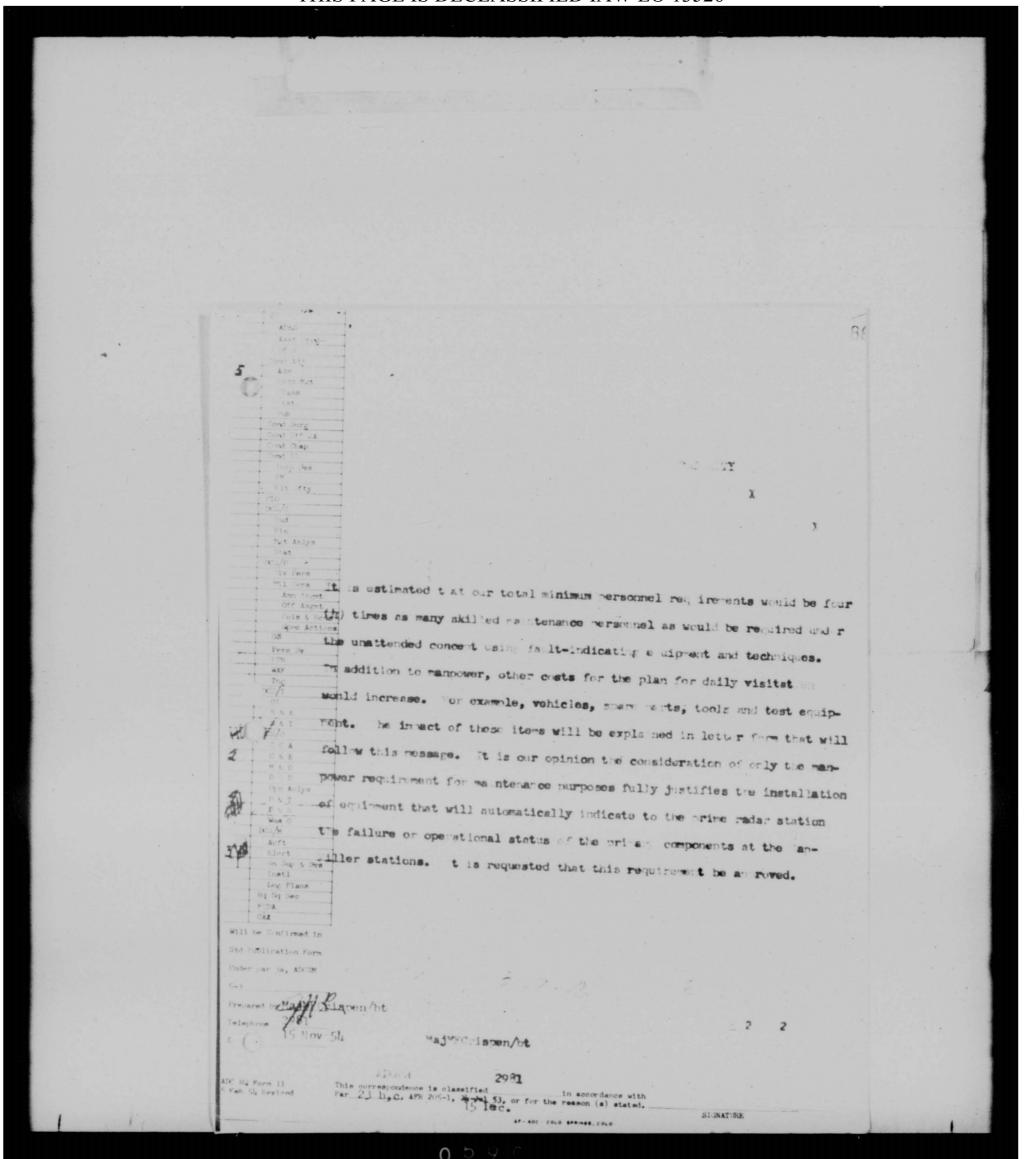

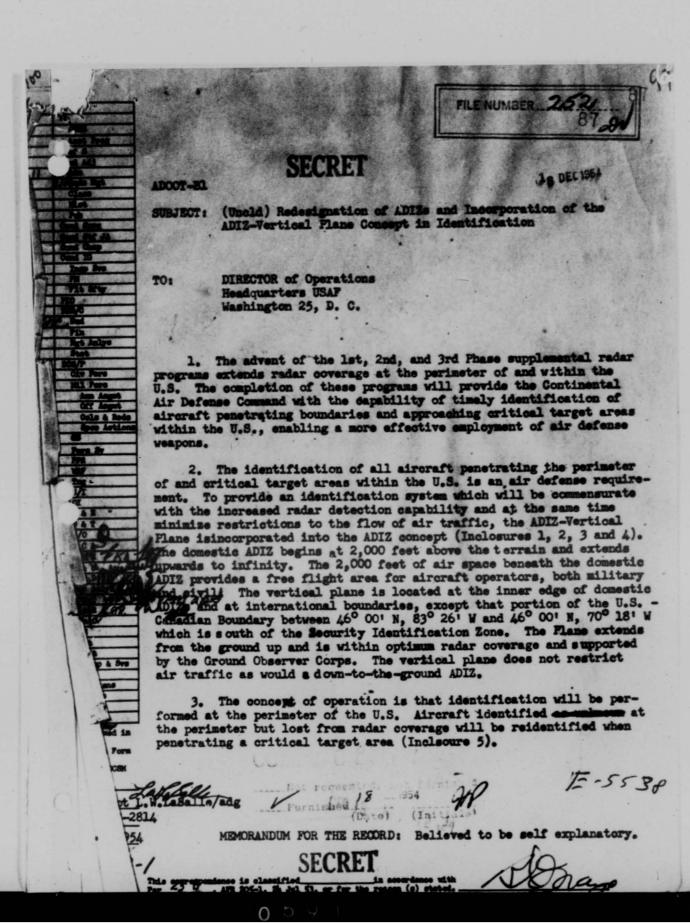

VD005-ET

(Uneld) Redesignation of ADTEs and Incorporation of the ADTE-Vertical Please Concept in Educatification

- 4. To achieve this operational capability, a redesignation of ADIEs and designation of ADIE-Vertical Flames are necessary (Incleasures 2 and 4). The locations of proposed ADIEs and ADIE-Vertical Flames are based on the following factors:
- a. The requirement for identifying all aircraft penetrating the perimeter of or critical target areas within the V. S. This requirement includes the accomplishment of identification as far as possible from such areas and from the ground up.
- b. Radar severage as computed when programmed radars are installed and operating.
- o. The need for minimizing restrictions to friendly air
- 5. A fund requirement for \$3,277,000,00 with which to meet ANES, GAA personnel and communications corts during Fiscal Year 1996 was included in our Fiscal Year 1996 budget estimate submitted to your headquarters 20 July 1954.
- 6. The CCC expansion approved by your handquarters is a partinest feature of this Identification Flam. Recognition and correlation are being performed by the CCC and implementation of the expansion program is under way. Now areas of CCC are correlated to the proposed ANISO.
- 7. Although this Eduntification Flammas very for eross burder implications, the concept has been presented to representatives of the RGAF ADC and formal conservence is expected shortly. Any changes resulting will be forwarded separately.
- 8. It is estimizated that minor revisions will be required as the reder progress progresses. My changes effecting the everall emospt will be coordinated with your headquarters.
 - 9. Request that mosessary action to taken to:
- a. Coordinate the ADIS and ADIS-Vertical Plane concept with
- b. Neve ANTE and ANTE-Vertical Planes designated as described in Inclusive 2,
- o, Have the Remville ANIX shelished consurrently with effective date of accomplishment of paragraph 96,

ADOOT-80 (Uneld) Redesignation of ARIEs and Incorporation of the ARIE-Vertical Flome Ocnospt in Identification d. Revise AFR 60-22, "Identification and Security Control of Military Miroraft," 26 January 1953, as recommended in Inchestre 6, draft proposal of revised AFR 60-22, e. Have Army Regulations 95-210, OFMAV Instruction 3722.5 and Part 620 of the Regulations of the Administrator changed to be a accord with the revised AFR 60-22. f. Africe the GAA of those ADAH unite which will be of an identification function (reference Inclosure 7). g. Inform the GAA of communication requirements between the AGMM units performing identification and appropriate ARTOG'S nee Inchesses 8). 10. Parther request that actions listed in paragraph 9 be completed order that this plan can become effective 1 September 1955.

SECRET

	WAVEL	SECURITY CLASSIFICATION (I/ only)	
DISI	POSITION FORM	X270 B	
FILE NO.	SUBJECT Summary of I	dentification Plan	
TO VC	FROM DCS/O	DATE 13 AUS 54 COMMENT NO. 1	
war and man	Attached is a summary of the Identiater Concept and GOC expansion as pand Council on 7 August 1954.	fication Plan for Double presented to the Air Defense	
		Monto	
	for	Brigadier General, USAF DCS/Operations	
2 Incl			
1.	Identification Plan for Double Perimeter Concept		
	Plan for GOC Expansion		
2.			
2.		7	
2.	LED O	P52	
2.	LED	P52	
2.	A A	P52	
2.	DED O	PSZ	
2.	LED	P5-2	
2.	LED	P5-2=	
2.	DED O	P5-2= B-63-1	
5-63-1	LED	B-63-1 25084	

and havings the state of the st			
DISPOSI	TION FORM	SECURITY CLASSIFICATION (If eng)	89
TLE NO.	SUBJECT Command Co	ouncil Meeting	
°LECS/O	FROM VC		OMMENT NO. 1
DCS/M DCS/I	× Comment		
DCS/P DCS/C			
IG Asst for Programs	ming		
	be a meeting of the Air Defe the Air Room. Subjects for		
for Double Perime	ter Concept and GOC Expans	sion. An outline of materia	ds to
be presented is at			
	A	1. Let	
2 Incl	FREE	BRICH. SMITH, JR.	
for Double Po	rimeter Concept Vice	General, USAF Commander	
2. Outline - GO	Expansion		
Note to DCS/C:R	equest a written summary of	the presentation he submi	
to this office 3 days	after the Council meeting to	or inclusion in council mee	ting
	7/		
017	110		
or or	sold with	"Note X see!	
	cangely with	art.	
meliny	an myen /	All re	
46372		AMPLEY W. MARTIN	
· 本立 *** (市) 表示解析: (2.25) / 原播(1.55) / 原播(2.52) / 原播(2.52)			THE RESERVE OF THE PARTY OF THE
	of Plant III. 1 (III II., Which May St. 1980.	Me/O Exec Officer	

IDEM/IFICATION IN THE COMBAT ZONE DURING THE PERIOD 1955-56

General Smith, Gentlemen:

The presentation that I am about to give is the same one that I gave to the Military Study Group in Ottowa, Canada on 14 August 1954.

Air Commordore Annis, Chief of Staff of the RCAF ADC gave the presentation on Identification in the Early Warning Zone, while I covered Identification in the Combat Zone. General Bergquist has asked me to outline briefly what the Canadian presentation covered. In general the R AF stated what they consider to be weaknesses in their system and that they are taking action to:

- Back up their CADIZ rules by suitable legislation and that further legislation similar to our SCAT plan be enacted.
- 2. Establish Multiple Corridor Identification Systems at Goose Pay and Gander.
- 3. Establish Air Movement Information Sections at the Lepartment of Transport Traffic Control Centers.
- warning lines, based on briefings at departure
 base, use of code words or maneuvers when penetrating
 the line. They also expressed a hope that SIF would
 be the answer for identification for military aircraft.

B-63-3

P. 8

All in all the Canadian ADC has gone right down the line with our concepts, and apparently are going to start actions to move forward.

The presentation that I am going to give this morning covers the identification of aircraft penetrating the boundaries of the North American Combat Zone. It also covers the identification of the aircraft flying within the confines of the Combat Zone.

Because of the large amount of air traffic flying within the combat zone, a volume beyond the identification and tracking capabilities of the present ACAW system, we have focused our attention on the identification of all aircraft penetrating the perimeter of the combat zone. Our experience in the last few years has given great promise of achieving a high degree of effectiveness in these areas where traffic is relatively light.

However, until we have achieved a tight ground-up detection capability around the perimeter of the combat zone so that we can detect all penetrations, and until we have reasonable assurance of a continuous tracking capability, it is essential to maintain a system for the re-identification of aircraft penetrating or flying within domestic ADIZs of the contat zone.

CHART 1

Here is a chart which shows the ADIZs and CADIZs as they exist today. It is required hat all aircraft penetrating the perimeter from the sea are the erossing the CADIZ, regardless of altitude of flight, must file a flight plan in order that identifies tion be accomplished. In the D. S., for givil aircraft,

15-63-4

those flying within or entering domestic ADIZs from the interior of the country, and flying at altituder above h,000 ft. are required to file a flight plan.

Present identification procedures depend largely on flightplan matching, wherein it is presumed that an aircraft arriving at a given location, flying at a pre-arranged brading and altitude and a pre-arranged time, is the one for which a flight plan was filed. A certa n amount of telerance (/ or -5 minutes and / or -10 miles) is permitted in pre-planned positions to allow for unpredictable variables such as wind and error in navigation. Pecause of these uncertainties, to other with the difficulties of accurate navigation over the oceans, it has been necessary to establish additional operational requirements for the pilots flying these routes. Under these requirements the pilot is assigned one or about five ten-degree-wide corridors converging on a navigational aid near the point where identification is desired. (Multi-corridors- refer to chart) The pilot must fly within this corridor and should come within ≠ or -10 minutes of his estimated time while within the corridor. He is also assigned a maneuver to perform on challenge if he should miss his corridor. This system, the multiple corridor system, is in operation at three points in the San Francisco, Los Angeles, and Boston areas, and is scheduled for operation at Atlantic City as soon as the navigational beacon is available. For the increased navigational efficiency which would result in fewer unknowns, each of these four corridors

B-63-5

3

will be equipped with consolan beacons by the first of July, 1955, according to latest SAF estimate, however, we are pressing for 1 April 1955. These beacons will have a range of 800 to 1500 miles depending upon their power output and will enable the pilot to fly accurately within his assi med corridor by the counting of a series of dots and dashes.

Approximately 30 percent of the oceanic arrivals were identified as DEKNOWNS before the use of this system. At present the percent of UNKNOWNS avera as about three percent of those overseas aircraft arriving at San Francisco and Los Angeles.

However the MCIS is still on a voluntary participation basis and while participation is 100% on the West coast, the bast coast has been a problem. EAD has started to take vigorous action in bringing participation at the Nantucket corridor to a higher level. At the present time participation is at about 70% with every indication of going higher.

CHA T II

Our next chart shows a general arrangement of the ADIZs as planned for 1955-56. You will note that in addition to the ADIZs shown on Chart I that domestic ADIZs consisting of double perimeters are drawn around critical target areas. These new ADIZs are compatible with our new radar installation program and the overall concept of operation has been discussed informally with the CAA and our Air Defense Forces. You will note that the eastern zone extends down through the center of the U.S. and then slants to

B-63-6

1,

88

perimeter is also established along the eastern boundary of the Western Air Defense Force area. These double perimeter ADIZs differ in configuration from the presently existing ADIZs in that the use of a vertical plane in conjunction with an ADIZ is envisioned. Briefly this ADIZ will begin at 2000 ft above the terrain and extend upwards to infinity. The vertical plane is the inner line of the ADIZ and extends from the ground up and is located within optimum radar coverage and supported by the GOC.

The purpose of the double perimeter plan is to provide a positive means of identification of all aircraft from the ground up and as far away from our critical target areas as possible, while at the same time imposing minimum restrictions on internal air traffic. Based on these requirements and upon the approved radar installations of the first and second phase radar program, these ADIZs were developed.

Initially, the identification function will not be done by
the Off-Shore Radar Installation, this function will be accomplished
by the Air Defense Direction Center in whose sub-sector the OffShore Radar Installation is located. Later if communications
permit and if operational experience indicates increased efficiency,
the identification function may be transferred to the Off-Shore
installation.

The third phase radar installation program is scheduled to virtually be completed by autumn of 1956. The third phase radar

B-63-7

program will provide a double perimeter along the southern boundary of the combat zone and along the border of the Northern edge of the combat zone between the Eastern and Western double perimeter ADIZs. These third phase ADIZs will accomplish their identification function in the same manner as described previously for the Western and Eastern double perimeters, however, it may be necessary to keep internal ADIZs for some time or until such tile as the perimeter ADIZ's have proven they can provide the positive identification capability we require.

PROBLEM AREAS

If sufficient warning information is available to enable the execution of the plan for the security control of air traffic (SCAT), the problem of internal identification in certain areas will be simplified to a great extent. In other areas, however, the grounding of non-essential air traffic is imperative if the air defense system is to be effective. In this connection the identification and movement of essential air traffic during a military emergency has erected certain problems which still must be resolved:

A. High priority flights. In order that the major air commands and the Navy may accomplish their mission during a military emergency, they have established a requirement for routes and navigational aids along these routes. In certain instances the routes have been slected without regard to critical target areas. Here is a sample of the routes which have been

6-63-8

6

remeated in the Western Air Defense Force area. While these routes in all probability will not all be used simultaneously or continuously, the problems that arise just trying to keep the plan current are readily apparent. It is also visualized that under certain conditions simultaneous im lementation of the various major commands emergency war plans will:

- (1) Cause saturation of the air space in certain areas.
- (2) Compromise ADC's requirement to control navigational aids (CONSLAAD Program).
- (3) Position tactical air traffic in a battle or threatened area.

To alleviate t is situation the following actions are being taken:

- A. Air defense forces are recommending routes and accompanying navigation aids which are compatible with the air defense mission and which well provide the necessary means for the other major air commands to accomplish their mission.
- B. Hq USAF has been requested to establish a priority system for use by the CAA during a military emergency.
- c. ADC-USAF is making a study to reduce the number of navigational aids required and is studying the possibility of operating those essential aids on a coded time basis.
- D. ADC-USAF has requested authority to divert essential air traffic away from battle or threatened areas during a military emergency.

B-63-9

88

SECRET

SAC GATEGORY 2 DEPLOYMENT FLIGHTS. A second problem which will exist in the event of hostilities is that SAC category 2 flights are classified as Top Secret, and therefore the flight plans must be passed directly from SAC Headquarters to Headquarters ADC for dissemination. Due to the high classification of these flight plans plus the large number involved, it is anticipated that a long delay can be expected at each headquarters through which the flight plans must pass prior to receipt by the using agency. This problem is further complicated due to the fact that the ADC using agency, the direction centers, are not cleared to handle Top Secret material. Since CAA is the only agency that can physically control the navigational aids required for these flights, it is not possible to make aids available to SAC without compromising the classification of these flight plans.

It does not appear to be realistic to use one system of flight plan correlation in peacetime and then attempt to revert to an altogether new system when an emergency is declared.

Recommendations have been made that USAF direct SAC to down-grade to unclassified those portions of their Category 2 flights pertaining to routes within the Combat Zone. In the event this is not possible, it is recommended that SAC pass their flight plans directly to the Air Defense Control Centers directly concerned. This would still result in a compromise of security, since the CAA personnel controlling aids are not cleared for Top Secret information.

B-63-10

As mentioned before, civil aircraft flying below 4000 ft are required to file flight plans when penetrating or flying within a domestic ADIZ. In order to establish a tight perimeter zone with a down-to-ground identification capability as shown on Chart II, it will be necessary to revise Part 620 of the Administrator's Regulations of CAA, amending the 4000 ft clause to read 2000 ft, and include the requirement for flight plans on all aircraft penetrating the vertical plane. The CAA will be briefed on this requirement, and appropriate action will be taken to request the CAA and Headquarters USAF to secure necessary amendments to existing regulations.

At the present time in order to accomplish identification of civil aircraft flying in ADIZs below 4000 ft, a voluntary flight plan reporting system has been developed and is in operation in the Green Bay and Minneapolis areas. This system consists of the private pilot placing a collect telephone call to the nearest COC Filter Center prior to his flight. This information is treated like a normal flight plan and is passed to the associated radar. Both the COC Filter Center and the radar then attempt to make appropriate correlation. It is contemplated that this system will be expanded throughout the domestic ADIZS.

Figure Deployment - Identification. One of the problems associated with the double perimeter concept is the lack of strategically located fighters to assist in the identification

8-63-11

-

PECKEI

88

of aircraft whose flight fails to correlate with the established identification criteria.

To alleviate this situation, action is being taken to request the major air commands and the Navy to provide a fighter alert committment at those locations along the double perimeter where ADC fighter locations are non-existent. A similar request has been made and approved by Headquarters USAF for the ANG to provide a fighter alert capability at 17 locations.

Gentlemen, this concludes a brief presentation of the identification systems for the combat zone. We feel these systems are compatible with the capability of presently planned and programmed equipments. In developing this plan consideration was given to plans and theories of the various methods of identification that have been made known to us.

The CAA has been informally briefed and has expressed acceptance of these identification systems as presented and we hope to obtain formal UNAF and CAA concurrence in the near future.

SECRET

B-63-12

10

88

THE GROUND OBSERVER CORPS EXPANSION PROGRAM

- 1. The identification plan just presented contemplates extensive use of the GOC for low altitude detection and identification in and around the ABIEs. With the addition of flight plan correlation at the filter centers, the GOC can assist in identification of low altitude penetrations of the ABIE and particularly those flights at low altitude which might cross the vertical AD¹Z plane. With flight information reporting, the GOC can filter out those flights permitted to operate freely below 2000 feet in the ADIE. Consequently, we feel an urgent requirement exists for the expansion of the GOC coincident with the expansion of the radar network.
- 2. Before taking up the details of the installations, communications, and military organisational requirements for the expansion, it may be well to review briefly the operational concept of the GOG for the vertical plane identification system. This concept requires complete detection and positive identification. In the absence of low altitude gap fillers, the GOG has proven its ability to assist in this function. The analysis of Operation SKY Scan indicates a high probability of detection by the GOC even with its present state of organisation. The flight plan correlation at the filter center, mentioned by Golenel Mayo, has proven so helpful in tests at Sacremente that the Western Air Defense Pages has expanded its use to the other filter centers in its area. Similarly, the voluntary use of flight information reporting to the filter centers by light planes as inaugurated at Green Bay, Wisconsin, proved of sufficient value to be expanded into the four northern ADIEs, Greta Falls, Hinneapolis, Traverse City, and Bengar.

B-63-13 3. No claim is being made of perfection with any of those processes.

88

at a relatively low cost. Now back to the plan for expansion.

- 4. For ease of explanation the plan has been devided into four steps. The first includes actions to be taken to more closely integrate the present GOC into the ACRN system. The other three steps consist of actions to be taken and geographical areas to be organized to extend the GOC coincident with the completion of the second and third phases radar expansion.
- 5. The actions which must be taken to successfully operate the GOC as an integral part of the ACRN system are: (1) to establish filter center areas of responsibility to correspond to radar sub-sectors; (2) increase the operational effectiveness of the GOC, and (3) establish an organizational structure for the GOC which will permit its most efficient operation. In each of these we have already made some progress.
- 6. One of the major operational problems confronting the GoC evolves from the fact that filter center areas no longer match the areas of the redar stations to which they report. Filter center area realignment has been underway for some time and has been completed at Pasadena, Oakland, White Plains, Scattle, Trenton, Harrisburg, Pitteburg, Canton, Columbus, Grand Rapids, and Indianapoliss Others must wait for redar installations and precise definition of air division boundaries.
- 7. Plans for increasing the operational effectiveness of the GCC include accelerated organization of additional observation posts, improved reproting techniques, improved filtering and tracking operations, and better use of GCC information. To accelerate observation post organization, Eq. USAF has established a new manning parastick for GCC units which provides

B-63-14

- 830

a substantial increase in manpower. Comparable equipment authorizations are established or are on the way— for vehicitos, projection equipment, accounties detectors, etc. Recent revisions to Air Force Manuals 50-12 and 50-13 emphasize improved aircraft recognition information reporting from observation posts, air novement processing for filter centers and greater emphasis on correct filtering. Exploitation of the identification capability of the 800 - through improved recognition and air novembes sections, should increase the use to which 800 information will be put by the direction centers.

6. For the purpose of this plan the present squadron structure of the military units of the GOS has been maintained. It provides the best administrative control and most direct contact with civil defence agencies. Operational control remains with the ACRN unit. Tests to date placing the filter center detachments under the administrative control out the ACRN units have not proven entirely satisfactory. Unnecessary delays in administrative matters are being encountered and personnel selection does not receive the meticulous attention required for GOS units.

9. Step Two of the SoC expansion plan is based on institution of the double perineter or vertical plane ABII system. With desarcts—theground surveillance and positive identification required, the SOC system should be expanded so that it will be operating upon the completion of Phase II supplementary redar, which is the 3rd quarter of Piscal Tear 1965.

To do this the Oberserver Copps will have to be expanded into the states of Oklahoma, Arkunsas, Missouri and Kensas as shown on the everlay in Green. This puts the 33d Air Division in the SOC business and a new squadron headquarters is required. Four state co-ordinators are required. The Stilter centers are planned to be located at Kansas City, Springfield, No., St. Louis, and Little Rock. The present filter centers at Mashwills. Known

ville and Atlanpta can absorb the parts of Alabam and Mississippi moded in the perimeter area and the filter centers at Sacramente, and Bakerefield, "Asade" can absorb the eastern part of Novada and the western fringe of Arisona.

at least a year to organise a state properly to the point where it can support 600 operations. The first step is to get the coordinators in place to lay the groundwork for state civil defense assistance. Four co-ordinators for Kansas, Oklahomal Missouri, and Arkanene should be available in the 3d quarter of FT 55 in order to give them a twelve-month lead time. The new squadron and its detachments should be activated and in place six months should of the target date are their real estate common acquired, map tables build, and communications equipment installed.

11. By the same operational target date - 34 quarter FT 1956, the realignment of the present filter center areas, including new centers needed for our present system, should be completed Three new centers are required - Columbia, S. C., Saginaw, Michigan and Bemidji, Minnesota.

This means a total of seven new detackments functions to activated in the let quarter of Fy 1956. We have already sutherised EADF to initiate action on Saginaw within their our resources.

12. During themis period a further complexity arises, that is the conversion to sixteen air divisions. This increases the jumber of squadron headquarters required and reshuffles the detachments between squadrons.

for the interim period between Phase II and phase III radar completion.

To maintain the twelve month leads time finitial action must be taken in

K-63-16the let quarter of FI 56 for the addition of eight co-ordinators for the

balance of the 48 states. The area to be organised is indicated on this overlay in blue and sibe includes the balance of the states of Kansas and Oklahoma and the entire areas of the states of Utah and Colorado.

Say for 1

14. The organization of the GOC in the sentral Rocky Nountain region and its contigious counterpart in the midwest is considered a requirement for flight following of pemetrations of the northern border which may progress southward into the area of no-programmed radar cover. Our ability to organize observation posts in this area will be limited due to sparse population. The procurement of accoustic detectors will aid considerably in this respect.

15. Because of its relatively low density of population, this fill-in area can by handles by four new detachments - Michita, Kansas, Okhahoma City, Salt Lake City, and Denver, with a squadron headquarters at Albuquerque. A fifth detachment is required within our present area of organisation - Pondleton, Oregon - and home

operation with in conjuction with Phase III reders, the target date for which is let quarter Fy 57. Maintaining the six mouth lead time requires activation of the detachments by 3rd quarter 56. The balance of the area is shown on this overlay imment red. Eleven filter center areas will be needed to work successfully with the new reders. These aloves detachments will be assigned to existing squadrens.

17. He mention has been made so far of the areas in which 24 hour operation of the 900 will be required. Since we cannot yet rely on other sources of surveillance, twenty-four hour operation must continue -63-17 along our northern border and along the coasts for the present. In addition

SELM

6. 88

Skywatch area can be made when the areas encompassed in the Phase II pertion of the redar double perimeter is completed. As consigious seaward extension is satisfactorily achieved, coastal areas may be relieved of continious akymatch. When Ganada has completed her plans for guarding the northern approaches by additional redar and/or her Ground Observer Corps, we may eliminate or further reduce the area of continous watch along the northern border.


19. When and if the Trans-Genada depplor line proves successful itemspoins and the extension barriers passes become operational, it may be people to place the GCC on a complete standby basis.

18. This final overlay shows the area presently visualised for twenty-four operation in conjunction with Phase II and product reduce.

20. The unit and personnel requirements and their time phasing

SECR

B-63-18X

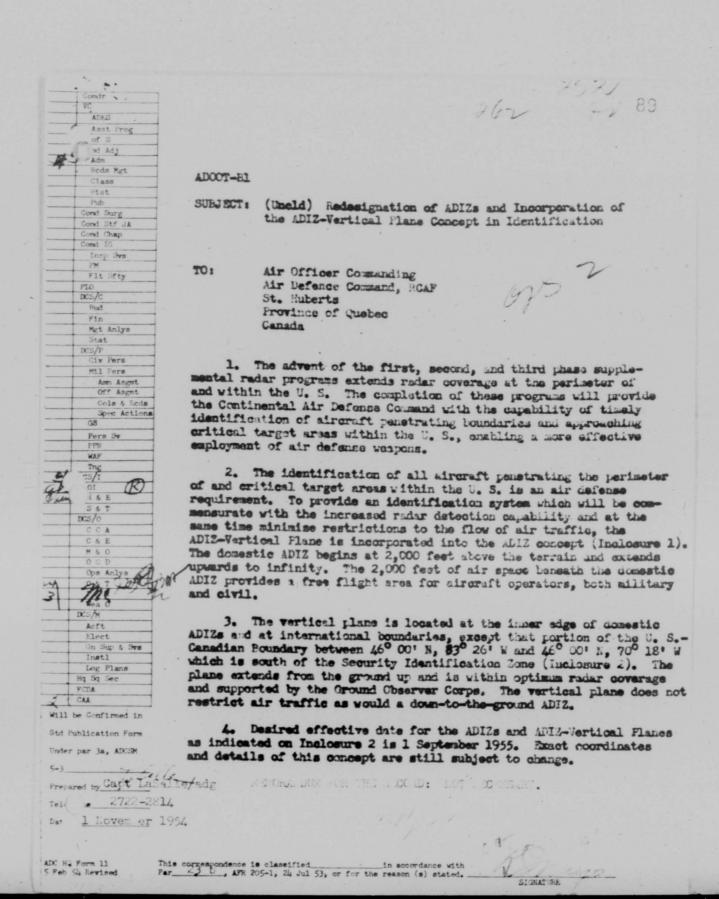

ADOOT-B1


SUBJECT: (Uncld) Redesignation of ADIZs and Incorporation of the ADIZ-Vertical Plane concept in Identification


5. To improve identification capability and at the same time retain standardization of ADIZ structure within both air defense commands, request your comments as to the feasibility of redesignating the Canadian Domestic ADIZs to extend from 2,000 feet above the terrain to infinity.


FOR THE COM ANDER:

2 Incls


l. ADIZ-Vertical Plans Concept 2. ADIZS

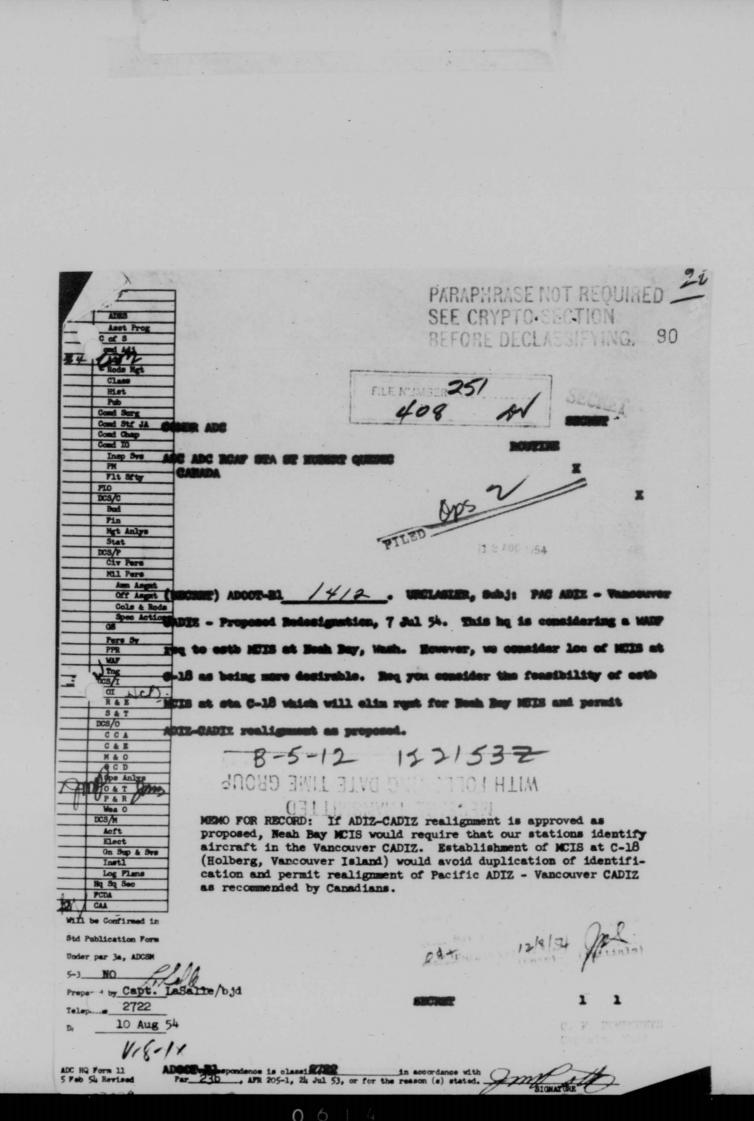

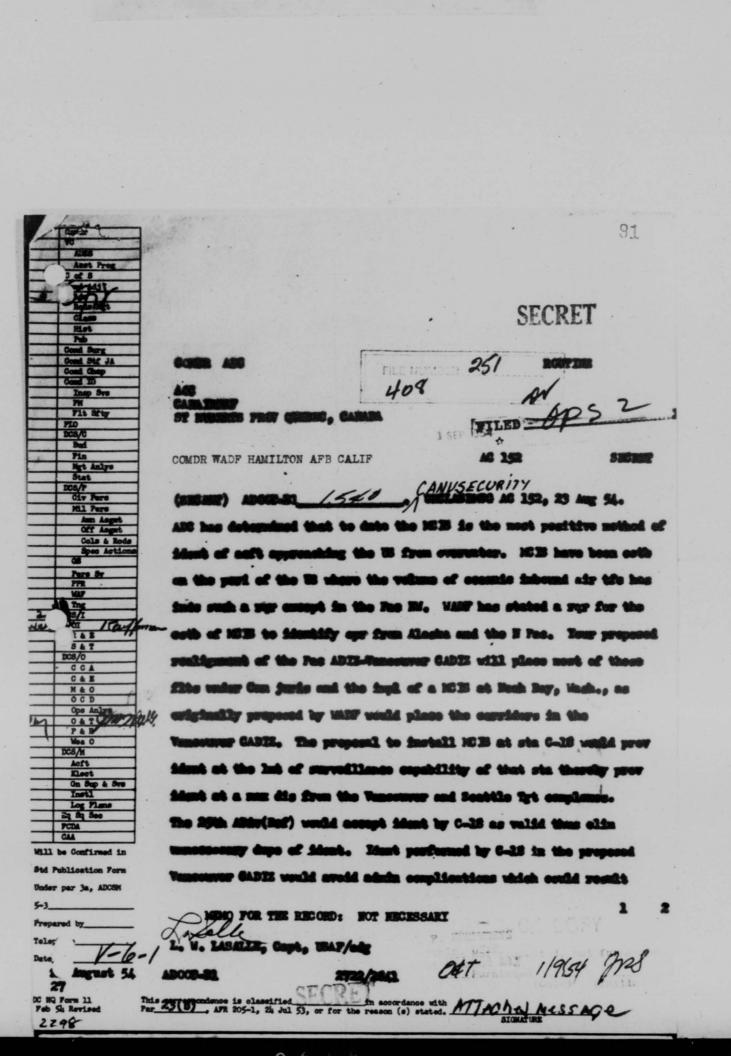

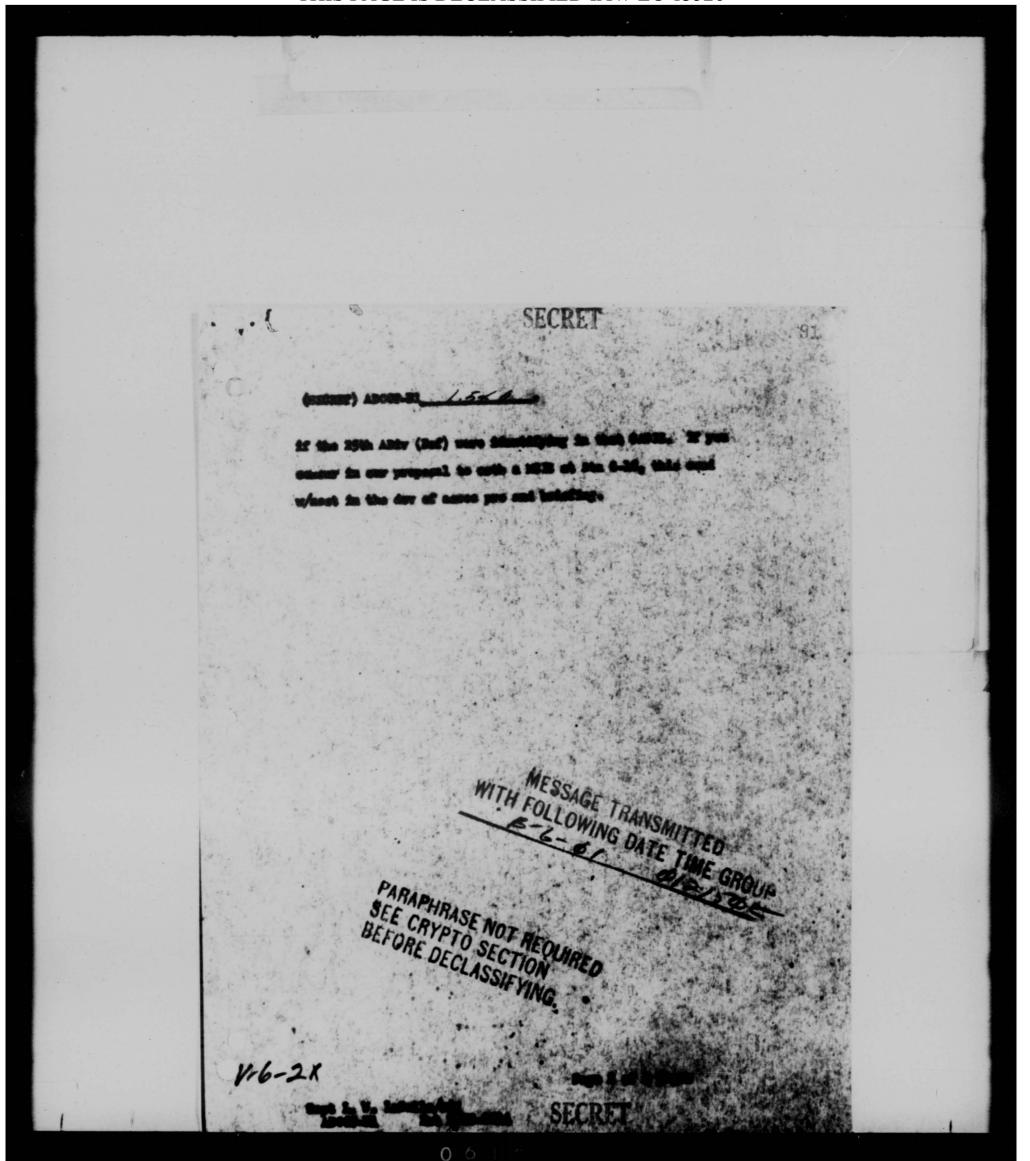

THIS PAGE IS DECLASSIFIED IAW EO 13526

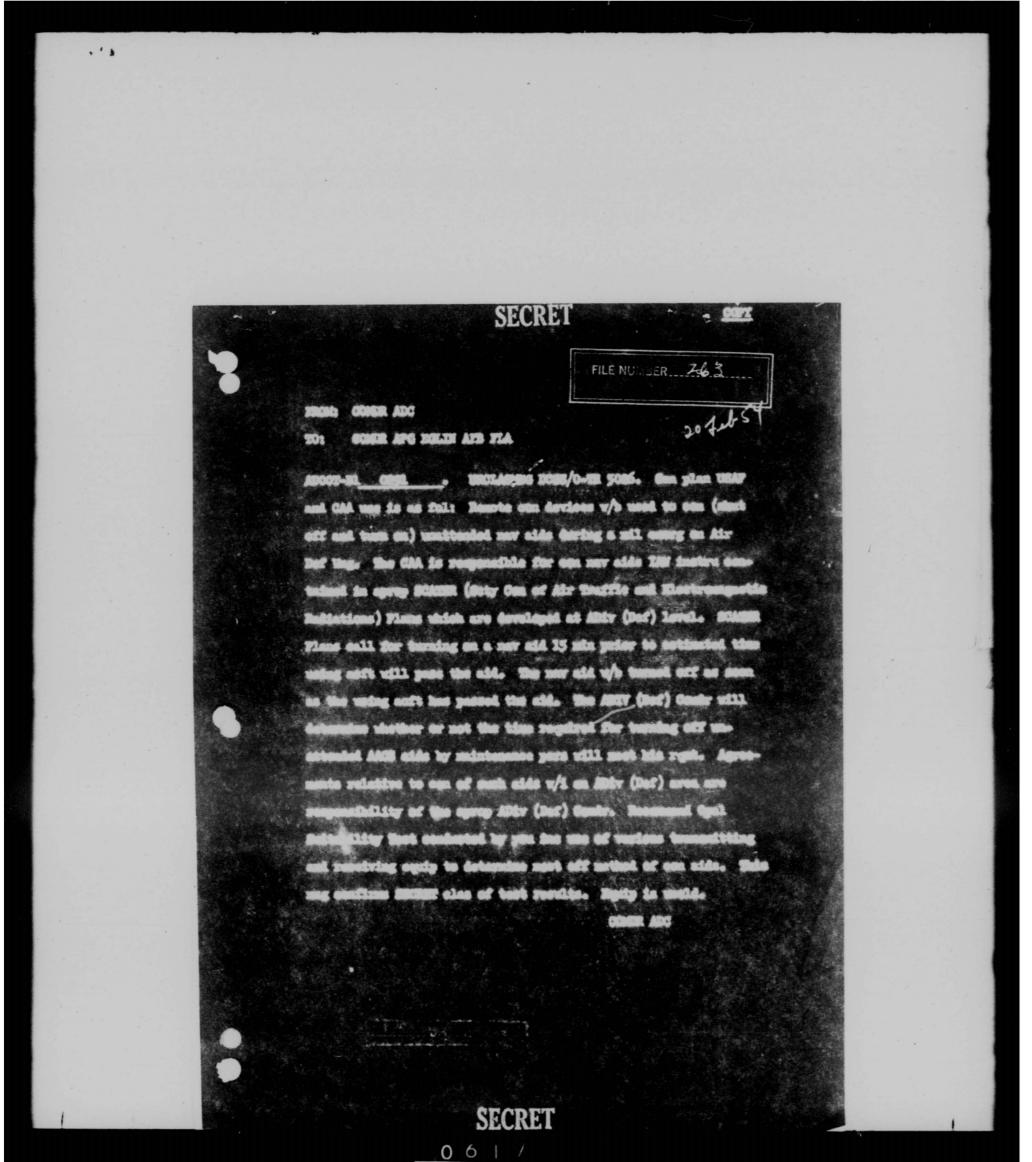

THIS PAGE IS DECLASSIFIED IAW EO 13526

MANAGE

COPY

HEADQUARTERS WESTERN AIR DEFENSE FORCE
Hamilton Air Force Base
Hamilton, California

WDOPR-1

8 Jun 1954

SUBJECT: Navy (Pacific Fleet) Routes and Navigation Aids

TO:

Commander

Air Defense Command Ent Air Force Base

Colorado Springs, Colorado

263


- 1. Reference is made to your headquarters SECRET letter ADOOT-B, subject as above, dated 27 April 1954.
- 2. The number of air routes and navigation aids requested for use by Navy tactical air traffic appears to be excessive. The proposed use of "direct" and VOR routes in the vicinity of vital target areas is contrary to the belief held by this headquarters that tactical air traffic should be confined to the lowest possible number of airways. Adoption of the large number of navigation aids requested by the Navy would vitiate the efforts of this headquarters in reducing the number of electronic emissions in the Western Region during air defense warnings red and yellow.
- 3. A map of air routes and a list of navigation aids acceptable to this headquarters was delivered to your headquarters on 27 May 1954; it is recommended that Navy tactical air traffic be required to use those routes and navigation aids.
- 4. The inclusion of the proposed routes and navigation aids in Western Region SCATER plans will be held in abeyance pending further instructions from your headquarters.

FOR THE COMMANDER:

/s/t/ J. P. CRIM Major, USAF Adjutant

SECRET

0618

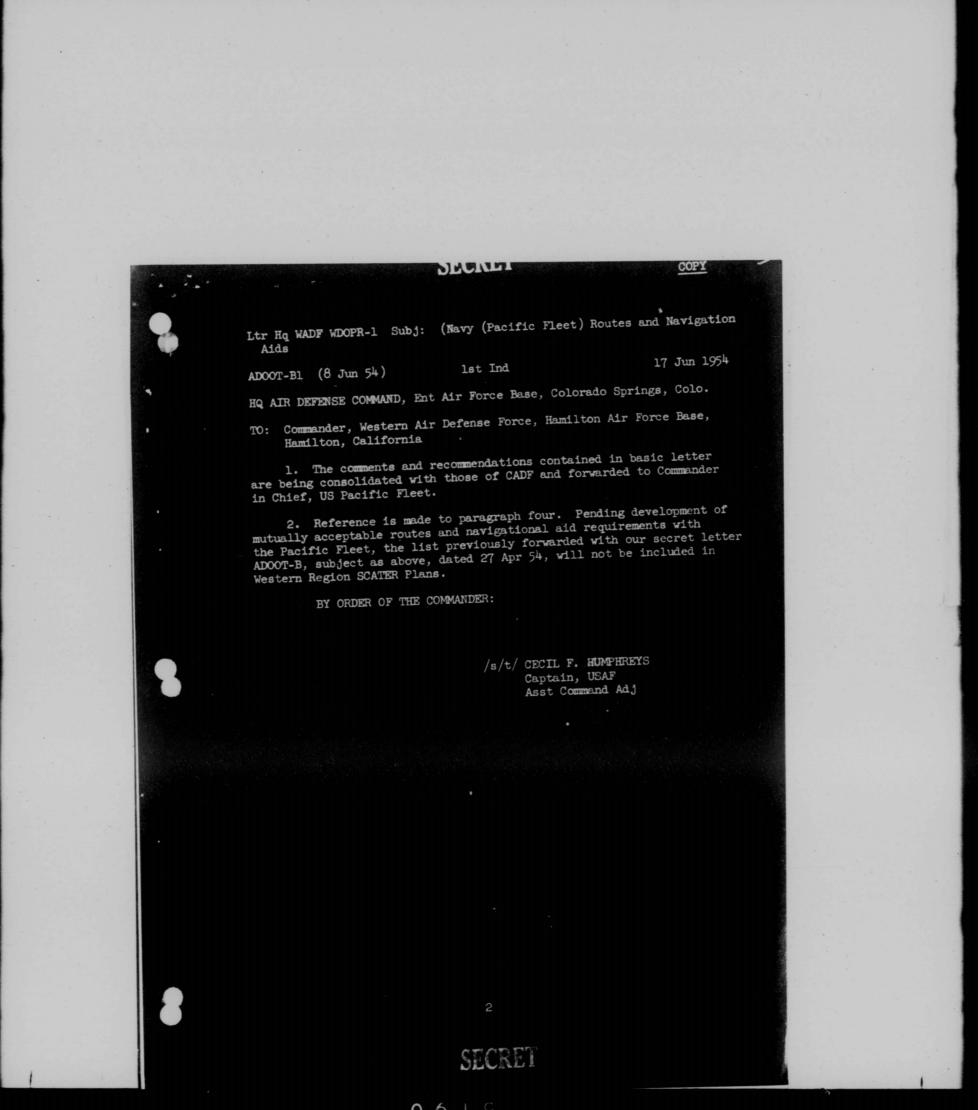

0619

ULUII.

HEADQUARTERS

AIR DEFENSE COMMAND

ENT AIR FORCE BASE

COLORADO SPRINGS, COLORADO

263 W

ADOOT-BL

24 JUL 1954

SUBJECT: (Unclassified) Headquarters USAF Conference on Problems Relative to Movement of Tactical Air Traffic during a Military Emergency

TO: Director of Operations
Headquarters USAF
Washington 25, D. C.

1. Inclosed is a report of a conference convened on 10 June 54 by your headquarters for the purpose of resolving problems pertaining to the movement of tactical air traffic during a military emergency. This summary includes the problem areas discussed and recommendations for resolution thereof.

2. Request you advise this headquarters of the status of action taken on these recommendations, since the majority of the problems, until resolved, will continue to adversely affect our defense capability.

FOR THE COMMANDER:

l Incl Rept of Conf, subj as above JOSEPH D. HORNSDY. Lt Cot, USAF Asst Command Adj

SECRET

V-9-1

€-1478

94

SUBJECT: USAF Conference on Problems Relative to Movement of Tactical Air Traffic During a Military Emergency.

- 1. A conference was convened at Headquarters USAF on 10 June 1954, for the purpose of discussing various problems related to the movement of tactical air traffic during a military emergency. Headquarters USAF, major air commands and Navy were represented.
 - 2. The following is a summary of the problem areas discussed:

PROBLEM:

Where conflict for the use of the same air space arises between major commands or services, who will be given priority?

DISCUSSION:

- a. Under certain conceivable conditions, i.e., simultaneous implementation of the various major commands emergency war plans, saturation of air space in certain geographical areas of the U.S. is anticipated. This problem will become particularly acute in the northeast where the bulk of this traffic tends to funnel out of the U.S. It was generally agreed that it would not be possible to predetermine where these problems would arise. Consequently they would have to be resolved at the time of conflict.
- b. It was generally agreed among the conferees that a reduction in aircraft separation both by time and altitude could be accepted with minimum additional risk to the air traffic involved. Further it was agreed that it would be better to reduce separation between traffic to the maximum extent possible prior to diverting any traffic due to the possible adverse effects these diversions would have on various emergency war plans.
- c. Strategic Air Command requested that they be given first priority until their deployment plan was completed. In turn, AMC and MATS felt that they should be given equal priority since their operations would be in direct support of SAC's primary mission. The Navy requested that it be made a matter of record that they could not accept an Air Force decision in this matter. It was further determined that one set of priorities would not be adequate for the entire emergency period but would have to be adjustable to meet the change in requirements of the various commands.

SECRET

V-9-2

SEUKEI

Subj: USAF Conference on Problems Relative to Movement of Tactical Air Traffic During a Military Emergency. (Cont'd)

RECOMMENDATIONS:

- a. It was recommended that USAF review the major commands EWP's to determine the feasibility of establishing a priority listing for CAA's use during a military emergency. (It is anticipated that this decision will require JCS approval in that more than one service is involved.)
- b. That the priority listing be made adjustable based on changing mission requirements of the various commands and services.
- c. That CAA be authorized to reduce separation minima between tactical aircraft.

PROBLEM:

Is the requirement to keep certain aircraft movements highly classified compatible with air defense requirements.

DISCUSSION:

- a. Present procedures require that SAC Phase III Category 2 flight plans, classified TOP SECRET, be passed directly from SAC Hqs to Hq ADC for dissemination. Due to the high classification of these flight plans plus the large number involved, it is anticipated that a long delay can be expected at each headquarters through which these flight plans must pass prior to receipt by the using agency. This problem is further complicated due to the fact that the ADC using agency, our direction centers, are not cleared to handle TOP SECRET material.
- b. Strategic Air Command representatives took the position that it would not be possible to downgrade these flight plans as it would compromise actual strike missions departing from the U.S. In those cases where they are deploying to staging bases it would provide the enemy with a good indication as to when their forces would be refueling at these bases, consequently jeopardizing their mission. SAC representatives further indicated that they were required by USAF regulations to classify these flight plans as TOP SECRET.
- c. Since CAA is the only agency that can physically control the navigational aids required for these flights, it is not possible to make the aids available to SAC without compromising their classification.

2

SEUKEI

94

Subj: USAF Conference on Problems Relative to Movement of Tactical Air Traffic During a Military Emergency. (Cont'd)

d. It was pointed out that it does not appear realistic to use one system of flight plan correlation in peacetime and then revert to an altogether new system when an emergency is declared.

RECOMMENDATIONS:

- a. That USAF direct SAC to downgrade to unclassified those portions of their Category II Flight Plans pertaining to routes within the continental United States and Canada. (This would permit these flight plans to be processed through normal CAA channels.)
- b. That in the event it is determined that it is not possible to downgrade these flight plans, Strategic Air Command be directed to pass the flight plans directly to the Air Defense Command's Air Division (Defense) Control center concerned. (Under this proposal navigational aids would be provided as directed by control centers to meet SAC's needs. Consequently this would be a compromise of security since the CAA personnel operating these aids are not cleared for TOP SECRET.)

PROBLEM:

Does the requirement for navigational aids by tactical commands compromise ADC's requirement to control navigational aids in accordance with Executive Order 10312?

DISCUSSION:

- a. SAC's dispersal plan requires a large number of navigational aids throughout the U.S. during our most critical period of air defense. The operation of these aids, during this critical period, to a large extent nullifies our CONELRAD Program.
- b. During the deployment phase of SAC and the airlift phase for TAC, certain routes through the U. S. will be in continuous use requiring that navigational aids along these routes be in continuous operation for long periods of time. These aids, in most cases, will be away from critical target areas; however they could be used as a valuable enroute fix by the enemy.

RECOMMENDATION:

That major commands cooperate with ADC to reduce aids wherever possible. (This at best will still leave a serious weakness in the CONELRAD Program. As a result this headquarters is studying the possibility of operating these aids on a coded time basis.)

V-9-4

FCRET

Subj: USAF Conference on Problems Relative to Movement of Tactical Air Traffic During a Military Emergency. (Cont'd)

PROBLEM:

Should the Air Division (Defense) Commander be given authority to divert tactical air traffic around a battle or threatened area during a Red or Yellow alert?

DISCUSSION:

It was the opinion of the major command representatives that this action could be taken without jeopardizing their war plans providing that diversion was of limited distance and would not require an additional refueling stop.

RECOMMENDATIONS:

- a. That USAF give ADC authority to make these diversions where necessary.
- b. That major commands be directed to stand by on appropriate air defense frequencies in order that they may be contacted in the event that diversion is necessary.

PROBLEM:

Is SAC's proposal to have blanket air space reservations approved for an indefinite period of time valid and workable?

DISCUSSION:


- a. It was not possible at the conference to determine if SAC air space reservation plan would conflict with the plans of other commands in that the plan had never been made available to any organization outside Strategic Air Command.
- b. As a result SAC representatives indicated that they would forward these requirements to CAA at an early date. Further SAC will submit to Hq USAF the full details of air space requirements and method of procuring the air space when needed.

RECOMMENDATION:


That Hq USAF review SAC's air space reservation requirements to determine if they are compatible with other major command emergency war plans.

3. These problems and recommendations are presently being reviewed by Hq USAF to determine future course of action.

V-9-51

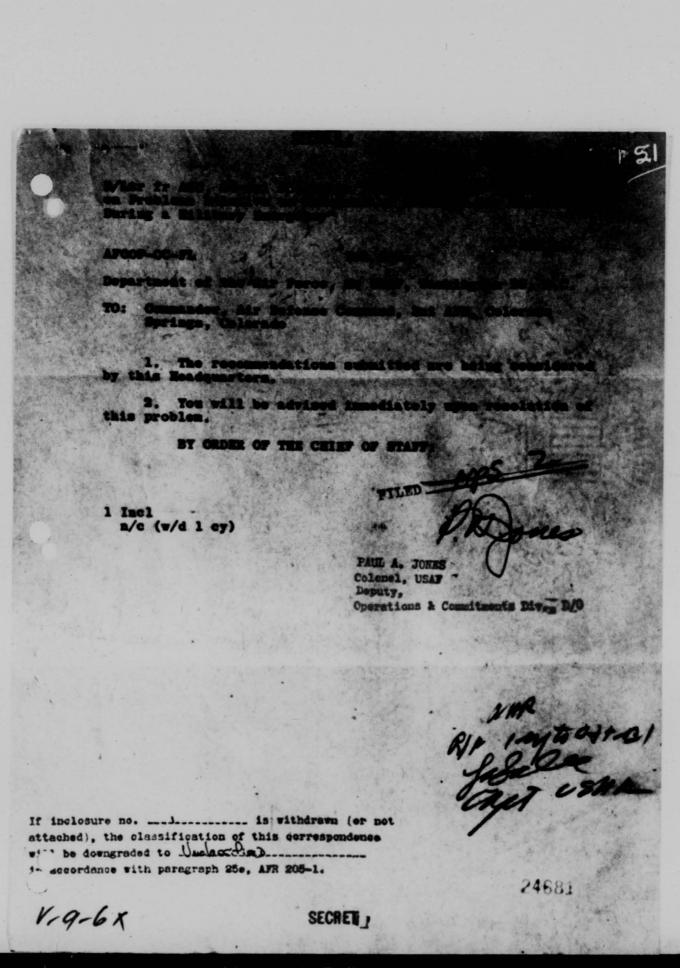

0 6 2

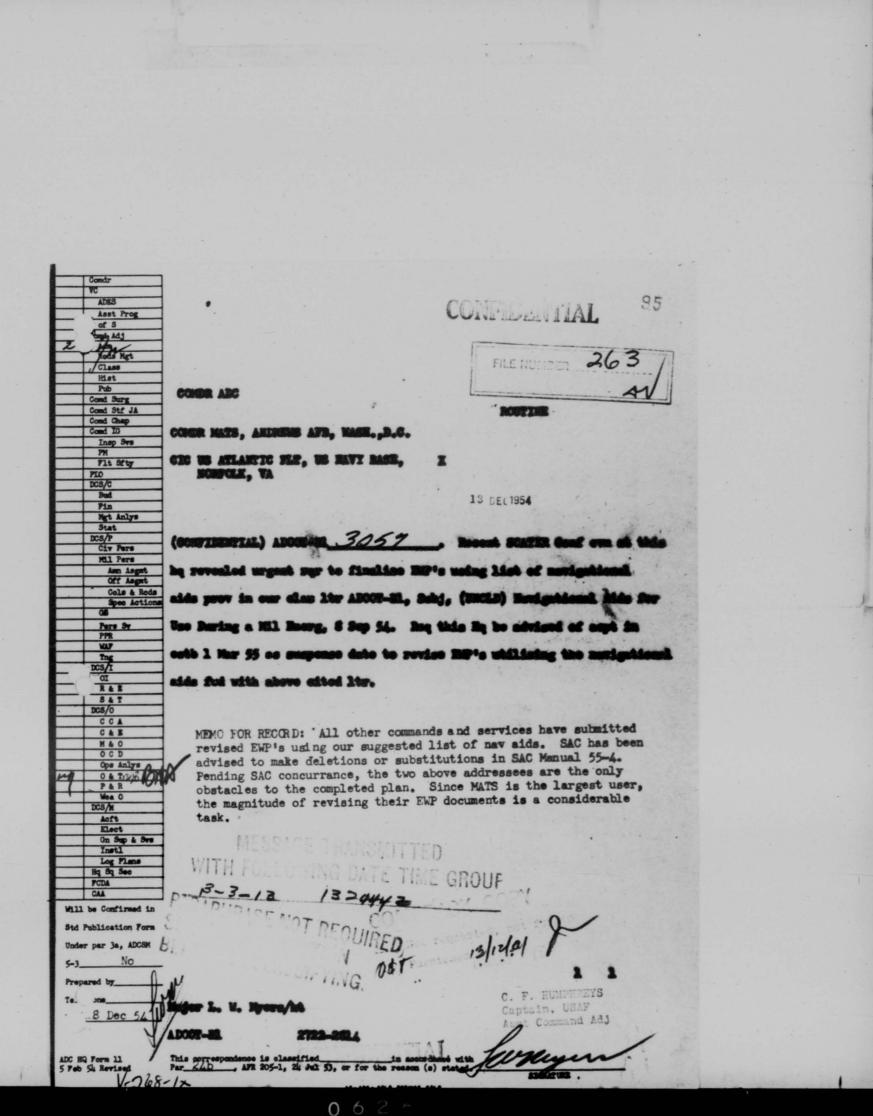

HEADQUARTERS
AIR DEFENSE COMMAND
ENT AIR FORCE BASE
COLORADO SPRINGS, COLORADO

98

ADOOT-B1

SUBJECT: (Unclassified) Navigational Aids for Use during a Military

TO: Commander
Military Air Transport Service
Andrews Air Force Base
Washington 25, D. C.

- l. In an effort to reduce the number of navigational aids required during periods of air defense warning red or yellow, this headquarters has compiled the inclosed list of navigational aids for use by tactical air traffic of all major commands. The navigational aids included within this list are controllable within time limits acceptable to air division (defense) commanders and, in general, are considered adequate for navigation along the present routes included within emergency war Plans (EWPS) of the major commands of the Air Force and Navy.
- 2. It is requested that revision of route and navigational aid requirements for tactical flights be formulated using the navigational aids listed in Inclosure 1. All existing routes and navigational aid requirements contained in mWPs of major commands will remain in effect pending receipt of revisions. In those instances where navigational aids are considered to be inadequate, your recommendations should be submitted to this headquarters for mutually acceptable additions to the list.
- 3. Your attention is invited to the following factors when using the list of navigational aids:
- a. The inclosed list contains "en route" aids only. Destination aids required by tactical air traffic during a military emergency will be made available from information contained within the Flight Clearance Form (DD Form 175) of each particular flight. Normally, the destination aid will be turned on fifteen minutes prior to estimated time of arrival.
- b. Air Force and CAA radars (air surveillance and precision approach) are not included in the list. Pilots of tactical aircraft should be advised to consult the latest Radio Facility Chart for location, type of operation, and assistance these various radars may provide should the need arise.
- 4. The Air Defense Command has no authority to ground tactical air traffic during a military emergency or during periods of air defense

15.19

\$ V-659-3

EBURET

99

Subj: (Unclassified) Navigational Aids for Use during a Military Emergency (Contd)

warning yellow or red. Air battles may be in progress around densely populated or critical target areas when aircraft of various commands are executing a tactical mission. Your cooperation in avoiding these critical areas when developing flight routes in sWPs will be mutually beneficial to all.

5. Considering the magnitude of revising EWPs to utilize the navigational aids inclosed, no time limit for submission of revisions is being stated. Any major discrepancies which are noted in the development of tactical flight routes in EWPs should be resolved at the earliest possible date. To assist in rapid identification of havigational aids by air division (defense) location, Inclosure 2 is forwarded to identify the air division (defense) boundary.

FOR THE COMMANDER:

6 Franghay

2 Incl 1. List of nav aids for EADF, CADF, and WADF

2. Map

Info copy to
Comdr, EADF
WADF
CADF

1659-4

SEUKEI,

) '

98

Hq Air Defense Command, Subj: (Uncl) Navigational Aids for Use during a Military Emergency, dtd 8 Sep 1954

MAOCE

1st Ind

HQ, MILITARY AIR TRANSPORT SERVICE, USAF, Washington 25, D. C. 6 DEC 1954

TO: Commander, Air Defense Command, Ent Air Force Base, Colorado Springs, Colorado

- 1. The inclosed list of navigational aids has been studied by this command and the following questions regarding the use of the aids have arisen:
- a. It is assumed that the aids listed will be operated intermittently by air division area or areas depending on the existence of a warning red or yellow for a particular section of the country rather than on a nationwide basis. Is this assumption correct?
- b. Will aircraft be required to file flight plans via established airways during periods of intermittent operations; and, if so, will all stations on the intended route which are included on the list be considered compulsory reporting points? If so, a problem is posed in operation of aircraft of this command which are not VOR equipped. For example, in the mid-central area of the country bounded roughly by Denver, Oklahoma City and St. Louis, the en route aids listed are almost excusively VOR. Similar situations obtain between Phoenix and El Paso and between Austin and Mobile. The provision of some LF/MF coverage in these areas or authority for an aircraft to file point to point for aids it is equipped to receive would eliminate these problems.
- c. The basic letter makes no reference to departure aids. It is assumed that departure aids will be made available on request for five minutes from time of departure. Is this assumption correct?
- 2. It is requested that answers to the above questions be provided in order that action can be completed on the enclosed list at the earliest possible date. (UNCL)

FOR THE COMMANDER:

James mo Johnson

2 Incl n/c Staff.

Paragraph 1 classified SECRET in accordance with paragraph 23c AFR 205-1, dtd 15 Dec 1953

3 V659-5

Hq Air Defense Command, Subj: (Uncl) Navigational Aids for Use During a Military Emergency, dtd 8 September 1954

ADOOT-B1 (8 Sep 54)

2nd Ind

22 0001954

HQ AIR DEFENSE COMMAND, Ent AFB, Colorado Springs, Colorado

TO: Commander, Military Air Transport Service, Andrews Air Force Base, Washington 25, D. C.

- 1. Reference paragraph la, 1st Ind. Your assumption is correct.
- Reference paragraph 1b, 1st Ind. Since this paragraph covers several major points, the following clarifications are provided:
- a. Aircraft need not be routed via airways. Pilots will file flight plans with route information which will provide the air defense system with a track over the ground. If the route indicated is from one air navigation aid direct to another and the flight path happens to be along presently established airways, such airway designation may be used. This airway routing is not compulsory and it is suffested that aircraft be routed from departure point, direct via necessary en route navigation aids thence to destination airfield.
- b. Each en route navigational aid listed in the llight plan will be a compulsory reporting point. This position report is required by the air defense system to effect identification and expedite shut down of the navigational aid. If the aircraft does not report over the station within five minutes of its estimated time, the aid will be turned off.
- c. With reference to certain areas where VOR ranges are prevalent, certain LF/NT changes have been incorporated in the list. These are:

Gila bend, Shaz, BVC

Cochise, ! RAWZ, BVCR

Prescott, SHAZ, BVCP

Columbus, SENJAZ, EVO

Winslow, SBRAZ, BUCK

abilene, CHNAZ, BVC

Tucson, EMH, BVOR .

Mineral bells, MIL, BVC

If your command has additional requirements for LF/VF stations which can be provided in the same geographical location as the FVCE incility, your requirements should be forwarded to this head worters as soon as possible.

98

Hq Air Defense Command, Subj: (Uncl.) Lavigational Aids for Use during a Military Emergency, dtd 8 Sept 1954

AD T-B1 (8 Sep. 54)

2nd Ind (Contd)

If the LF/FF facilities are acceptable to the Air Division (Defense) Co mander concerned, they will be added to the list of en route navigational aids.

3. Reference paragraph 1 c of 1st Ind. The assumption is correct. Detailed information concerning control of navigational aids during air defense warning yellow or red is contained in our classified message. ADOOT-BL 0846, 20 May 54. The procedures as stated therein remain unchanged for departure, en route and destination aids.

FOR THE COMMANDER:

2 Incl n/c

34

Basic Ltr fm Hq ADC, subj: (Uncl) Navigational Aids for Use during a Military Emergency

MAOCP (8 Sep 54)

3rd Ind

HQ, MILITARY AIR TRANSPORT SERVICE, USAF, Washington 25, D. C. 1 5 FEB 1955

orado

TO: Commander, Air Defense Command, Ent Air Force Base, Colorado Springs, Colorado

With the additions contained in paragraph 2 c, 2nd Indorsement, and the clarification on use provided by the 2nd Indorsement, the list of navigational aids contained in Inclosure 1 to the basic letter is acceptable to this command. MATS Emergency Plans are being revised to incorporate the new list of aids.

FOR THE COMMANDER:

2 Incl n/e

This indorsement is in itself UNCLASSIFIED.

V659-2

98

Basic Ltr fm Hq ADC, subj: (Uncl) Navigational Aids for Use during a Military Emergency

MAOCP (8 Sep 54)

3rd Ind

HQ, MILITARY AIR TRANSPORT SERVICE, USAF, Washington 25, D. C. 1 5 FEB 1955

TO: Commander, Air Defense Command, Ent Air Force Base, Colorado Springs, Colorado

With the additions contained in paragraph 2 c, 2nd Indorsement, and the clarification on use provided by the 2nd Indorsement, the list of navigational aids contained in Inclosure 1 to the basic letter is acceptable to this command. MATS Emergency Plans are being revised to incorporate the new list of aids.

FOR THE COMMANDER:

Janus Thomas

2 Incl n/c

263 W

This indorsement is in itself UNCLASSIFIED.

V-659-1

WESTERN AIR DEFENSE FORCE
LIST OF NAVIGATIONAL AIRS RECON ENDED FOR USE BY TACTICAL AIR TRAFFIC
DURING AIR DEFENSE WARRINGS RED AND YELLOW

96

25TH AIR DIVISION (DEFENSE)

Missoula SEMRAZ, PVOR Mullan Pass EMRLZ, PVOR Spokane SERAZ, EVOR Larson EMI-HW, GCA Ellensburg, SEMELAZ, BVOR Whidbey MRLZ, GCA, ASR Neah Bay SEAWZ McChord SEMRA, GCA Portland SERAZ, PVOR The Dalles SEHAZ, BVOR Pendleton SERAZ, BVOR Eugene SERAZ, BVOR Medford SERAZ, BVOR

28TH AIR DIVISION (DEFENSE)

Ft. Jones SBRAZ
Red Bluff SBRAZ, BVOR
Areata SBRELZ
Sacramento SBREAZ, BVOR
Moffett SMRIZ, GCA
Pescadero BPN
Stockton PMRLZ
Fresno SBRAZ, BVOR, ILS
Donner Summit RPN
Reno SBRAZ, VORW
Lovelock BMRLZ, BVOP
Battle Mountain FMRLZ, BVOR
Elko SBRAZ

27TH AIR DIVISION (DEFENSE)

Bakersfield SBMRAZ, BVOR
Newhall MRLW
Santa Barbara SBMRLZ, BVOR
Long Beach SBMRLZ, BVOR
Oceanside RBN
San Diego SBRAZ, BVOR
Dargett SBLAZ, BVOR
Las Vegas SBMRAZ, BVOR
Needles BMRLZ, BVOR
Riverside SBLRAZ
El Centro SEMBLZ
Blythe SBMRAZ, BVOR
Thermal BMRLZ, BVOR
Yuma SBMRAZ, BVOR
Thoenix SEMBAZ, BVOR

V-654-8

SECRET

LIST OF NAVIGATIONAL AIDS RECOMMENDED FOR USE BY TACTICAL AIR TRAFFIC DURING AIR DEFENSE WARNINGS RED AND YELLON

26TH AIR DIVISION (DEFENSE)

Elmira SBRAZ
Wilkes Barre SBMRAZ
Poughkeepsie SBRAZ
Altoona SBMRAZ
Lynchburgh SBRAZ
Millville SBRAZ
Richmond SBRAZ

32D AIR DIVISION (DEFENSE)

Buffalo SBRA Syracuse SBRA ALbany SBRA Burlington SBRA Chicapee SBRA North Bangor SBRA Presque Isle SBRA Portland BMRL Otis MHW

30TH AIR DIVISION (DEFENSE)

Houghton BRL Evansville BVOR Charleston SBRAZ, BVOR Louisville, BVOR, LF

1659-9

GENTRAL AIR DEFENSE FORCE
LIST OF NAVIGATIONAL AIDS RECOMMENDED FOR USE BY TACTICAL AIR TRAFFIC
DURING AIR DEFENSE WARRINGS RED AND YELLOW

29TH AIR DIVISION (DEFENSE)

Great Falls SBRAZ Miles City SBMRAZ Birmarck SBRAZ Fargo SERAZ Missoula SBMRAZ Helena SBMRAZ Dillon BMRLZ Fort Eridges SBRAZ Sinclair SBRAZ Cheyenne SBRAZ North Platte SBRAZ Grand Island SPMRLZ Lincoln SBMRLZ Sioux Falls SBRAZ Watertown EMRLZ Cherokee BVOR Casper BVOR

31"T AIR DIVISION (DEFENSE) Alexandria BMRLZ

Minneapolis SBRAZ
La Crosse SPRAZ
Omaha SBRAZ
Des Moines SPRAZ
Purlington SBRAZ
Springfield SBNRAZ

33HD AIR DIVISION (DEFENSE)

Randolph MRLWZ
Palacious RBN, BVOR
Perrin SBNRAZ
Tyler BMRLZ
Alexandria SRRAZ
Austin SBNRLZ, BVOR
Monroe BVOR
Texarkana SBRAZ
Little Rock SBRAZ
Little Rock SBRAZ
Springfield BVOR
Vicky BVOR
Ardmore BMM

33HD AIR DIVISION (DEFENSE) (CONTD)

9A

Vance MRLWZ Gare SBRAZ Hutchinson SBMHLZ Columbia BVOR Chanute SBRAZ Advance MRAWZ Abilene BVOR Midland BRRLZ, BVOR San Angelo BMRLZ, BVOR Wichita Falls SBMRAZ Lubbock BMRLZ College Station BVOR Lufkin BVOR Mineral Wells BVOR Ponca City BVOR Neosho BVOR Farmington BVOR Kirksville BVOR Emporia BVOR Russell BVOR Hill City BVOR Goodland BVOR Dodge City BVOR Garden City BVOR Beaumont BVOR Lafayette BVOR Cotula BVOR Junction BVOR

34TH AIR DIVISION (DEFENSE)

Albuquerque SBRAZ, BVOR
Wendover SBRAZ, BVOR
Salt Lake City SBRAZ, BVOR
Ogden SBRAZ, BVOR
Denver SRMRAZ, BVOR
Akron SBMRAZ, BVOR
Ll Paso SBRAZ, BVOR
Salt Flat HMRLZ, BVOR
Wink SPRAZ, BVOR
Truth or Consequences SBRAZ
Hobbs HMRLZ
Carlsbad BMRLZ

V6.19-10

88

ATE AND DIVISION (DEFENSE) CONTD)

Crindend 31 AZ Colorado Sprin a MeLZ La Junta SHIFLZ Enterprise SFMEAZ Dolta Francis Winclew EVOR Transfer I EVOR Unemajorph EVOR The nix F.OR
Tucson I Volt
Douglar EVOR
Cuchise EVOR
Columbus EV.R
Pheblo EVOR


30 TH ATE DIVISION (DEFENSE)


Filtoni LVOR

Colombus SHALZ Orlando SHALZ Alma SPHAZ
Merchis BHRAZ, BVOR
Montromery SEHAZ, BVOR
Nachville SPRAZ, BVOR
Meridian SEHRAZ, BVOR
Tallahassee SBRAZ, BVOR
Cross City SEMRAZ, BVOR
West Palm Beach SPHRA, BVOR
Savennah SEMRLZ, BVOR
Florence SHTRLZ, BVOR
Raleich SBRAZ, BVOR
Spartanburg SBRAZ, BVOR
Macon SEMRAZ, BVOR Alma SPEAZ Macon SBMRAZ, BVOR Crestview SBRAZ, BVOR Mobile BVOR Huntsville BVOR Anderson BVOR


1689-11×

SECDET

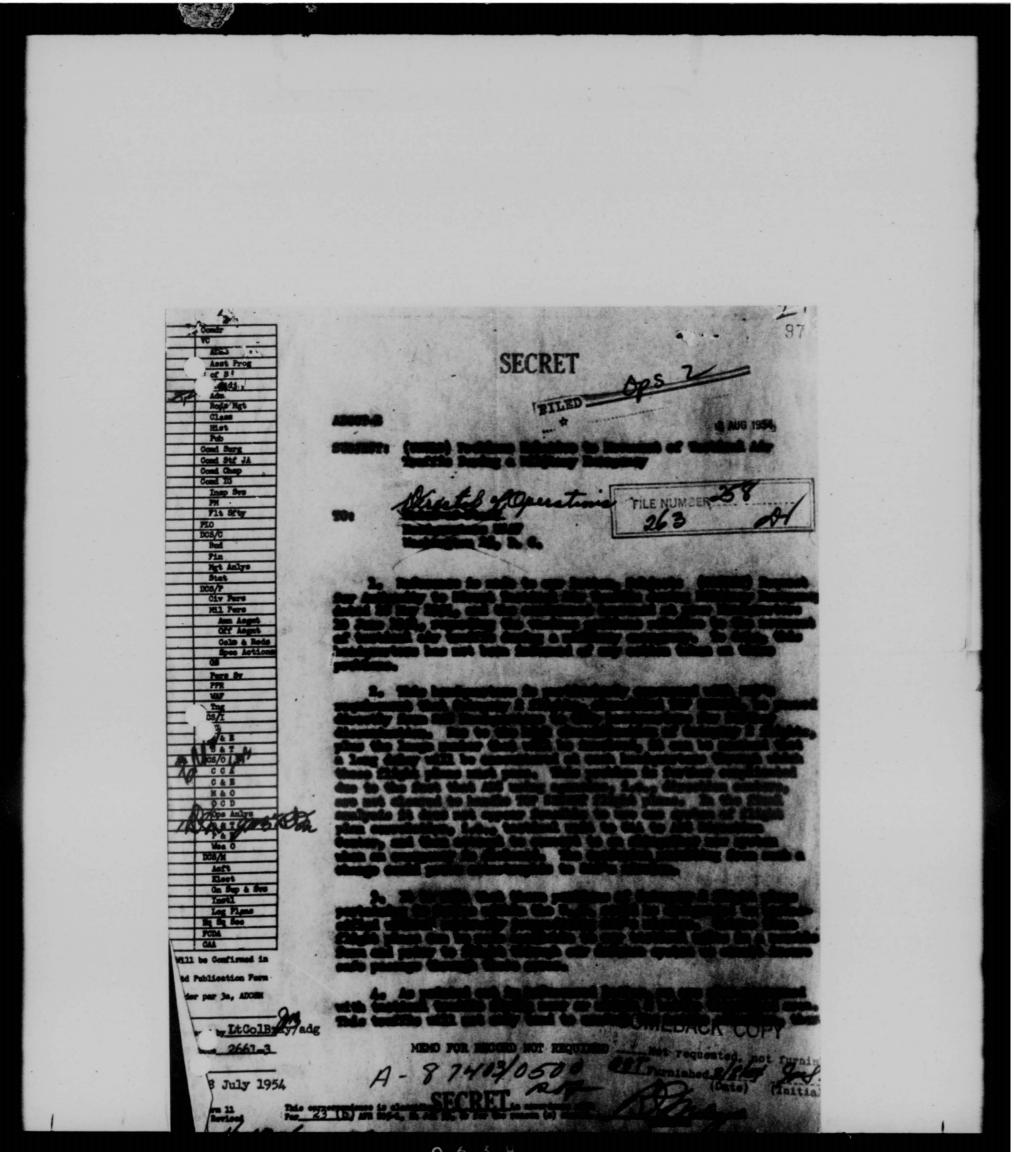

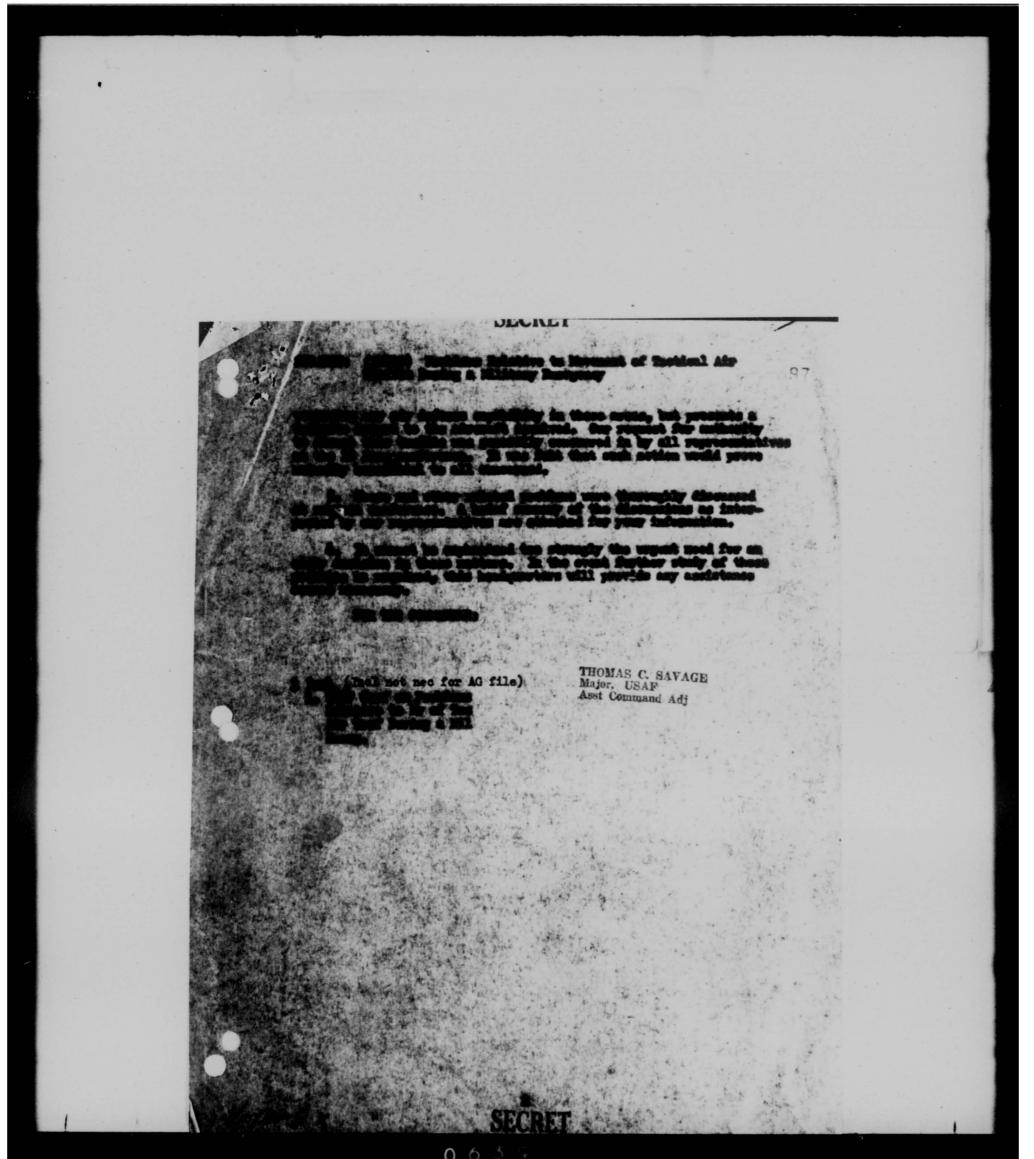


THIS PAGE IS DECLASSIFIED IAW EO 13526

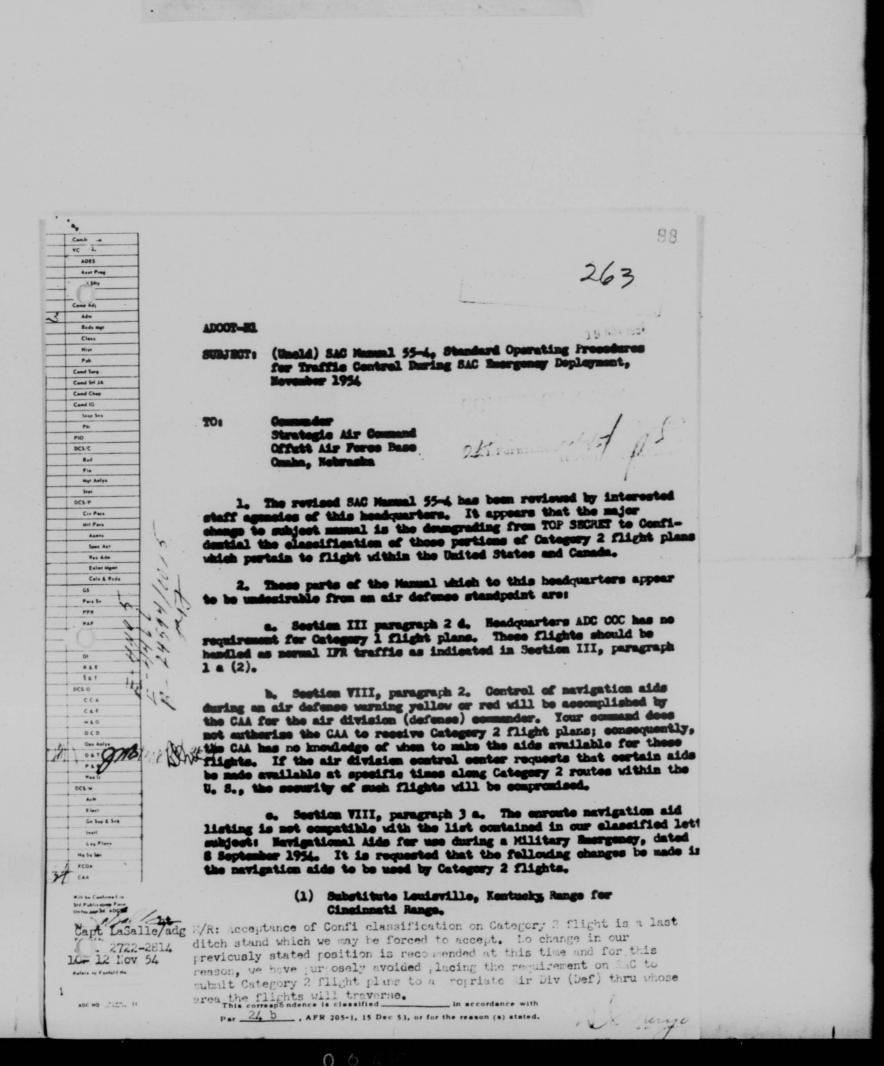


ADOOT-HO


(Uneld) SAC Masual 55-4, Standard Operating Procedures for Traffic Control During SAC Energoncy Deployment, November 1954 (Cont'd)

- (2) Substitute Buffalo, H. Y., Range for Youngstonn Range.
- (3) Substitute Burlington, Vermont, Range for Houtpelier Range.
- (4) Substitute Releigh, N. C., Range for Cherry Point Range.
- (5) Delete New Castle Range.
- (6) Substitute Orlando or West Palm Beach, Flac, Range for Tampa Range.
- (7) Substitute Sagremente, Calif., Range for Travis Range.
- 3. Reference is made to Section II, paragraph 3.
- a. Request you advise this headquarters as to which "Military Channels" will be used for transmitting Category 2 flight plans to Headquarters ADC, COC.
- b. Reference is made to our lot Indersement dated 4 October 1954, to your classified letter, subj: SAC Altitude Requirements for Resrgement Deployment, 15 September 1954 (Inel 1). The recommendations as contained in the above cited correspondence represent the desired procedures for Category 2 flight plans which will insure the most efficient mission accomplishment by both ADC and SAC. The Confidential classification of Category 2 flight plans still poses the problem of descring, emerging and ruley to subordinate headquarters. This procedural requirement involves a prohibitive time delay before the flight plan information is made available to the direction center, the using agency.
- 4. Request you take the necessary action to amend subject massed to eliminate the deficiencies estimate in paragraph 2;

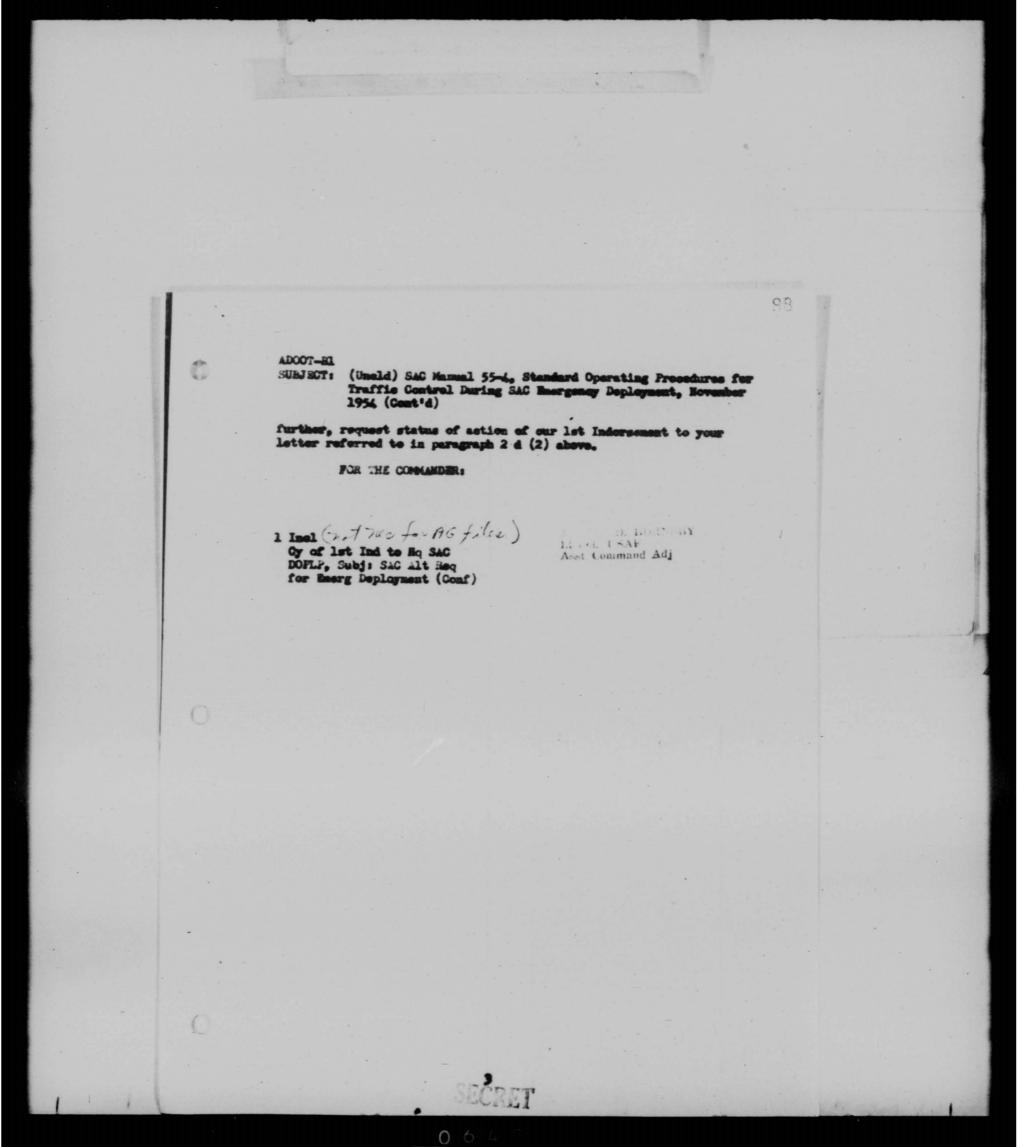

		CUIVE	IDENTIAL SEE		
	le o				
		ADQUI-BI.	20 Neb 1954		
		SUBJECT: Priority of Testion	al Filgate (Unela)		
		To: Director of Operati Headquarters WAF Washington 25, D. C			
		movements of MAC, TMC, MACE, AMC and Mony have disclosed a possibility of confliction. This is especially true between some phases of SAC deployment and other commands or the Navy. 2. Mandamenters SAC has stated a requirement for areas of reserved altitudes for entagony 2 operations of the deployment phase. These reservations which will be provided by the CAA vill be held for an indefinite period of time. Due to the classification placed upon these operations by Mondamenters SAC, flight plans will not be filed with the CAA. The CAA vill not be informed of numbers of six-oraft or periods of time when the altitude reservation is actually in use. This will preclude the CAA from using the altitudes reserved by SAC for the movement of other tactical operations.			
		3. In an effort to resolve the problem, a conference was held in this headquarters on 9 Feb 54 with representatives of CAA and SAC. SAC representatives stated a first requirement that their sategory 2 operations must operate as set forth in paragraph 2 above.			
		4. Heretofore, the planning of this headquarters has been on the basis of equal priority for testical movements. It now appears that there is a requirement for a command or services priority listing applicable to testical operations.			
		5. Representatives of the command are available to assist in establishing a priority determination. Representatives of SAC and CAA have expressed a willingness to participate if deemed necessary.			
		FOR THE COMMEDIER:			
			THOMAS AC. SAVAGE Major, WHAT Aget Command Adj		
			ENTER		

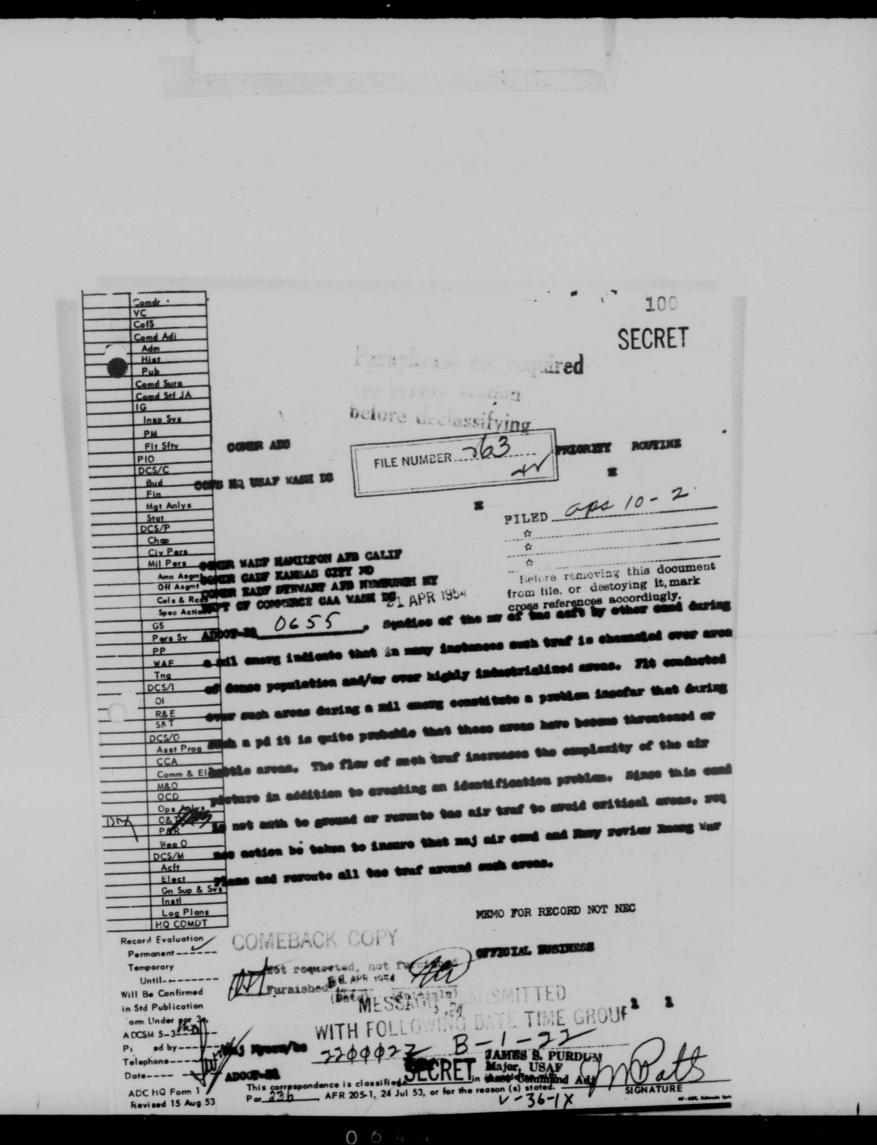

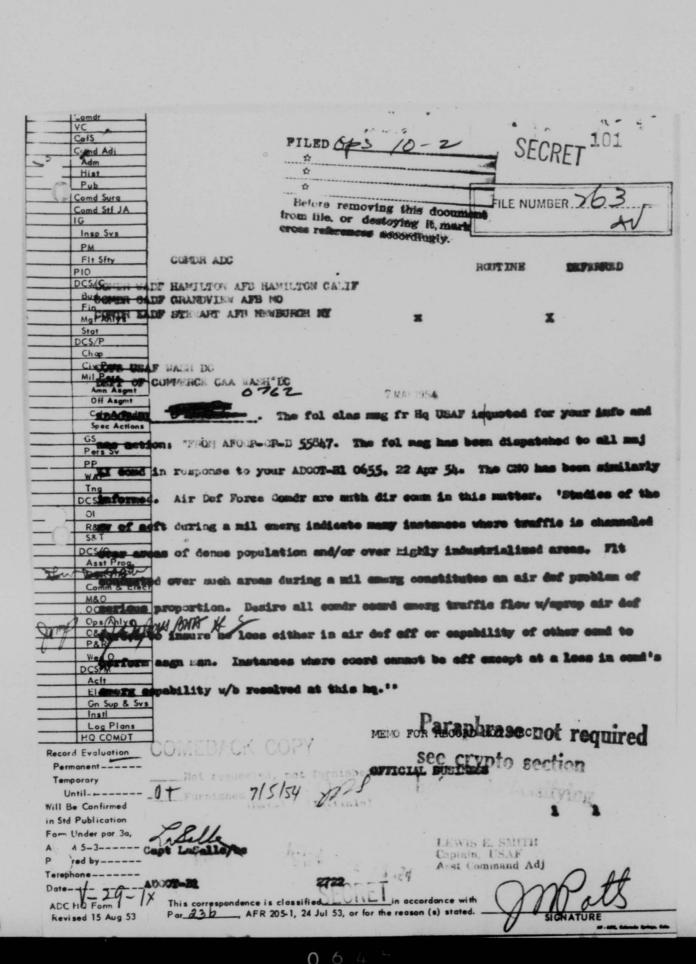

COPY

From: HQ 34TH ADIV (DEF)

FILE NUMBER 263

CDC

11 May 1954

SUBJECT: Tactical Operations in Albuquerque ADIZ During Emergencies

· OT

Commander Central Air Defense Force Grandview Air Force Base P. O. Box 528 Kansas City 41, Missouri

- 1. The problem of tactical operations into and through and ADIZ during emergencies is outlined below. This division considers the matter an urgent one and requests aid and assistance in completing required planning necessary to avert serious difficulties during actual air defense actions.
- 2. A large amount of tactical air traffic will be dispatched into and through the Albuquerque area with the declaration of a military emergency or upon the beginning of hostilities. Concurrently, due to the nature of activities located at Kirtland, Sandia and Los Alamos, a considerable number of Strategic Air Command, Naval, MATS and support type aircraft of other commands will stage into this important base. This has been confirmed by personnel of the Special Weapons Center. This and other information indicates that the tactical air traffic which will enter the Albuquerque ADIZ during an emergency may be of such volume as to strain the air defense capability of this division unless appropriate plans are formulated. Strategic Air Command aircraft will conduct their planned operations into this ADIZ under any conditions of alert. In this respect, the identification of aircraft closely resembling enemy types is of particular concern since during a red alert all aircraft must be identified as either friendly or boatile.
- 3. The requirement for preparation of comprehensive plans for the handling of air traffic scheduled to fly into and through the Albuquerque area shortly after hostilities begin must necessarily be accorded a high priority. At the present time, official information upon which to base such plans is not available to the 34th Air division (Defense). It is possible that plans of the various military services have been coordinated with Air Defense Command headquarters and that the necessary information is therefore available at that level. It is strongly recommended that immediate measures

SECRET Hq 34ADD CDC, Subj: Tactical Operations in Albuquerque ADIZ During Emergencies be taken to furnish this headquarters with detailed information regarding planned flights to include specific routes into or through this ADIZ during emergency conditions. Such information will permit the preparation of plans for accommodation and particularly for identification of the air traffic which causes concern. The strategic and tactical importance of the Kirtland-Sandia-Los Alamos target complex is such as to warrant extreme measures to provide for its defense. /s/t/ WENDELL W. BOWMAN Colonel, USAF Commander SECK.

STOCKET

Hq 34th ADiv, CDC, Subject: Tactical Operations in Albuquerque ADIZ During Emergencies

PO&R-A (11 May 54)

1st Ind

26 May 1954

HQ CENTRAL AIR DEFENSE FORCE, Grandview Air Force Base, P. O. Box 528, Kansas City 41, Missouri

TO: Commander, Air Defense Command, Ent Air Force Base, Colorado Springs, Colorado

1. Reference paragraph 3 of above letter, all information pertaining to high priority tactical flights that has been made available to this headquarters has been forwarded to the 34th Air Division. A tabulation of this information is as follows:

a. AMC - Routes and aids required were forwarded from Head-quarters ADC 19 December 1953 and indorsed by this headquarters to 34th Air Division 28 December 1953.

b. Navy - Routes and aids required were forwarded from Head-quarters ADC 30 March 1953 and indorsed by this headquarters to 34th Air Division 10 April 1953. An additional listing of Navy Pacific Fleet flights was received from Headquarters ADC and indorsed to the 34th Air Division on 20 May.


c. MATS - Routes and aids required were forwarded from Head-quarters ADC 11 February 1954 and indorsed by this headquarters to 34th Air Division 19 February 1954.

d. TAC - Aids required were listed in letter from Headquarters ADC, dated 17 March 1952. None were in the 34th Air Division area; however, as was stated in the Headquarters ADC letter and paraphrased here: "In the event a high priority military flight should be ordered by USAF, the required navigational aids would be provided subject to the following conditions:

- "(1) File an IFR flight plan regardless of weather conditions, listing the minimum aids required.
- "(2) When selecting aids, extreme care should be taken to select aids at least 150 miles from critical target areas such as New York City, Detroit, San Francisco, and Albuquerque."

e. SAC - Information regarding aids and routes is provided the Air Divisions by the respective SAC wings operating within the Air Division area. As is evidenced by the classified supplement to the 34th Air Division SCATER plan which is being forwarded under separate cover for your approval, SAC forces have coordinated with the 34th Air Division.

SECK

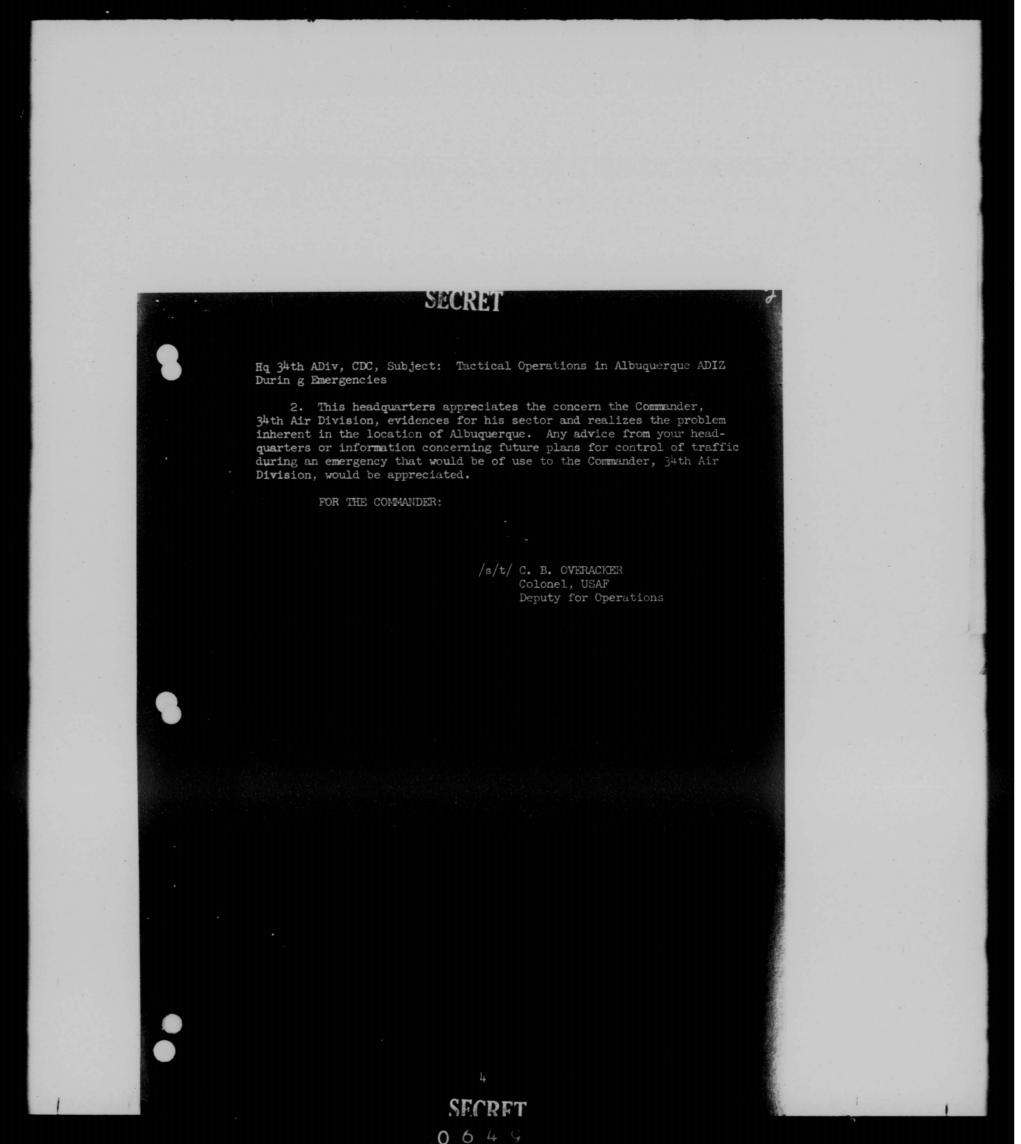

COPY

Hq 34th ADiv (Def) CDC Subj: Tactical Operations in Albuquerque ADIZ During Emergencies

ADOOT-B1 (11 May 1954)

2d Ind

8 Jun 1954

HQ AIR DEFENSE COMMAND, Ent AFB, Colorado Springs, Colo.


TO: Commander, Central Air Defense Force, Grandview Air Force Base, P. O. Box 528, Kansas City 41, Missouri

- 1. This headquarters is well aware of the problems associated with tactical air traffic through an ADIZ during periods of emergency or air defense warning yellow or red. The concern of the Commander, 34th Air Division (Defense), is appreciated and is certainly well justified.
- 2. A conference is being held in Headquarters USAF on 10 June to be attended by representatives of all major commands and the Navy. The conferees will attempt to resolve airspace requirements, establish a command or service priority listing, and discuss routing of tactical traffic together with navigational aids required along these routes. We believe that mutually acceptable procedures must be developed whereby all commands can accomplish their assigned mission.
- 3. Reference is made to paragraph three of basic letter. All information available to this headquarters has been disseminated to the defense forces. The route and navigational aid requirements applicable to each major command and the Navy have been made available to each air division (defense) commander. All air divisions (defense) will be able to correlate flight plan data (which includes an identifying three letter prefix) with the EMP route and navigational aid requirements of major commands and Navy.
- 4. We do not believe that the volume of tactical air traffic through an ADIZ during a military emergency will be so intensive that it will saturate the capability of the defense system. As pointed out in our recent indorsement to your letter on Navy (Pacific Fleet) requirements, we have requested Headquarters USAF to consider giving air division (defense) commanders the authority to divert tactical air traffic around threatened or battle areas. This capability, if approved, will further assist us in accomplishing the defense mission.

BY ORDER OF THE COMMANDER:

/s/t/ JAMES S. PURDUM Major, USAF Asst Command Adj.

SECRET

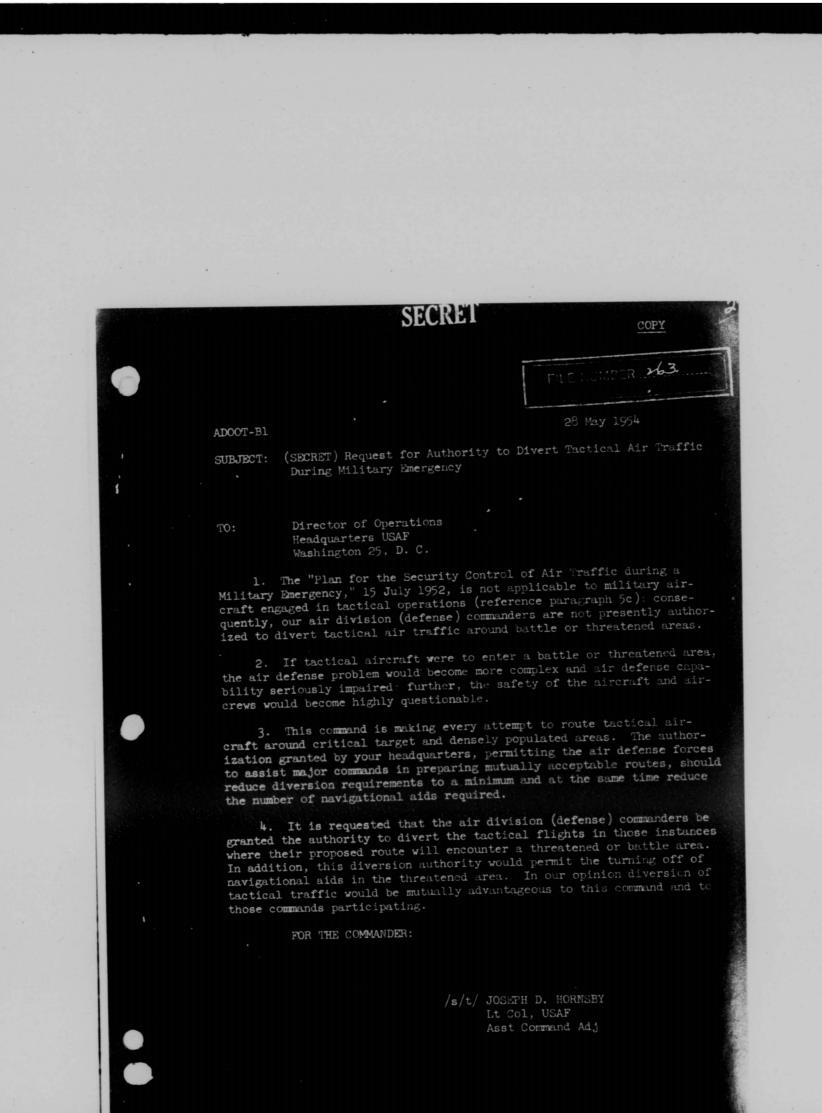

CECDET

CUNTINEINITAL

HEADQUARTERS
CENTRAL AIR DEFENSE FORCE
GRANDVIEW AIR FORCE BASE
'GRANDVIEW, MISSOURI

4 OCT 1954

104

PORR-R

SUBJECT: Security Control Positions (Uncl.)

TO: Commander
Air Defense Command
Ent Air Force Base
Colorado Springa, Colorado

- 1. Reference is made to a letter from the 35th Air Division, subject as above, 27 August 1953, and your 2d Indorsement thereto.
- 2. Approval was granted to establish security control positions at Jacksonville, New Orleans and Washington ARTOUS provided adequate communications were available and agreements for participation of comcerned augmentation radars were adequate.
- 3. It is requested that security control positions be established at Jacksonville ARTCC to provide air movements information on a twenty-four hour basis.
- 4. Initially the Jacksonville ARTCC will provide air movements information to the Winth Air Force Tactical radar network through the 507th Tactical Control Group radar located at Myrtle Beach, South Carelins.
- 5. The Minth Air Force CADF Joint Agreement is considered adequate for purposes of assisting in identification of air movements. Units of the 507th Tactical Control Group operate on a twenty-four hour basis and have agreed to accept responsibilities concerning all phases of air defense operations.
- 6. A request for an air novements (AM) circuit from the TAC ADDC at Myrtle Beach to the Jacksonville ARTOC has been submitted by previous correspondence. Entrance facilities and cable pairs are available for this circuit. Operational date for this circuit was requested for 15 October 1954. It is recommended that staffing of positions required for security control at Jacksonville ARTOC coincide as closely as possible with the operational date of the AM circuit.


FOR THE COMMANDERS

ce: Comdr, 35th ADiv Comdr, 507th Tac Com Op MILTON A. HENDERSON Capt. USAF Asat Adjutant


CADF-6479 - 54

0 6 5

Cometa VC ADES	CONTE		50/4
Asst Prog	PORR-R Subje (Uneld) Sees	rity Control Positio	
S/ Adm Rode Mgt	ADOOT-HQ (4 Oet 54)	let Ind	8 NOV 1954
Class Hist	NO AIR DEFENSE CONGLED, BE	A AFB, Colorado Spri	ngs, Coloredo
Pub Comd Surg Comd St.f JA Cond Chap	TO: Comender, Central Ai Grandview, Hissouri		
Comd IG Insp Sys PM Fit Sity PIO DCS/C Bud Fin Mgt Anlys Stat	l. Reference is made optablishment of security is being held in absymmen methorization relative to mente for the balance of F the results of the evaluation of the controller.	pending an evaluation at pending an evaluation let Quarter AVIS oblines. If the are a size of the area	m of the MIS budget lightions and require- m will be advised of swilable to reinburse
DCS/P Civ Pers Mil Pers Amm Anget Off Anget Cols & Rods Spec Actions OS	2. Reference is made on the request for an air Myrtle Beach to the Jackso evaluation of our budget a above.	mylle ARTOC is being withorisation as desc	of withheld pending the
Pere Sv PPR MAF Tng XCS/I OI R & E	BY ORDER OF THE C	COOCAN DER:	mgt 5
S & T DCS/O C C A C & E M & O O C D	MEMORANDUM FOR THE RECORD:		
Ope Anlys O & T P & R Wea O DCS/M		Major, U Asst Com	SAF imand Adj
Acft Elect On Sup & Sys Instl Log Plans Hq Sq Sec	COMEBACK COP	furnished	-76491/137
PCDA CAA Will be Confirmed in	Furnished (Date)	(Inftiale)	ptt
Std Publication Form Under par 3a, ADC29 5-3 Prepared by Capt 1 Tel me 2722-28	asallo/adg	2	
6 November 1	954	1 A 2 TO 2 A 2	
ADC HQ Form 11 5 Feb 54 Revised	This correspondence is eliminated Far 23 h , AFR 205-1, 24 Jul 53, or for	in secondance with	Stanteurs

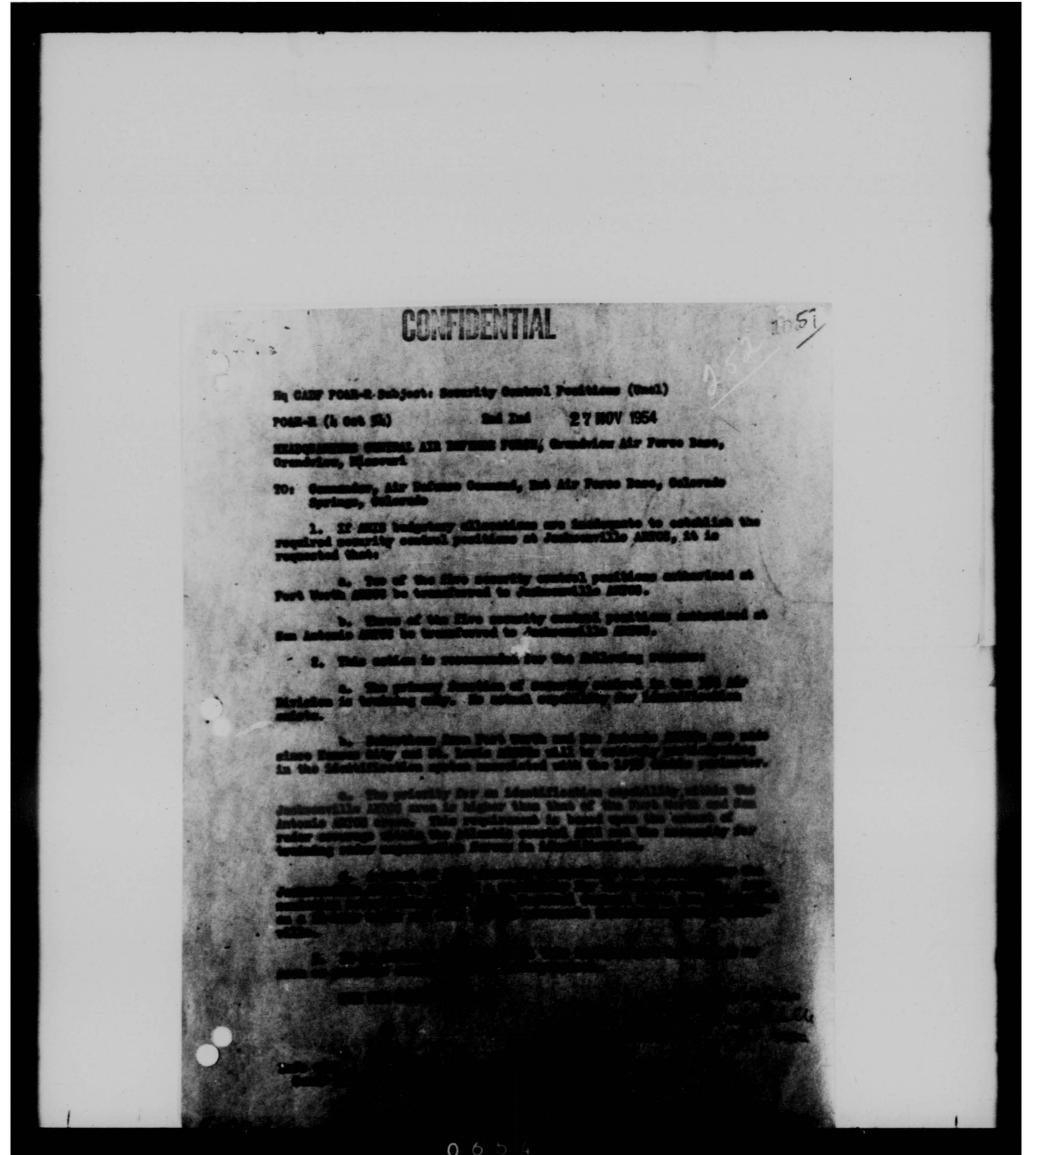

O 6 5 4
THIS PAGE IS DECLASSIFIED IAW EO 13526

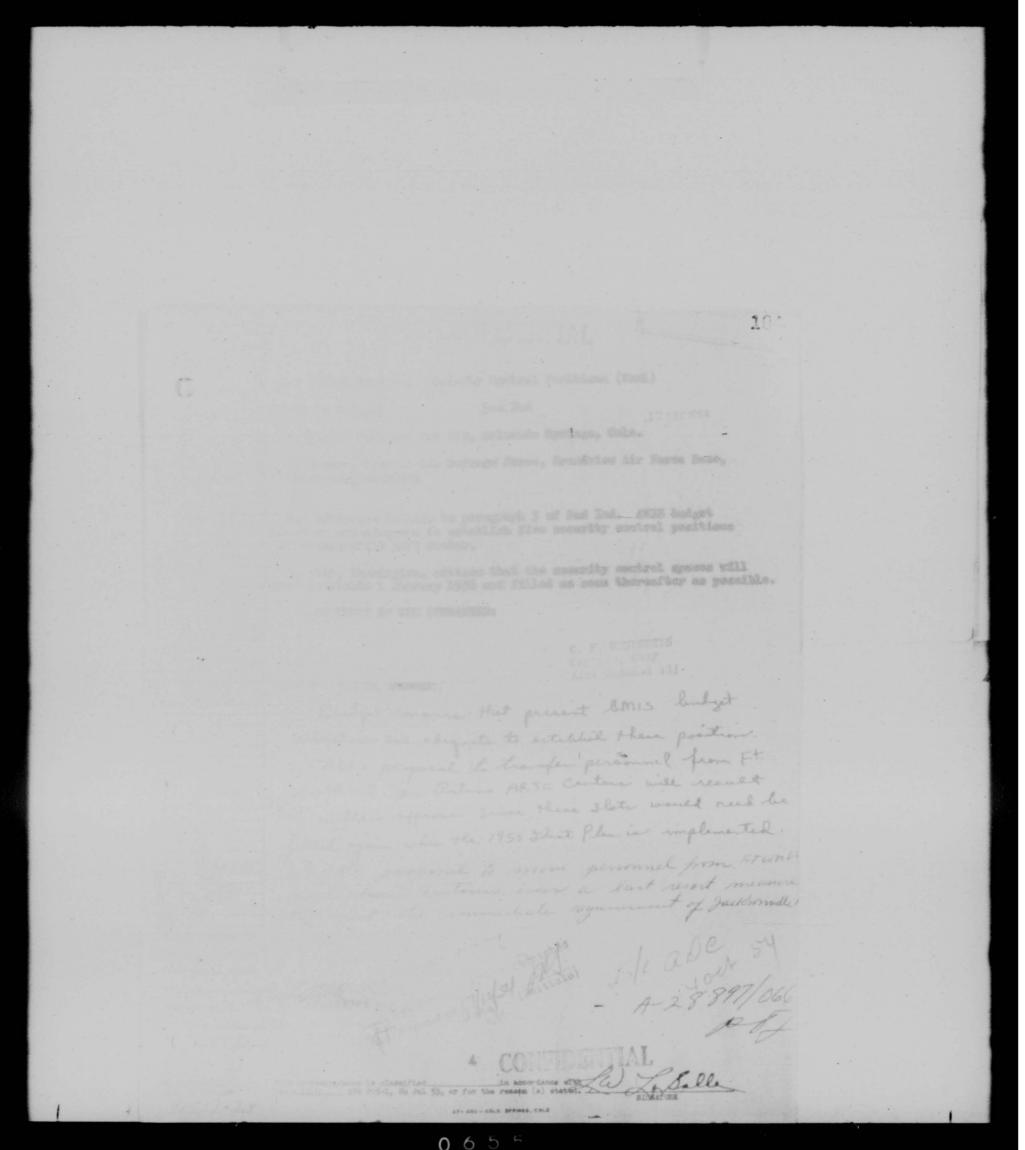

HEADQUARTERS
CENTRAL AIR DEFENSE PORCE
GRANDVIEW AIR PORCE BASE
GRANDVIEW, MISSOURI

105

3 DEC 1954

POSR-R

SUBJECT: (Unclassified) Requirement for AMES Service

TO:

Commander
Air Defense Command
Ent Air Force Base
Colorado Springs, Gelorado

251

av

1. A requirement exists for establishing AMIS service at the Winnipeg ARTCU at the earliest practical date.

- 2. This requirement is based upon the following facte:
- a. The present method of obtaining air movements information through multiple relays has proven completely inefficient. Security controllers at Winnipeg ARTCC now provide data to the Minneapolis AMIS which is relayed to appropriate ABCC's. The time element involved results in the greater percentage of initial tracks requiring identification being classified as unknown.
- b. The amount of air traffic within the Winnipeg CADIZ requires special handling which is not possible through security control type service. The large number of tracks under surveillance of radar within the Winnipeg CADIZ, requires direct dissemination of air movements information to the identification agency as seen as possible. At the present time, there is no capability to provide position reports and/or changes in flight plans to appropriate ADGC's.
- c. The large geographical area, under control of the Winnipeg CADIZ, makes it next to impossible for dissemination to be accomplished through the Minneapolis AMIS efficiently. Again, the time element becomes critical, since the Winnipeg ARTOC control area overlaps the complete control areas of the Great Falis, Minneapolis, and Traverse City ARTCC's.

SECRET

CADF-7695 -54

V-620-1

STORET

105

Mq CADF, POAR-R, Subj: (Uncl) Requirement for AMIS Service

- d. The most critical area for identification by P-26, P-27, P-28, P-29, C-17 and C-16, lies within their surveillance coverage of the Winnipeg CADIZ.
- e. Proper use of fighter-interceptors, presently stationed or programmed for bases near the Canadian border, requires early identification sction of the track while still in Canadian territory. A quick and accurate identification system must be implemented within the Winnipeg CADIZ to insure that these fighter-interceptors are not always committed to tail-chase intercept action.
- f. Programmed Fourth Phase radars west of C-17, will require dissemination of air movements information to them by the Winnipeg AMIS.
- 3. A conference with DOT officials associated with the Winnipeg ARTCC was held at Beausejour, Manitobs on 18 19 November 1954.

 Arrangements were made for passing flight plans direct to C-17, which would relay those applicable to C-16. DOT officials stated that in the past they have been unable to pass flight plans, as desired, to include position reports. DOT officials also estimated that an increase of five (5) controller positions, in addition to the five (5) now authorised, would be required to provide AMIS service.
- h. It is requested that AMIS service from the Winnipeg ARTCC be provided:
 - a. P-26, P-27, P-28, P-29, C-17, and C-16.
- 5. Upon approval of this request, air movement (AM) circuite will be requested to the ACAW units listed in paragraph 4 above.


FOR THE COMMANDER:


Info Cy: Comdr, 29th ADiv Comdr, 3lst ADiv CLIFFORD H. REES Brigadier General, USAF Deputy for Operations


5

OCCUET

V.520-2

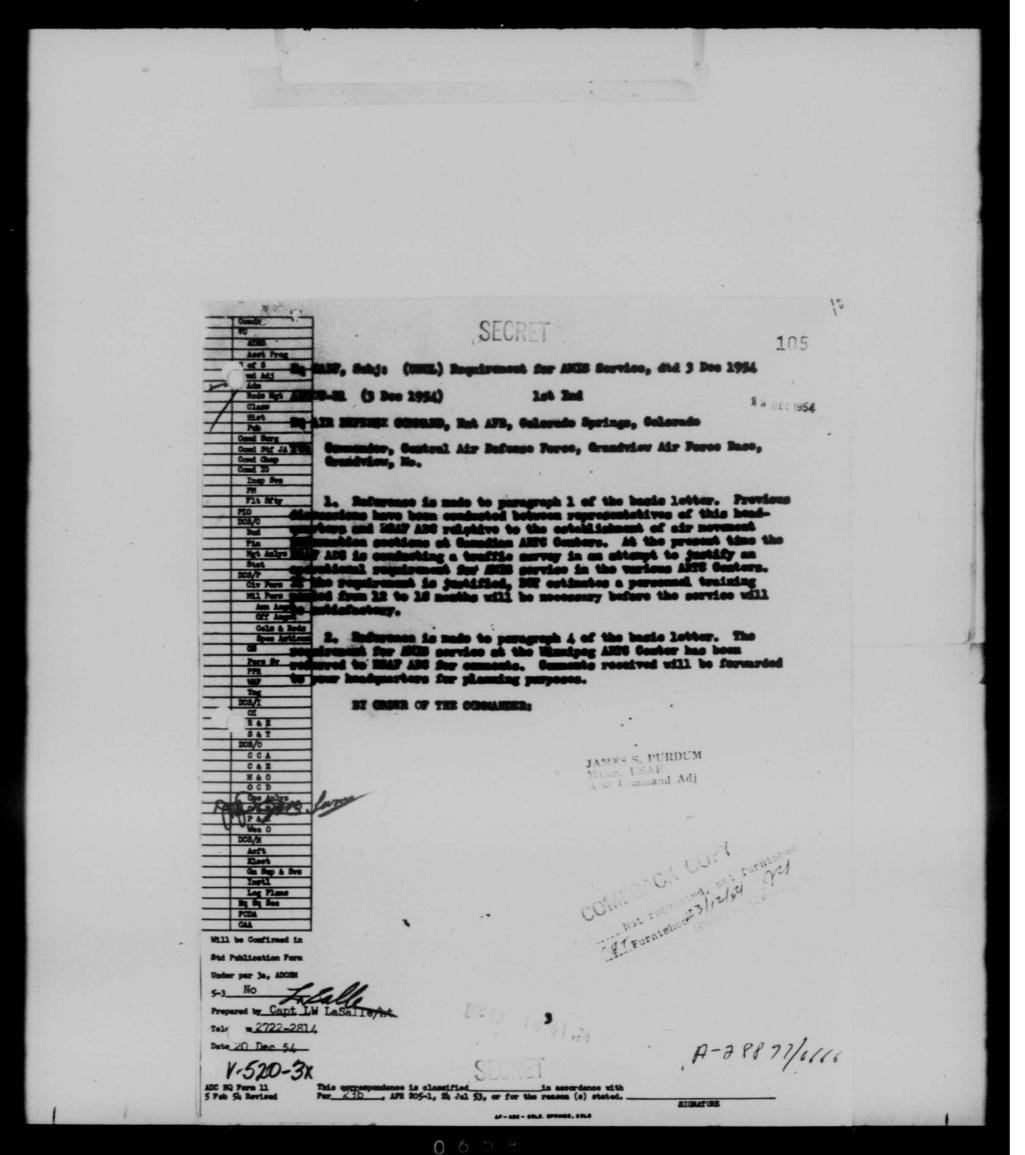

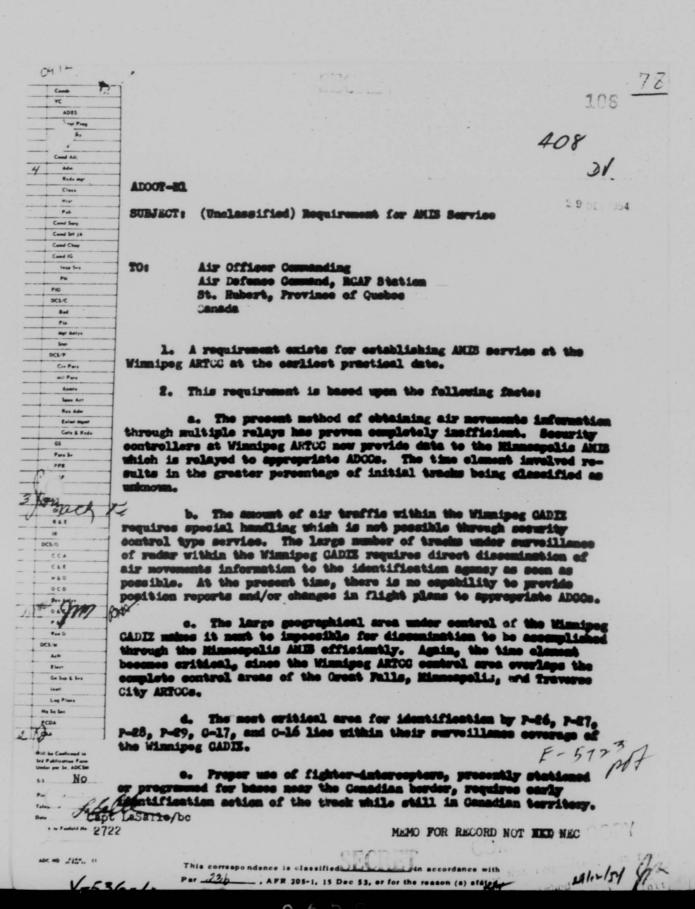

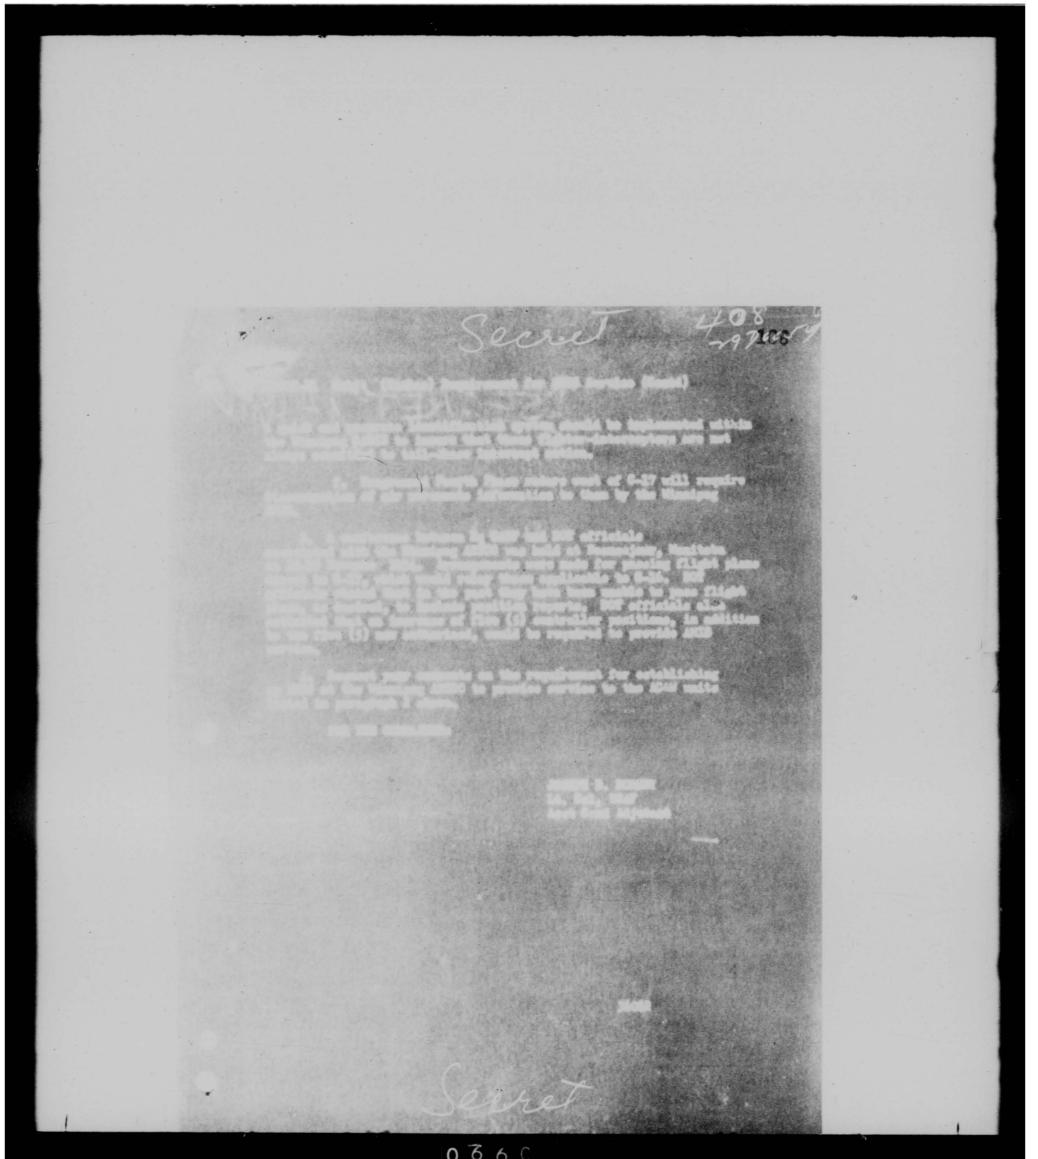


THIS PAGE IS DECLASSIFIED IAW EO 13526

COPY

107

HEADQUARTERS AIR DEFENSE CONSAND ENT AIR FORCE BASE COLORADO SPRINGS, COLORADO



16 DEC 1954

Mr. J. H. Tippets, Director Office Federal Airways Civil Aeronautics Administration Department of Commerce Washington 25, D. C.



Dear Mr. Tippets:

Our supplemental radar programs indicate that M and SM radars associated with the 1955 Identification Plan will be operational by December 1955. The completion of installation of the sites establishes a requirement for AMIS operation at the following ARTC Centers:

- 1. Kansas City
- 2. St. Louis
- 3. Memphis 4. Atlanta
- 5. Jacksonville

Air movement circuits required for this service have been programmed and should be operational by December 1955.

Request you take the necessary action to implement AMIS service on a 24 hour basis at the above ARTC Centers during 2nd Quarter Fiscal Year 1956.

Sincerely,

/s/t/ JOHN C. MEYER Colonel, USAF Director, Operations and Training

V-544-1X

COPI

159

101

POSR -R


SUBJEC! | Requirement for AMIS Service

TO: Commander
Air Defense Command
Ent Air Force Base
Colorado Springs, Colorado

1. In considering the identification system associated with the 155 double perimeter concept of operation a requirement exists for AIS operation at the following ARTCGs:

- a. Kansas City
- b. St. Louis
- c. Memphis
- d. Jacksonville
- e. Atlanta
- 2. Air movement circuits required for this service have been programmed and should be operational by December, 1955. Present programs indicate that M and SM radars associated with the 1955 double perimeter should be operational by December, 1955.
- 3. It is requested that AMIS service be implemented at the above locations during 2nd Quarter Fiscal Year 1956. It is further recuested that necessary funds be allocated for AMIS service at these locations on a twenty-four hour basis.

FOR THE COMMANDER:

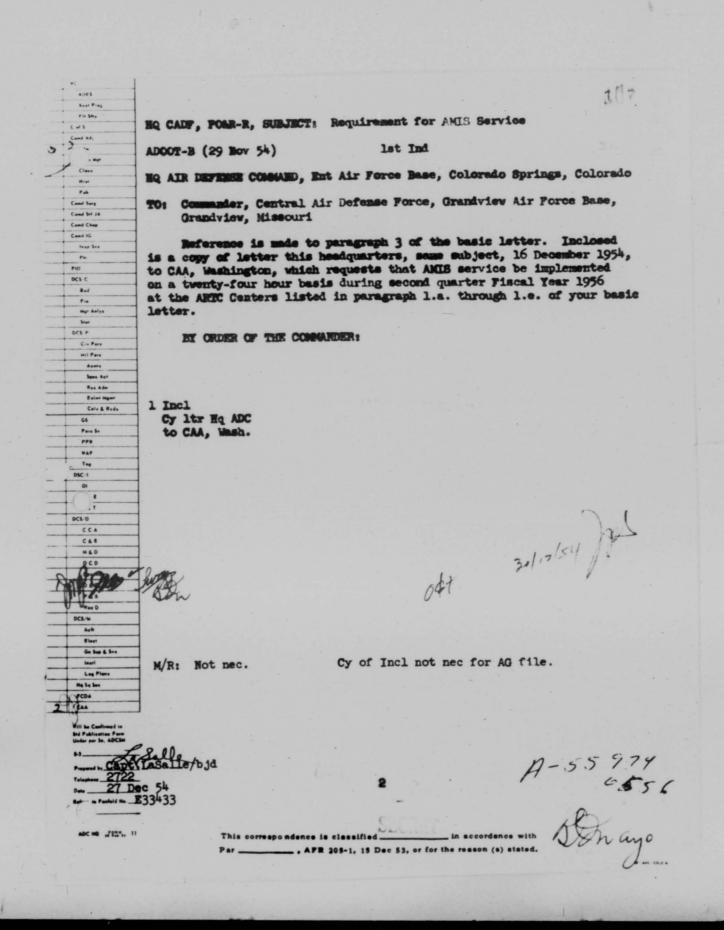

107

HEADQUARTERS
CENTRAL AIR DEFENSE FORCE
GRANDVIEW AIR FORCE BASE
GRANDVIEW, MISSOURI

PO&R-R

SUBJECT: Requirement for AMIS Service

TO:

Commander
Air Defense Command
Ent Air Force Base
Colorado Springs, Colorado

1. In considering the identification system associated with the 1955 double perimeter concept of operation a requirement exists for AMIS operation at the following ARTCCs:

- a. Kansas City
- b. St. Louis
- c. Memphis
- d. Jacksonville
- e. Atlanta
- 2. Air movement circuits required for this service have been programmed and should be operational by December, 1955. Present programs indicate that M and SM radars associated with the 1955 double perimeter should be operational by December, 1955.
- 3. It is requested that AMIS service be implemented at the above locations during 2nd Quarter Fiscal Year 1956. It is further requested that necessary funds be allocated for AMIS service at these locations on a twenty-four hour basis.


FOR THE COMMANDER:


/s/t/ MILTON A. HENDERSON Capt, USAF Asst Adjutant

33433

COPY


CADF-7577 -54

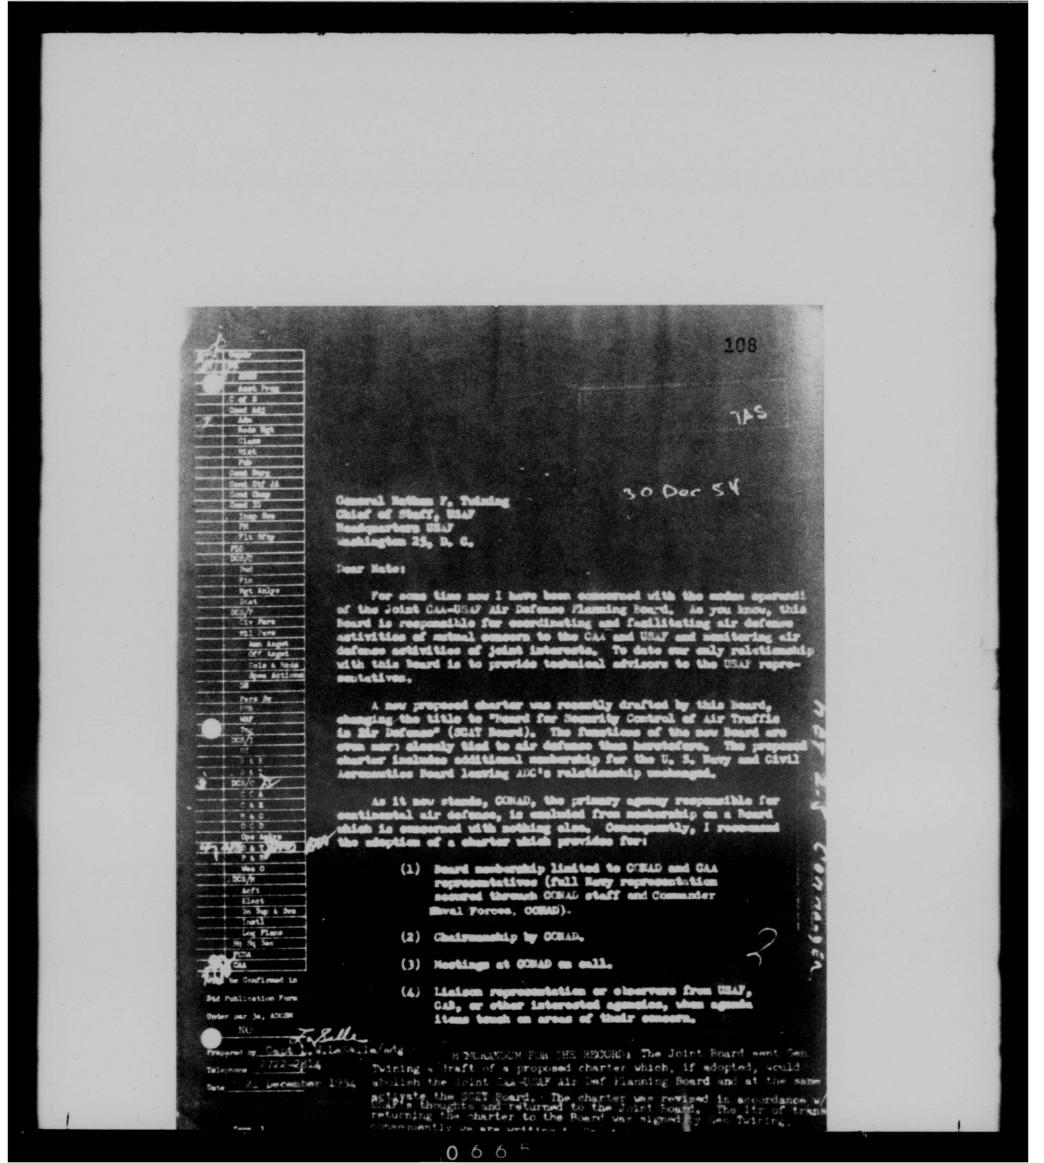


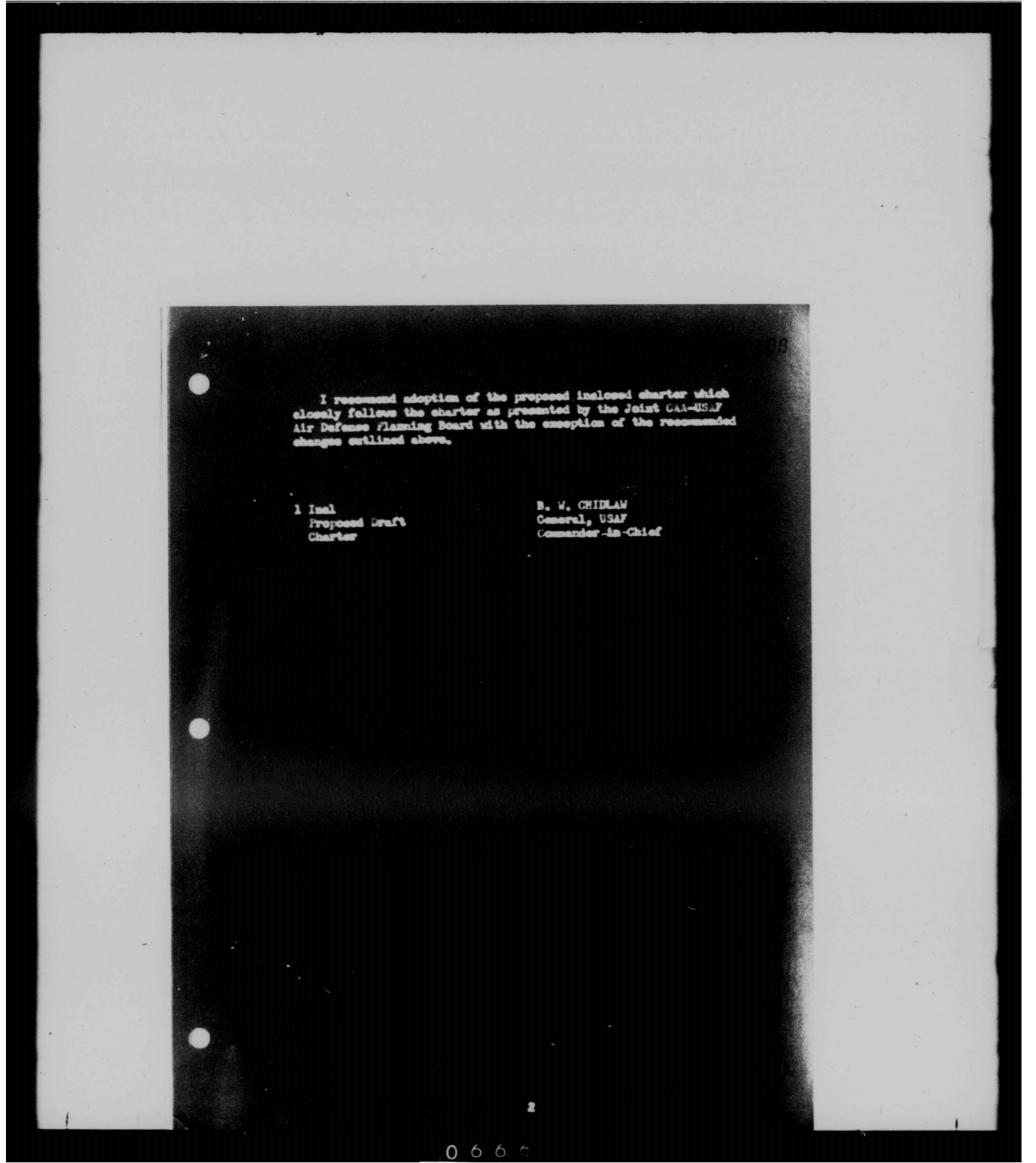

THIS PAGE IS DECLASSIFIED IAW EO 13526

BRAZE THE PERSONALITY CONTROL OF AND TRANSPORT IN ALL IN Short Titles Stat House I. Distant The Chief of Staff, Inited States Air Peres, and the Administrator of Sivil Assessation have naturally agreed to the establishment of an inter-agrany group to aid in the development, exercisation, and refinement of programs relaking to the presently control of air traffic in the air defence of the Inited Meter as a measure to assist each agency in the discharge of its responsibilities assigned by the Civil Acromention not of 1936, as assessed, (primarily Public Law 776 of the Mat Seagrees) and the Setional Security Let of 1947, as II. SEATION OF THE MAST MARD FOR THE SECRETARY SOUTHER OF AIR THATFAL A. There is hereby established the Board for Security Sentral of Air Traffic in his Defence, bereinefter called the Sitt Beard. B. The Milf Stard shall complet of a Stairman and Rescutive Secretary, and in addition, three numbers and three alternate mbore such from the Ambianated Air Indiano Amanat and the BRAZE

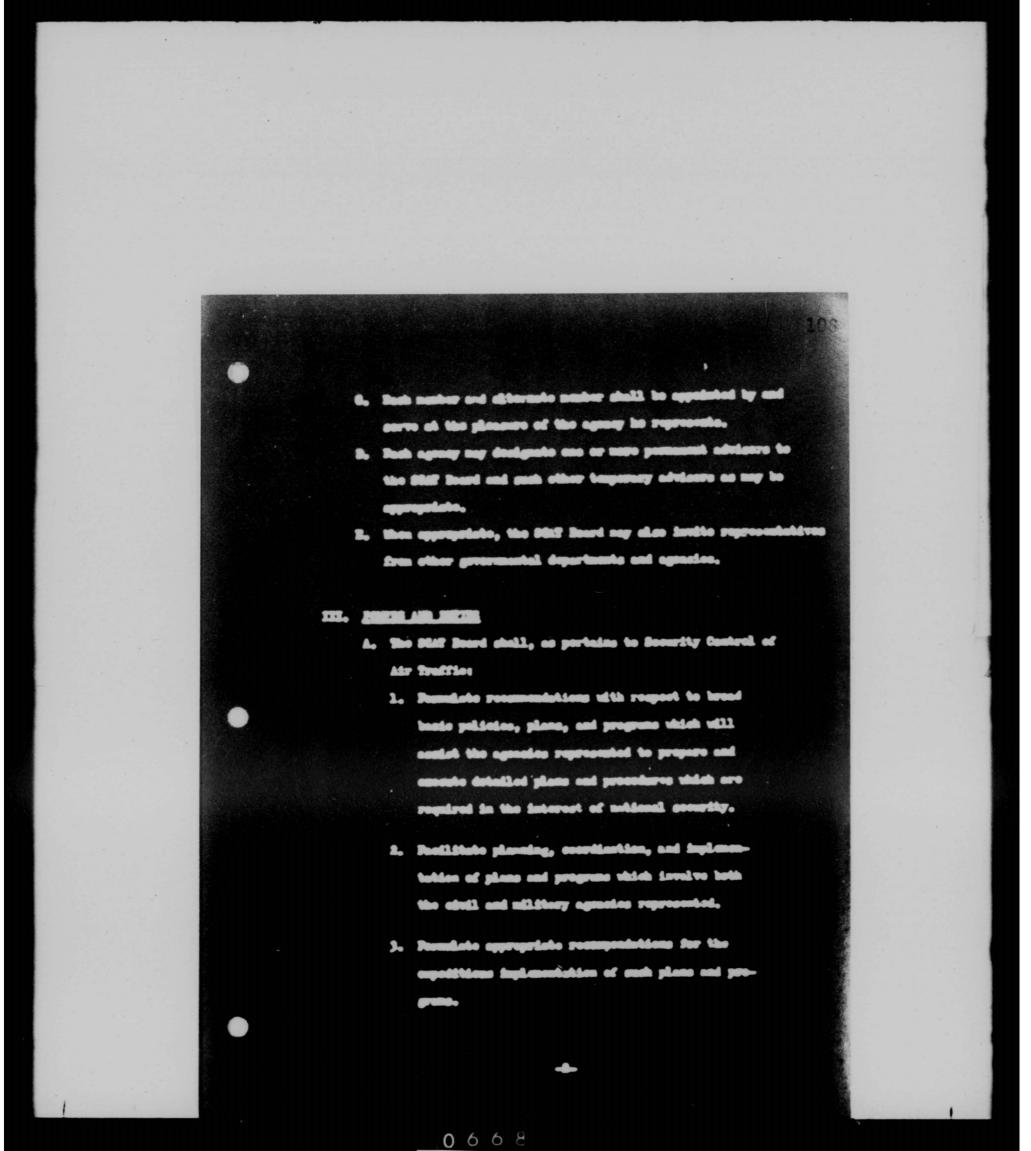

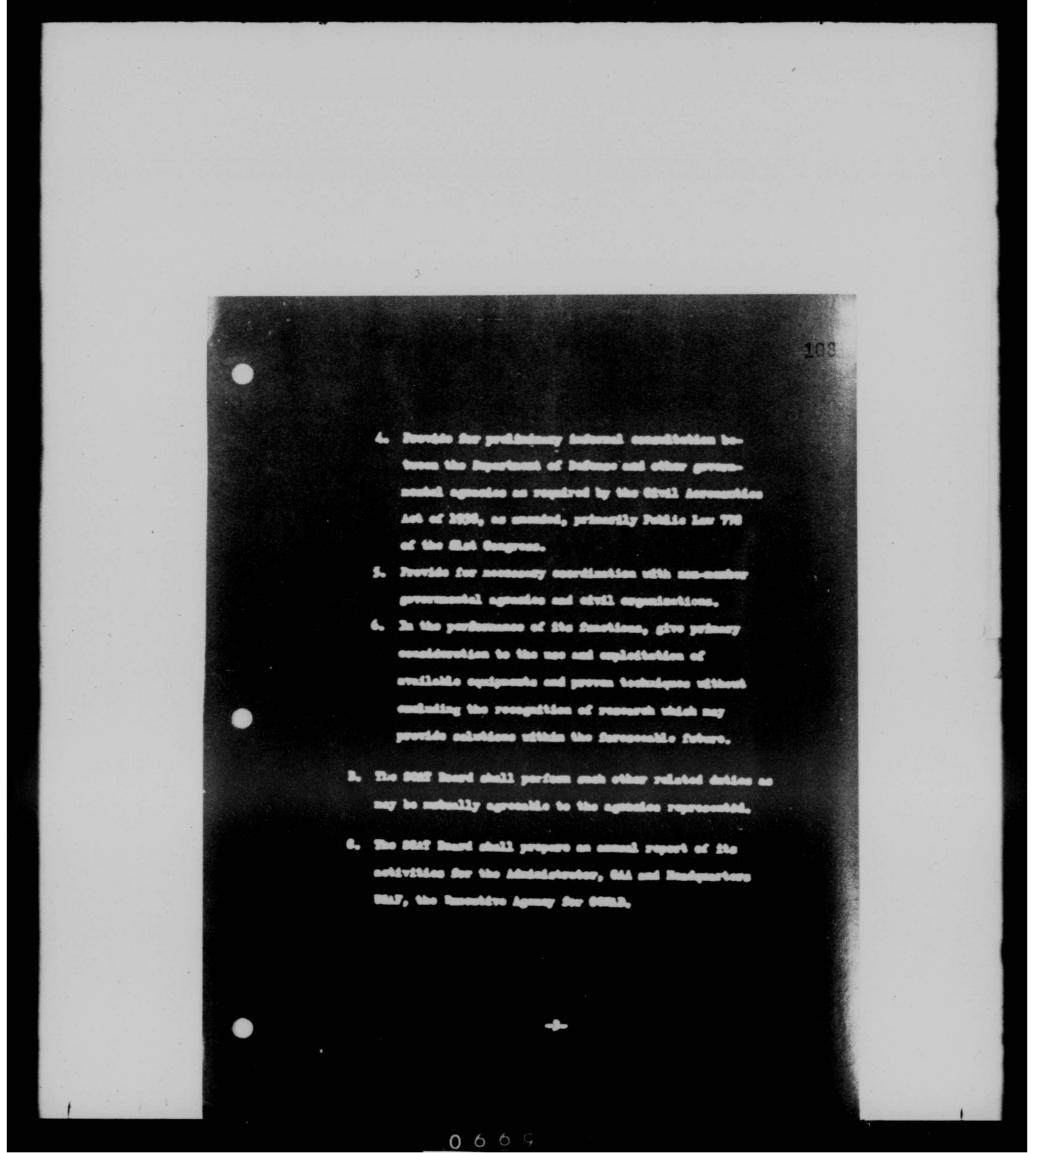

IV. COLUMN

- A. The Chadaman shall be appelated by the Commender, Costsmental Air Defense Comment.
- B. The Basestive Secretary shall be appointed by the Administrate of Sivil Assessation.
- 6. The Chairman may designate one of the other numbers as Vice-Chairman, the shall, in the absence of the Chairman, not furand operates the powers of the Chairman.


V. PROCESDES AND ADDITIONATION


- A. The SGAT Board shall meet at the call of the Chairman or at such time or times as may be fixed by the Board.
- B. Only the Chairman and members or, in their absence, their designated alternates shall passess voting power. The Reseative Secretary shall not passes voting power. The pressure of one number or one alternate from each number agency shall constitute a query.
- 6. Recumendations which are concurred in by a majority of the numbers shall be forwarded to appropriate agencies for consideration and action. A minority report, if salmitted, shall accompany the recommendation.
- S. All necessary procedural rules shall be prescribed by the SMT Boord.
- E. The sect of travel by numbers and staff shall be beene by the agency from which the individual is appointed.

VI. AMERICAN AGRICUTUR


A. The SMT Board is expensed to establish an Industry idvisory Committee consisting of representatives from industry organientions.

0 6 7 C

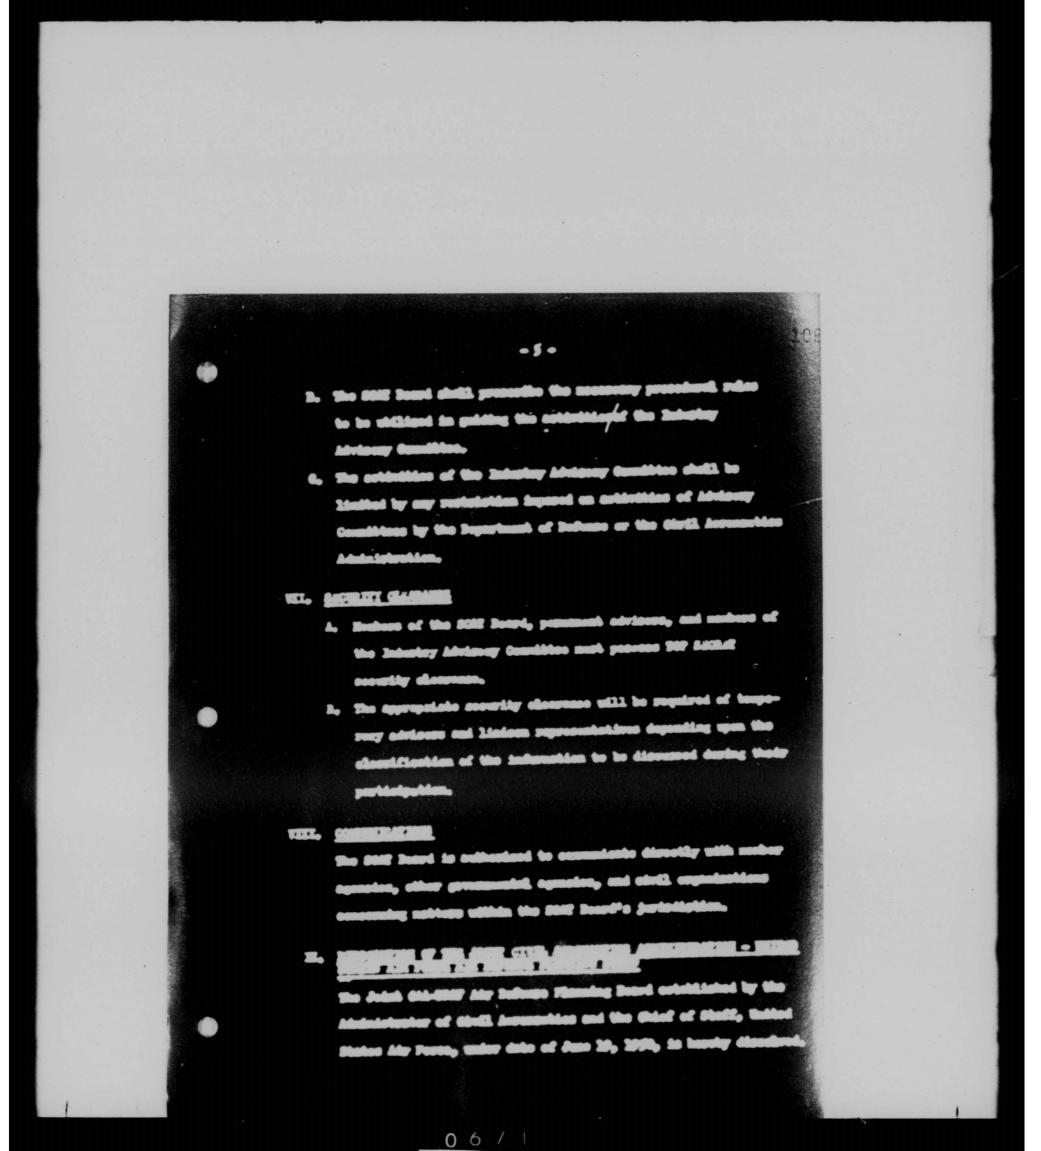

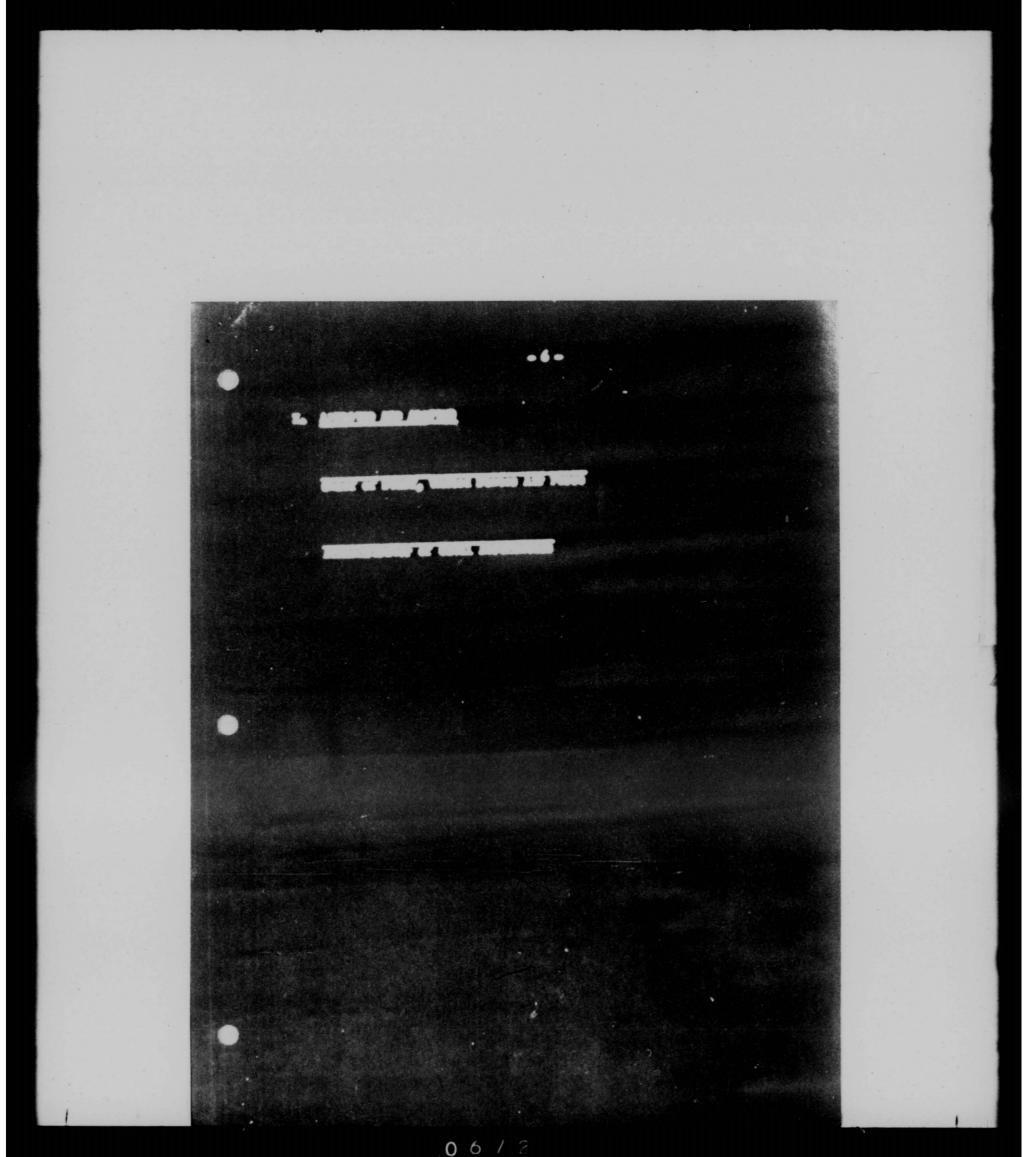

THIS PAGE IS DECLASSIFIED IAW EO 13526

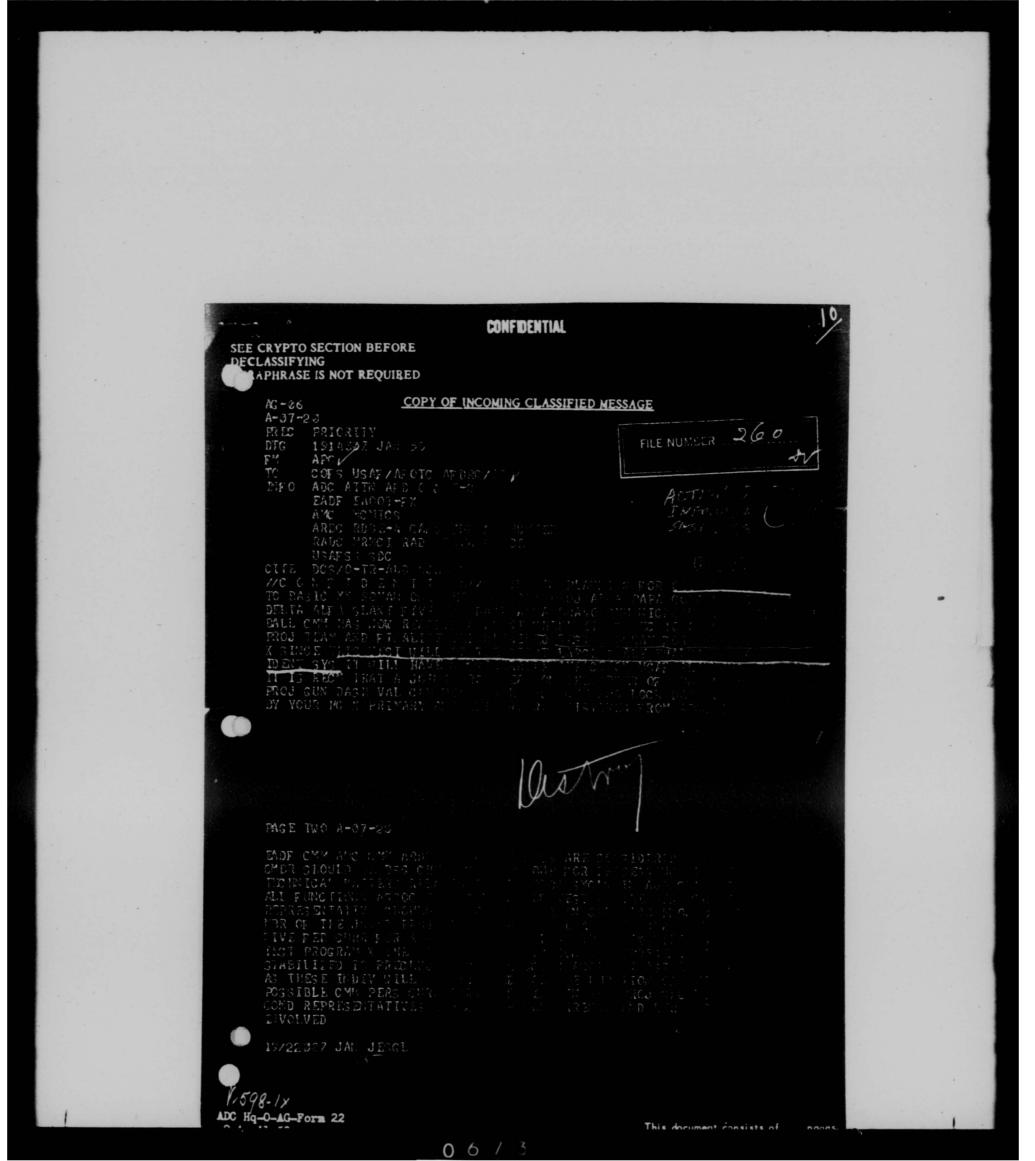

EAOON-CM

22 DEC 1954

SUBJECT: (Unclassified) IFF Equipment for ANO Pighter Squadrons

Commander Air Defense Command Ent Air Force Base Colorade Springs, Colorado

1. A recent survey of ANG Fighter Squadrons participating in the Air Alert Flam and/or having an M-Day assignment to RADF indicates that only 57% of the assigned fighter or T-31 alreraft are equipped with bank F IFF. Information available to the ANG Fighter Squadrons and this command does not indicate that IFF equipment is programed for installation in those ANG fighters and T-33s not presently equipped or whether aircraft programed for ANG Fighter Squadrons will be equipped with IFF.


2. Request a requirement be established or that other appropriate sotion be taken to equip all ANG fighter and T-33 aircraft with suitable


3. The following justification for IFF equipment is submitted:

a. Provides a method of positive interceptor control which is not otherwise possible due to poor blip scan ratio for jet type inter-


b. Use of different modes offers a means of recognizing flight landers, alements, or individual siroraft after interceptors have en-


c. Provides immediate indication of an aircraft in distress.

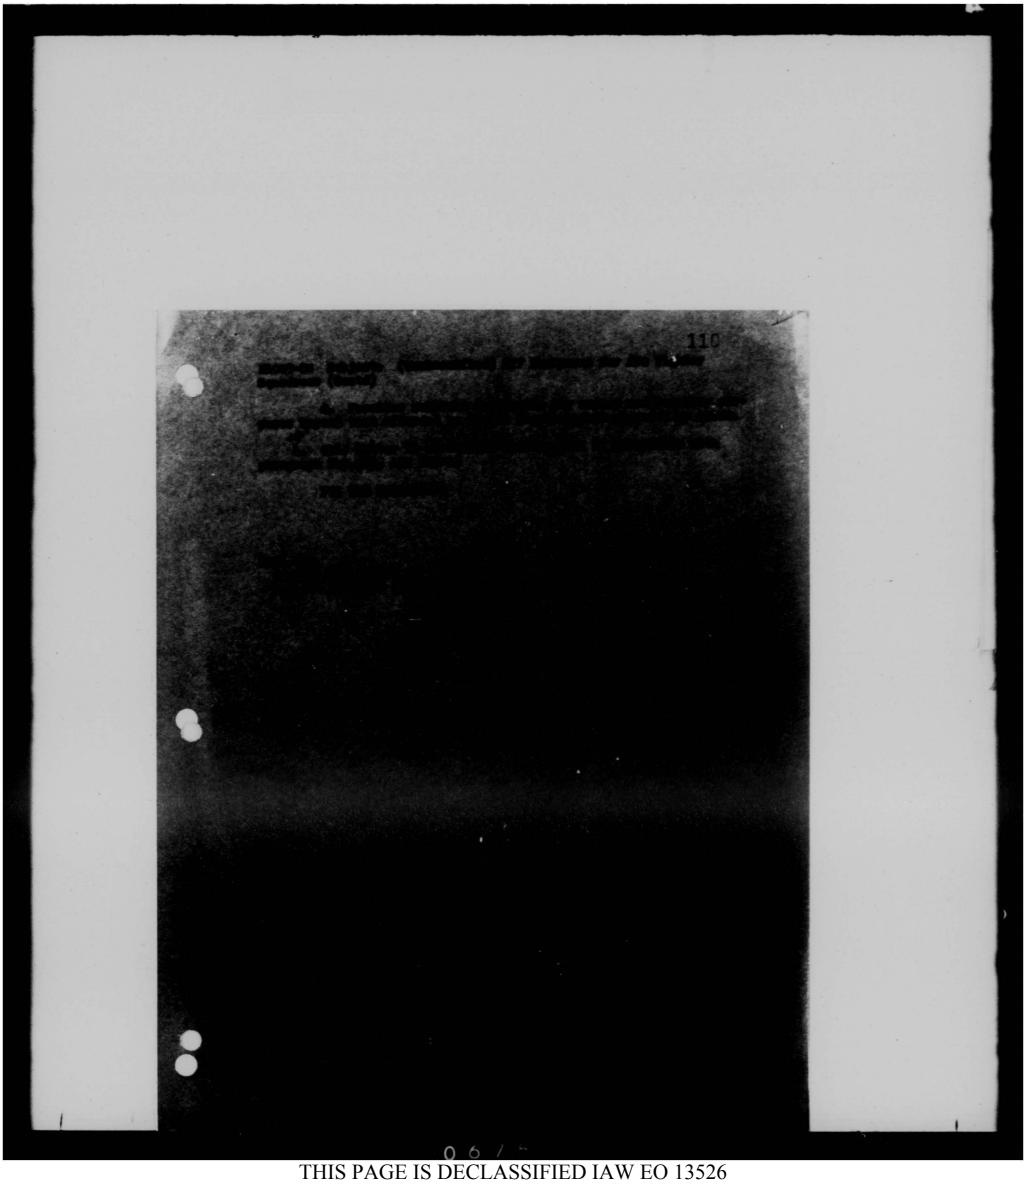


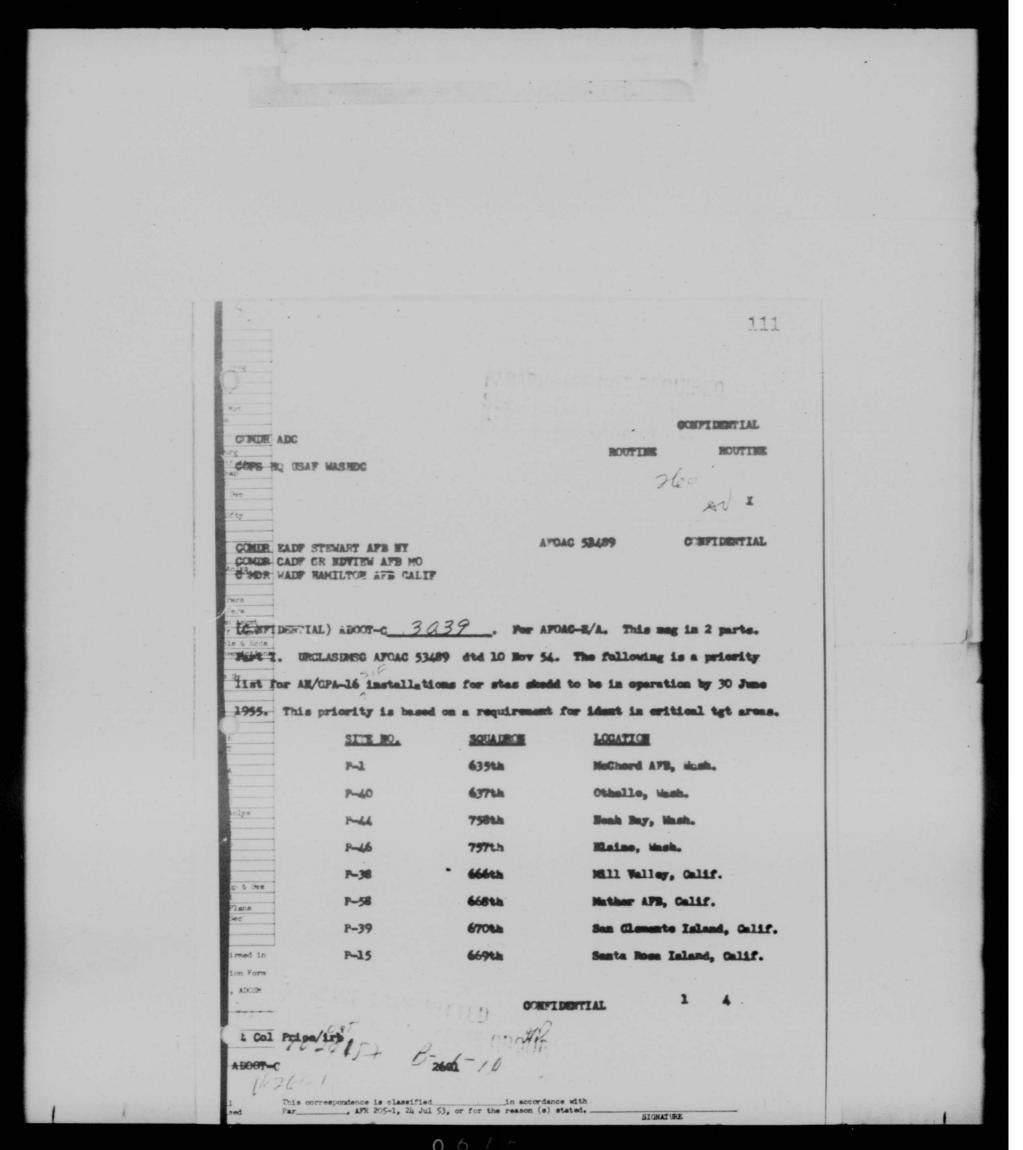

					·	
10						- Control
9						
				111		
Prog						
	ENFIDENTIAL) ABOOT-C	*				1
Mgt	SITS NO.	SQUADRON	LOGATION			
irg	1-99	750th	Boron, Calif.			
erg Ef JA Pap	N-94	687th	- Striland AFB, H. H	lext.ee		
Sys			Host Mose, N. Mext	60		-
irty	P-24	661.et	Cut Bank, Homt.			-
inlys	P-74	774th	Madera, Calif.			
ere	P-51	768th	Moriarity, Mex.			
ers .	P-69	756th	Finland, Minn.			
h Angest Asgest Da & Reds	P-78	745th	Damcanville, Tex.			-
ec Actions	P-71	789th	Omaha, Nebr.			1
Sv	P-37	776th	Pt. Arena, Calif.			
	P-17	739th	Wadens, Minn.			
	P-57	759th	Massalle, Wash.			
	P-29	785th	Finley, N. Dak.			
nlys	P-42	663rd	Lake City, Tenn.			
	P-72	738th	Clathe, Kans.			
	P-25	778th	Havre, Mont.			
4 Svs	9-27	780th	Fortuna, N. Dak.			
tans	P-76	751st	Mt. Laguma, Colif.			
	P-60.	788th	Waverly, Ioua.			
med in	1-2	775th	Cambria, Calif.			
on Form	P-28	786th	Minot, N. Dak.			
	P-11					
		680th	Yank, Mont.			1
	P-33	777th	Klamath, Calif			
1/-	761-2 P-32	636th	Condon, Ore.			
1 1 1	This correspondence is classified_	in accordance	with		The state of the s	

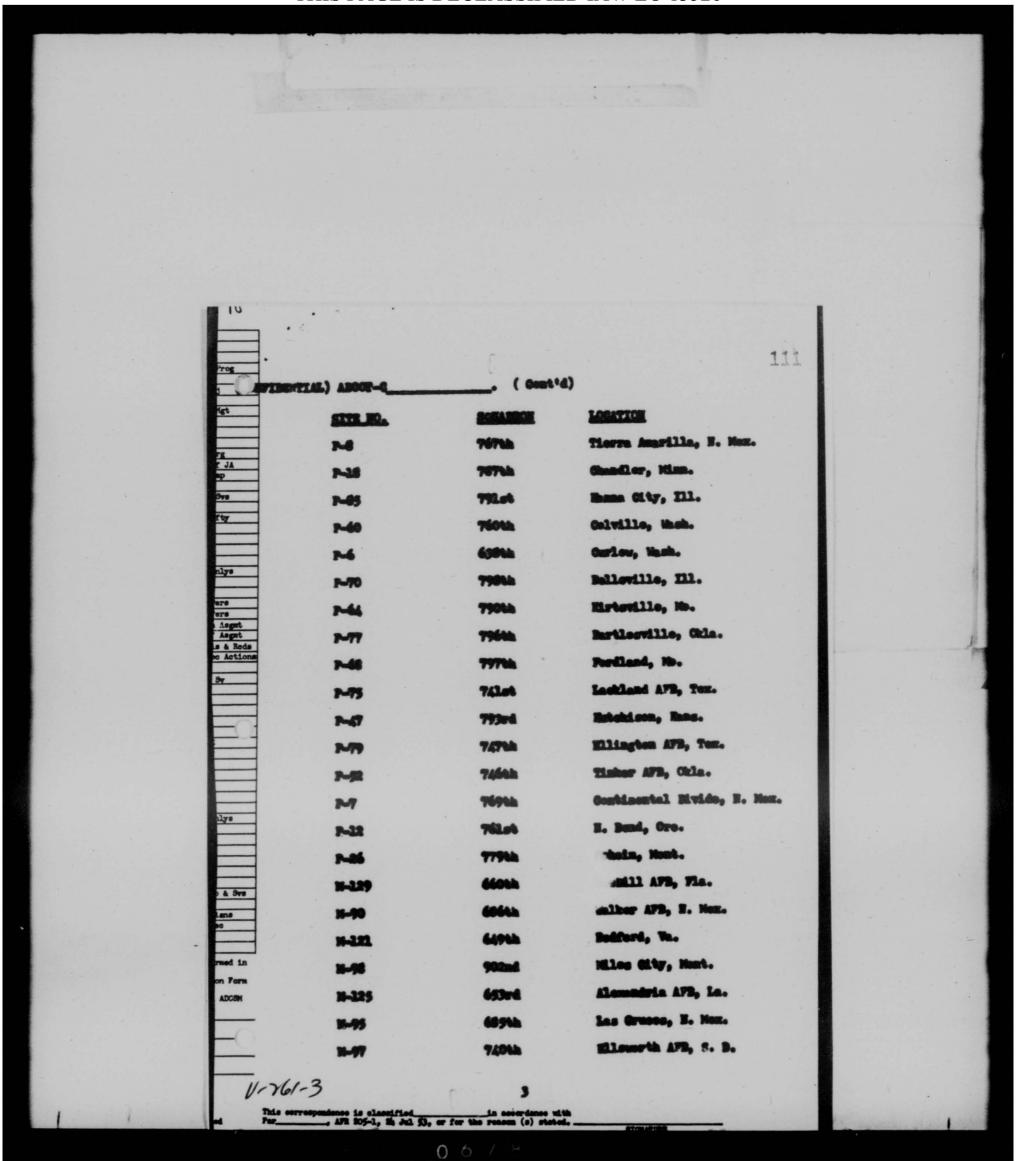

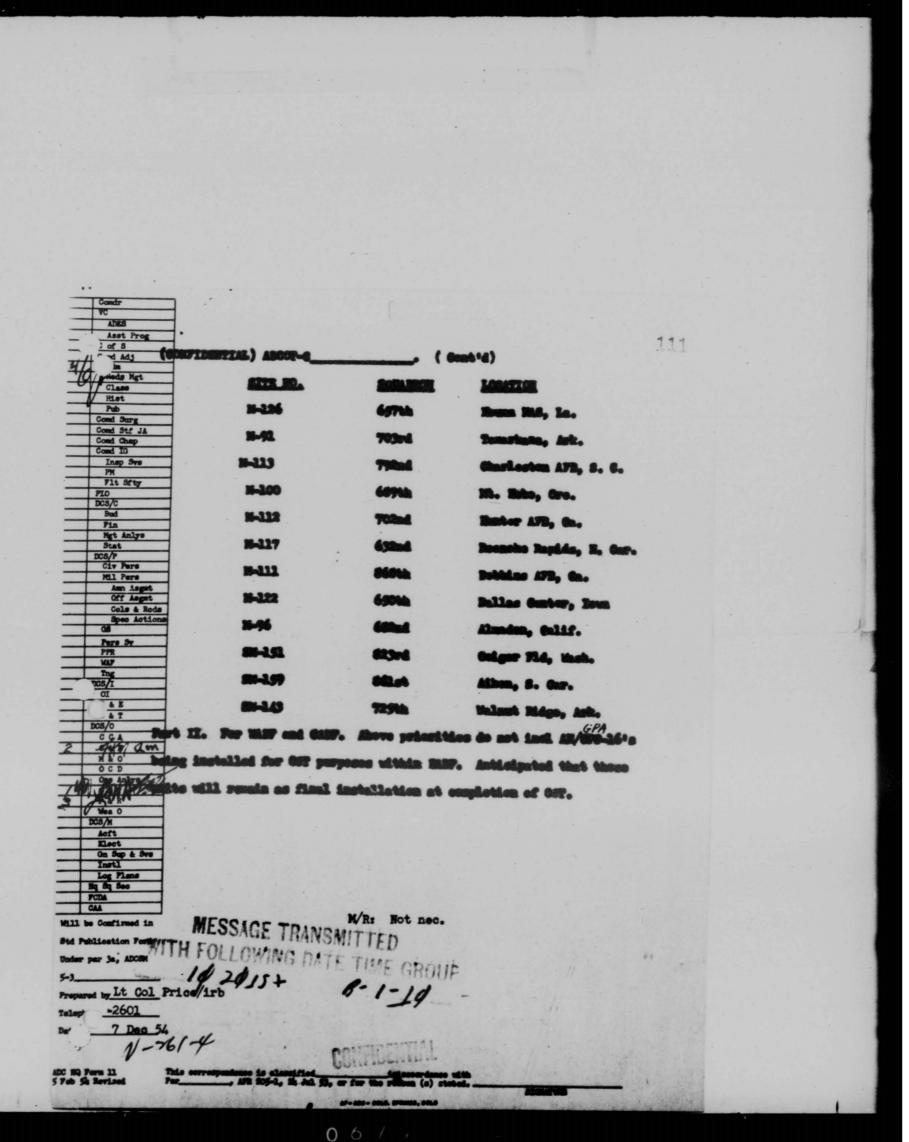

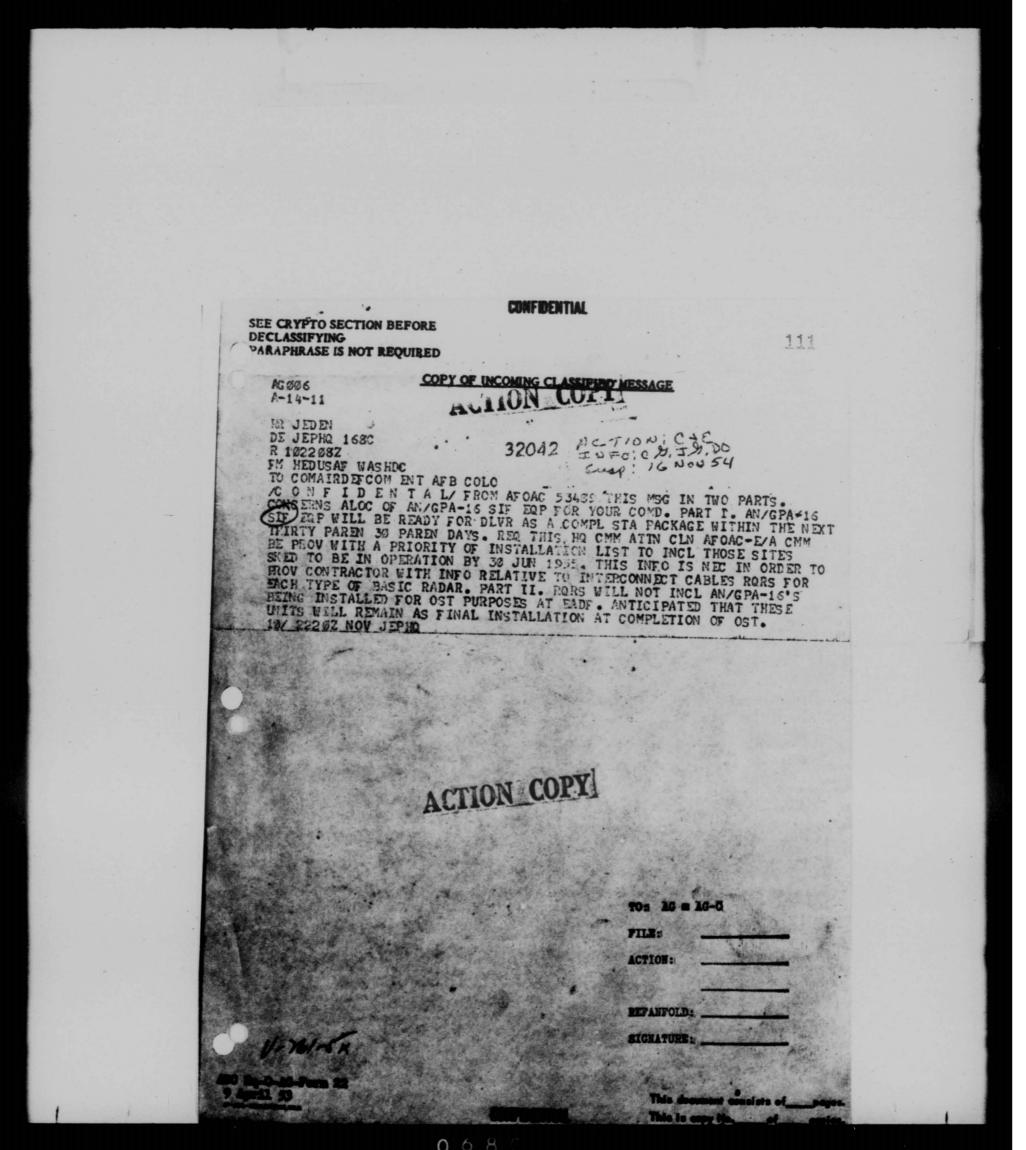

THIS PAGE IS DECLASSIFIED IAW EO 13526

AIR DEFENSE COMMAND 70: 1 Pirector of Reg irecots
Hostgooders Tells
enting a 21, R. C. 1. The beacon assist capalility of the Mark X IFF system is being used within this occurs for it increal of jet interceptors, due to the scall radar scholag area of jet type already. An operational deficiency exists in this technique, in that the Mark X IFF returns have too great an azimuthal dimension to permit accurate positioning of interceptors for lead collision attacks. In order to overcome this deficiency, the following a slitative operational requirement is submitted in accordance with AFR 27-3. 2. The AS-295/UP Mark X ITF antenna is currently being used on all search a control redars operated by this command. The characteristics of this actions are such that it produces a beam width on the order of this magnitude is too great to accurately position interceptors for lead collision attacks. An antenna having a beam width on the order of 20-210 will satisfactorily evercome this deficiency if it will result in a reduction of asimuthal size of the displayed IFF seturn by approximately one-half. 2. Non-molature: It is believed antenna AT-309/GFX (USAF Exhibit R/G-2146A) would satisfactorily meet this command's requirement. 4. <u>furpose</u>: Subject antenns will be used on all search and control radors operated by this command to provide a higher degree of azimuth discrimination for Mark X IVF operations. 5. Performance: Antenna must provide a maximum beam width of 2.5° with side lobe suppression on the order of 25 db. The azimuthal size of the displayed IFF return must be reduced to approximately half its present size to penalt effective control of interceptors. 6. Design and Special Fentures: Antenna must be electrically and mechanically interchangeable with antenna AS-295/UP. Antenna must be usable with the following ruders: AN/CFS-6B, AN/FFS-3, AN/MPS-11, 1693-3

No ADC ADCCE-E, Subj: (Uncl) Cumlitative Operational Paguirement for an Improved Mark X IFF IR Antonna (Contd) AN/FPS-8, AN/FPS-10, AN/FPS-7, of the AN/FPS-7 is promoved by the Air Force. Antenna, when installed, must be capable of proving under currently installed and proposed resonant. 7. Propose: State of James: Antonio will be required on a one-for-one basis to replace the 12-17://l satisfies correctly in use and programmed. Total command requirements will be approximately 260 plus necessary spares. 8. Method of Meeting the Dequirement: It is believed that the use of the AT-209/GFX or similar extends will reduce the Hapland IFF return by approximately one-half the size of the correct display; if this is true, recommend the procurement of sufficient AT-309/GFX or similar extennas to meet the command requirements. FOR THE CONSTRUCT. Info cys: Comdr, AMC Coudr, ARDC 1693-4

112 9

Basic letter Hq ADC, File No. ADOCE-E, dtd 30 Jul 54, subj: (Uncl)
Qualitative Operational Requirement for an Improved Mark X IFF IR
Antenna

1 2 OCT 1954

AFDRQ-AD/C

1st Ind

Department of the Air Force, Hq USAF, Washington 25, D. C.

TO: Commander, Air Defense Command, Ent Air Force Base, Colorado Springs, Colorado.

The Air Force has procured eleven antenna AT-309/GPX as part of the AN/GPX-19, Mark X IFF interconnecting equipment for AN/CPS-1 - AN/MPS-5 radars. Equipment for operational suitability test at Air Proving Ground Command is expected to be available about January 1955. It is anticipated that test data on the improved traffic control capability of the larger antenna compared to the AS-295/UP will be available about July 1955. Your headquarters will be advised of the results of the Air Proving Ground Command tests.

BY ORDER OF THE CHIEF OF STAFF:

Deputy Chief of June, Dovelopmen

Hq ADC ADOCE-E, Subj: (Uncl) qualitative Operational Requirement for an Improved Mark X IFF IR Antenna

ADOCE-E (30 Jul 54)

2d Ind

HQ AIR DEFENSE COMMAND, Ent AFB, Colorado Springs, Colorado

TO: Director of Requirements, Headquarters USAF, Washington 25, D. C.

1. Your attention is invited to the following paragraph from a paper prepared by Rome Air Development Center entitled, "Mark X IFF and Extensions," dated 19 October 1953.

"Antenna AT-309/GPX, which is mechanically and electrically interchangeable with the AS-295, was originally intended to be a 40 ft. antenna for use on large radar sets. One model, a 37 ft. version, was built by Hughes Aircraft in 1950. This antenna has been thoroughly tested and it demonstrates the characteristics which RADC personnel have long claimed were needed for optimum utility of the Mark X system, such as a 20 beam width and side lobe suppression between 26 and 32 db. Specification requirements have since been reduced to 30 ft., due to mechanical conflicts on installations under radomes. However, Hq USAF does not agree that there is a need for an improved antenna and they have refused to sanction its production. Their argument is based, in part, on the fact that the operating Commands have not indicated any requirement for such an antenna."

- 2. Further to my paragraph 8 of the basic letter, inasmuch as the AT-309/GPX is apparently a lengthened version of the AS-295, the limited technical information available to this headquarters indicates that it may be feasible to modify the existing AS-295 antenna by the addition of sections. It is suggested that the feasibility of such a modification be investigated in the interest of time-saving, simplicity, and economy.
- 3. The course of action, as outlined by your 1st Ind, can reasonably be expected to result in this antenna being made available to operational units during the latter part of calendar 1956 or, possibly, early 1957. The basic letter has established the operational requirement of this command for antenna AT-309/GPX in accordance with AFR 57-3. With further reference to the paragraph quoted in paragraph 1 above, it is recommended that action to meet this requirement not be delayed, pending the availability of OCT data.

FOR THE COM ANDER:

Info cy: Dir of Comm, Hq USAF

1693-6

Count Com

Basic ltr Hq ADC, 30 Jul 54, subj: (Uncl) Qualitative Operational Requirement for an Improved Mark X IFF IR Antenna

AFDRQ-AD/C

3d Ind

DEPARTMENT OF THE AIR FORCE, HQ USAF, Washington 25, D. C.


TO: Commander, Air Defense Command, Ent Air Force Base, Colorado Springs, Colorado

- 1. The parameters for a replacement Mark X IFF antenna cited in the basic letter establish the criteria for development and testing of an antenna such as the AT-309/GPX. Production of AT-309 and replacement of the AS-295/UP antennas in your command will be deferred until the operational suitability test of AT-309 demonstrates its capacity to meet your stated requirement or proves to have reasonable improvement over the performance of AS-295/UP for control purposes.
- 2. Action has been initiated to have the Air Research and Development Command determine the technical feasibility of converting AS-295 antennas into AT-309/GPX equipment.
- 3. Limited production models of the AT-309/GPX antenna are being made available to Rome Air Development Center, Cambridge Research Center and Air Proving Ground Command for testing and evaluation of this equipment. One (1) additional AT-309/GPX antenna is available to your command upon request. Evaluation studies of the antenna by your command would provide valuable supplementary information to the APGC test report.

Lilbert S. Muyens

BY ORDER OF THE CHIEF OF STAFF:

V693-7

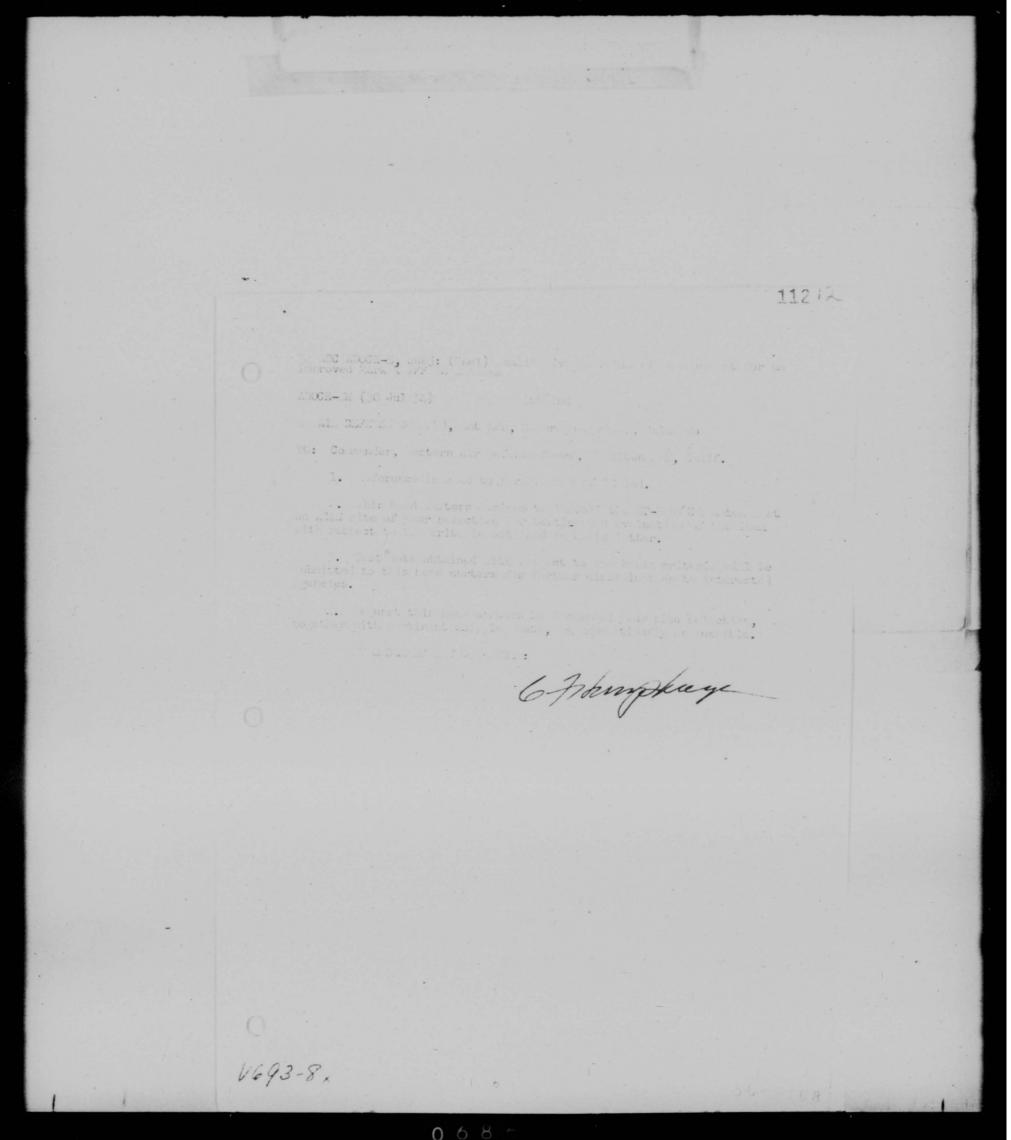

Ho ADC, ADCCE-N, Subj: (Uncl) 'ualitative' (perational Requirement for an Improved Fark % IFF IR Antenna

(00 CE-8 (30 Jul 54)

5th Ind

HE MESTERY . IN DEPOSE FORCE, Familton .FB, Hamilton, California

TC: Commander, ir Defense Command, Unt ir Porce Pase, Colorado Springs, Colorado

- 1. Reference paragraph 4, preceding Inforsement, this headquarters has selected site F-57 for the proposed testing and evaluation of the AT-309/GTX antenna.
 - 2. Recommend that equipment be shipped as follows:

AF-09-30 lcChord air Force Base Tacoma, Assington Larked for: 757th Ca Squadron Maselle air Force Station Maselle, Assington


- 3. Request that this headquarters be advised of date and method of shipment so that follow-up action can be taken.
- L. Although this headquarters concurs at the installation, your attention is invited to the lock of complete instrumentation at 1-57 and/or available to estern in Defense Force, for a comprehensive testing and evaluation of this antenna. The d ta extracted from this test c n only be basic and supplementary to that of home air Development Center, Cambridge Research Center and in Froving Ground Command.

FOR THE COLL ADD :

PE Haupt

1693-2

5t-21.65

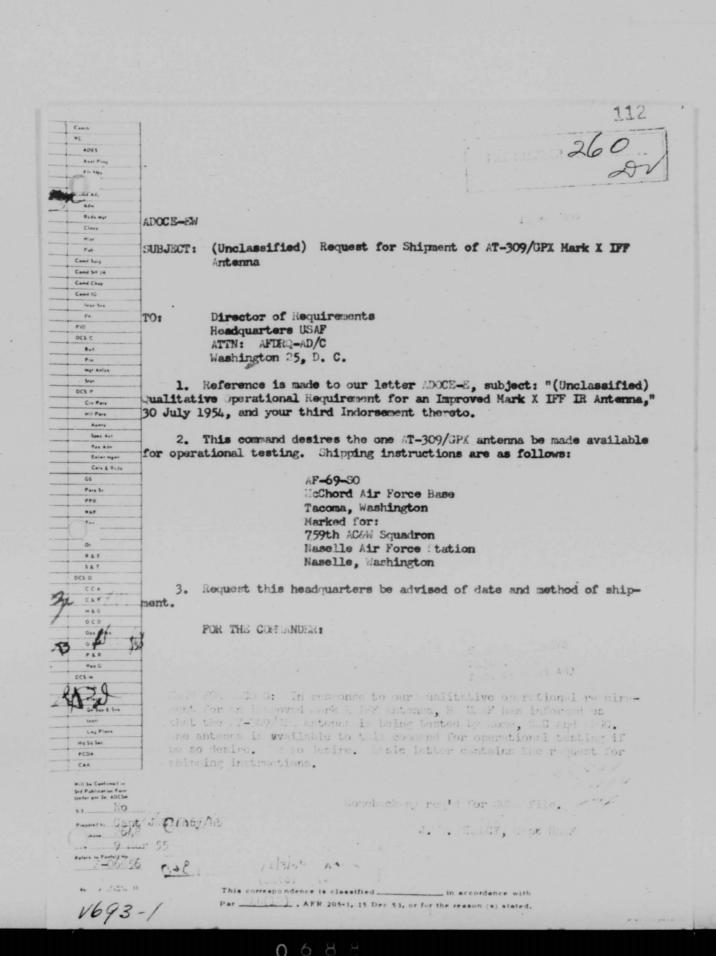

HEADQUARTERS . AIR DEFENSE COMMAND ENT AIR FORCE BASE

COLORADO SPRINGS, COLORADO

ADOPR 413.44

SUBJECT: (Uncl) Requirement for Automatic Directional Finding Equipment

768

TO: Director of Requirements
Headquarters USAF
Washington 25, D. C.

- 1. The inadequacy of our present Identification Procedure to properly identify all detected aircraft and provide the Air Division Commander with a method of determining when his sector is under attack by the enemy, has caused identification to become one of the weakest links in our defense system.
- 2. In order that the Air Division Commander may be provided with a means whereby he can properly tag all detected aircraft as friend or foe and thereby with no hesitation, intelligently commit his forces in the defense of his sector an improved means of identification must be provided. A requirement therefore exists for automatic directional finding equipment which combined with secure operational procedures will provide the Air Division Commander with this means.
 - Description of proposed equipment is as follows:
 - a. Nomenclature: Automatic Direction Finding Equipment.
- b. <u>Purpose</u>: To automatically obtain the instantaneous bearing of a communication signal being transmitted by an aircraft and to positively associate this bearing with the radar return as seen on the PPI scope. It is recommended that lA priority be assigned this requirement.
- c. <u>Performance</u>: This D/F equipment must be capable of continuous operation and adaptable to all search radars of this command such as AN/CPS 6B, AN/FPS 10, AN/FPS-3 and AN/TPS-1D. It also must be capable of automatically obtaining accurate bearings of communication signals and presenting this information on a PPI scope.
- d. <u>Design Features</u>: The receiver-transmitter must be crystal controlled, capable of operating in the VHF (100 MC 180 MC) band and in the UHF (225 MC 400 MC) band and contain 10 preset channels each, with a total of 281 available channels in the VHF band and 1751 channels in the UHF band. The power output of the transmitter must not be less than 12 watts. Channel selection should be accomplished by means of a

1201 mest/

1118/53

SECRET

SECURITY INFORMATION

ADOPR 413.44, Subj: (Uncl) Requirement for Automatic Directional Finding Equipment (Cont'd)

telephone dial and switch, the number of these selection positions should not be less than three (3), and a lamp type indicator, provided at each position to indicate which of the ten (10) channels is being utilized. The accuracy of the D/F bearing should not be less than 23.

e. Special Features: None

- f. Proposed Basis of Issue: It is proposed that all ADC radars along both coasts and certain ADC and Canadian radar stations which will, in the future, be assigned identification responsibilities for certain areas have installed one (1) complete set of D/F equipment. Total numbers of D/F equipment will be furnished at a later date. It is recommended that this equipment be made a part of the radar stations fixed equipment.
- g. Methods of Meeting the Requirement: It is understood that a modification kit is being developed which will enable the AN/CRA-9 to be used with CPS-6B, AN/FPS-3 and AN/TPS-1D type radars. It is possible such equipment would meet the requirements of the command.

Janed / Crall

4. Recommend this requirement be approved and immediate action taken to accomplish it.

CG, RADC CG, ARDC CG, AMC

SECRET

V-70-2

SECURITY INFORMATION

2-33599

B/Ltr Hq ADC, 30 Oct 1952, subj: (Uncl) Requirement for Automatic Directional Finding Equipment

AFDRQ-AD/C

1st Ind.

DEPARTMENT OF THE AIR FORCE, HQ USAF, WASHINGTON 25, D. C. 18 300 185

TO: Commander, Air Defense Command, Ent Air Force Base, Colorado Springs, Colorado.

- 1. The latest development status of the Direction Finding Group AN/GRA-9 and the associated indicator modification for the AN/CPS-6B and AN/FPS-3 radar sets is as follows:
- a. Direction Finding Group AN/GRA-9 with an associate installation kit will satisfy all the requirements listed in the basic letter, except for the following limitations:
 - (1) AN/TPS-1D. This radar set operates from a 400 cycle power source whereas the D/F equipment operates from 60 cycle power. Furthermore, the form factor and utilization of this set as normally used is not readily conducive to adding additional functions. If, however, the AN/TPS-1D is used in a fixed installation with permanent shelters and 2 kw of commercial 60 cycle power available these objections would be minimized.
 - (2) Receiver Transmitter. The D/F equipment does not normally encompass a communications transmitter, however, this could be incorporated into the installation kit without difficulty. If a separate transmitter is required, this D/F requirement should stipulate that a separate transmitter should be located with the D/F equipment rather than with the normal VHF and UHF communications transmitters for the radar station.
 - (3) VHF (100 mc 180 mc). The equipment as presently designed only covers 100 to 156 mc with some degradation between 100 and 110 mc.
 - (4) Accuracy. Accuracies with this type of installation are not fully known but are expected to be better than +5° for all frequencies over the band.

1.70-3

20533

1st Ind to ADC, Cont'd, subj: (Uncl) Requirement for Automatic Directional Finding Equipment.

The bearings at any single frequency vary approximately +3°. Test data indicates this equipment will have a standard deviation of 1.9° when operated over the entire band without reorientation at each frequency.

- b. Air Research and Development Command states that the Air Defense Command requirement can satisfactorily be met by equipment presently developed except for the application to the AN/TPS-lD. Additional information will be required on the application and type of installation of the AN/TPS-lD before an evaluation of the development requirement can be made.
- c. Equipments under development which are applicable to the ADC requirement are: Direction Finder Group AN/GRA-9, Radio Set AN/GRC-30 and the AN/FPS-3 and AN/CPS-6B indicator modifications. The final integration of these equipments into the overall system will require further study and design. Engineering models of a modification to the PPI's are being developed by Bendix Radio Corporation. The model for the AN/FPS-3 is scheduled for delivery to June 19 3 and the model for the AN/CPS-6B is expected in September 1953.
- d. Assuming that equipment presently under development will satisfy the subject requirement, procurement information for use on AN/FPS-3, AN/CPS-6B and AN/FPS-10 is expected to be available by January 1954. No date for procurement information for AN/TPS-1D can be estimated at this time. Production lead time is estimated to be about 18 months.
- e. Rome Air Development Center has been instructed to take no further action to develop capabilities beyond those already designed into the AN/GRA-9. As soon as practicable, your headquarters will be invited to attend a demonstration of subject equipment. In addition to the demonstration of performance, a presentation will be made to indicate the estimated costs, time schedules, engineering effort, etc. to provide the subject equipment to the USAF.
- 2. Reference is made to par 2 of the basic letter. This head-quarters does not concur in the general use of UHF-VHF/DF facilities for identification of all aircraft detected by the ADC radar stations. The IFF Mark X system has been adopted by the CAN-UK-US military services as the combined electronic identification system. It is considered that the basic IFF Mark X system with the SIF attached will

1-76-4

lst Ind to ADC, Cont'd, subj: (Uncl) Requirement for Automatic Directional Finding Equipment.

provide the most reliable and secure IFF system that can be produced with existing electronic and cryptographic techniques. The SIF equipment will provide Air Defense Command with an improved means of identification.

3. The basic IFF Mark X system will provide accurate bearing and range information on all friendly aircraft equipped with the AN/APX-6. After the SIF is attached to the basic IFF Mark X equipment, "who are you" and "where are you" information will be available at the controllers PPI scope for a specific interrogated aircraft. The SIF equipment is expected to be in production by January 1954. This equipment will provide improved facilities at the radar station for locating, identifying and controlling the movement of individual military aircraft equipped with the AN/APX-25.

4. Request your headquarters re-examine the existing requirement for automatic direction finding equipment at the aircraft control and warning radar stations and determine if this need still exists.

in es Bening

BY COMMAND OF THE CHIEF OF STAFF:

This document consists of 3 Pages. Copy No. ____ of ___ copies.

V-70-5

- 5 -

Hq ADC ADOPR 413.44 Subject: (Uncl) Requirement for Automatic Directional Finding Equipment

ADOPR 413.44 (30 Oct 52) 2d Ind

HQ AIR DEFENSE COMMAND, Ent Air Force Base, Colorado Springs, Colo.

TO: Director of Requirements, Headquarters USAF, Washington 25, D. C.

- 1. Reference paragraph la(1), 1st Indorsement. We plan to use direction finding group AN/GRA-9 with approximately 8 AN/TPS-1D radar sets. These installations will have 2 kW 60 cycle commercial power available.
- 2. Reference paragraph la(2), 1st Indorsement. Each installation requires separate VHF/UHF transmitters. Ten pretuned VHF and UHF channels are required.
- 3. Listed below is our quantitative requirements, by types of associated radars, for AN/GRA-9 equipment; of these, eight are Canadian radars.
 - a. 34 FPS-3
 - b. 14 MPS-7
 - 1 c. (9 MPS-11
 - _d. (2 FPS-8
 - e. 8 TPS-1D
 - f. 2 FPS-10
 - g. 2_FPS-502 (FPS-3)

4. We are aware of the potential value of SIF for Mark X IFF to the air defense system. It will not, however, solve the identification problem pertaining to nonmilitary aircraft. Your headquarters concurred in our desire to limit installation of SIF equipment to military aircraft for security reasons. Manifestly, other means to identify civilian air traffic must be used. Operational means such as VHF/UHF automatic DF used with a secure voice code is one of these means. Our requirement for automatic direction finding is therefore still firm.

opy to 478/53

AFDRU 478/53

V170-6

SECRET

Security Information

ADC- 45-4

5 T Hq ADC ADOPR 413.44 Subject: (Uncl) Requirements for Automatic Directional Finding Equipment 2d Ind (Contd) ADOPR 413.44 (30 Oct 52) 5. Request we be advised to the adaptability of this equipment to the FPS-8 since the original requirement was written the AN/FPS-8 and MPS-11 has been selected for certain first and second phase mobile radars. Further request necessary action be taken to include this requirement in FY 55 budget. FOR THE COMMANDER: with the permission c. ... c. co of origin.

Basic letter Hq ADC, ADOPR 413.44, 30 Oct 1952, subj: (Uncl) Requirement for Automatic Directional Finding Equipment.

AFDRQ-AD/C

3d Ind.

Department of the Air Force, Hq USAF, Washington 25, D. C.

TO: Commander, Air Defense Command, Ent Air Force Base, Colorado Springs, Colorado

- 1. The following information has been received from Air Research and Development Command:
- a. An additional 12 months will be required to complete development on the AN/TPS-1D indicator modification to display AN/GRA-9 direction finding information and complete the integration of the two equipments. Production specifications are expected to be available by July 1955.
- b. Models of the modified PPI scopes of the AN/FPS-3, AN/CPS-6B and AN/FPS-10 to display D/F information now undergoing testing at RADC. It is proposed that final integration of the direction finder and the radars should be accomplished on a production contract. Production specifications can be available by June 1954.
- c. The AN/CPS-6B indicator modification kit will be applicable to the AN/FPS-8 and AN/MPS--11 indicators. It is estimated that procurement specifications could be available by June 1954.
- d. The present VHF receiver R-264/GRD of the AN/GRA-9 is designed to operate in the 100 to 156 mc frequency range. If ADC requires operation in frequency range of 156 to 180 mcs, the VHF receiver R-264/GRD will require redesign.
- e. The estimated dates that procurement information will be available for the above equipments are made with the assumption that the testing underway will be completed satisfactorily and that the equipment as presently designed will be operationally acceptable.
- 2. Reference is made to par 1,d above. In view of present established frequency allocation in 156-180 mc range, request clarification of requirement for AN/GRA-9 to operate within this frequency band.
- 3. Air Defense Command representatives attended a demonstration and discussion of the above equipment at RADC, Rome, N. Y. on 27 April 1954. At this meeting, RADC personnel stated that the automatic D/F bearing accuracy of the production equipment for AC&W use will be in the order of 40 to 45°. It was further indicated that the accuracies requested by ADC can not be obtained without a major redesign of the AN/GRA-9 equipment. Request ADC comments on the acceptability of these accuracies forecast for the production equipment.

1-10-8

11324

AFDRQ-AD/C, 3d Ind to Com, ADC, subj: (Uncl) Requirement for Automatic Directional Finding Equipment.

4. Testing of the AN/GRA-9 is currently being performed by RADC with this equipment attached to an AN/CPN-18 radar. RADC has not performed any testing of the AN/GRA-9 attached to an air defense radar and displayed on the modified AN/FPS-3 or AN/CPS-6B indicator. AN/GRA-9 equipment has not yet been scheduled for OST by APGC with either traffic control or air defense radars. Request your comments on operational acceptability of the AN/GRA-9 equipment, as demonstrated at RADC, and the advisability of procuring this equipment for AC&W use prior to any operational testing or evaluation.

5. If procurement data is available in June 1954 and it is established that this equipment will be operationally and technically satisfactory, action will be taken by this headquarters to establish procurement of this D/F equipment for AC&W purposes within existing fund limitations.

BY ORDER OF THE CHIEF OF STAFF:


JOSEPH L. LAUGHLING

Colonel, USAF

Chief, Air Defense Division

Directorate of Requirements, DCS/D

V-70-9

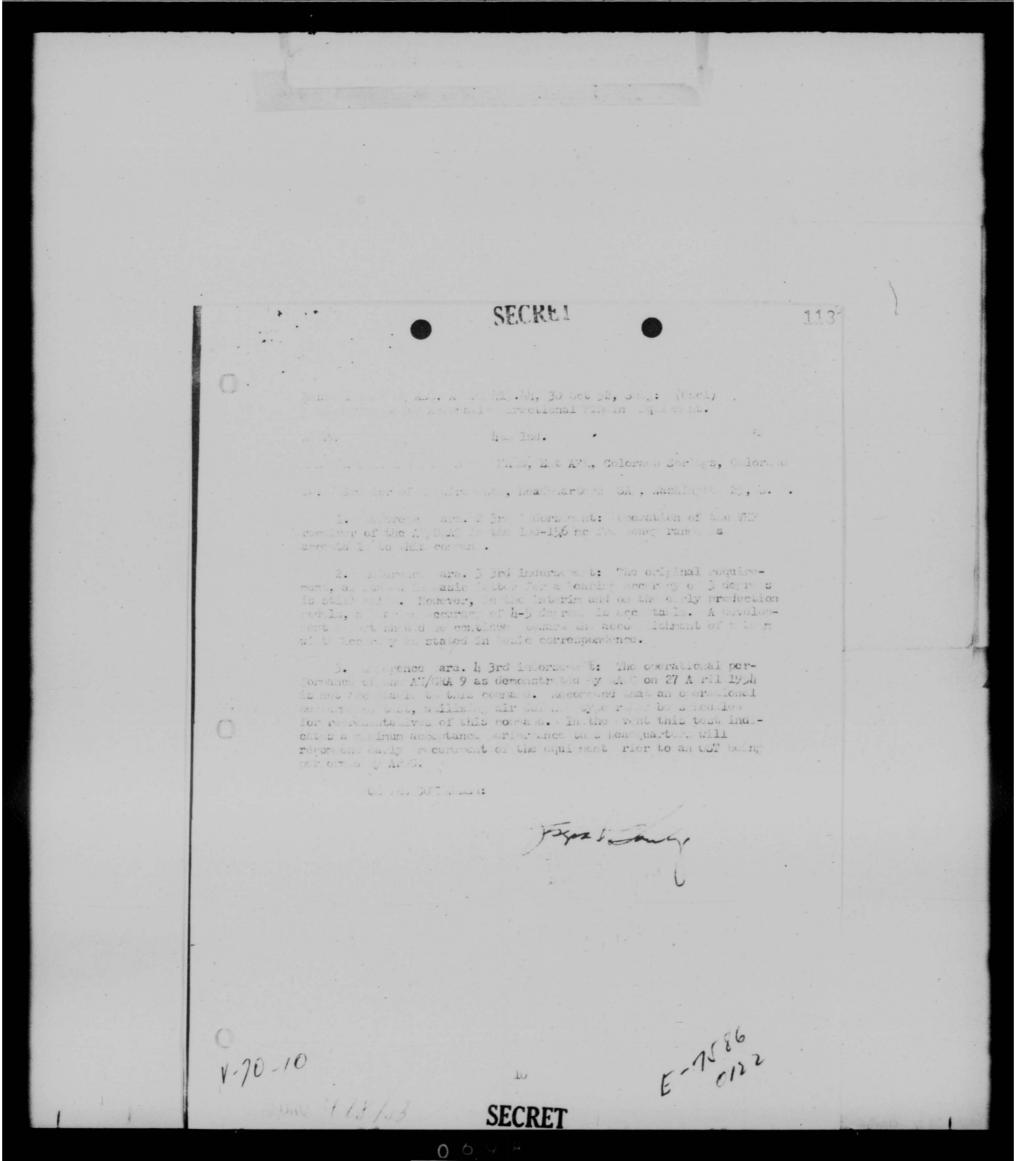

MTN , Radar 1

Basic letter fr Hq ADC, File ADOPR 413.44, dated 30 Oct 1952, subj. (Uncl)
Requirement for Automatic Directional Finding Equipment

AFDRQ-AD/C

5th Ind.

Department of the Air Force, Hq USAF, Washington 25, D. C. 5 000 054

TO: Commander, Air Defense Command, Ent Air Force Base, Colorado Springs, Colorado

- 1. Since the April demonstration of the AN/GRA-9 direction finder malfunctions in the equipment have delayed further tests of the CPN-18/GRA-9 system until approximately 10 Sep 1954.
- 2. Following are the Rome Air Development Center engineering estimates of the development possibilities to engineer the AN/GRA-9 to such a point that it will satisfy your requirement:
- a. The accuracy of the present CPN-18/GRA-9 system is 5° . This is the result of bearing inaccuracies of the AN/GRA-9 of $3\frac{1}{2}^{\circ}$ plus the radar indicator error of 1° and a system tie-in error of $\frac{1}{2}^{\circ}$. Two methods exist for possible improvement:
 - (1) Redesign of the AN/GRA-9 with closer tolerances may reduce the error to 2° resulting in a system error of 3½°.
 - (2) Install a "Wullenwever" antenna (40 ft. diameter dipole array mounted on a 40 ft. tower) which should reduce the AN/GRA-9 error to ½° for a system error of 2°. This would be a large device but is recommended if the present inaccuracies cannot be tolerated.
- b. Spoking (multistrobing) can be reduced by integration to require strobing through the sum of a series of impulses rather than many strobes through each of the small impulses. This would cause a sluggish response with a reaction time of 6-8 seconds on a 2-3 second transmission.
- c. Blossoming (too much light on PPI scope) is associated with par b above and requires the same action to correct.
- 3. The information contained in par 2 above consists of engineering estimates. The amount of development time required before the equipment will meet your requirement is uncertain. If the stated 3° accuracy is to be obtained the system will not be instantaneous and will require about a 5 second radio transmission. The utilization of a Wullenwever antenna

V-70-11

478/3

11

AFDRQ-AD/C, 5th Ind to Com, ADC Cont'd., subj: (Uncl) Requirement for Automatic Directional Finding Equipment

might produce problems of antenna interference which would require remoting of the antenna and additional equipment development.

4. In view of the indicated research and development time involved in meeting your requirement for display on the PPI radar scope of D/F indications, it is recommended that you consider the feasibility of utilizing the AN/URD-2, VHF direction finder, and the AN/CRD-6, UHF direction finder as substitute items of equipment to fulfill your operational requirement.

BY ORDER OF THE CHIEF OF STAFF:

JOSEPH L. LAUGHLIN Colonel, USAF Chief, Air Defense Division Directorate of Requirements, DCS/D

V-70-124

SECRET

SEE CRYPTO SECTION BEFORE DECLASSIFYING PARAPHPASE IS NOT REQUIRED Reproduction of this message in whole or in part is prohibited without approval of action office

Action: DM Info: CG, IG

12/

ME JW POV JEDEN JW PD M COPY OF INCOMING CLASSIFIED MESSAGE DE JW PMC 52 A

R Ø6213ØZ

FM COMNADE HAMILTON AFB HAMILTON CALIF

TO JEDEN/COMDR ADC ENT AFB COLO SPRCS COLO

INFO JWPDV/COMDR 4702D DEF WG GEIGER FLD WASH

JWPDM/COMDR 25TH ADIV (DEF) MCCHORD AFB WASH

JWPDM/COMDR 27TH ADIV (DEF) NORTON AFB CALIF

//S E C R E T//WDMAC-4C1854. AN OPR RQR EXISTS IN 445 FIS GEIGER FLD

WASH AND 33 FIS PAINE AFB WASH FOR F-86D ACFT EQPD WITH DRAG CHUTES

PRIOR TO THE ARR OF WINTER WEATHER. REVIEW OF INCL NR 5 TO LTR YOUR

HQ CLAS SECRET, FILE ADMAC-4 SUBJ: (UNCL) ADC ACFT SKED AND ASGMT

PLAN FOR PROJ PULLOUT, DATED 15 JUN 54, REVEALS 445 FIS WILL HAVE

RECD 6 ACFT FROM PROJ PULLOUT BY 32 NOV 54. THIS WILL LEAVE 445 FIS WITH

15 ACFT AND 83 FIS WITH 12 ACFT NOT EQP WITH DRAG CHUTES. TO PROVIDE

ABOVE UNITS WITH DRAG CHUTE EQPD ACFT BY 30 NOV 54 IT IS REQ (1)


15 OF 16 MOD V ACFT DESTINED FOR 94 FIS DURING OCT AND NOV 54 BE 15 OF 16 MOD V ACFT DESTINED FOR 94 FIS DURING OCT AND NOV 54 BE

ACTION COPY


PAGE TWO JWPMC 52A


DIVERTED TO 445 FIS. A LIKE NR OF UNMOD ACFT WOULD BE REASED FROM 445 FIS TO 94 FIS. (2) 10 OF 12 MOD V ACFT DESTINED FOR 317 FIS DURING OCT AND NOV 54 BE DIVERTED TO 83 FIS. A LIKE NR OF UNMOD ACFT WOULD BE REASED FROM 83 FIS TO 317 FIS. UPON REC OF NEW PDN ACFT IN 83 FIS AND MOD VII ACFT IN 445 FIS MOD V ACFT REF TO ABOVE WOULD BE REASEND TO UNITS ORIGINALLY SKED (317 FIS AND 94 FIS). OPR ROR OUTLINED ABOVE WAS DISCUSSED BY FONECON ON 5 OCT 54 BY COL T. H. BEESON THIS HQ AND LT COL P.E. JOYAL YOUR HQ.

ACTION COPY

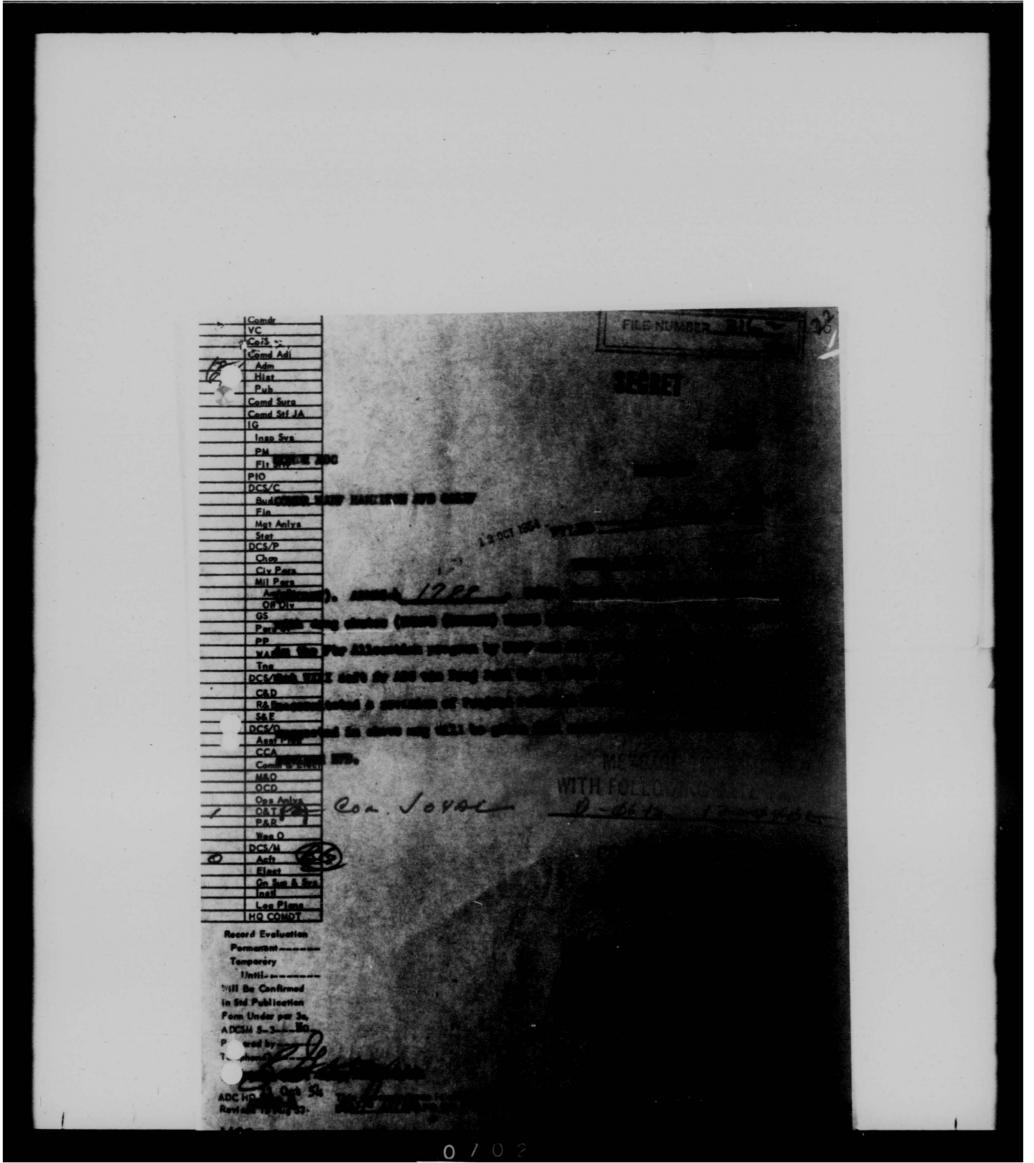

THIS PAGE IS DECLASSIFIED IAW EO 13526

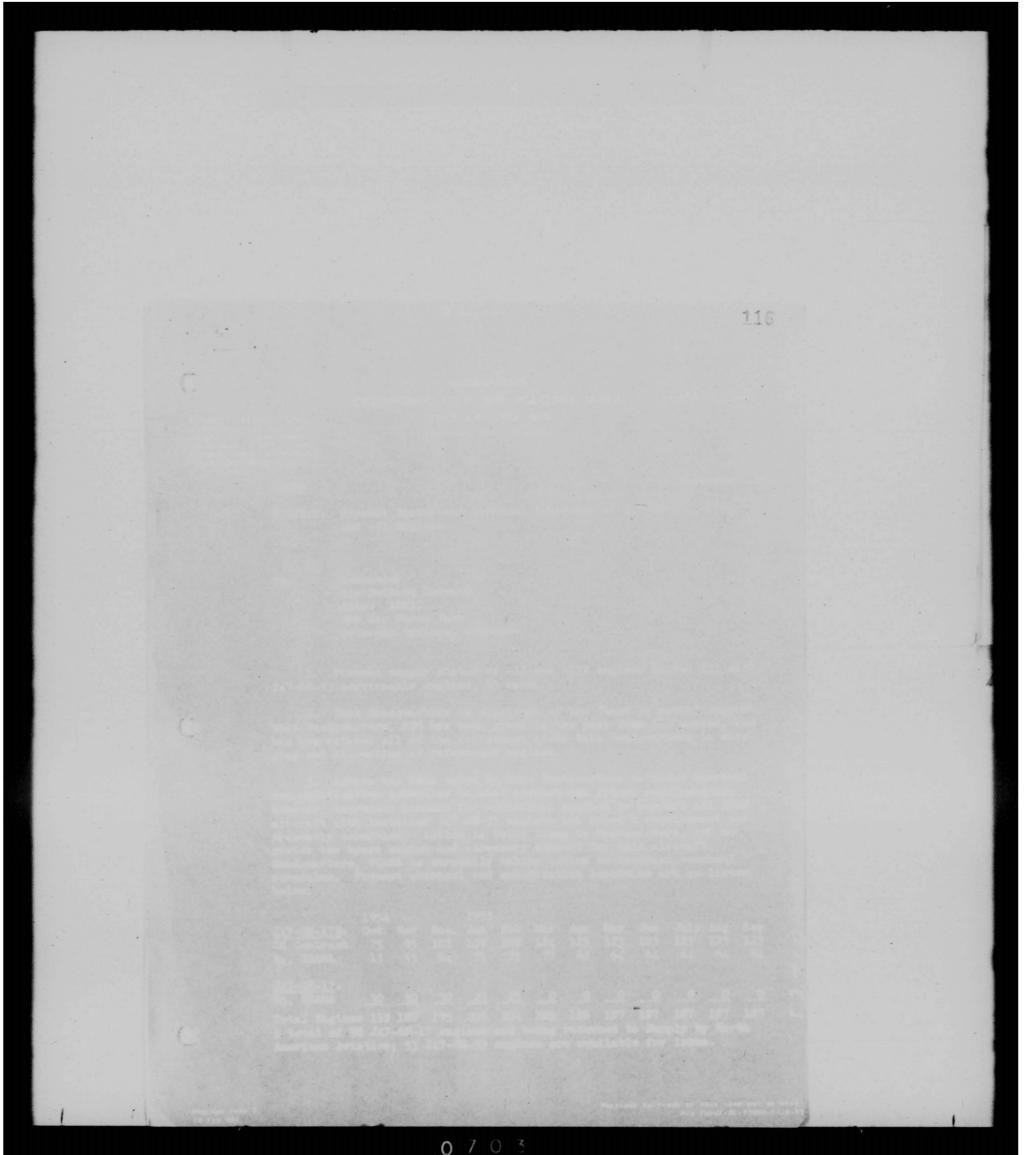

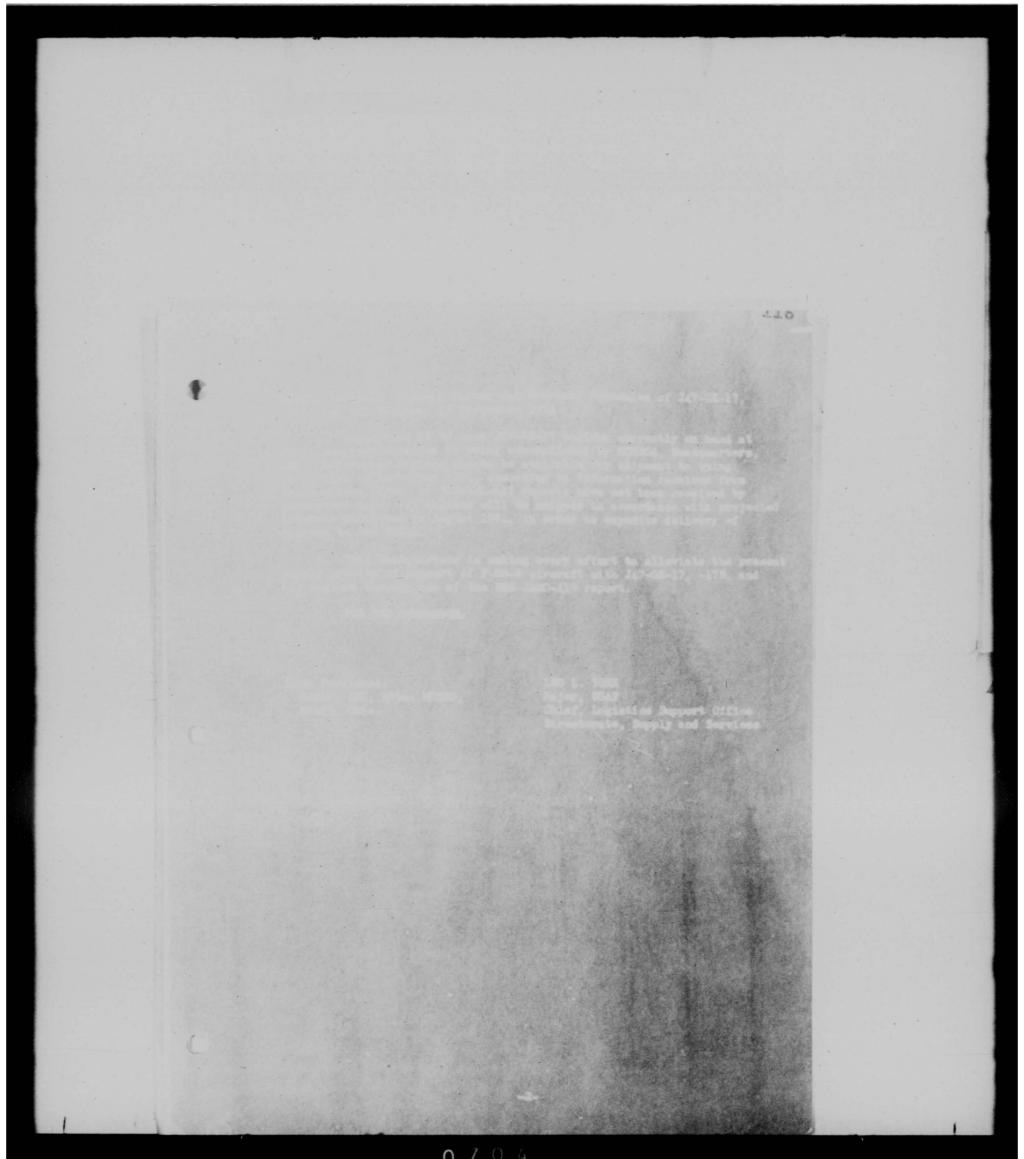

PRESERVATION

SACRAMENTO AIR MATERIEL AREA MCCLELLAN AIR FORCE BASE MCCLELLAN. CALIFORNIA

314.3

REFER TO

SMMG

5 October 1954

SUBJECT: Project Pull-Out

TO:

Commander Air Defense Command ATTN: ADMAC, Colonel Hamilton Ent Air Force Base Colorado Springs, Colorado

- 1. Attached are the Minutes and Brochure of the Project Pull-Cut Conference held at Sacramento Air Materiel Area on 20 September 1954.
- 2. When Inclosure #2 is withdrawn or not attached the classification of Secret on this correspondence will be cancelled in accordance with Par 25a, AFR 205-1.

FOR THE COMMANDER:

2 Incls:

1. Minutes (5) (Uncl)
2. Brochure (C1)
Cys #3 & #4

WOHN A. PECHUZS

Colonel, USAF Director of Maintenance Engineering

SMAMA . FORM 80 2

54SM 12041

Project Pull-Out Conference Minutes, 20 Sep 54

- 1. The conference was officially opened by Colonel John A. Pechuls, Director of Maintenance Engineering, with an introduction of Brigadier General William T. Hefley, Commander of SMAMA. General Hefley welcomed the conferences and recommended future conferences for Project Pull-Out be called only in the event that a serious problem develops.
- 2. The Project Fill-Out status was presented and an evaluation of support capability to increase the project was shown and discussed. The limiting factors as presented were Engines, Engine Accessories, and Fire Control Systems. The MAAMA Representative, Mr. Jackson, also stated that MAAMA would not have the capacity to increase autopilot support for Project Pull-Out at this time.
- 3. In the discussion following the status presentation, Captain Mc-Laughlin, representing WRAMA, announced that WRAMA was experiencing difficulty in obtaining the expected input of unmodified fire control components to Hughes Aircraft Corporation from SMAMA, Fresno, and the LAS Hop-Up Mod Lines. Receipt of spare components to be modified from the Field have also fallen behind the scheduled input requirements. Captain McLaughlin advised this condition was adding to the contract cost of the E-5 modification. Colonel Hamilton, ADC, stated that all spare components for E-5 Fire Control Systems in the Field were being shipped to the Mod Center as required and asked for a further check to determine that all black boxes within the system have been definitely located and are in the process of modification. In a separate conference all affected activities agreed to expedite the input of all black boxes into the Hughes Mod Center.
- 4. There were no other problems raised in the general conference. Conferees were invited to meet with individual SMAMA activities for any information which they might require. Affected activities met in a separate conference to discuss the critical engine components. Action was agreed upon by the next thirty days.
- 5. Major J. D. Webb, Hq USAF, gave conferees a general description of the impending electronic modification of the F-86D aircraft inventory. He indicated this type of modification was also planned for F-9hC and F-89 aircraft.
- 6. Conferees expressed general satisfaction with the status of Project Pull-Out. No recommendations were made for future Pull-Out Meetings. There being no objection to Brigadier General Hefley's suggestion concerning future meetings, none will be scheduled unless serious problem areas arise or as may be desired by higher authority.

1117

Project Pull-Out Conference Minutes, 20 Sep 54

- 7. At the close of the Project Pull-Out discussions the status of Project Hop-Up was presented to interested conferees. In a discussion following this presentation Mr. Lackey, SMAMA Supply, indicated that difficulty in finalising the overhaul contract with Holly Corporation for modification of main and afterburner fuel control valves may prevent meeting the J-18 P-7 Engine configuration in the first aircraft of Phase II. A suggestion was made that six of the input aircraft for the month of November and four for the month of December have P-7 Engines installed. This would allow SAAMA to establish an uninterrupted J-18 P-7 Engine support for the balance of the program. Captain Gray of the Air Defense Command indicated that they could meet this requirement. Command Workload Division at SMAMA will finalise these arrangements.
- 8. A separate conference was held by affected parties to establish an in-process pool of modified B-5 Fire Control Systems to be retained at SMANA for Phase II aircraft.
- 9. There being no further business, the conference was adjourned at 1200 hours.

Colonel, USAF

Colonel, USAF Director of Maintenance Engineering

M6+3-3x

DECLASSIFYING PARAPHRASE IS NOT REQUIRED

118

COPY OF INCOMING CLASSIFIED MESSAGE

CANDID NOT A-20-23 (DEC 1984)

JAPRO 71

TO JEDMP 390

TO JEDMP 390

TO JEDMACOMADC, ENI AFB, COLORADO SPRINGS, COLO. ACTION DN.

JEDMACOMATRO, SCOTT AFB ILL

JE


PARAPHRASE NOT REQUIRED, SEL COMPTO SECTION BEFORE BECLASSIFYING. WITH FOLLOWING DATE TIME GROUP

8-10-14 1921302

9 April 53 4547 - 2x

CONFIDENTIAL

This document consists of ___pages.
This is copy No.___of __copies.

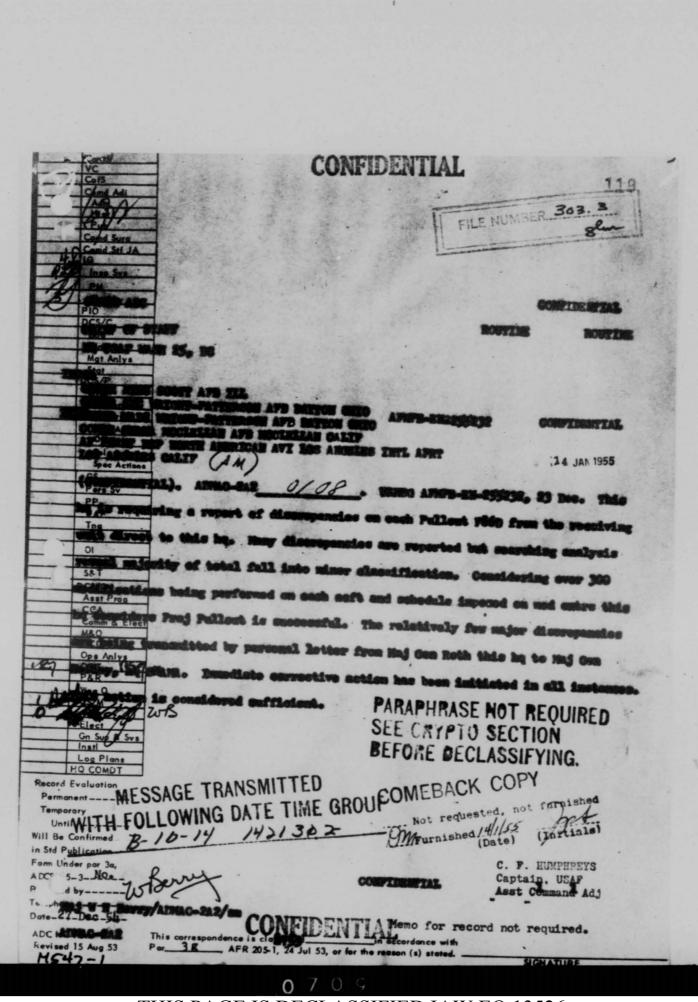

COPY

120

ADMDM

23 December 1954

SUBJECT: (Unclassified) Research of Future F-86D Fuel Control Configuration

TO: Commander
Air Research and Development Command
P. 0. Box 1395
Baltimore 3, Maryland

- 1. This command has considered the serious nature of the problem that will exist in the future when F-86D aircraft are transferred to the Air National Guard. Primarily our deep concern in this matter has to do with maximum capabilities of Augmentation Forces in support of the Air Defense mission. It is well known that the Electronic Fuel Control has been most difficult and costly to maintain. Some of its components are still sub-standard from an operational reliability point of view. Therefore, the feasibility of using this control in aircraft that will be transferred to the Air National Guard should be investigated.
- 2. It is the recommendation of this command that Air Research & Development Command study the problem of substituting a hydraulic mechanical fuel control system that can be employed in our J-47GE-17, 17B, and 33 engines. The hydraulic mechanical device would, of course, eliminate such features as variable eyelids, so that the final configuration would be similar to that found on F-94 type aircraft, i.e., the variable feature would be reduced to two positions. Substituting a hydraulic mechanical fuel control system would reduce the efficiency of the J-47 engines contained in F-86D aircraft. However, this loss undoubtedly would be compensated for by higher in-commission rates and more in-flight reliability. If the flight performance is decreased only to a minor extent, the change over would probably be worth the effort.
- 3. This recommendation to investigate the feasibility of substituting a hydraulic mechanical fuel control system for the presently installed IEC is made because of the maintenance skills


120


Hq ADC, ADMDM, Subject: (Unclassified) Research of Future F-86D Fuel Control Configuration


required and the detailed and aggressive supply action necessary to support this complicated device. While this command has successfully met the challenge of the electronic fuel control, we seriously question the practicability of burdening Air National Guard units with the continued problems of its operation. We do not know the exact extent of the skills possessed by Air National Guard units to maintain the J-47GE-17, 17B and 33 engines in their present configuration, nor do we know the capabilities of Air National Guard pilots to safely use this device on a week-end basis. Therefore, we request that Air Research and Development Command research this problem to determine whether the IEC should remain on engines contained in aircraft that will be transferred to the Guard in the future. The initial transfers are scheduled to take place during the first quarter of Fiscal Year 1958.


FOR THE COMMANDER:

MARSHALL S. ROTH
Major General, USAF
Deputy Chief of Staff, Materiel

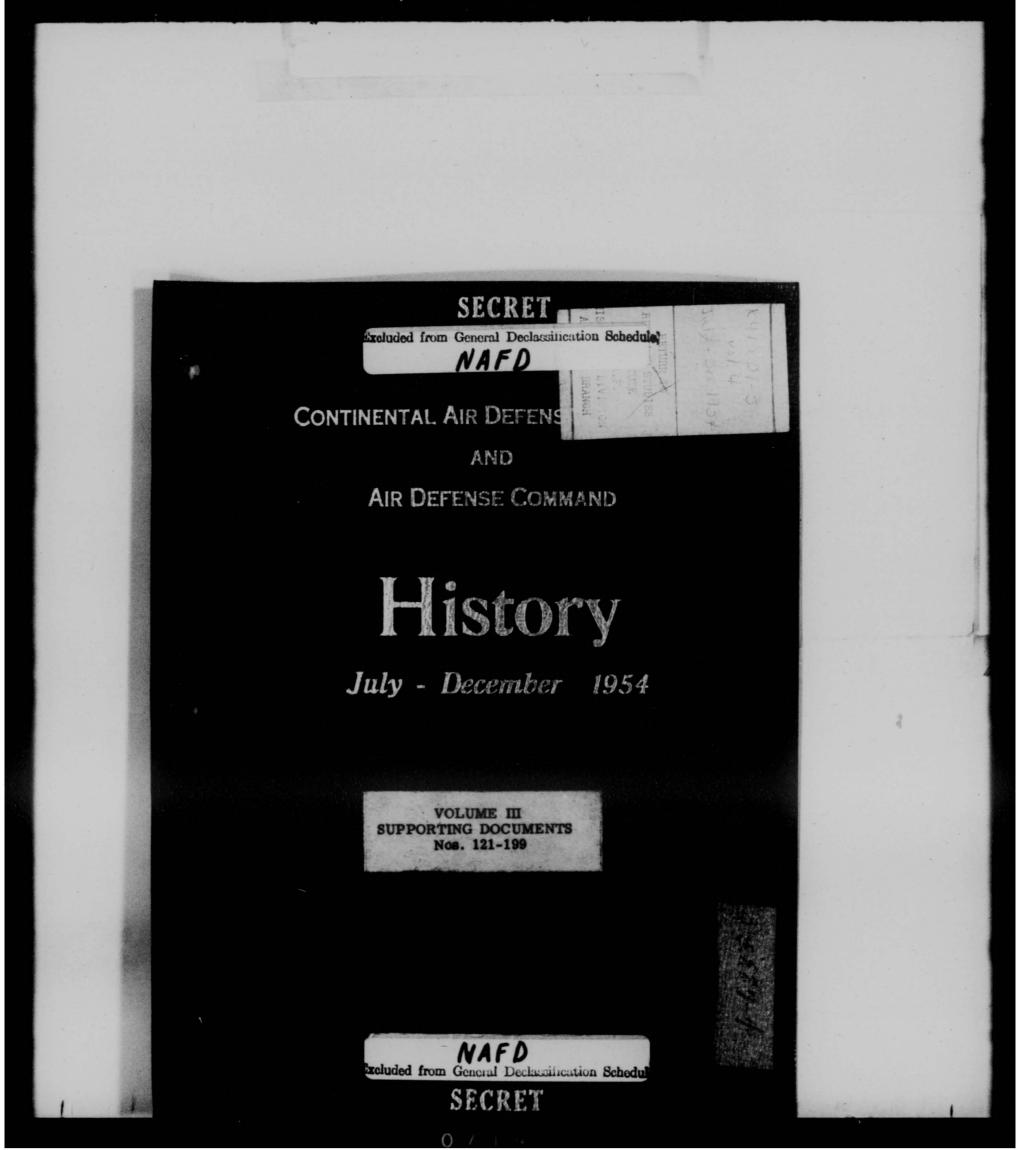

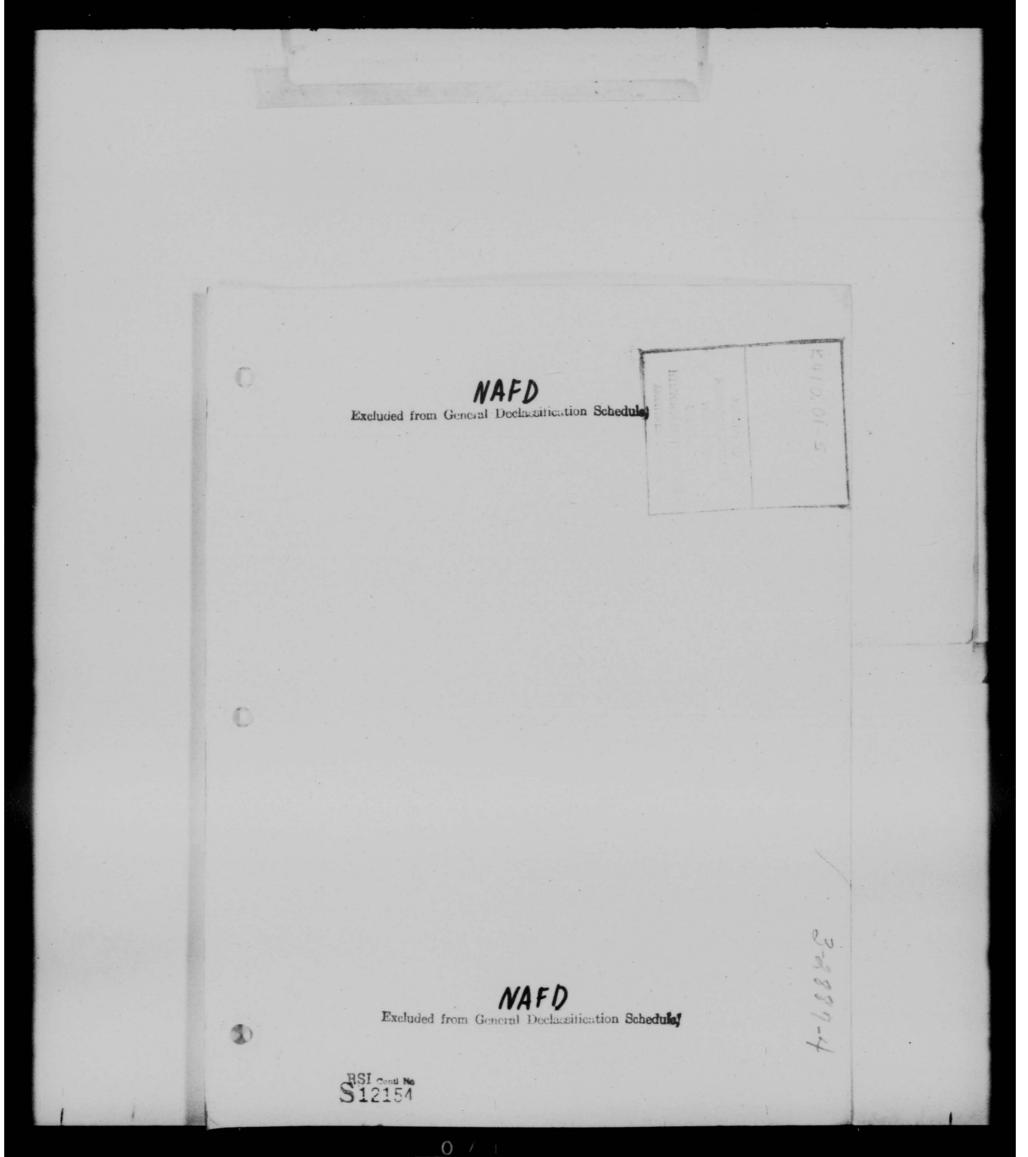

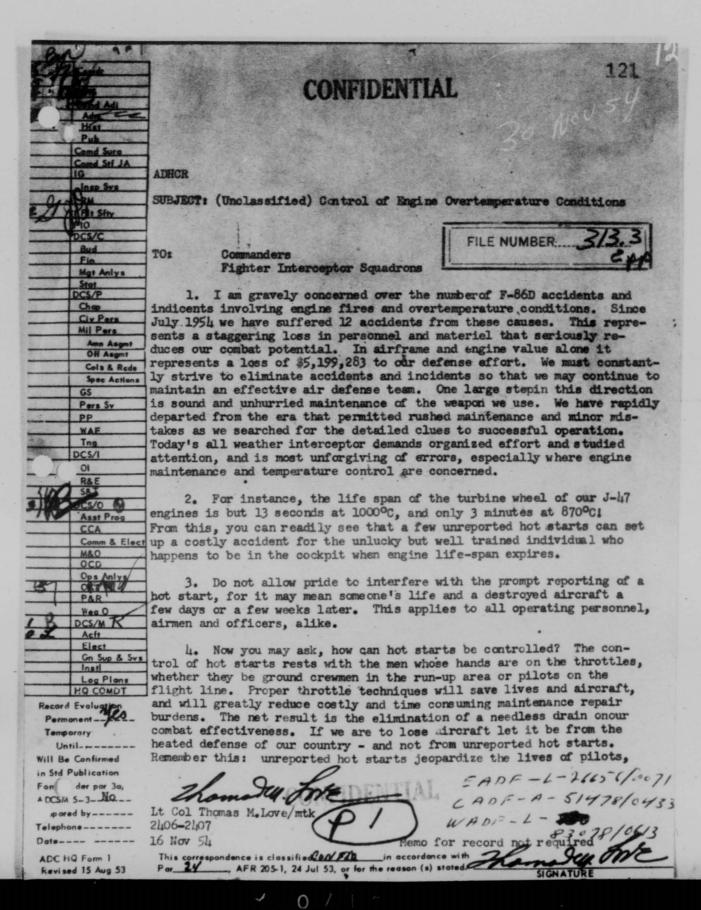

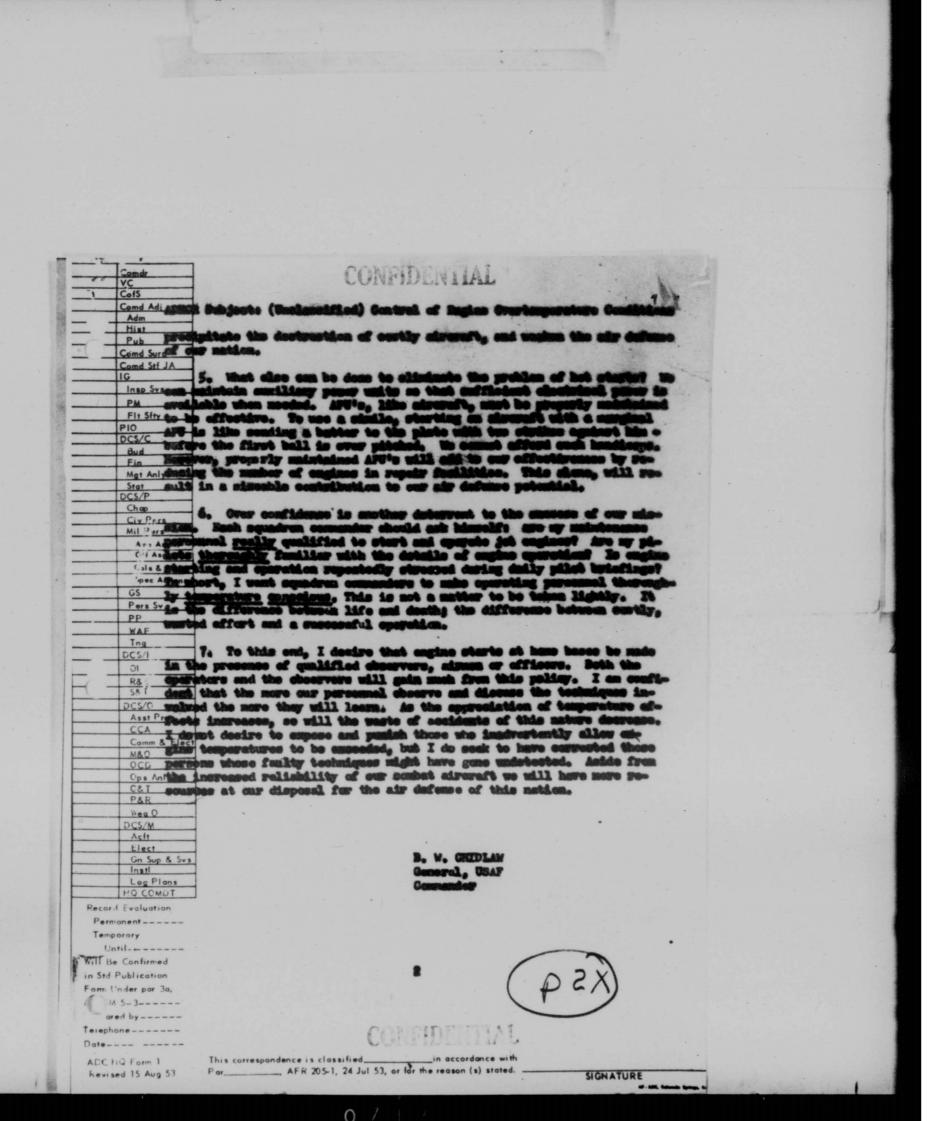

Easy reading copy made

From: COMMANDER, ADC

3 Sept 1954

COMMANDER, EADF, STEWART AFB, NEWBURGH, N. Y. COMMANDER, WADF, HAMILTON AFB, HAMILTON, CALIF COMMANDER, CADF, GRANDVIEW AFB, GRANDVIEW, MO COMMANDER, 4750TH TW, YUMA COUNTY, YUMA, ARIZ.

(UNCLASSIFIED). ADMAC-2A4 28818 . This message in two parts: Part I. Accident involving a F-86D aircraft indicates that units of this command may be flying some aircraft which have engines installed that may have been subject to over temperatures due to conflicting TO's in which it was not made clear as to what maintenance was required after experiencing 1000° C temperature or 10 hot starts above 870°C. (OCAMA and SMAMA have been notified of conflicting TO's). Part II. To preclude the possibility of turbine wheel failure on the J-47-17 engine which could result in loss of aircraft this headquarters directs that all F-86D units in this command re-inspect all aircraft engine forms to determine if evidence is present of any hot starts of 1000°C, 10 hot starts above 870°C or steady temperature above 720°C which may have occurred prior to the issue of ITO 2J-J47-358 dated 5 April 54. If inspection reveals any turbine wheel which has a history of any of the above conditions the turbine wheel will be removed and replaced.

COPY

123

HEADQUARTERS AIR DEFENSE COMMAND ENT AIR FORCE BASE COLORADO SPRINGS, COLORADO

ADMAC-2

22 December 1954

SUBJECT: Turbine Wheel Rim Failures J-47GE-17 and -17B Engines

TO: Commander
Western Air Defense Force
Hamilton Air Force Base
Hamilton, California

- 1. Turbine wheel rim failures on engines installed in F-86D type aircraft have been of great concern to this headquarters.
- a. In order to reduce these failures, the following action has been taken, and where these Technical Orders have been accomplished, no further wheel failures have been reported.
 - (1) TO 2J-J47-349 Adjustment of Main and Emergency Fuel Controls J-47-GE-17 Engines.
 - (2) TO 2J-J47-208 Recalibration of Exhaust Gas Thermocouple System on All Turbo-Jet Engines.
 - (3) TO 2J-J47-358 Removal of Overtemperature Turbine Wheels J-47 Engines.
 - (4) TO 2J-J47-343 Installation of Adjustable Turbine Wheel Baffle J-47-GE-17 Engines.
 - (5) TO 2J-J47-503 Inspection of Turbine Wheels -J47 Series Engines.
- 2. No definite historical record has been kept by field organizations on turbine wheels making it impossible at the present time to determine the condition of either installed or pipe line turbine wheels. Consequently, all turbine wheels in the field will have to be replaced by either new wheels or serviceable turbine wheels that have been inspected in accordance with the applicable TO's listed in paragraph la (3) and (4), above.
- 3. This replacement program will be accomplished in the field by squadrons utilizing field maintenance personnel and OCAMA supervisory teams. OCAMA will furnish necessary wheels, tools, and dolleys, in the following manner:

123

Headquarters Air Defense Command, ADMAC-2, Subject: Turbine Wheel Rim Failures J-47GE-17 and -17B Engines.

- a. Enough wheels will be airlifted to each squadron to completely replace all wheels that fail to comply with the Technical Orders listed in paragraph la. It is estimated this replacement will take not more than three (3) working days per squadron.
- b. OCAMA will then pick up all replaced turbine wheels and airlift them to an appropriate depot for thorough inspection. Acceptable wheels will be retained in order to establish a "turbine wheel bank."
- c. The target date for implementation of this program is 3 January 1955; completion, 30 May 1955.
- 4. It is not feasible to establish post emulsification inspection facilities at field installations because of a six to eight month procurement delay in vapor blast machines. Moreover, there are no turbine wheel balancing machines available for field use.
- 5. Captain Dethman, this headquarters, will personally brief your maintenance directorate before 1 January 1955 on this program.
- 6. It is requested that the attached turbine wheel historical record be reproduced at your headquarters, distributed to your squadrons and be utilized until an identical AMC form is printed and distributed.

BY ORDER OF THE COMMANDER:

1 Incl
Turbine Wheel Record
(1 cy)

MARSHALL S. ROTH Major General, USAF Deputy Chief of Staff, Materiel

COPY 124

ADMON

12 August 1954

SUBJECT: EADF Analysis of Difficulties Encountered on the J-47-Ge-17
Engine

TO: Commander
Wright Air Development Center
Wright-Patterson Air Force Base, Onio

- 1. The inclosed study of J-4702-17 engine failures prepared by Eastern Air Defense Force is forwarded for your information and corrective action decemb necessary.
- 2. This analysis contains specific information regarding the causes for J-4702-17 engine malfunctions over a large number of samples. Hence, it should materially assist your command in getting a reasonably firm picture of our J-4702-17 maintenance and supply problems. It is our desire that this information be used to increase the effectiveness of material support for the Air Defense Command mission.
- 3. The inclosed GTF Sensor Study is of great importance. This command considers GTF sensor reliability unsatisfactory, as is the present repair and return program. It is requested that aggressive action be taken to alleviate both aspects of this problem.
- 4. A copy of this study is being forwarded to the Director of Statistical Services, Headquarters USAF, as a part of the Fereign Object Damage report (AF-E4).

FOR THE CONSMILLER:

Litr EANG-ACM, He EADF, 30 Jun 54, subjt Study of J-4768-17 Reg Failures, w/5 Incls

MARKALL S. ROTH Brigadier General, USAF Deputy Chief of Staff, Materiel

IDENTICAL LETTER TO: Commander Oklahoma City AMA Tinker AFS, Oklahoma City, Okla

COPY

124

Basic, Hq Air Defense Command (ADMM) 12 Aug 54 to Commir WADC, Subject: "EADF Analysis of Difficulties Encountered on the J47-GE-17 Hogine"

1st Ind

30 August 1954


HQ, WRIGHT AIR DEVELOPMENT CHNTER, Wright-Patterson Air Force Base, Ohio, 30 August 1954


- TO: Commander, Air Defense Command, ATTN: ADMIM, Ent Air Force Base Colorado Springs, Colorado
- 1. The subject study has been carefully reviewed and is in general agreement with service experience of other activities using \$47-68-17 engines.
- 2. With regard to the compressor discharge sensor, the contractor is actively pursuing a development program to improve this component. It is estimated that the development of an improved sensor will be completed by October 1954. Air Materiel Command has indicated that every effort is being made to improve the repair and return program for defective sensor elements.
- 3. It is believed that the engine changes being made as a part of project "Pull Out" will improve the reliability of the engine and decrease the failure rate. Emphasis on redesign and testing to further improve the J47-CE-17 engine will be continued both by Wright Air Development Center and the contractor.
- 4. An improved version of the J47-CE-17 engine, the J47-CE-33, which incorporates a large number of improvements, is now in production for use in F-86D aircraft.
- 5. The information contained in the analysis is of benefit to this Center in assessing the service difficulties with the subject engine and is greatly appreciated.

1 Inel:

ALBERT BOXD Major General, USAF Commander

2

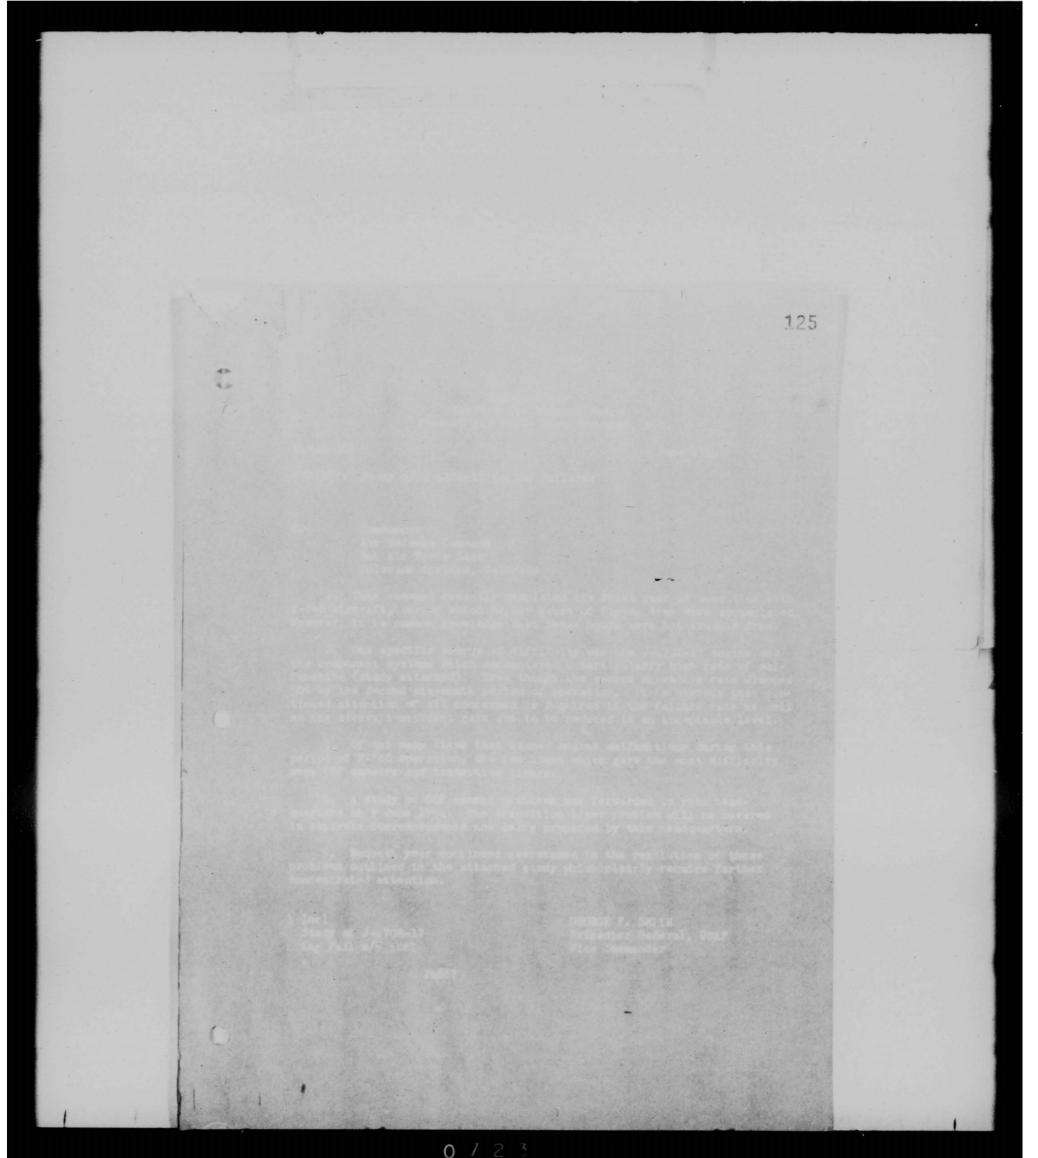

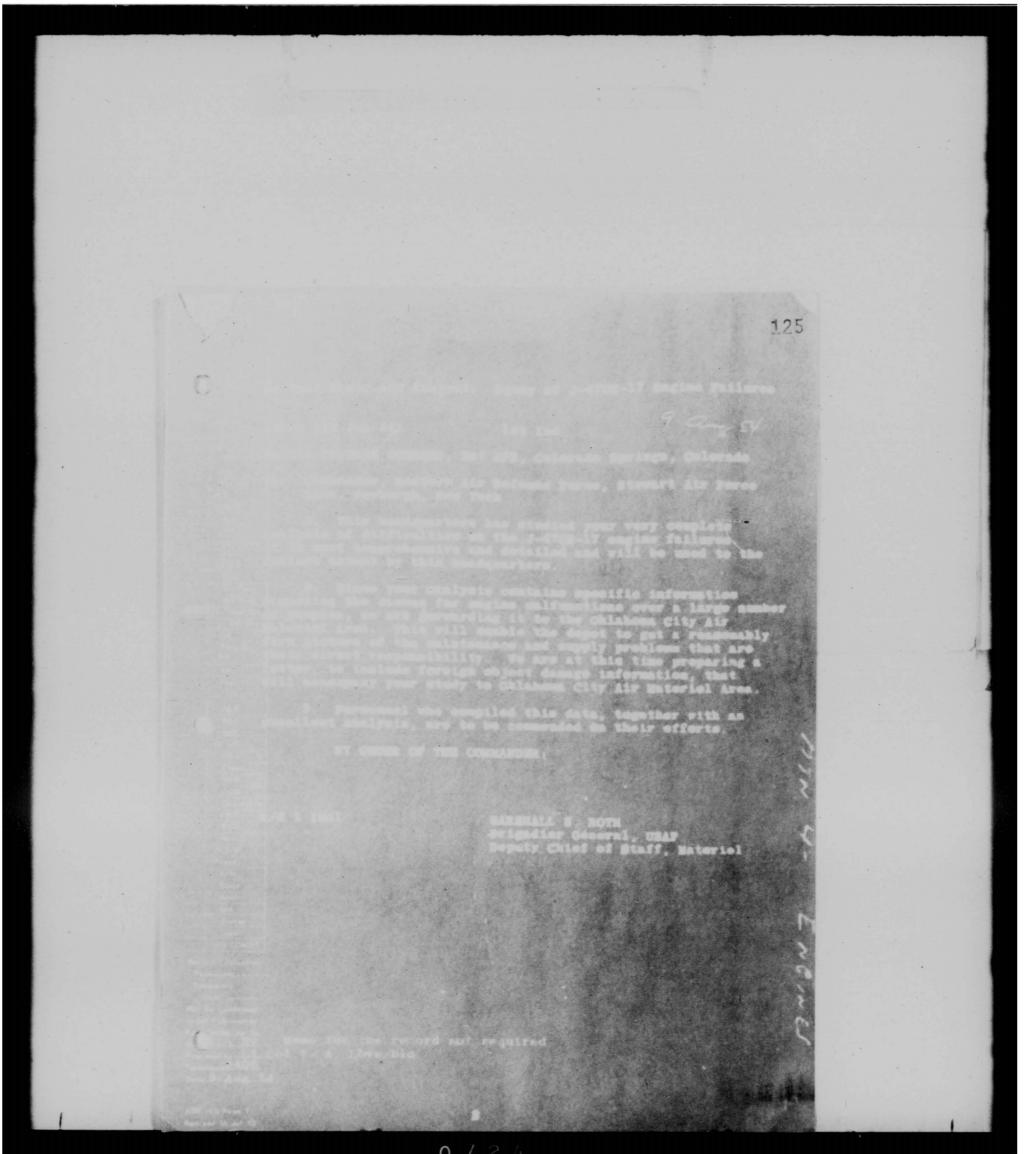

THIS PAGE IS DECLASSIFIED IAW EO 13526

1	C	0	N	FI	D	E	N	TI	A	L
									milities.	

AIR FORCE FLIGHT TEST CENTER EDWARDS AIR FORCE BASE California

FILE NUMBER 303

PUDIS

15 September 1954

SUBJECT: F-89D "Provisions For" Phase VI Progress Report Report No. 1

TO:

Wright Air Development Center ATTN: WCSF-7 Wright-Patterson Air Force Base, Ohio

1. This is the first in a series of semi-monthly progress reports which will be submitted for the duration of the test program. A final test report summarizing the progress reports will be submitted at the conclusion of the test program. These reports will contain information on aircraft and component system malfunctions, major maintenance difficulties, maintenance manhours expended, pilots' evaluation comments, and an appendix of Unsatisfactory Reports submitted. Once a month parts consumption will also be included in the appendices of these reports. Two F-89D aircraft, Serial Nos. 52-1873A and 52-1878A, are undergoing Phase VI "Provisions For" testing. The duration of the program will depend on the frequency and seriousness of new deficiencies uncovered. For planning purposes it is estimated that the program will require approximately 100 flying hours.

2. Although the F-89D "Provisions For" aircraft are equipped with the E-6 Fire Control System, "provisions for" retrofitting with the E-9 Fire Control System and a missile carrying capability are incorporated in this aircraft. The F-89D "Provisions For" aircraft differ from earlier F-89D aircraft as the result of the following major changes:

a. B-11 Autopilot.

b. Nose Wheel Steering.

c. WADC Gas Operated Ejection Seat. d. J35-A-35 Engine.

Re-arrangement of the E-6 Fire Control System New Non-Rip, Non-Self-Sealing Nose and Sump T

Pylons and Pylon Tanks. lew Wave Guide Assembly.

New Radar Cooling System.

Revised Anti-Icing and Air-Conditioning System
 Associated Weight Increase.

FROM: ADM DC.Z41

3. Both Phase VI aircraft arrived at the Air Force Flight Test Center on 20 August 1954. The first flight on aircraft S/N 52-1873A was accomplished on

125

Hq AF Flt Test Center, EAFB, FTDTS, Subject: F-89D "Provisions For" Phase VI Report No. 1

24 August 1954, and on aircraft S/N 52-1878A on 25 August 1954. Test time accomplished on the two aircraft is as follows:

A/C S/N	Test Time
52-1873A	28:25
52-1878A Total Project Test Time	16:05

4. Forty flights have been flown on Phase VI missions for a total of 44:30 test hours. Missions flown to date have been primarily familiarization and engine and afterburner evaluation missions. A diversified breakdown of flying time accomplished is shown below:

Type Mission	A/C S/N 52-1873A	A/C S/N 52-1878A
Familiarization E-11 Autopilot Radar Interception	4:40 1:45 2:35	8:45
Engine and Afterburner Evaluation: Afterburner Relite Air Starts Maximum Altitude Functional Test Flight Miscellaneous	5:55 5:05 4:55 3:20	5:45
MINCELLINGOUR	0:10	

5. The F-89D aircraft have been maintained on a 10-hour day, 6-day week schedule during this initial phase of testing. However, as a basis for computation of in- and out-of-commission status the time during which maintenance flying is being performed will be used as the length of the day. No inactive periods will be included in the report. In-commission time will be that time aircraft is awaiting a pilot or flying. Out-of-commission time will be that the used for scheduled maintenance, corrective maintenance, and periodic inspection computed on this basis the in- and out-of-commission time of the two aircraft is as follows:

128

Hq AF Fit Test Center, RAFB, FTDTS, Subject: Y-89D "Provisions For" Phase VI Progress Report Report No. 1

	A/C S/N 52-1873A	A/C S/N 52-1878A
In-Commission	29	17
Out-of-Commission: Scheduled Maintenance Corrective Maintenance ACCP Modifications E.O. & T.O.C.	53 56	-32 48 24
Total Out-of-Commission	109	104
Average In-Commission Rate:	21%	14%

6. The following chart contains a detailed breakdown of the maintenance manhours expended by the maintenance personnel on the line and in the shops. The breakdown of systems is the same as that in the F-89D Maintenance Instruction Handbook.

	A/C S/N 52-1873A	A/C S/N 52-1878A
Scheduled Maintenance: Pre-flight Inspection Service and Sefety of Flight Inspection Post-flight Inspection Lst Periodic Inspection	49 46 46 12	36 31 56
Total Scheduled Maintenance	153	123
Corrective Maintenance: Airframe Hydraulic	33,	4
Utility Power Plant Instrument	54	73
Electrical Electronic Armement	1 12	:
Modification E.O. and T.O.C. Total Corrective Maintenance	100	78
Total Flying Hours	28:25	16:05
Maintenance Manhours per Flying Hour	9	13

7. Major Malfunctions and Discrepancies:

a. Airframe:

(1) Cracked skin on the pylon fairing was removed and repaired.

An Unsatisfactory Report was submitted.

Hq AF Flt Test Center, RAFB, FTDTS, Subject: F-89D "Provisions For" Phase VI Progress Report Report No. 1

(2) Two broken canopy chains were repaired by replacing a broken pin and a broken turnbuckle.

(3) A malfunctioning side slip stability augmenter was corrected by realigning and leveling the accelerometer and replacing a defective OB-2 tube in the amplifier.

b. Power Plant:

- (1) A melfunctioning afterburner which would not relight between 10,000 and 25,000 feet was repaired by replacing the RC-9 afterburner fuel regulator control assembly.
- (2) Fuel leaking from the fuel vent on the right wing was stopped by cleaning a sticking dive valve.
- c. Electrical Power Supply and Lighting: A dead battery required replacement.

d. Armsment:

- (1) An inoperative radar set which gave no scope presentation to the radar operator was repaired by replacing the radar operator's console and indicator.
- (2) A malfunctioning radar hand control required replacement of the electrical synchronizer (OS Box).
- (3) A new vertical gyro was installed to stop the erratic movement of the pilot's artificial horizon (radar).
 - 8. Engine and Afterburner Evaluation:
- a. Ten missions were flown on which emphasis was placed upon after-burner relights and throttle bursts. Afterburner relights were accomplished at all altitudes up to and including 45,000 feet using the "jabbing" technique. This technique is accomplished by actuating the afterburner demand finger lifts before jabbing the throttle forward approximately 1% rpm. This proved to be the most successful procedure for afterburner operation. Throttle, bursts were accomplished from idle to 100% rpm at all altitudes from ground to 45,000 feet. No overtemperature conditions or compressor stalls were encountered.
- b. Five maximum altitude missions have been flown on aircraft S/N 52-1873A and a maximum altitude of approximately 46,500 feet has been obtained. Flights were made using a combat loading of approximately 42,200 pounds at take off. Performance of the F-89D aircraft with the J35-A-35 engines installed appears to be approximately the same as the F-89D with the J35-A-47 engines installed.

CONFIDENTIAL

0 7 2

Hq AF F1t Test Center. RAFB. FIDTS. Subject: F-89D "Provisions For" Phase VI Progress Report
Report No. 1

c. During four missions air starts were accomplished on both engines of aircraft S/N 52-1873A from 10,000 to 35,000 feet using the procedure outlined in the Flight Handbook (T.O. 1F 89D-1). Successful starts were obtained on all attempts at 10,000, 15,000, 20,000, 25,000, 30,000, and 35,000 feet with a peak exhaust gas temperature of 710°C encountered 900°C maximum allowable).

d. The following chart presents the test flying time and after burner operating time obtained during the program.

Aircraft	Flying Time	Afterburner Time
52-1873A	28:25	9:49
52-1878A	16:05	6:47

- 9. Pilots' Comments:
- a. The J35-A-35 engines are slow on starting and care must be exercised to prevent overtemperature conditions between 10% and 35% on starting.
- b. The location of the UHF radio control panel is objectionable as the pilot must get his head down in the cockpit to see it.
- c. The noise level between 70% and 90% rpm is high in both sircraft compared to other jet aircraft. The noise level in aircraft S/N 52-1873A is much higher than in aircraft S/N 52-1878A.
- d. It is difficult to tune the radio compass (AN/ARN-6) when there is sunlight reflecting from the frequency tuning dial window.
- e. Response of case wheel steering to pilot control is too slow.
- f. The aircraft has considerable nose down trim change from approximately .82 to .88 Mach.
- g. Afterburners require a "jabbing" technique of the throttles of approximately 1% rpm after lifting the afterburner demand inger lifts to in sure lights at higher altitudes.
 - h. Longitudinal trim response is slow.

Hq AF Flt Test Center, EAFB, FTDTS, Subject: F-89D "Provisions For" Phase VI Progress Report
Report No. 1

i. The pilot's cockpit head rest is too far back and puts the pilot in a dangerous position for ejection.

j. Excessive fuel siphons from the over-flow fuel vents in the wings when rolling into or out of turns.

FOR THE COMMANDER:

H. M. HANES Colonel USAF

Director, Flight Test

CONFIDENTIAL

6

Hq AF Flt Test Center, EAFB, FTDTS, Subject: F-89D "Provisions F r" Phase VI Progress Report No. 1

APPENDIX I

UNSATISFACTORY REPORTS

The following Unsatisfactory Reports were submitted during the reporting period:

System Affected	Station. Serial No.	Subject	A/C S/N
Airframe	54-1680	Pylon Installation, Left Hand	52-1878A
	54-1681	Amplifier Side Slip Stability Augmenter. Fourth Repeat on UR No. 53-1390.	52-1873A
	54-1682	Door Assembly, Wing, Outer Trailing, Station C-15 to 57.00, Right Hand	52-1878A
	54-1686	Pylon Instellation, Right Hand	52-1873A
	54-1722	Belt Assembly, Safety Automatic Opening	52-1873A 52-1878A
	54-1749	Quality Control	52-1873A 52-1878A
Airframe and			
Utility Utility	54-1690	Quality Control	52-1873A 52-1878A
Electrical	54-1750	Light Assembly	52-1873A
NA .	54-1685	Unaccomplished Technical Orders	52-1873A 52-1878A

CONFIDENTIAL

APPENDIX I

0

Hq AF Flt Test Center, RAFB, FIDIS, Subject: F-89D "Provisions For" Phase. VI Progress Report Report No. 1

DISTRIBUTION LIST

Activity	No. of Copies
Hq WADC, Wright-Patterson AF Base, Ohio:	
Attn: WCSF-7, Capt. Crouch	4
Attn: WCOF, Flight Safety Office	. 2
Hq ARDC, P. O. Box 1395, Baltimore 3, Maryland:	
Attn: RDDDA-4	1
Attn: RDDSD	1
Attn: RDMM	1
Attn: RDOS	1
Comdr, Air Proving Ground Command, Eglin AF Base, Floris	da:
Attn: 3200th Proof Test Wing	1
Coundr, Alaskan Air Command, APO 942, c/o Postmaster, Seattle, Washington:	
Attn: 11th Air Division, 449th Fighter Interceptor	Sqdn 2
Comdr, Alaskan Air Command, APO 942, c/o Postmaster, Seattle, Washington	2
Comdr, Elmendorf AF Base, APO 942, c/o Postmaster,	
Seattle, Washington: Attn: 10th Air Division (Defense)	8
Director of Requirements, Air Training Command,	
Scott AF Base, Illinois:	
Attn: GQE	1
Hq Moody AF Base, Valdosta, Georgia:	
Attm: 3550th Flying Training Wing	1
Attn: 3552d Maintenance Sqdn	1
Comdr, Ogden Air Materiel Area, Hill AF Base, Utah:	1
Attm: Class 01-E	•
Comdr, 497th Fighter Interceptor Sqdn, Portland Interna Airport, Portland, Oregon:	tional
Attn: 1st Lt. Willard E. Stanfield	1
ADC Installations:	
Hq ADC, Ent AF Base, Colorado: Attn: DCSM	1
Attn: DCS/O (Plans and Requirements)	1

128

Hq AF Flt Test Center, RAFB, FTDTS, Subject: F-89D "Provisions For" Phase VI Progress Report Report No. 1 ADC Installations: (Cont'd) Hq ADC, Ent AF Base, Colorado:
Attn: Comdr, Eastern Air Defense Force, Stewart AF Base, N.Y.
Attn: Comdr, Central Air Defense Force, P. O. Box 528, Kensas City, Missouri Attn: Comdr, Western Air Defense Force, Hamilton AF Base, California Hq AFFTC; Edwards AF Base, California: Attn: FTO Attn: FIDE Attn: FIDEF Attn: FTDM 10 Attn: FTDTS Attn: Northrop Technical Representative

303.7

Wright Air Development Center gen 12

WRIGHT PATTERSON AIR FORCE BASE,

S BEPL T ADDRESS BOTH COMMUNICATIONS IND ENVELOPE TO COMMUNICE BRIGHT IN DEVELOPMENT CENTER ATTENTION

OCT 1 4 1954

WCSF-7

SUBJECT: (Conf) Recommendations - Northrop J-65 Powered F-39 Proposal

TO:

Commander
Air Dofense Command
ATTN: ADOPR, Colonel Powell
Ent Air Force Base
Colorado Springs, Colorado

MIND PLD 1 FTR

1. This Centers' comments to Headquarters, Air Research and Development Command on the subject proposal are as follows:

- a. Flight tests have been made on the "high altitude operational technique" as proposed by Northrop and a brief summary of the results are contained in the attached inclosure. Results do not appear to warrant the development of a prototype to verify the performance gains due to the installation of J-65 engines, the cambered leading edge and the flap operating technique.
- 2. This Center is in receipt of a requirement initiated by the Air Defense Command for an electronics configuration study which indicates that the electronics configuration of the F-89D and H do not meet the using commands requirements. Thus a complete electronics modification program similar to the one recently approved for the F-86D will presumably be required for the F-89D and H. Due to the necessary production lead time and the engineering time required for a redesign of this sort, the proposed J-65 F-89 could not possibly be delivered within the quoted time period incorporating these electronic changes. Therefore, any procurement action initiated for this aircraft for delivery within the quoted period would be done with the knowledge that the J-65 F-89 will not meet Air Force requirements which have been established by the using Command.

FOR THE COMMANDER:

Incl: Incl: Incl. 1. Cy Comments on F-89(X) and summary of F-39D Flight Tests 54WC-25600-C-1

H. A. Doubley
Colond, US F

Colonel, US. F. Asst. Director of Weapon Systems Operations

303.1

54WCS-9811

127

COMMENTS ON F-59(X) and SUMMARY OF F-59D FLIGHT TESTS TO CHECK HIGH ALTITUDE OPERATING TECHNIQUE

1. The flight tests were conducted at AFFTC in August 1954 using two (2) F-69D's with the so-called 50,000 ft afterburner. Flights were made at 40 - 45,000 ft altitude with flaps lowered seven degrees. The gain in aircraft performance during flight test was noted only in the ability to turn tighter with the flaps lowered. At an altitude (approximately 45,000 ft) where the aircraft could maneuver at 1.2g with no flaps, it could maneuver at 1.5g with seven degrees of flaps. Themaneuroring capability was raised from 2.0 to 2.5g by the use of flaps at 40,000 ft. The decrease in drag was not noticeable. A comparison of this performance gain for an area intercept mission with internal fuel only is as follows:

F-59D F-59H F-59X *

Combat cedling, feet 46,500 45,700 52,500

Combat radius, nome 332 320 370


- * With J-65 engine and high altitude operating techniques.
- 2. Based upon the engineering data submitted and flight test reports, there is no apparent reason why the proposed F-69(X) aircraft could not attain the altitude claimed.
- 7. The model specification for the proposed F-89% has been reviewed and appreximately 100 changes are required. A weight increase is indicated by these changes but the extent of the increase is not known at this time. Any appreciable weight increase, of course, will adversely affect the estimated altitude gain. The development of a prototype for the purpose of verifying the performance gain due to the J-65 angine installation, the cambered leading edge, and the flap operating technique is not believed warranted. It appears to this Center that the operational availability of the F-69% is such as to make it undesirable when it is compared with other weapon systems programmed for the same time period.

C O P

SECRET

M68-2x

54RC-25600-C -

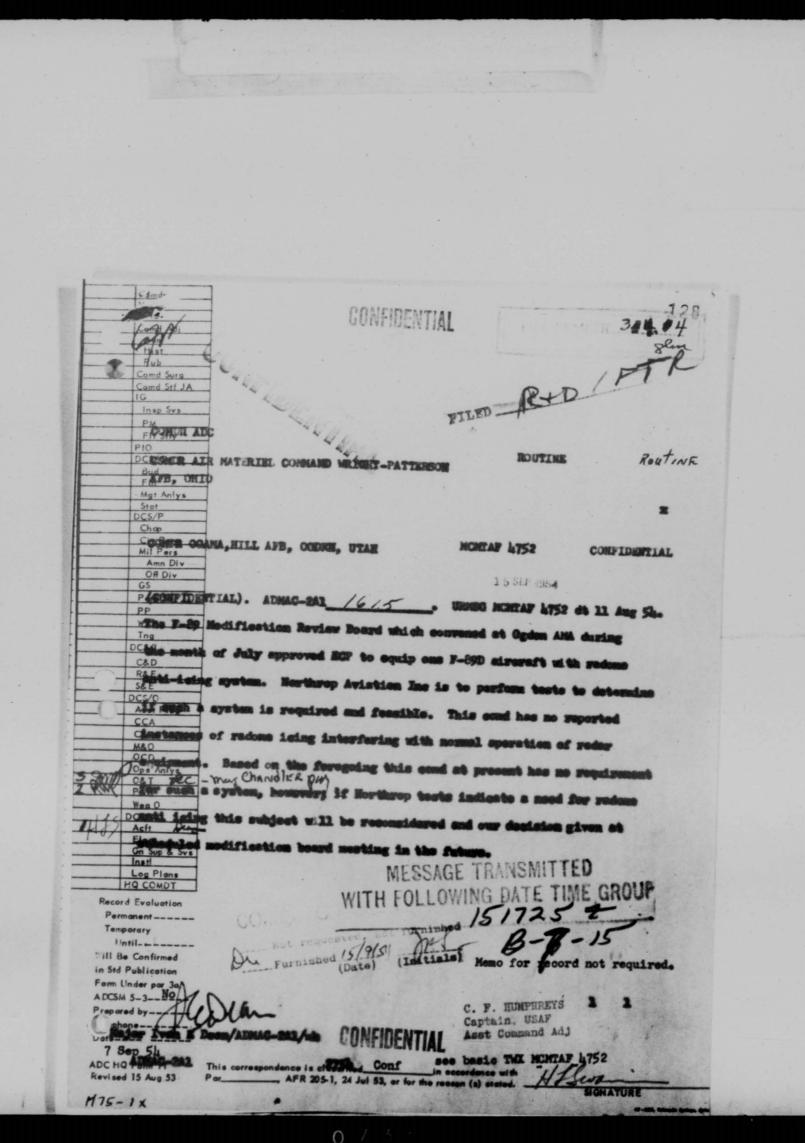

COPY

129

ADOPR

12 August 1954

SUBJECT: (UNCLASSIFIED) Electronic Configuration of the F-89D/H

TO:

Commander
Air Materiel Command
Wright-Patterson Air Force Base

- 1. This Command is programming toward an integrated system of manned interceptors operating on an all-weather concept. The basis of this system will be the Improved Manual System of Ground Control Intercept, followed by the Air Defense Transition System which will require standardization of electronics and allied equipment installed in Air Defense interceptors. This requirement for a standard electronic configuration in the F-89D/H is submitted under the provisions of AFR 57-4. As some of this equipment is presently installed in the aircraft or separate requirements have been established, this requirement is an affirmation of previously submitted requirements as well as a request for new modifications.
- 2. The modifications required will be performed on all F-89D/H aircraft of this Command. It is highly desirable that F-89D/H aircraft of other commands be modified accordingly as they are to be used as augmentation aircraft or as extended forces using similar ground environment in their operational areas.

ITEM

3. The equipment to be installed will be that contained in the following list.

SYSTEM

Navigation and Instruments TACAN	AN/ARN-21
ILAS	AN/ARN-31
Marker Beacon	AN/ARN-12
Identification	
Air-to-Ground SIF	AN/APX-25
Air-to-Air IFF	AN/APX-25 AN/APX-26 & 2
Command Radio	
UHF R/T	AN/ARC-34
Data Link, Air/Ground	AN/ARC-34 AN/ARR-39
Data Link, Air/Ground	MI/MUI-39

129

Hq ADC ADOPR Subj: (UNCLASSIFIED) Electronic Configuration of the F-89D/H

SYSTEM

Aircraft Control
CSTI
Auto Pilot
Approach Coupler

Fire Control System
FCS
ECCM

Magnetic Scope Recorder Standby Sighting System Identification Pass

ITEM

(No proposal as yet) E-11 MB-1 or MB-3

E-6/E-9 Common Synchronizer Tuneable Magnetron NADAR II Optical Sight Dover Mod.

- 4. The following special considerations and features should be made in engineering this configuration:
- a. The AN/ARN-6, Radio Compass is required in addition to the AN/ARN-21 until such time as TACAN is completely operational in ADC and will meet all navigational requirements of this Command.
- b. The optical sight mode should have the capability of portraying lead collision and lead pursuit attack information on the windscreen.
- 5. The aircraft are to be used as Air Defense Command interceptors before and after modification.
- 6. The requirements and justification for the greater part of this configuration are outstanding as a result of other correspondence or, in some cases, by direction of Headquarters USAF. Equipments for which requirements have been established by other than standard AFR 57-4 correspondence are listed below with referenced correspondence.
- a. Air/Ground Data Link requirement was established by ADC, reference, 1st Indorsement from this Headquarters dated 9 January 1953 to Headquarters USAF letter AFDRQ-AD/C, subject: "Air/Ground Data Link Retrofit Requirements," dated 23 December 1952. This was reaffirmed by letter from this Headquarters ADOPR, subject: (Unclassified) "Data Link Installations in Interceptor," dated 13 May 1954, to Director of Requirements, Headquarters USAF. This equipment will allow all Air Defense interceptors to be compatible to the Improved Manual Systems and the Transition System of G.C.I.

2

129

Hq ADC ADOPR Subj: (UNCLASSIFIED) Electronic Configuration of the F-89D/H

- b. Requirement for Control-System-Tie-In in F-89D aircraft was established in letter from this Headquarters, ADOPR 452.11, subject: "Control System Tie-In," dated 30 June 1953 to Director of Requirements, Headquarters USAF. Headquarters USAF 1st Indorsement to this letter, dated 27 July 1953, concurred in the need for this equipment in all Air Defense interceptors.
- c. The requirement for NADAR II was established on the basis of one unit per each interceptor aircraft in message from this Headquarters, ADOPR 1060, dated 5 May 1953 to Director of Requirements, Headquarters USAF. This equipment will give each organization the capability of immediately assessing the quality of attacks performed on intercept missions.
- 7. The materials needed for these modifications will be predicated on the final engineering of the complete configuration.
- 8. It is requested that the required modifications be made in a single operation at depot level or in production aircraft, where possible. It is requested that this program not be delayed due to the lack of undeveloped and untested equipment. During the modification program, "provisions for" the unavailable equipment should be incorporated in the aircraft in order that the equipment could be installed at squadron or base level at a later date.
- 9. A total of 563 F-89D and H aircraft will require this configuration.
- 10. It is considered that this configuration will cause no adverse effect on support equipment, assuming that contracts for the airborne equipment will include complementary special tools, test equipment and ground display equipment.

FOR THE COMMANDER:

Info cy COMDR, NEAC COMDR, AAC COMDR, ATRC

COMDR, EADF

MARSHALL S. ROTH Brigadier General, USAF Deputy Chief of Staff, Materiel

3

130

HEADQUARTERS
SACRAMENTO AIR MATERIEL AREA
MCCLELLAN AIR FORCE BASE
MCCLELLAN, CALIFORNIA

SMMTAC-2

21 September 1954

SUBJECT: Installation of Harp Material in F-94C Radome (U)

TO: Commander
Air Defense Command
Ent Air Force Base
Colorado Springs, Colorado


- 1. Your attention is invited to the attached inclosures regarding the experimental installation of Harp material in F-94C radomes.
- 2. The desired test is considered a class IV change in accordance with AFR 57-4. Justification for this test, in the form of Unsatisfactory Reports, or other correspondence, is not currently available at this Headquarters. Therefore, request confirmation for this experimental test and the quantity and serial numbers of the F-94C aircraft to be affected.
- 3. A telephone conversation between personnel of Hamilton Air Force Base and Sacramento Air Materiel Area indicated that the materials required to conduct the test are available in AirForce Supply.
- 4. Publication of Technical Order instructions is dependent upon Wright Air Development Center's approval of experimental and flight testing results and the establishment of a firm retrofit requirement by your Headquarters.
- 5. When the above referenced inclosures are withdrawn or not attached, the classification of Confidential on this correspondence will be cancelled in accordance with Paragraph 26g, AFR 205-1.


FOR THE COMMANDER:

3 Incls
1 Hamilton AFB Ltr
dt 28 Apr 54
2 SMAMA Ltr dt 10 May
54 w/lst Ind
3 SMAMA Ltr dt 11 Aug 54
w/lst Ind

s/JOHN A PECHULS Colonel, USAF Director of Maintenance Engineering

VC .	CONTRACTOR OF THE PARTY OF THE	
CofS Comd Adj	RIDIANE 10	
Adm Hist	ATTEN A	
Comd Surg	SMANA, SSMIAG-C, Subje Installation of Herp Material in	
IG Page Rades	■ (V)	
10	(21 Sept Sh) let Ind	
PIO HRADQUARTER	RS AIR DEFENSE COMMAND, Ent Air Force Base, Colorade Springs	
DCS/C Coloredo		
Mgt Anlys Hamilt	nder Western Air Defense Force, Hamilton Air Force Base ton, California	
DCS/P	amount you get up a test program to evaluate the use of	
Civ Pers Hare Mater	ial as outlined in attached enclosures.	
Amn Asgmt 2. Re	oute all test results through this headquarters.	
Cole & Reds	our attention is invited to Hughes Interdepartmental Corres-	
GS Pondence of	f 9 July 1954, Subject: Harp Material for Material	
PP	Y ORDER OF THE COMMANDERS	
WAF Tng		
OI 3 Incles		
SRT dtd 2	ten APB Ltr 6 Apr 5k	
Asst Prog	Ltr dtd 10 h w/lst Ind	
Comm & END		
OCD	h w/ist Ind	
Ops Anlys C&I	1/6	
P&R Wea O	MC.	
D Sante		
Gn Sup & Svs	1119	
Log Plans HQ COMOT	2-8,026	
Record Evaluation	A-30026	
Permanent Temporary		
Until		
for D. Mination	02-11	
ACCSM 5-3-BO-Capt. T.A.	Nuckols/ADMAC-5A/laj Memo for record not required	
phone6224	Continue of the second	
Date - 7 Oct 54-	orrespondence is classified CONFIDENTIAL accordance with 20 nucli-65 21 AFR 205-1, 24 Jul 53, or for the reason (s) stated.	

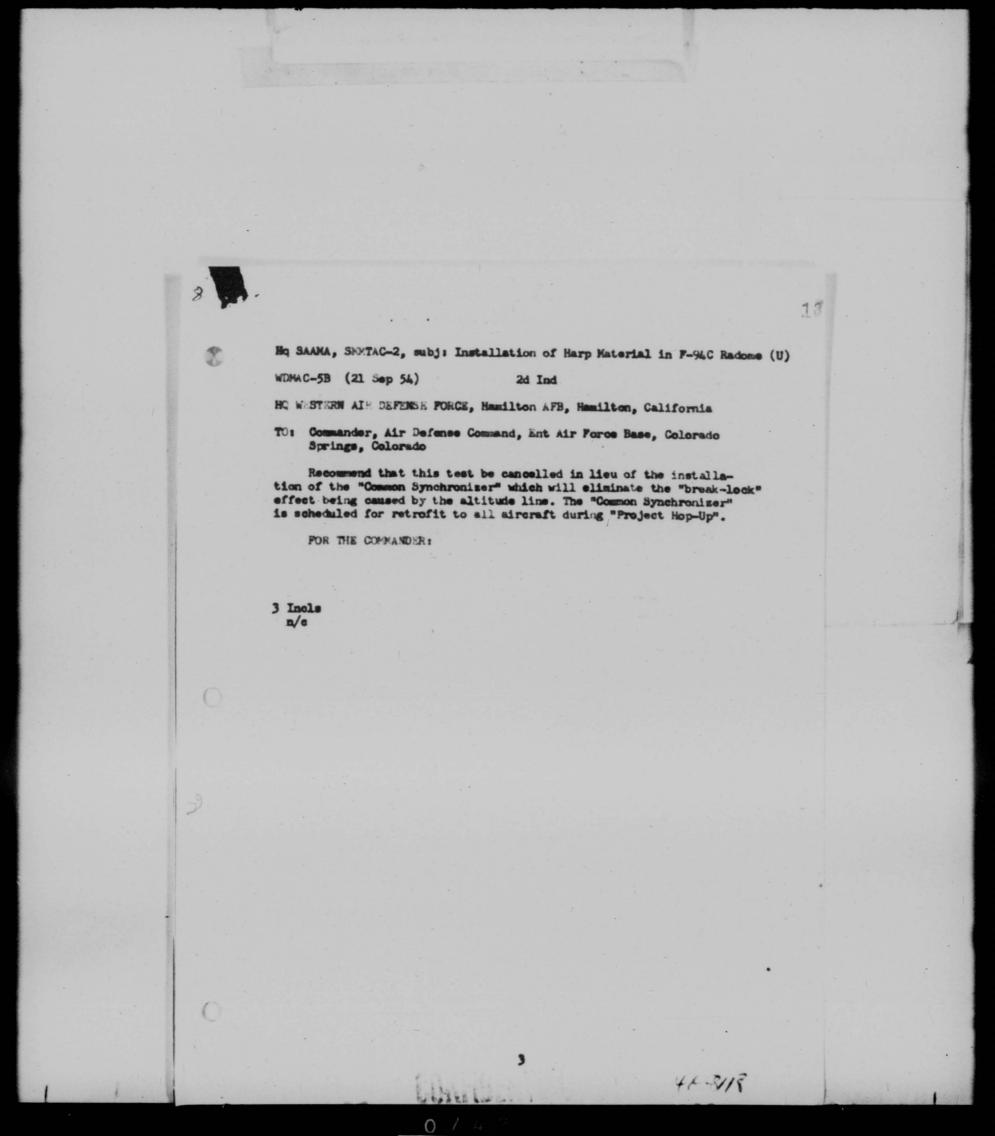

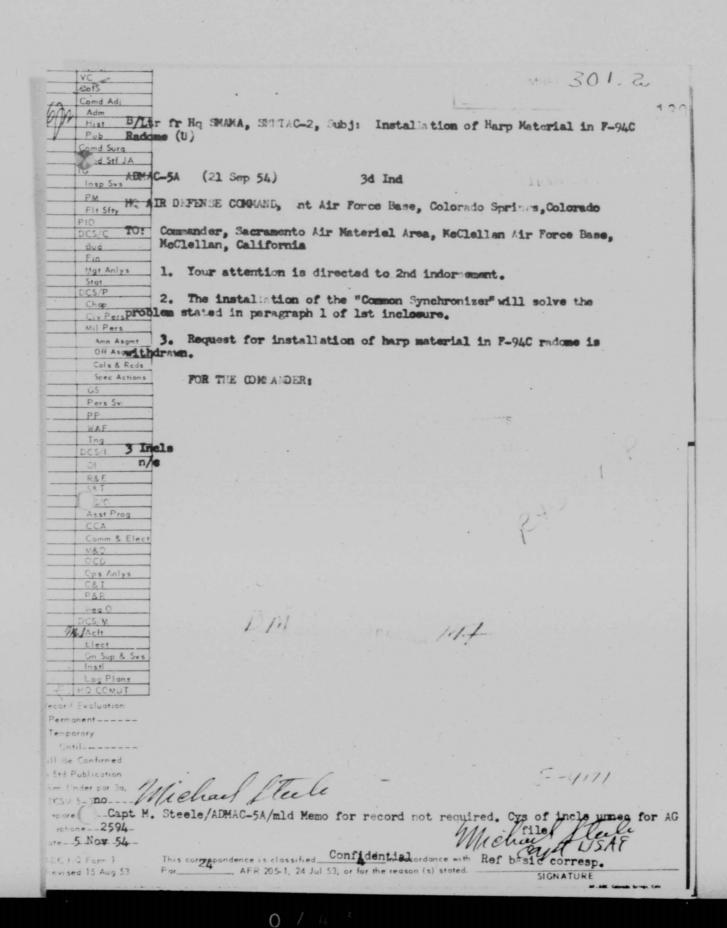

1.3

OCE-3A-18

28 April 1954

SUBJECT: Modifying the E-5 Fire Control System in the F-94C

TO: Commander
Sacramento Air Materiel Area
ATTN: Maintenance Engineering
Services Division (SMMTAC)
McClellan Air Force Base
McClellan, California

- 1. (Conf) One of the undesirable features of the F-9hC Fire Control System is the terrain and sea return reception in the radar. The return, also called the altitude line often causes the radar to "break lock" when in automatic track operation. When the "break lock" condition occurs during an intercept on, it frequently becomes necessary to re-initiate the "pass" in order to be effective.
- 2. (Conf) To reduce the effect of the altitude line in the F-86D, T.O. 1F-86D-10h suthorises a modification kit for the radome. As yet no authorisation has been received to modify this portion of the F-9hC.
- 3. (Conf) Assistance is requested for the 84th Fighter-Interceptor Squadron at Hamilton Air Force Base, California, for the following purposes:
 - a. To provide technical help in designing a shield for use with the F-94C radome.
 - b. To provide supply assistance for procuring materials required for this project.
- h. (Conf) Request that this modification be performed on two (2) or three (3) aircraft in the 8hth Fighter-Interceptor Squadron on a trial basis. Then if the modification proves feasible, request your headquarters prepare the justification and specifications for a technical order compliance on all F-9hC aircraft.
- 5. (Uncl) This correspondence is classified CONFIDENTIAL because of the classification of paragraphs 1 thru h, and in accordance with paragraph 2ha(2), AFR 205-1.

FOR THE COMMANDER:

*/MARION R MCCANN Major USAF Adjutant

SPMTAC-2

10 May 1954

SUBJECT: Installation of Harp Material in the F-94C Radome (Uncl)

TO: Commander

Wright Air Development Center ATTN: WCLG Wright Patterson Air Force Base, Ohio

- 1. Your attention is invited to Hamilton Air Force Base letter OCE-3A-18, dated 28 April 1954 attached as an inclosure.
- 2. The inclosure is forwarded for your review and comments relative to installing Harp material in lower portion of radome in F-94C aircraft similar to modification as directed by Technical Order 1F-86D-104 for F-86D aircraft.
 - 3. Request your reply be expedited.
- 4. When Incloses 1 is withdrawn or not attached, the classification of CONFIDENTIAL on this correspondence will be cancelled in accordance with paragraph 26g, AFR 205-1.

FOR THE COMMANDER:

1 Encl Ltr fr Hamilton AFB 28 Apr 54 (cy) s/A. C. PERRY Colonel, USAF Director of Maintenance Engineering

U

Basic, Hq SMAMA (SMMTAC-2) 10 May 54 to Comdr WADC Subject: "(Unclassified) Installation of Harp Material in the F-94C Radome"

WCLGF

20

1st Ind

HQ WRIGHT AIR DEVELOPMENT CENTER, Wright-Patterson Air Force Base, Ohio

TO: Commander, Sacramento Air Materiel Area, ATTN: SMMTAC-2, McClellan Air Force Base, McClellan, California

- 1. The Armament Laboratory, WADC, has no objections to the $8l_1$ th Fighter Interceptor Squadron preparing test installations on three (3) aircraft as requested. (Unclassified)
- 2. No information is presently available as to the optimum installation of Harp material in the F-94C since the location of the Harp is dependent upon the angle of attack of the aircraft and radome configuration. Information from Northrop Aircraft Inc. indicates that with the antenna pointed dead shead the optimum location is two inches shead of the antenna dish. Since no other information is available, it is recommended that, as a starting point Harp material of same type and shape as that used in the F-86D (Ref TO 1F-86D-104) be inserted in the radome with its foremost edge 2ⁿ forward of the antenna dish. The optimum position and dimensions can then be determined by experimentation and flight testing. (Conf)
- 3. It is requested that results from any testing be forwarded to this Laboratory for evaluation and used in the preparation of applicable T.O. instructions. (Uncl)

FOR THE COMMANDER:

s/ROBERT W. HOMMEL
Asst Chief, Fighter Systems
Armament Laboratory

Incl:

This correspondence is classified Confidential inasmuch as the unauthorized disclosure of this defense information could be prejudicial to the defense interests of the nation.

HEADQUARTERS
SACRAMENTO AIR MATERIEL AREA
McClellan Air Force Base
McClellan, California

SMMTAC-2

0

11 Aug 1954

SUBJECT: Installation of Harp Material on F-9hC Radome (Uncl)

TO: Commander
Air Materiel Command
ATIN: MCMTAF
Wright Patterson Air Force Base, Ohio

- 1. Your attention is invited to Hamilton Air Force Base letter OCE-3A-18, dated 28 April 1954, attached as Inclosure 1 and Wright Air Development Center 1st Indorsement dated 3 June 1954 to Sacramento Air Materiel Area letter dated 10 May 1954, attached as Inclosure 2.
- 2. Your comments and recommendations are requested relative to installing Harp material on the radome of F-9hC aircraft. This experimental installation will be similar to modification directed by Technical Order 1F-86D-10h. Results of this experiment will be forwarded to Wright Air Development Center for evaluation prior to publication of requested Technical Order.
 - 3. Request your reply be expedited.
- h. When the above referenced inclosures are withdrawn or not attached, the classification of Confidential on this correspondence will be cancelled in accordance with Paragraph 26g, AFR 200-1.

FOR THE COMMANDER:

s/A. C. PERRY
Colonel, USAF
Director of Maintenance
Engineering

2 Incls
1. Ltr fr Hamilton AFB
28 Apr 54
2. SMAMA Ltr w/lst Ind

0

Basic ltr fr SMAMA (SMMTAC-2) Subject: Installation of Harp Material on F-9hC Radome (Uncl) dtd 11 Aug Sh

MOMTAF

1st Ind

HQ AIR NATERIEL COMMAND, Wright-Patterson Air Force Base, Ohio


TO: Commander, Sacramento Air Materiel Area, Attn: SMMTAC-2, McClellan Air Force Base, California


- 1. The proposed installation of Harp Material on F-940 Radome is considered a Class IV modification in accordance with Air Force Regulation 57-4, paragraph hJ(h)(b).
- 2. The decision to incorporate this modification on referenced aircraft is within the functional scope of the prime aircraft Air Materiel Area as pertains to Class IV type modifications; however, the decision to accomplish such modification should be based upon Wright Air Development Center approval and adequate justification by the using Commands.

BY ORDER OF THE COMMANDER:

2 Incls

a/MAURICE L. DYER
Colonel, USAF
Chief, Maintenance Engineering
Services Division
Directorate of Maintenance
Engineering

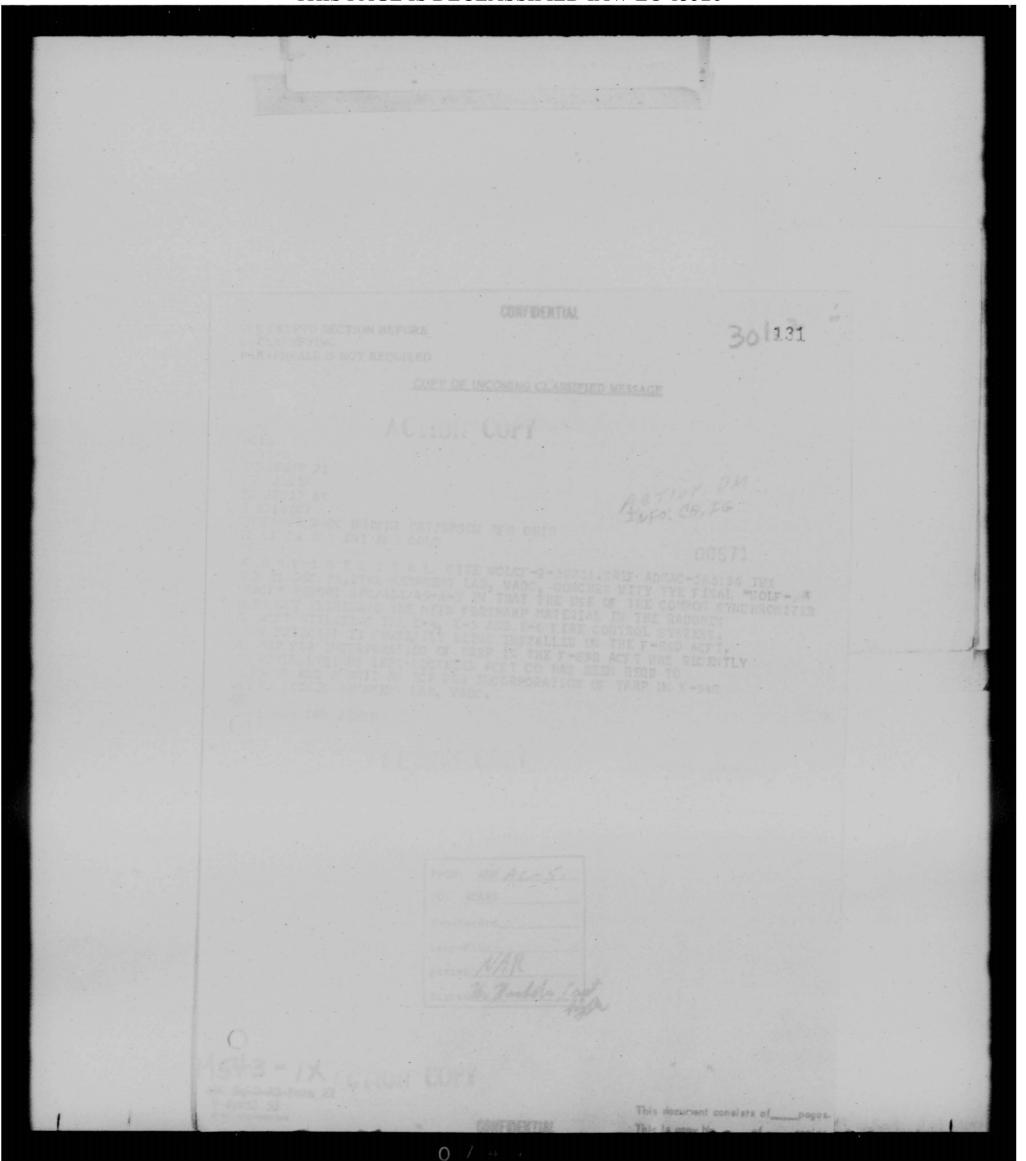



SUBJECT: AMC Master Plan for the Modernization of the F-94C

TO:

1. PROJECT DESCRIPTION.

a. Project Number: A-5-7307 SM has been established by SMAMA for the modernization of the total F-94C inventory and its related systems. This program has been authorized by Hq AMC in TWI MCMTAF 94-6-28E, attached as Inclosure No. 2.

b. The F-94C Modernization Program will be implemented in two phases. Phase I: 151 aircraft to be processed at Lockheed Aircraft Services, Ontario, California, commencing June 1954 and continuing through May 1955. Phase II: 220 aircraft to be processed at SMAMA, commencing in October 1954, ending November 1955.

c. Total Quantity and Type Aircraft - Phase I and II: 371 each F-940 aircraft.

2. WORK TO BE ACCOMPLISHED:

a. Phase I: Accomplish 187 modifications as follows: 78 airframe (including cockpit enlargement); 100 fire control systems (E-5); 2 mutopilot (W3A); 7 engine (J-48-P-7); and IRAN maintenance. (For details, see Inclosure No. 3).

airframe, 100 fire control systems (E-5); 2 autopilot (W3A); 7 engine (J-45-P-5); and IRAN maintenance. (For details, See inclosure No. 3)

c. Outstanding field and organizational maintenance beyond the capability of the using command will be accomplished concurrent with the depot level maintenance and modification programs.

M59-1.

Secret

518 6.370

132

Secret

Subj: AMC Master Plan for the Modernization of the F-940

- d. Using commands are expected to accomplish as many outstanding field and organizational items as time and manpower permit prior to dispatching aircraft to the ANC facilities for modernization.
- e. Items of maintenance which cannot be incorporated in the aircraft during the modification program due to non-availability of kits will be provided for in a retrofit program. SMAMA will develop and implement this program to the mutual satisfaction of AMC and the using commands.

3. RESPONSIBILITIES:

a. SMAMA is assigned the overall monitorship of the F-94C Modernization Program and will accomplish the work required on Phase II aircraft. Work required on Phase I aircraft will be accomplished by Lockheed Aircraft Services, Ontario, California. WRAMA, SAAMA, and MAAMA will be required to furnish adequate assistance and maintain functional responsibilities over their prime commodities.

b. WRAMA will:

- (1) Determine and provide contractor or AMC depot assistance required to generate modified B-5 Fire Control Systems in accordance with the approved aircraft in and output schedule, Phase I and Phase II.
- (2) Provide an adequate Bank of spare components and systems to guarantee uninterrupted production at LAS and SMAMA.
- (3) Provide technical guidance required at LAS and SMAMA.
- (4) Develop and implement with SMAMA and LAS, the ground rules for removal and transportation of unmodified E-5 systems to the proper modification facility for rework. Transportation costs may be borne by SMAMA.

c. SAANA vill:

- (1) Determine and provide contractor or AMC Depot assistance required to generate J-46-P7 engines in accordance with the approved aircraft in and output schedule. Phase I and II. Provide an adequate bank of spare engines or components to guarantee uninterrupted production at LAS and SMAMA.
- (2) Provide technical assistance required at IAS and SMAMA.

Secret

545N 08379

M59-2

132

190

SUbJ: AMC Master Plan for the Modernization of the F-940

(3) Develop and implement, with LAS and SMAMA, the ground rules for removal, modification and transportation of unmodified engines to the proper modification facility for rework. Transportation may be borne by SMAMA.

will

at a W 3A meterilate in accordance with

All other AMA's and Specialized Depots will:

(1) Furnish assistance as required to meet the requirements of the F-94C modernization program.

4. GENERAL PROGRAM DATA:

a. Spares Control:

- (1) AMC requires the assistance of all F-94C using organizations to establish rigid control of all critical spaces required to support this program.
- (2) AND Depots will take immediate action to determine spare parts requiring modification prior to start and actual production of modified aircraft and to insure that modifications are accomplished.
- (3) F-94C using organizations, in coordination with the appropriate AMC depot, will be responsible for the scheduling of spare components for modification concurrent with the aircraft modification program.

b. Funding Instructions:

(1) Funds required by the AMAs directly supporting this program have been authorized by Hq AMC and will be available upon request for each AMA involved. Final release is contingent upon USAF approval of the AMC FT-55 financial program. In this connection, Hq AMC will release the detail (by funds account and amounts) funding program, as applicable to each depot currently involved.

Secret

548M 08379

M59-3

132

19

SUBJ: AMC Master Plan for the Modernisation of the F-940

c. Aircraft Scheduling Data:

(1) Inclosure Number one (1) indicates scheduling information applicable to this program.

Releasing Commands:

(1) Air Defense Command, Air Training Command, Tactical Air Command, Air Research and Development Command Air Proving Ground Command and Air Materiel Command

Prepared for "one time flight" in accordance with Technical Order 00 25-4, Section IV, par. 3. All aircraft must be delivered fully equipped.

f. Ferrying of Aircraft:

(1) Commands dispatching aircraft to Sacramento Air Materiel Area and LAS will be responsible for ferrying aircraft into and away from these maintenance facilities. In the event assistance is required in ferrying aircraft, Air Force Regulation 67-37 will be followed. Upon completion of aircraft, availability reports will be submitted in accordance with Air Force Regulation 54-112.

E. Flight Test Pilots:

(1) SMANA will initiate action to develop mutual agreements with all affected commands on the requirement and utilization of flight test pilots to be assigned to maintenance facilities for flight test purposes and final acceptance of aircraft.

h. Priority:

(1) OFU-1-6 has been requested from Hq USAF. Confirmation will be disseminated by Hq AMC.

(2) Supply Priority

Supply priority will be in accordance with Air Force Manual 67-1, Volume III, Section 2, Par 2.

Secret

54SM 08379

M59-4

0 7 5 3

132

Subject:

AMC Master Plan for the Modernization of the F-94C

Hq AMC, (Attn: MCSDXG) will be advised immediately of any project delays or contemplated delays that can be attributed to the assigned supply priority.

1. Material Requirements List

(1) Material Requirements Lists will be prepared and processed in accordance with Air Materiel Commend Regulation 70-8, dated 16 December 1953, or Air Materiel Command Regulation 65-6, dated 3 Sep 53, as applicable.

J. Work Specifications

 The development of Work Specifications will be the responsibility of the AMA designated as prime in Technical Order 00-25-115.

k. Purchase Requests:

(1) All purchase requests will be initiated by the prime AMA and processed through established PR-MIPR channels as indicated in AMCM 66-6 and AMCM 172-2.

1. Contractual Coverage

(1) All Air Materiel Areas, by prime commodity, will negotiate, contract, and administer with their respective contractors relative to such items as air-frames, engines, engine accessories, fire control systems, and automatic pilots which will include TOC and ECP kits, material service, and modification and repair of all equipment required to support the F-94C requirement.

m. Transportation:

 Premium transportation will be utilized when necessary to insure timely delivery of parts and equipment for this program.

n. Monitorship by Prime Commodity (Maintenance, Supply, Procurement and Transportation)

SMAMA - Lt Col A. G. Lyon, Command Monitor Ext 4234 - SMMG Supply - Mr. D. Lackey - Ext 23219, SMSRD Maintenance - Mr. D. Shilling - Ext 21128, SMGT Programs - Mr. W. G. Eutland, Ext 4188, SMFW

Secret

Subject: AMC Master Plan for the Modernization of the F-94C

WRAMA - Programs - Mr. W. Runfola, WRF

SAAMA - Programs - Mr. J. Chavis, SAF

MAAMA - Supply - Mr. A. Breon, MASRD

o. Reporting:

(1) F-94C production progress at Sacramento Air Materiel Area will be reported in the Aircraft Maintenance and Supply Production Report (RCS-3-AMC-K7).

132

- (2) F-94C production status at LAS will be obtained by the Sacramento Air Materiel Area, Directorate of Maintenance Engineering, Command Workload Control Office, from the local responsible procurement agency and furnished Hq AMC, ATTN: MCM.
- (3) Kit procurement and line item action pertaining to all supporting phases of this program will be reflected in the AMC X-20 report compiled by the Maintenance Enginsering Services Division of all Air Materiel Areas. Initial report will reflect all kit procurement and status. Subsequent reports will reflect only status of kits which are not available in sufficient quantity to support the entire program.

p. Amendments to Master Plan:

(1) Variations from this Master Plan may be required due to unforeseen developments; therefore, all participating organizations are encouraged to submit proposed amendments to Sacramento Air Materiel Area, Attn: SMMC, for official amending action.

q. Classification:

(1) The total aircraft inventory and Inclosures 1 and 4 are secret information. The balance of the information contained in this document is not classified.

WILLIAM T. HEFLEY

Brig General, USA

LAS Schedule AMC TWX, 17 Jun F-940 Mod Prog, Phases I & II AMC Ltr 17 Jun

1159-6x

SECRET

COPY

133

ADOPR

30 August 1954

SUBJECT: (Unclassified) Electronic Configuration of the F-94C

TO:

Commander

Air Material Command

Wright-Patterson Air Force Base

Ohio

1. This requirement for an electronic configuration in the F-94C is submitted under the provisions of AFR 57-4. The equipment requested will provide a compatibility with the Air Defense Transition System, TACAN and the air-to-air and air-to-ground identification requirements. The Fire Control System will be capable of performing its required functions under normal conditions or when ECM is encountered.

- 2. The modifications required will be performed on all F-94C aircraft of this Command. It is recommended that this modification be performed on F-94C aircraft belonging to ADC augmentation forces and to other Commands using the same ground environment.
- 3. The equipment to be installed will be that contained in the following list:

SYSTEM

ITEM

Navigation and Instruments

TACAN

Identification

AN/ARN-21 AN/ARN-31 AN/ARN-12

Marker Beacon

Air-to-Ground SIF

Air-to-Air IPF

AN/APX-25 AN/APX-26 & 27

Command Radio

UHF R/T Data Link, Air-Ground AN/ARC-34 AN/ARR-39

SECRET

SECRET

133

ADOPR Subject: (Uncl) Electronic Configuration of the F-94C

SYSTEM

ITEM

Aircraft Control

Auto Pilot

CSTI

Approach Coupler

(Lockheed ECP #LH -

F-94C-3108) MB-1 or MB-3

Fire Control System

FCS

ECCM

Magnetic Scope Recorder Standby Sighting System Identification Pass

E-5

Common Synchronizer Tuneable Magnetron NADAR II

Optical Sight Dover Mod.

- 4. The following special considerations and features should be made in engineering this configuration:
- a. The AN/ARN-6 Radio Compass is required in addition to the AN/ARN-21 until such time as TACAN is completely operational in ADC and will meet all navigational requirements of this Command.
- b. The optical sight mode should have the capability of portraying lead collision and lead pursuit information on the windscreen.
- 5. The aircraft are to be used as Air Defense Command interceptors before and after modification.
- 6. The requirements and justifications for the greater part of this configuration are outstanding as a result of other correspondence or, in some cases, by direction of Headquarters, USAF. Equipments for which requirements have been established by other than standard AFR 57-4 correspondence are listed below with referenced correspondence.
- a. Air/ground Data Link requirement was established by ADC, reference 1st Indorsement from this Headquarters, dated 9 January 1953 to Headquarters USAF letter, AFDRQ-AD/C, Subject: "Air/Ground Data Link Retrofit Requirements," dated 23 December 1952. This was reaffirmed by letter from this Headquarters ADOPR, Subject: (Uncl) "Data Link Installations in Interceptors," dated 13 May 1954, to Director of Requirements, Headquarters USAF. This equipment will allow all air defense interceptors to be compatible with the Improved Manual System and the Transition System of GCI. Manual System and the Transition System of GCI.

SECRET

SECRET

133

ADOPR Subject: (Uncl) Electronic Configuration of the F-94C

- b. Requirement for Control-System-tie-in in F-94C aircraft was established in letter from this Headquarters, ADOPR 452.11, Subject: "Control System Tie-In", dated 30 June 1953 to Director of Requirements, Headquarters USAF. Headquarters USAF lst Indorsement to this letter, dated 27 July 1953, concurred in the need for this equipment in all air defense interceptors.
- c. The requirement for NADAR II was established on the basis of one unit per each interceptor aircraft in message from this Headquarters, ADOPR 1060, dated 5 May 1953 to Director of Requirements, Headquarters USAF. This equipment will give each organization the capability of immediately assessing the quality of attacks performed on intercept missions.
- 7. The materials needed for these modifications will be predicated on the final engineering of the complete configuration.
- 8. It is requested that the required modifications be completed in a single operation at depot level, or in production aircraft, where possible. It is requested that this program not be delayed due to the lack of undeveloped and untested equipment. During the modification program, "provisions for" the unavailable equipment should be incorporated in the aircraft in order that the equipment could be installed at squadron or base level at a later date.
 - 9. A total of 300 F-94C aircraft will require modification.
- 10. It is considered that this configuration will cause no adverse effect on support equipment, assuming that contracts for the airborne equipment will include complementary special tools, test equipment and ground display equipment.

FOR THE COMMANDER:

Info cy: Comdr, ATRC Dir, Rqmts, USAF MARSHALL S. ROTH Brigadier General, USAF DCS/Materiel

3

SECRET

DEPARTMENT OF THE AIR FORCE HEADQUARTERS UNITED STATES AIR FORCE WASHINGTON 25, D. C.

CONTRACTOR

AFRSS-AR-2

15 NOV 1954

SUBJECT: (Unel) Supply Support of E Series Fire Control Systems

TO:

Air Defense Command
Ent Air Force Base
Colorado Springs, Colorado

- 1. It has come to the attention of this headquarters that there is and will be fore some time, a serious support deficiency for components of the E series Fire Control Systems. Projects "Pull Out" and "Hop Up" for the modernisation of F86D and F94C, interim complete dependence on contractor modification facilities, incomplete accountability, and other factors have combined to make this problem extensive.
- 2. Unusual measures are being taken to overcome the supply difficulties. Even though AMC reports that major commands are cooperating and assisting in such measures, this headquarters believes that the following actions can be taken by major commands to assist further in resolving the support difficulties.
- a. Disseminate adequate information on "Pull Out" and "Hop Up" objectives to the lowest affected operating echelors, assuring the understanding of the information.
- b. Emphasise improved supply discipline, Strict accounting, reporting, and identification of fire control equipment is essential to the USAF's ability to achieve operational readiness. It appears at this time that lax reporting and hoarding of some critical components, coupled with misidentification of items, are significant factors in the present support situation. Recomputations of requirements balanced against past procurements do not justify significant new procurement to meet current shortages. Therefore, existing components must be recovered to meet the requirements.
- c. Direct each echelen concerned to conform promptly and strictly to shipping instructions from the monitoring depot (WRAMA) for movement of Fire Control System components.
- d. Expedite the movements of reparable components to depot repair facilities in accordance with Technical Order 16-1E-1, including use of premium transportation where feasible.

COPY

Confidenti

SUBJECT: (Uncl) Supply support of E Series Fire Control Systems

3. WRAMA is sending out inventory teams, to be assisted by major command representatives, in an attempt to recover and establish identification of critical fire control system components. This action has increased considerably the availability of some critical items. This headquarters desires that you continue to fully cooperate in the spirit of this action.

4. Whole hearted support of supply agencies and strict adherence to the above requests should significantly alleviate a serious situation. The USAF cannot condone a status of supply discipline which indicates that poor supply management contributes to such a serious supply shortage. All individuals concerned should be impressed with the fact that mutual benefit will accrue to all elements of the Air Force mission when cooperation in such matters is routine. Although WRAMA reports full cooperation has been given their inventory teams, the necessity for such teams manifests an unsatisfactory situation. The use of these teams is an emergency measure to be discontinued at the earliest possible date.

BY ORDER OF THE CHIEF OF STAFF:


/s/ John G. Duffey
JOHN G. DUFFEY
Colonel, USAF
Chief, Armament Division, D/S&S
Office, Deputy Chief of Staff, Materiel


DISTRIBUTION:


Comdr: ADC
APGC
AMC
ARDS
ATC
AAC
CAC
CONAC
FEAF
SAC
NEAC
TAC
USAFE

COPY

LUMBLERIA

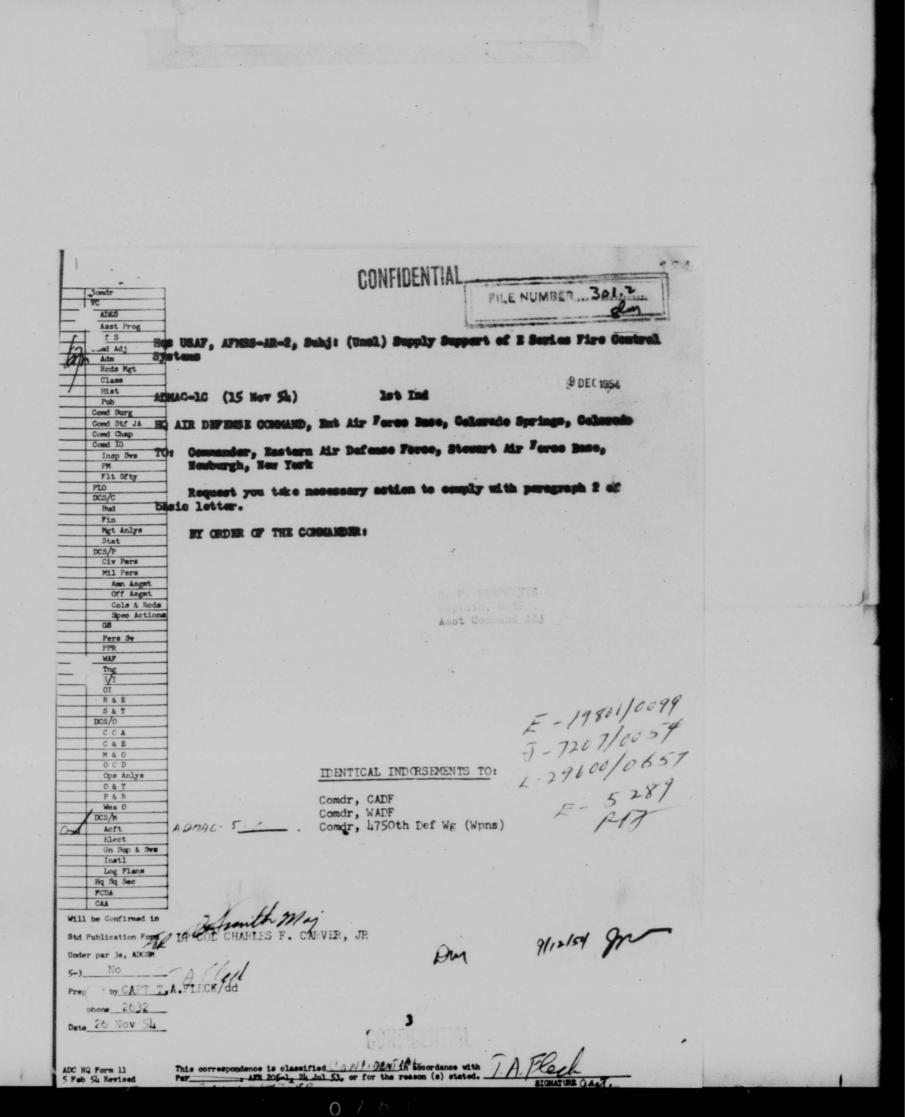

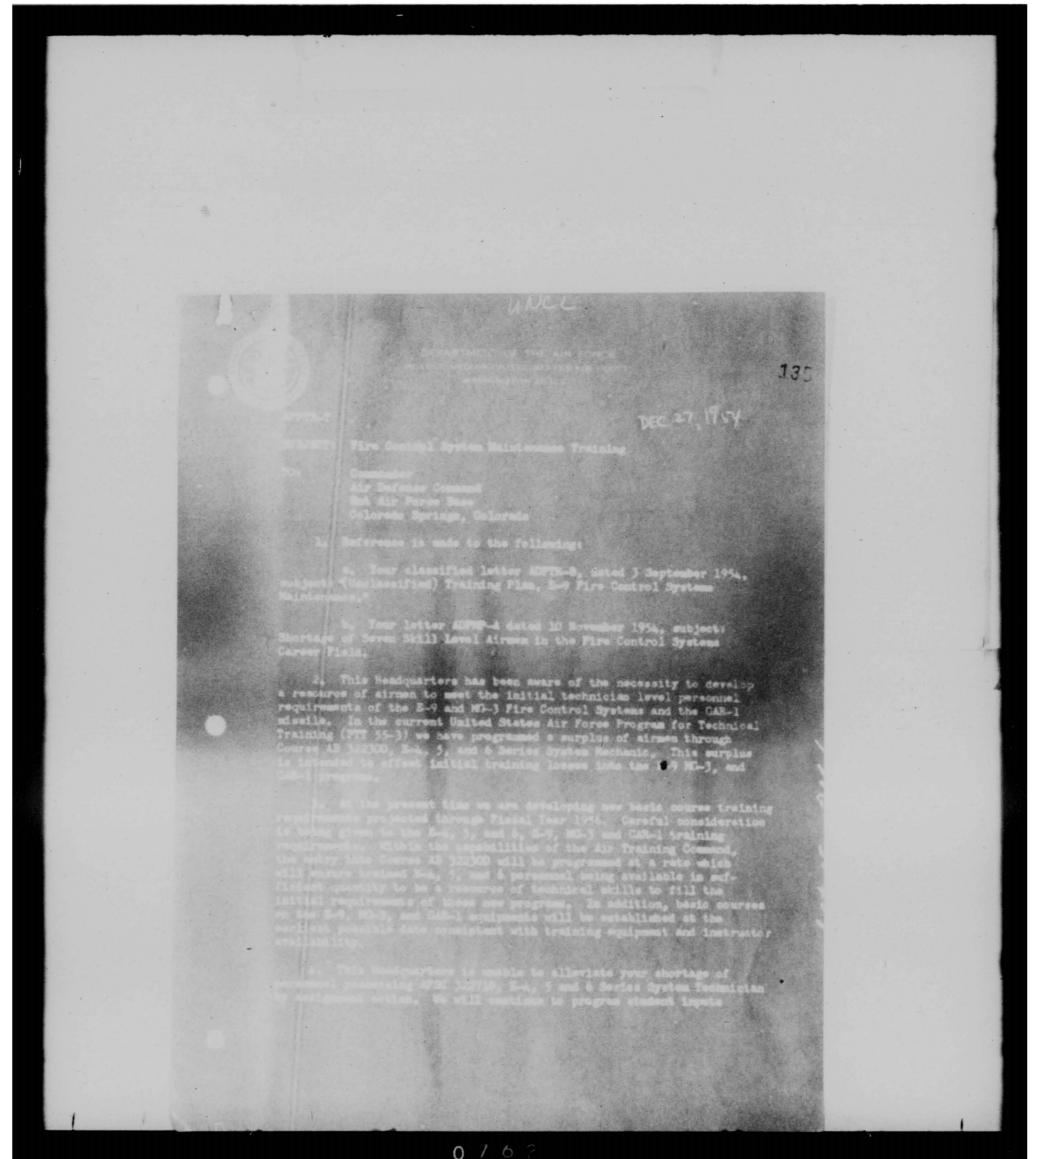

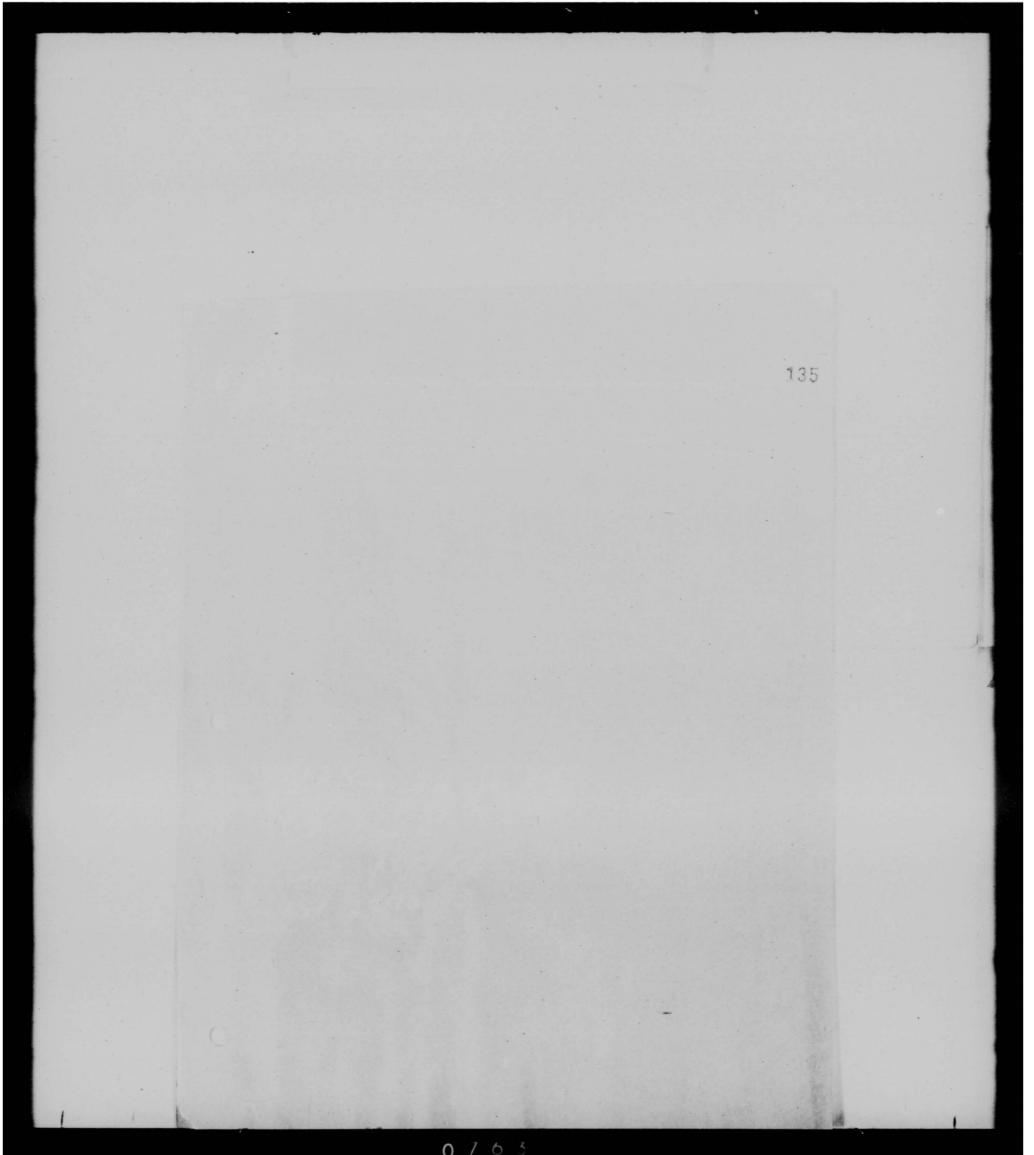

Easy reading copy made

From: COMMANDER, ADC

21 Dec, 1954

To: COMMANDER, WRAMA, ROBINS AFB, GA.

COMMANDER, WADF, HAMILTON AFB, CALIF COMMANDER, CADF, GRANDVIEW AFB, MO COMMANDER, EADF, STEWART AFB, N. Y. COMMANDER, SMAMA, McCLELLAN AFB, CALIF COMMANDER, OOAMA, HILL AFB, UTAH

(UNCLASSIFIED) ADMAC-1E . Personal from Maj Gen Roth, by Lt Col Carver, to Maj Gen Tibbetts. Subject is: Support of the E Series Fire Control System for ADC Fighter Interceptors. This message in three parts. Part I. Currently the average gross number of ADC fighter interceptors not combat ready for Class 11B spares is about 85 which shows a net reduction over the past months. I appreciate your sustained successful efforts to improve the supply of E Series Fire Control System parts and increase the ADC combat potential. Part II. More than 50% of those 85 aircraft are not combat ready for 5 only frequently recurring AMFE Class 11B items. Those are S/N 5200-20 3265 computer, S/N 5200-221380 control (and suitable substitutes), S/N 5200-241189-35 detent, S/N 5200-374405 indicator, and S/N 5200-928897 xmtr part of complete assembly S/N 5200-628631-75. Part III. Request that an immediate special review be made again of those 5 items and that we, and the info addressees be advised of the dates when the items will be available for (A) limited base stockage to eliminate ANFS condition (B) normal base stockage.

Heavy reeding copy made

Prom: COMMANDER, CADF, GRANDVIEW AFB, NO.

3 Nov 1954

To: COMMANDER, ADC, ENT AFB, COLORADO

(UNCLASSIFIED) CDMAC-5 _______. Your message ADMAC 18
3h613, 26 Oct 5h. A slight improvement in the support supply of
E-Series Fire Control Systems has been shown. It is believed that
with the action being taken as indicated in your message every
possible source is being exploited to continue to improve this
situation. Therefore, a negative report is submitted. This headquarters is appreciative of the aid rendered in obtaining critical
items and feels that units of this command have been materially
aided in the 1h day base stockage of critical items.

COPY
Easy reading copy made

138

From: HQ ADC

28 Oct. 1954

To: CHIEF OF STAFF, HQ USAF, WASHINGTON 25, D. C. (AIRMAIL)

Info: COMMANDER, AMC, WPAFB, OHIO (AIRMAIL)
COMMANDER, WRAMA, ROBINS AFB, GA (AIRMAIL)
COMMANDER, SAAMA, KELLY AFB, TEX (AIRMAIL)
COMMANDER, OCAMA, TINKER AFB, OKLA (AIRMAIL)

(UNCLASSIFIED) ADMAC-1E 34977 . Your message C1E52741 dated 22 Oct. This message is in two parts.

Part I. The supply support of Class 11B parts for the E Series

Fire Control Systems on ADC aircraft has been the subject of numerous communications and personal visits between ADC and WRAMA and

Hq AMC during the past months. From April through July an average
gross total of 217 ADC aircraft were AOCP/ANFE for Class 11B parts.

From August through September the gross average dropped to 138 aircraft. Currently the following action is on hand by WRAMA and ADC,
in close harmony, to further reduce the number of ADC fighter interceptors incapable of performing their mission.

(A) On an ADC list of 45 Class 11B items (see attachment) prepared in September, which had recurred frequently as AOCP/ANFE requirements during the six month period March through August, WRAMA is (1) investigating the need for additional procurement and (2) is re-examining depot stocks to give special 14 day base stock levels, against ADC specified quantitive requirements, to prevent AOCP/ANFE conditions. Requisitions to meet 14 day

(UNCLASSIFTED) ADMAC-1E 34977 (CONTD)

requirements of 23 of the 45 items are new in course of issue.

This is a temporary measure until depot stocks will allow normal base stockage.

- (B) Four joint WRAMA-ADC teams were formed one week ago to search certain ADC bases and AMC depots for Class 11B items lost to the supply distribution system through lack of identification, excess holdings, or any other reason.
- (C) ADC bases are being checked constantly to insure that reparables are evacuated immediately. It is now mandatory that ADC AOCP/ANFE requisitions for components and sub-assemblies listed in TO 16-1E-1 show the shipping details of relative reparable items. Part II. Class 03D Amplifiers valves and sensors for the Electronic Fuel Control System on F-86D aircraft have been the subject of numerous communications between ADC and Hq AMC, SAAMA and OCAMA during the past months. SAAMA message SASCDC-10-9268-M dated 18 October (copy attached) to Hq AMC giving a summary of their recent important messages is the latest supply information available. Our message ADMAC-1E 34104 dated 21 October referred the above SAAMA message to the personal attention of General Dau, Hq AMC, and stated that the sensor problem has existed for about one year and that in addition to the cost of pilot pick-up on a serviceable for reparable basis there had been, and still is, the constant adverse affect on the ADC combat potential. As for other critical items ADC bases are being checked constantly to insure that serviceable and reparable amplifiers valves and sensors in excess of requirements are evacuated immediately. Copy of attachment for Hq USAF only.

Easy reading copy made

139

From: HQ ADC, ENT AFB, COLO SPRINGS, COLO.

13 October 1954

To: COMMANDER, EADF, STEWART AFB, NEWBURGH, N.Y.
COMMANDER, CADF, GRANDVIEW AFB, GRANDVIEW, MO.
COMMANDER, WADF, HAMILTON AFB, HAMILTON, CALIF.
COMMANDER, 4750TH TNG WG (AIR DEF) YUMA COUNTY AIRPORT,
YUMA, ARIZ.

COMMANDER, WRAMA, ROBINS AFB, GEORGIA AFPR HUGHES AIRCRAFT CO, CULVER CITY, CALIF

(UNCLASSIFTED) ADMAC-5A _____. For WRSWF, WRAMA. For Major Winkel, Hughes Aircraft Co.

Fire Control Systems inventory teams composed of WRAMA and ADC personnel will visit all bases on which ADC units are stationed, Within the next 60 days. The purpose of this visit is to effect the physical inventory and redistribution of FCS components. This inventory and redistribution is vital and necessary if Project Pull-Out and Hop-Up are to be successfully completed. Inventory teams are authorized to give on-the-spot shipping instructions on FCS components determined to be in excess to the requirements of ADC units. Teams will be in possession of a list of quantities of FCS components which have been determined as the minimum level required for operation of the ADC Fighter-Interceptor Squadrons. This list has been agreed on by ADC and WRAMA. It supersedes all previous levels and authorities and will be used in lieu of Table XVI quantities for effective components for the duration of Pull-Out and Hop-Up. It is realized that in some instances, that

quantities reflected on this minimum level list will be less than desired, however, it is believed that by reducing the level in some units that the critical shortages in others can be eliminated.

Quantities of this list represent total quantities in the squadrons and in the base supply. Copies of these minimum levels lists will be forwarded to your headquarters as soon as reproduced at this headquarters. It is requested that the utmost cooperation and assistance be given to personnel of the inventory teams by all personnel of your Command. Compliance with shipping orders of your inventory teams is mandatory.

AF PLANT OFFICE HUCHES AIRCRAFT COMPANY Culver City, California

140

6 October 1954

SERCQ

SUBJECT: Evaluation of Failed Parts of Hughes Fire Control Systems

20: Comme

Air Defense Command ATTN: ADNAC Ent Air Force Base Colorado Springs, Colorado

- 1. Transmitted herewith is Hughes Aircraft Company letter dated 28 September 1954, subject: "Evaluation of Failed Parts of Hughes Fire Control Systems."
- 2. The Air Force Plant Representative concurs with the Contractor's request in the Feedback I program. Reliability of tactical equipment is recognised in the Air Force as mandatory in the performance of its mission.
- 3. The Hughes Aircraft Company has recently launched a major program in the reliability of E Series Fire Control Systems. This is a result of a request received from Headquarters Air Materiel Command to consider inclusion of a 200 life hour test prior to Air Force acceptance of this type of equipment.
- 4. Cooperation and assistance in this program by the Air Defense Command is respectfully requested.

FOR THE AF PLANT REPRESENTATIVES

l Inel: HAC ltr dtd 28 Sept 54 v/Inel /s/ HARRY G COOK Chief, Quality Control Division

940

B/itr AF Plant Office, Hughes Acft. Co., SERCQ, Subject: Evaluation of Failed Parts of Hughes Fire Control Systems

ADMAC-5A (6 Oct 54)

3 Nov. 54

HEADQUARTERS AIR DEFENSE COMMAND, Ent Air Force Base, Colorado Springs Colorado

- 20: Commander, Wastern Air Defense Force, ATM: WDMEL, Hamilton Air Force Base, Hamilton, California
- 1. Your attention is invited to the preceeding correspondence; this headquarters concurs in the reliability program proposed by Hughes Aircraft Company. This headquarters is of the opinion that the results of this program will be of benefit to organizations of this Command and interposes no objection to visits by Hughes Aircraft Company personnel to the 94th Fighter-Interceptor Squadron, George AFB, Calif. If your headquarters or the Commander of the 94th Fighter-Interceptor Squadron objects to these visits it is requested that this headquarters be so advised.
- 2. With reference to paragraph 6b of the letter by Mr. E. M. Boykin (Incl. #1), Headquarters AMC interposes no objection to the release of non-recoverable Fire Control System parts to Hughes Aircraft Company personnel. (See Incl. #2). Hughes Aircraft Company has been advised of AMC's concurrence in this portion of the reliability program.
- 3. It is requested that the Commander of the 94th Fighter-Interceptor Squadron be advised of the contents of the preceeding correspondence and that his cooperation in this program be requested.

BY CRUER OF THE COMMANDER:

2 Inclas

HAC 1tr dtd 28 Sept 54, w/incl. AMC mag NCSFPQ-10-

140

HUGHES AIRCRAFT COMPANY Gulver City, California

28 September 1954

Commander, Air Defense Command TO: Ent Air Force Base Colorado Springs, Colorado ATM: ADMAC

Air Force Plant Representative SHEET:

Hughes Aircraft Company ATIN: SERCA Culver City, California

SUBJECT: Evaluation of Failed Parts of Hughes Fire Control Systems

- 1. By careful attention to engineering and manufacturing details, the Hughes Aircraft Company is able to produce fire control systems in which the reliability has remained essentially constant even though the system sizes and complexities have increased greatly. However, the ultimate goal is to improve over-all system reliability regardless of complexity. As an important step in achieving this regardless of complexity. As an important step in achieving this goal, Hughes Aircraft Company is hereby requesting the concurrence of Air Defense Command in a program of failed parts evaluation.
- 2. As advances are made in the techniques and materials used in the manufacture of parts which are used in a fire control system, the reliability of these parts may be expected to increase. However, without an indication of the long term reliability of a part when used under actual Air Force conditions, the part manufacturer does not have sufficient information to permit him to make further advances in reliability. Therefore, Hughes Aircraft Company is proposing a program which will permit the evaluation of parts which failed under field operating conditions.
- 3. A detailed description of the proposed program is contained in the enclosure. In brief, this program proposes that Hughes Aircraft Company send an engineering representative to each of several Air Force bases which utilize E-Series Fire Control Systems. This representative will be under the jurisdiction of the resident Hughes representative will have as his sole duty the collection of data on failures which occur in the fire control systems. It is also proposed that any non-recoverable parts involved in the failure be obtained by the representative for return to Hughes Aircraft Company of future study. These parts my either be sent directly from the base or by way of the Western Electronic Maintenance Depot. Upon receipt the parts will be transmitted to the appropriate manufacturer for investigation while at the same time the application of

the part in the fire control system will be reviewed for possible causes of the failure. It is felt that in this way the parts manufacturer will be able to make the most worth-while improvement in the reliability of parts.

- 4. The basic program has been divided into two phases identified as Feedback I and Feedback II. The first phase of the program, Feedback I, will be primarily a test period to permit evaluation of the methods and procedures, rate of return of parts, estimated man-hours required and any other related problems. It is planned that this portion of the program will take place at George Air Force Base and will require approximately three months for completion. It is anticipated that only one engineer will be required to support this phase of the program. After an evaluation of the results of Feedback I, it is expected that a more extensive evaluation program will be indicated. In this case, the second phase of the program, Feedback II, will be instituted to cover a larger number of Air Force bases.
- 5. While any data gathered during this program will be submitted to Air Defense Command as desired, it should be noted that any program intended to improve reliability will only show results in improved reliability on a long term bases. The final objective of the programs would be that each fire control system type would be more reliable than its predecessor.
- 6. Initial contacts have been made with George Air Force Base to determine if the proposed program could operate successfully in the environment of an Air Force base. While initial indications are that the program can be successful, Air Defense Command concurrence is required in two areas:
- a. Permission is required for the representative to function as an observer in collecting data.
- b. It is further requested that any non-recoverable parts which are removed from the fire control systems at the Air Force base be released immediately to the representative for return to Hughes Aircraft Company with no continuing accountability.

A parallel request for release of non-recoverable parts from the Western Electronic Maintenance Depot has been sent to Warner Robins Air Materiel Area. It is requested that repid approval of the proposed plan be made and transmitted to George Air Force Base in order that the initial phase of the program may begin as soon as possible.

Very truly yours,

EBB:RCR:eb

Englamme

/s/ MINASO N BOTKEN

Director

Field Service and Support

8

140

PROPOSAL FOR FAILED PART EVALUATION

I SUMMARY

A system is proposed for the return of electronic parts which were primary field failures in Hughes fire control systems. These parts will be returned to their manufacturers for analysis as to the causes of failure with the objectives of improving the reliability of the parts, their applications, and specifications.

II DERODUCTION

Hughes Aircraft Company is incorporating into its systems the most reliable available parts of which it is aware, and is specifying these parts in the most definitive manner it has yet devised. Design engineers are becoming increasingly sware of the importance of careful and proper parts application. Certain reliable, ethical vendors are producing for the military equipment market the highest quality parts which they know how to make, consistent with the quantities required.

The results of these advances have not been more reliable systems, however. Rather, the reliability has remained essentially constant as the system sizes and complexities have increased - a very real accomplishment.

Hughes is now developing and proposing larger systems, or systems requiring higher reliability. Further efforts along the lines described above probably will no longer produce comparable improvements in parts, their application, or their specifications. The limitation is that the better vendors are now making essentially the best parts they know how to produce, considering the compromises they must make to turn out general use parts, but therein lies the factor which may yield better parts in the shortest time. Advances will continue to be made in materials and techniques, but this is a long-term program. If the vendor is to supply a more useful, reliable part in a short time, it is essential to return to him those parts which have failed in the field, together with as much information as practicable on the part's application, history, and acceptability criteria. The present system of reporting field failures is neither accurate nor useful to vendors. It has been adjudged that not all failures are reported and those which are reported do not represent a random sampling. Further, it is not sufficient for the vendor to know marely that, over a certain period of time, a number of his parts have failed. He must be able to determine what percentage, how, and why they failed. To accomplish the objectives, the following program is proposed.

III FAILED PARTS EVALUATION PROGRAM

Because of uncertainties as to the quantity and usefulness of the data to be obtained, the program is divided into two steps or programs. Program 2 depends upon the outcome of Program I.

A. Program 1 (Also see B: Appendix)

- 1. A tactical Air Force Base having an adverse environment during the trial period is to be selected. This should preferably be as close to Culver City as possible for easy liaison. George AFB appears to satisfy both of these requirements.
- 2. An engineer will be stationed at the Base for the sole purpose of acquiring every non-recoverable part which is removed from a Hughes fire control system. Those parts which fail, removed from a Hughes fire control system. Those parts which fail, but are returned with a unit to the Western Electronic Maintenance but are returned with a unit to the Western Electronic Maintenance Depot are to be logged in with the part and unit serial number for later attention at the Depot.
- 3. Each part which is removed will be embared on a log (for statistical purposes) and categorized as well as the engineer is able, as:
 - a. Primary failure those parts which apparently failed of themselves for no obvious external electrical reason.
 - b. Secondary failure those parts which probably failed as a result of the failure or malfunction of another part of the system.
 - c. No failure those parts which were removed for access to another, a failed part, or for preventative maintenance.
- 4. Each primary failure part is tagged (or numbered and referenced to a report number) with its system type, unit type and number, circuit symbol number and history. The parts are sent to Culver City.
- 5. Units to be returned to the Western Electronic Maintenance Depot are:
 - a. Tagged to insure that certain designated parts are sent to Culver City upon removal, or
 - b. A request form is sent to the Depot requesting that certain designated parts are sent to Gulver City upon resoval from specified units.

140

- 6. Upon arrival at Culver City, parts are:
 - a. Examined and analyzed
 - b. Examined and discarded
 - c. Transmitted to their manufacturers with pertinent histories and application data.
- 7. The parts manufacturers will analyze the failed parts and:
 - a. Report to Hughes Aircraft Company on their findings
 - b. Report to Hughes Aircraft Company on the failures as a possible result of the applications
 - c. Recommend changes in the parts and/or their specifications.
- 8. Hughes Aircraft Company will treat the data and reports as new engineering information and act accordingly. Possible actions includes
 - a. Encouragement to the vendor to improve the part
 - b. Refinement of specifications
 - e. Re-examination of applications
 - d. Communication of findings to other interested
 - e. Seeking changes in military specifications, where the data indicates the need.

B. Program 1 (Appendix)

As the steps set down above are examined, numerous questions arise. This section answers certain of them. The numbering corresponds to that in A.

- 1. Before proceeding to a full program encompassing several Bases, certain questions need be answered. For example:
 - a. How many parts will be covered?
 - b. How many Bases should be included?
 - c. How long should the program take?

- d. Is the information useful (quantity and quality)?
- e. What rules or guide-lines are needed? For example, should all temperature-sensitive parts be elipped out rather than unsoldered? Are short-cuts possible in procedures, forms, etc.?
- 2. It is absolutely essential that Hughes secure from Air Defense Command the understanding that non-recoverable primary failure parts will become the property of Hughes and are not to be accounted for, and will not be sold or reused. Accountability could become such a clerical burden as to make the program unfeasible.
- 3. The presence and aid of the Hughes field engineer will be provided for technical systems advice and as a liaison between the parts engineer and certain Air Force personnel initially.
- 4. Certain capable, ethical parts manufacturers have been contacted with regard to this program. On a no-charge, no-obligation basis, they have agreed to participate in the program and to assign engineers to enalyze the failures and submit reports. These agreements were received from the following organizations (a partial list):
 - s. Sprague (capacitors, resistors)
 - b. Gudeman (capacitors)
 - c. Helipot (potentiometers)
 - d. Littlefuse (fuse holders)
 - e. Allied Controls (relays)
 - f. Filters, Inc. (relays)
 - g. Vitramon (capacitors)
 - h. G. E. (tubes)
 - 1. RGA (tubes)
 - j. Sylvania (tubes)
 - k. Daven (resistors)

Tubes will be covered only to a limited extent. Cornell University and ARTH are now engaged in a similar progrem on tubes. Their data is available to Hughes. Hughes and/or tube manufacturers will establish whether

140

a correlation exists between the types of tube failures in Hughes equipment and the average equipment. If so, Hughes can do no more than what is being done by Cornell and ARING. If not, the equipment reasons for tube failure should be looked into.

C. Program 2

This is an extension of Program 1 to other Bases. It would be desirable to conduct the test at cold bases, humid bases, and to provide other variations, as indicated by experience.

COPY

711

ADMDM

6 December 1954

SUBJECT: Maintenance Stand for E-4 Fire Control System, F-86D Aircraft

TO: Director of Requirements
Headquarters USAF
Washington 25, D. C.

- 1. In accordance with AFR 57-3, 28 May 1951, the following operational requirement is submitted:
- a. Standard AF maintenance stands are not adequate or efficient for maintenance on the E-4 Fire Control System as installed in the F-86D type aircraft. The standard stands require excessive movement of stands and personnel, and do not offer protection for installed equipment, test equipment or maintenance personnel in inclement weather.
- 2. The maintenance stand in the attached drawing will correct the conditions cited in paragraph la.
- a. It will enable maintenance personnel to move on either side of the aircraft from the cockpit to the radome without climbing down to the ground. The stand is such height as to enable the maintenance personnel to work on various components with ease.
- b. With the addition of a canopy, lighting and storage space, the attached radar workstand would have flexibility in its use as a maintenance item.

3. Description:

- a. Stand, maintenance, E-4 Fire Control System (F-86D), similar to attached Drawing #16044-29B.
- b. Drawing #16044-27B shows the storage racks for the work stand, and Drawing #10044-30B shows the canopy for the F-86D radar work stand. These items may be constructed with slight variations, but the following should be kept in mind:

741

Hq ADC, ADMDM, Subject: Maint Stand for E-4 Fire Con Sys, F-86D Acft

- (1) Should be constructed to maintain portability of the stand; but should be capable of being placed in a secure position.
- (2) Sufficient height to enable the top to clear the canopy in the raised position.
- (3) Attachment point for a small hoist to change E-4 FCS. Transmitter and Receiver units.
- (4) It should be wired for lights and electrical outlets for test equipment.
- (5) Storage racks should also be built for holding test equipment and tool boxes in order to prevent the walkway from being cluttered with boxes and tools.
- (6) The casters should allow for easy towing and adequate truck locks for stowed position.
- c. The advantages of this stand over standard items are that it may be used in inclement weather, easier to move, enables personnel to have access to all components of E-4 Fire Control System, to remove and replace components such as the transmitter, receiver and antenna during adverse weather conditions without the use of a hangar, and is readily disassembled for shipment or squadron movement.
- d. The proposed basis of issue should be two (2) each per F-86D squadron.
 - e. Recommend the adoption of a commercial item.


4. Request this headquarters be advised of action taken to procure and authorize a suitable standard radar maintenance stand for all F-86D units.

FOR THE COMMANDER:

3 Incls
1. NAA Dwg #16044-27B
2. NAA Dwg #16044-29B

2. NAA Dwg #16044-29B 3. NAA Dwg #16044-30B MARSHALL S. ROTH
Major General, USAF
Deputy Chief of Staff, Materiel

Info Coy: Comdr ARDC ComdrAMC

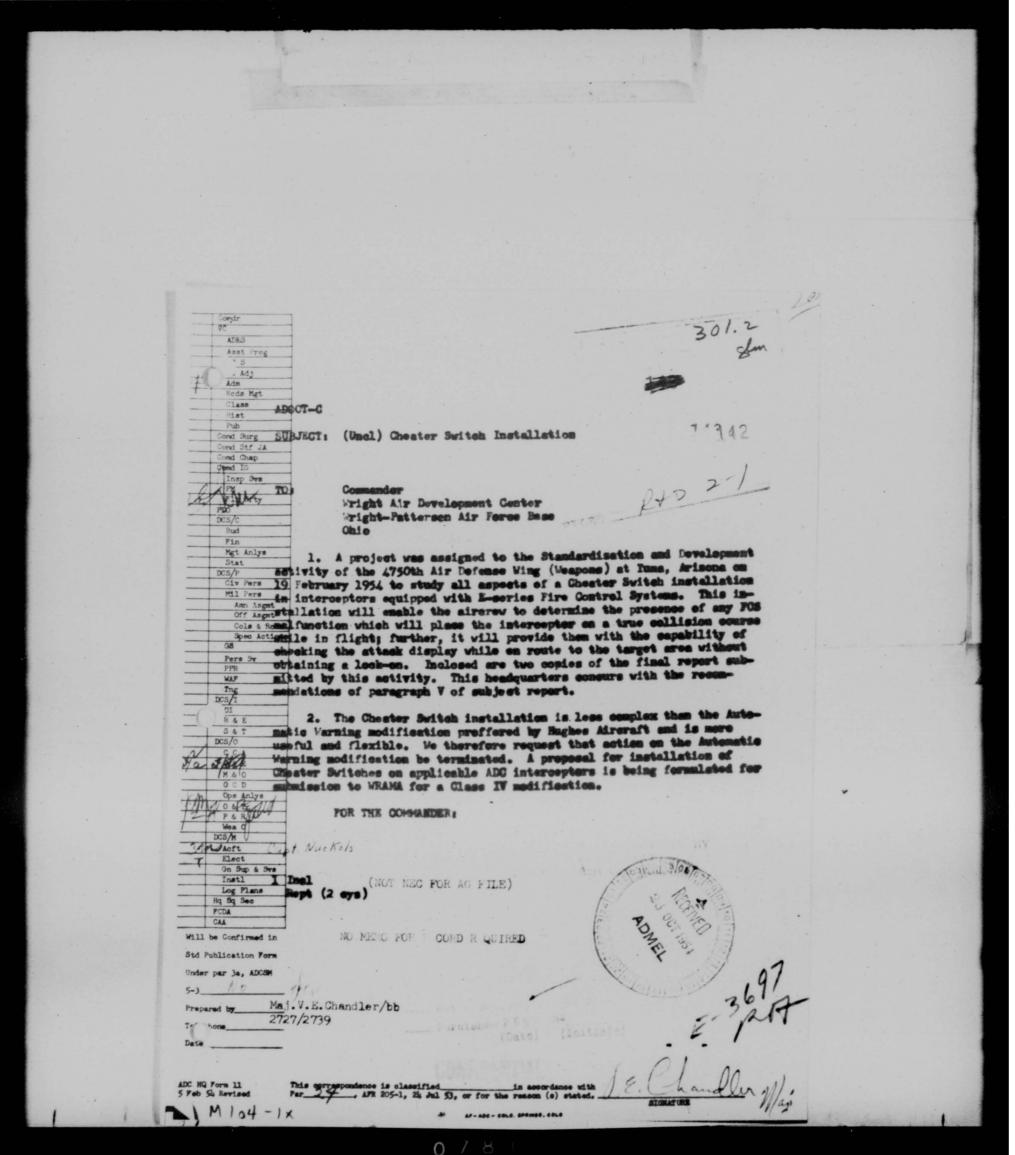

COPY

ADMAC-5A

5 October 1954

7 40

SUBJECT: (Uncl.) Modification of E-4, 5 and 6 Fire Control Systems

TO: Commander
Warner-Robins Air Materiel Area
Attn: WRMT
Robins Air Force Base
Georgia

- 1. In accordance with paragraph 7, AFR 57-4, 10 June 1954, request approval of the installation of the "Cheater Switch" modification on the E-4, 5 and 6 Fire Control Systems. A detailed description of this modification is included as inclosure 1.
- 2. In forwarding this request the following information is submitted:
 - a. This modification is applicable to all E-4, 5 and 6 Fire Control Systems.
 - b. The use of the "Cheater Switch" will enable flight crews and maintenance personnel to determine if certain malfunctions exist which will place the interceptor on a collision course.
 - c. Diagrams and descriptions are contained in inclosure
 - d. Materials required for installation of this modification may be obtained from Air Force stock.
 - e. The proposed modification may be accomplished at organization level.
 - f. This Command presently possesses 465 F-86D's, 225 F-94C's and 137 F-89D type aircraft.
 - g. It is requested that all the above aircraft be modified.

ADMAC-5A, Subj: (Uncl) Modification of E-4, 5 and 6 Fire Control Systems

h. There will be no effect on related equipment.

3. If additional technical information is required it is requested that the 4750th Training Wing (ADC) Yuma, Arizona be contacted direct.

FOR THE COMMANDER:

1 Incl: 2 cys of ADC Proj YAB/FCS-3 Cheater Switch C. F. HUMPHREYS Captain, USAF Asst Command Adj

301.2 /46

BAOPR-5

21 JUL 1954

SUBJECT: (Secret) Use of E-4 Fire Control System for Aircraft
Identification on Active Air Defense Hissions

TO: Commander
Air Defense Command
Ent Air Force Base
Colorado Springs, Colorado

1. Reference: Paragraph 2, 7th Indorsament, your headquarters, subject as above, 11 June 1954.

- 2. The "Dever Medification" requires an additional medification for the E-4 fire control system over and above that required for the same end result on the E-5 system. The DC antenna elevation positioning voltage is available on the E-5 but not on the E-4. Positioning voltage is available on the E-5 but not on the E-4. Therefore, the attack display as proposed by the 16th Fighter-Intercepter Therefore, the attack display as proposed by the 16th Fighter-Intercepter Squadron (when the error dot, when medified, gives antenna position information in both elevation and assistant) is not deemed feasible on the E-4 system without further medification.
- 3. This headquarters does not consider the preposal to modify E-4 systems at unit level advisable. Request this plan be reconsidered for the following reasons:
- a. In the past this command has experienced difficulty in locally procuring necessary parts and equipment to accomplish modifications at unit level. The necessity to substitute parts and deviate from engineering drawings results in non-standard "Rube Coldberg" devices.
- b. The existing command-wide shortage of 3227lDe presents a supervisory problem that could very well affect the quality of a complex modification.
- e. The present workload of fire control systems personnel is taxed to capacity. Any increase in this workload will result in time

SECRET

A 160

301.2 146

BAOPR-5

21 JUL 1954

SUBJECT: (Secret) Use of E-4 Fire Control System for Aircraft Identification on Active Air Defense Missions

TO: Commander
Air Defense Command
Ent Air Force Base
Colorado Springs, Colorado


- 1. Reference: Paragraph 2, 7th Indorsement, your headquarters, subject as above, 11 June 1954.
- 2. The "Dover Medification" requires an additional medification for the E-4 fire control system over and above that required for the same end result on the E-5 system. The DC antenna elevation positioning voltage is available on the E-5 but not on the E-4. Therefore, the attack display as proposed by the hoth Fighter-Interceptor Squadron (when the error dot, when medified, gives antenna position information in both elevation and azimuth) is not deemed feasible on the E-4 system without further medification.
- 3. This headquarters does not consider the proposal to modify E-4 systems at unit level advisable. Request this plan be reconsidered for the following reasons:
- a. In the past this command has experienced difficulty in locally procuring necessary parts and equipment to accomplish modifications at unit level. The necessity to substitute parts and deviate from engineering drawings results in non-standard "Rube Coldberg" devices.
- b. The existing command-wide shortage of 32271De propents a supervisory problem that could very well effect the quality of a complex modification.
- e. The present workload of fire control systems personnel is taxed to capacity. Any increase in this workload will result in time

SECRET


4460


Ming-


SECRET 144 EACPR-5 Subjects (Secret) Was of B-4 Fire Control System for Aircraft Identification on Active Air Defense Hisrions (Cont'd) lost to maintenance and as a result will reduce unit operational offerh. This document is classified Secret in accordance with paragr 230(6), AFR 205-1. FOR THE COMMANDER: JAMES R. WORLINE Captain, USAF Asst Adjutant 4460 M109-2

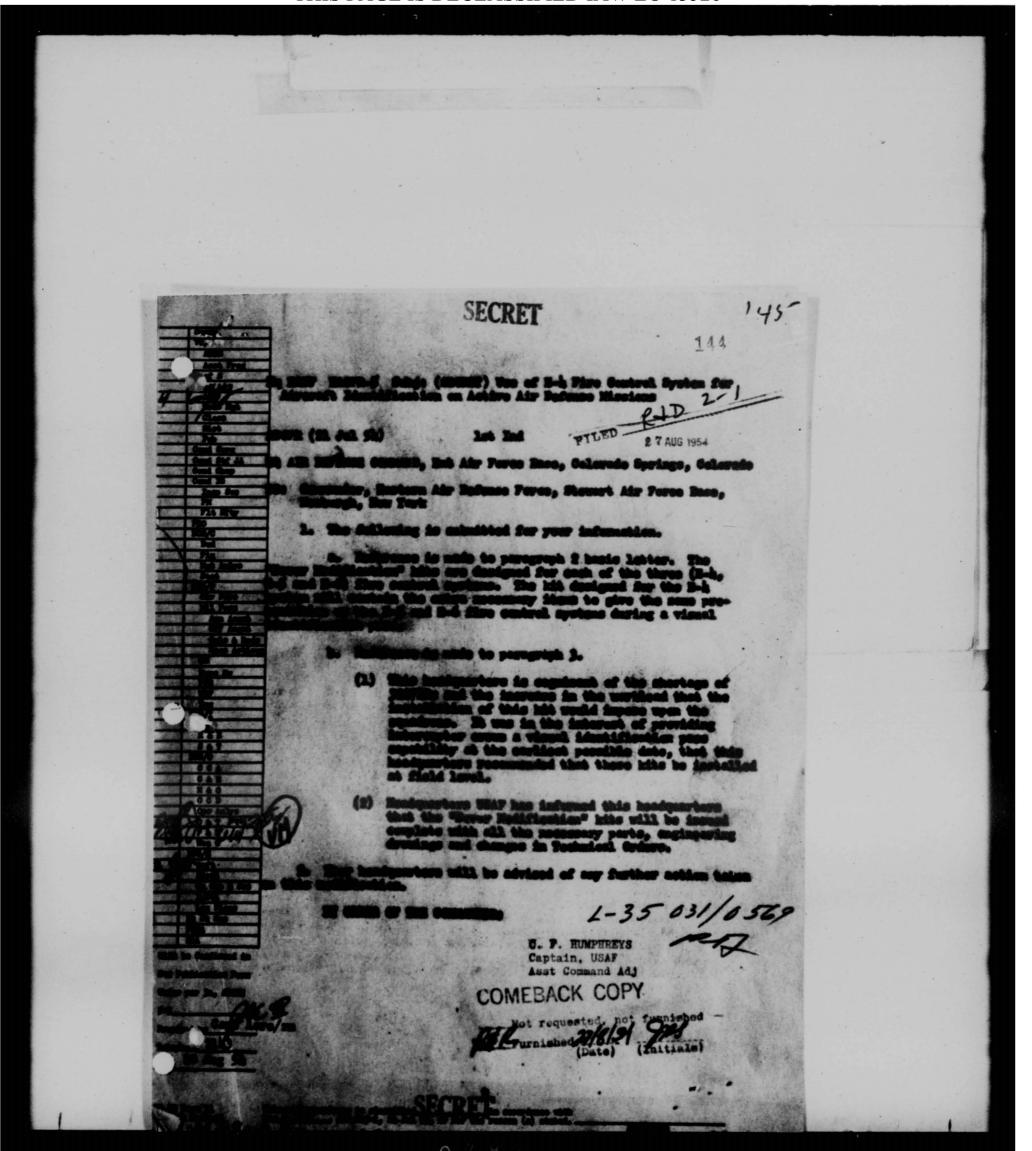



THIS PAGE IS DECLASSIFIED IAW EO 13526

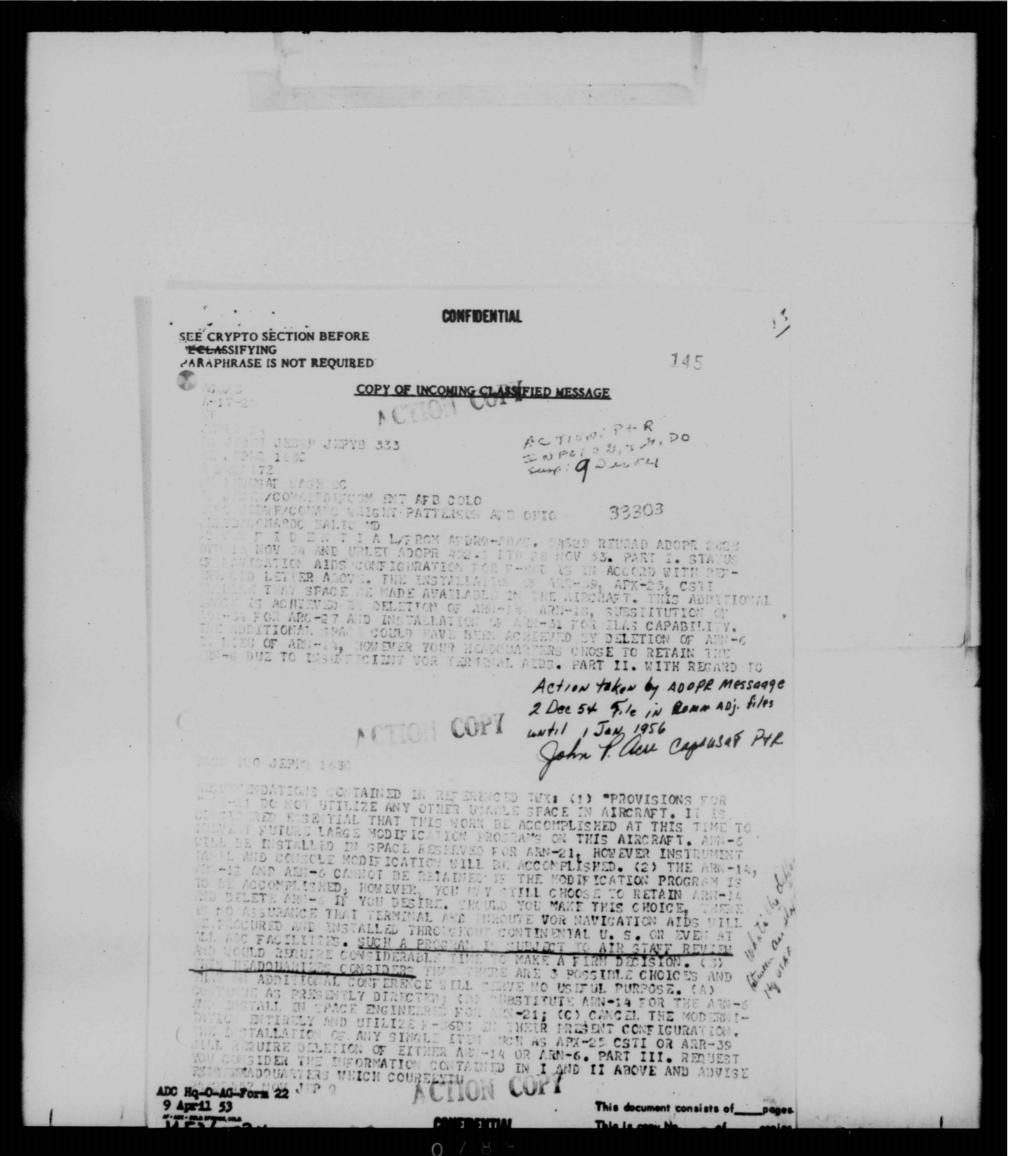

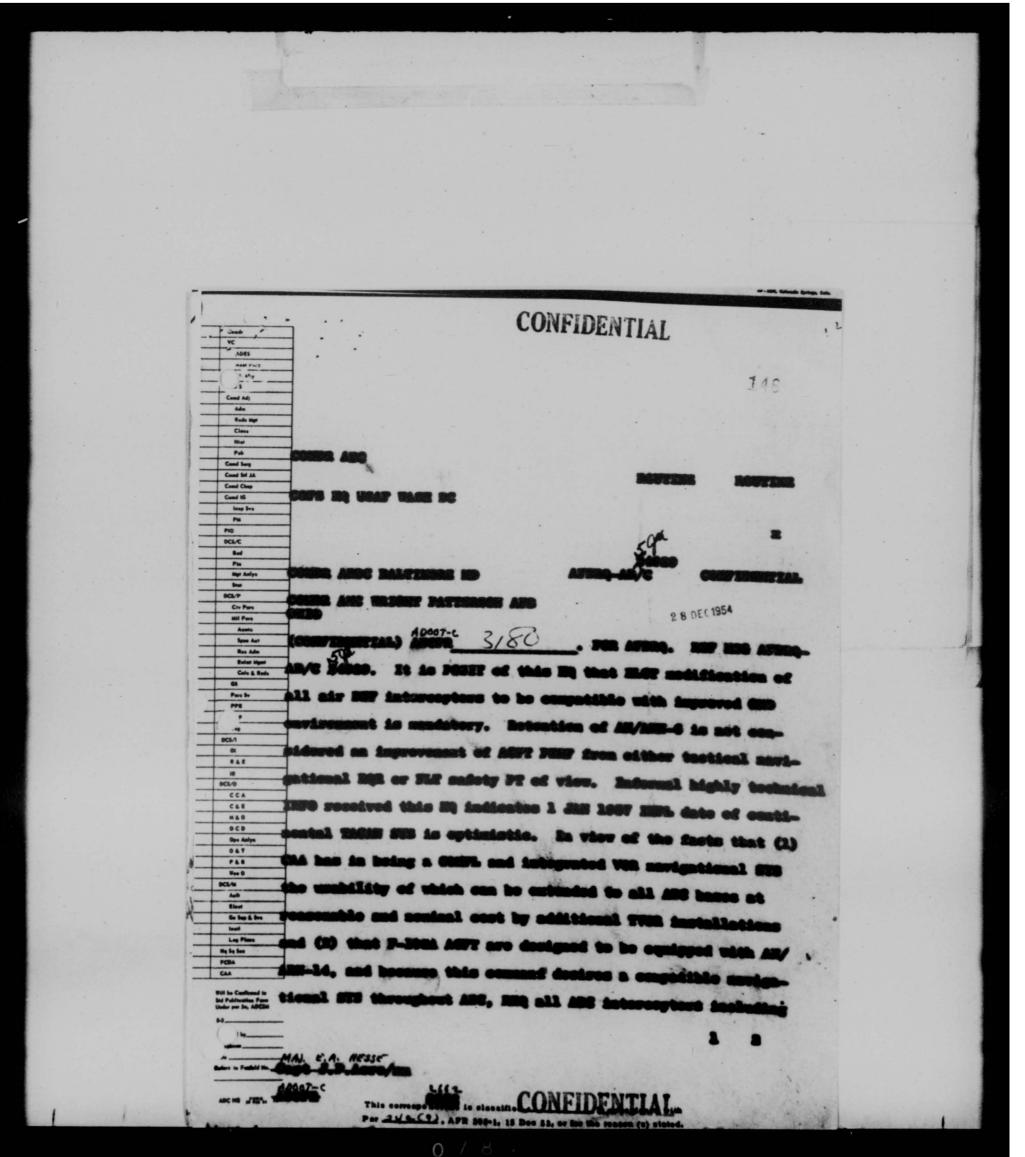

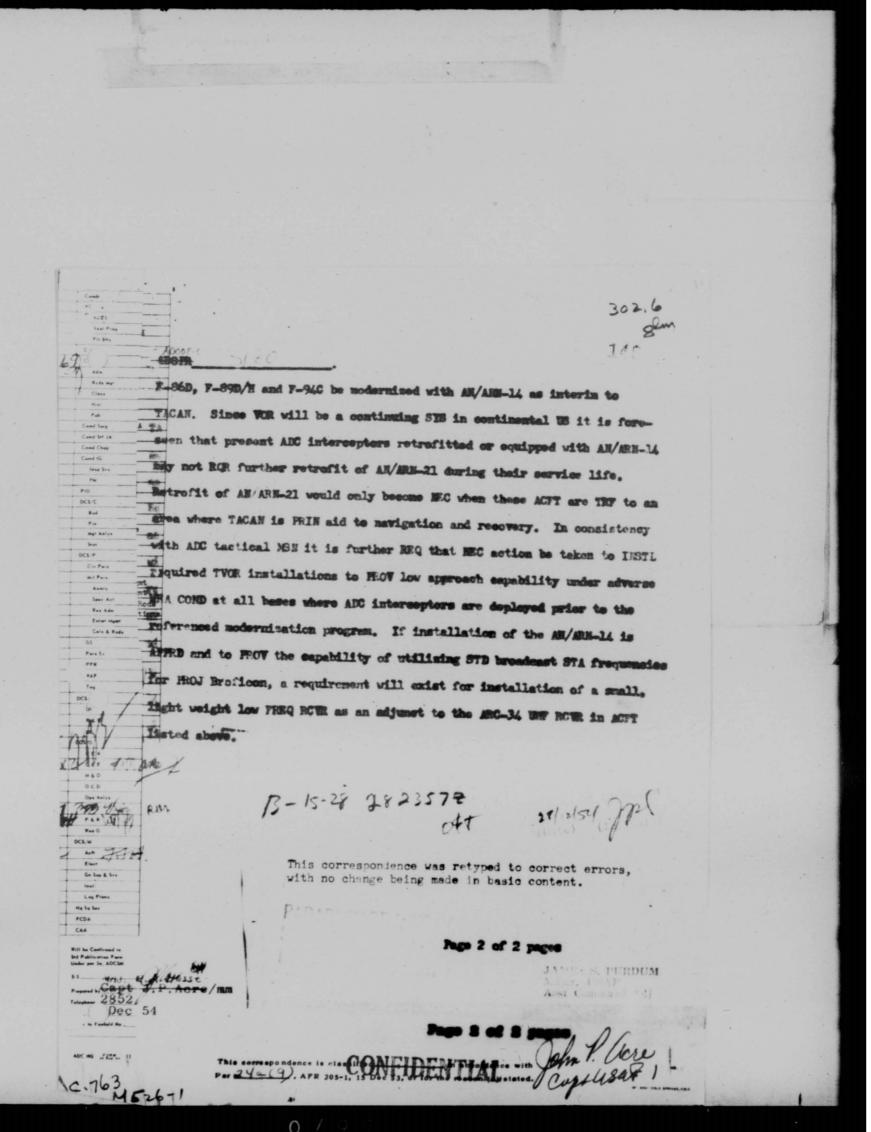

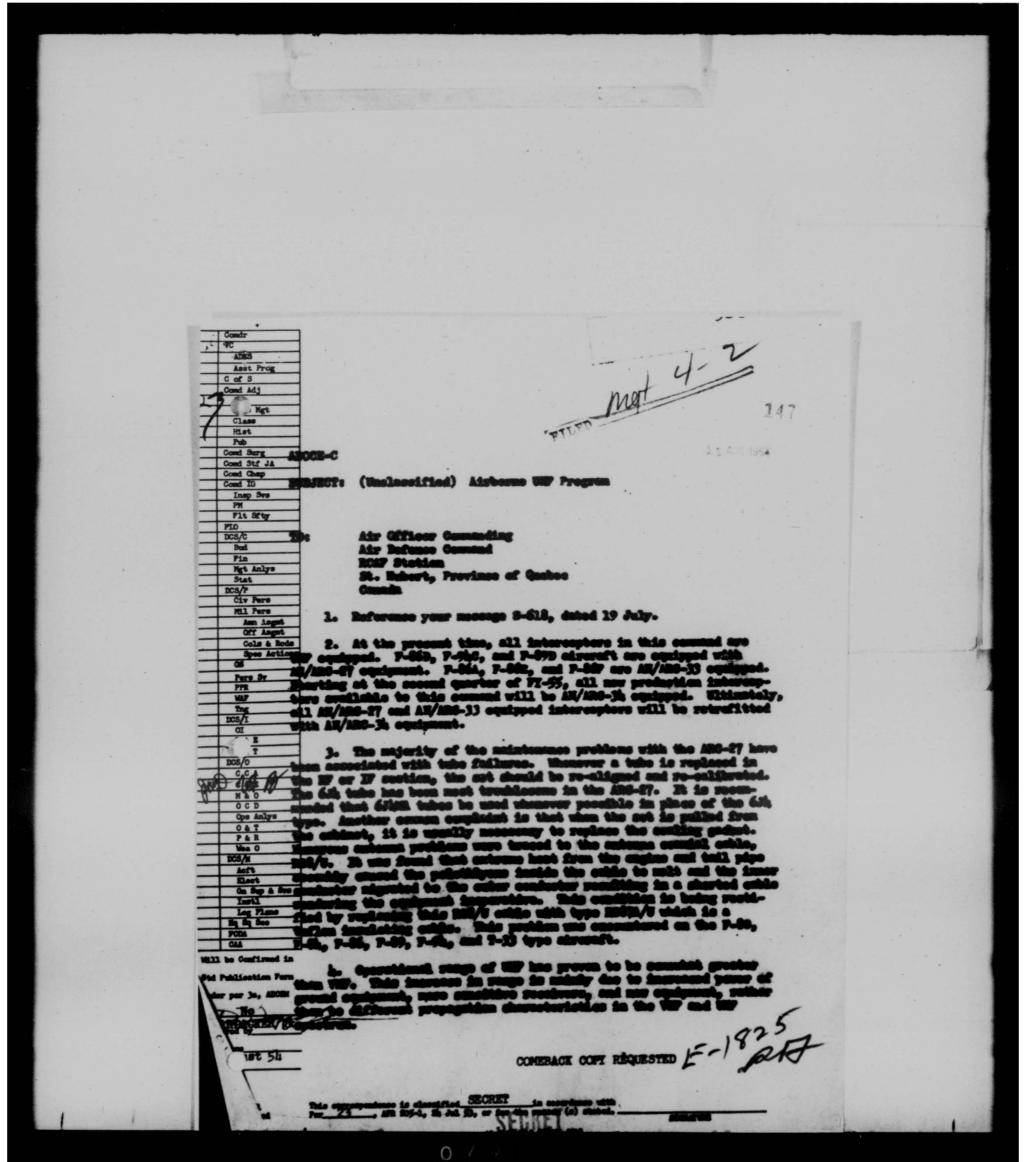

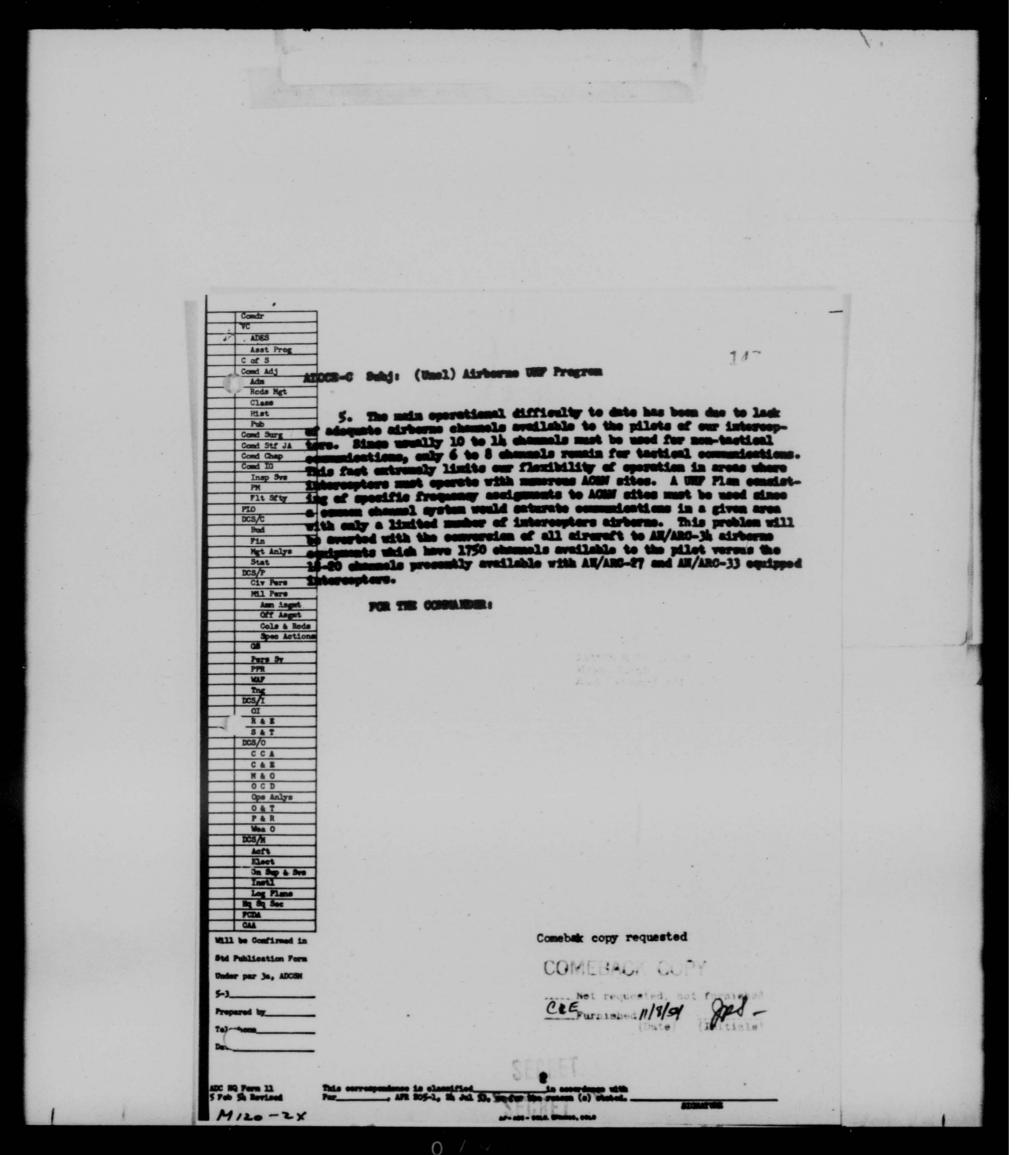

CONFIDENTIAL

Easy reading copy made

110

From: COMMANDER, ADC

30 Oct 1954

To: COMMANDER, EADF, STEWART AFB, NEWBURGH, N. Y. COMMANDER, WADF, HAMILTON AFB, HAMILTON, CALIF COMMANDER, GRANDVIEW AFB, GRANDVIEW, MO.

(CONFIDENTIAL) ADMAC 1898 . For AFOMO and AFMME, Hq USAF. Reference message your headquarters, AFOMO-M-2 31009, 21 October 54. This message in 6 Parts. Part I. On 28 September, representative from this headquarters briefed AFOMO and AFMME personnel regarding increased capability for electronic maintenance of ADC tactical aircraft. No objections to the proposed increased maintenance capability were voiced at that time, and our message ADMAC-5 32563, dated 8 October 54, and ADOMO 32479, dated 7 October 54, were confirmation of the concept presented in Hq USAF. Further, the ADC combination electronic shop for all ADC tactical squadrons is in consenance with the increased maintenance capability required. Part II. Prior to receipt of your message AFOMO-M-2 31009, 21 October 1954, this headquarters contacted AFFAME by telephone relative to this airborne electronic maintenance concept for tactical aircraft. APARE advised verbal approval of this concept for those ADC tactical squadrons operating at isolated locations, such as municipal airports. In addition, AFMME advised informal approval of the expanded electronic maintenance concept as it concerns installing electronic equipment peculiar to ADC tactical aircraft, in this case, the F-86D.

CONTRACTOR

110

(CONFIDENTIAL) ADMAC 1898 . (CONT'D)

The delineation of installation equipment peculiar to the F-35D was made by AFMME to prevent duplication of test equipment at those stations were adequate field maintenance should be available for support of communication and navigation equipment common to both both tactical and support aircraft. However, these conditions are not stated in message AFOMO-M-2 31009, dated 21 October 1954. Part III. Five additional items of test equipment would be required in order ADC fighter interceptor squadron to accomplish the additional maintenance capability. This additional capability will represent a monetary savings to the AF due to reduced processing and handling of component in electronic systems, and will increase the combat potential at every fighter interceptor squadron. The five items required are as follows:

TS-497/URR - Sig Genr

IS-375A/U - Vacuum Tube Voltmeter

TS-382D/U - Sig Gonr


AN/PSN-6 - Multimeter


J-229/ARM-14 - Junction Box

It is noted that no increase in personnel or in skill levels of personnel presently authorized is necessary or sought in the event this electronic maintenance concept is approved and implemented. By increasing the maintenance capability within our fighter interceptor squadron, we will not reduce the adverse affects of parent wing deployments during the crucial period when such support would be vital to the air defense of this

710

(CONFIDENTIAL) ADMAC 1898 . (CONT'D) country. The possibility of field support being withdrawn coupled with the need for rapid maintenance in the event of hostilities must be considered, since many of our tactical squadrons operate on TAC and SAC Bases. Part IV. Support under provisions of AFR 11-4, is good at some bases and poor at others. This headquarters and the Air Defense Force Headquarters are constantly trouble shooting tenant squadron support problems. Regardless of the regulation, it is most difficult to cope with the human nature aspects of the parent base supporting, i.e., no command cares as much about ADC as ADC, itself. A survey of all bases would result in a prolonged research of a problem that is tangential to the basic need for increased maintenance capability. Sufficient to say that troop carrier organizations have the fewest clues concerning maintenance of F-86 D aircraft. As a result, such systems as the Electronic Fuel Control, VOI, F-5 Auto Pilot, etc., do not receive proper field maintenance support, and it is relatively easy to place this responsibility where it can best be handled in the squadron. All ADC Squadrons will benefit from this concept. Part V. AMC concurs with this increased electronic maintenance concept. The Equipment Authorization Division, Hq AMC, approved the placement of electronic test equipment in the squadron, and fully appreciates the ADC position in this matter. Part VI. Request that the ADC requirement be reconsidered as soon as _ possible. Further, request comments from AFME on this matter.

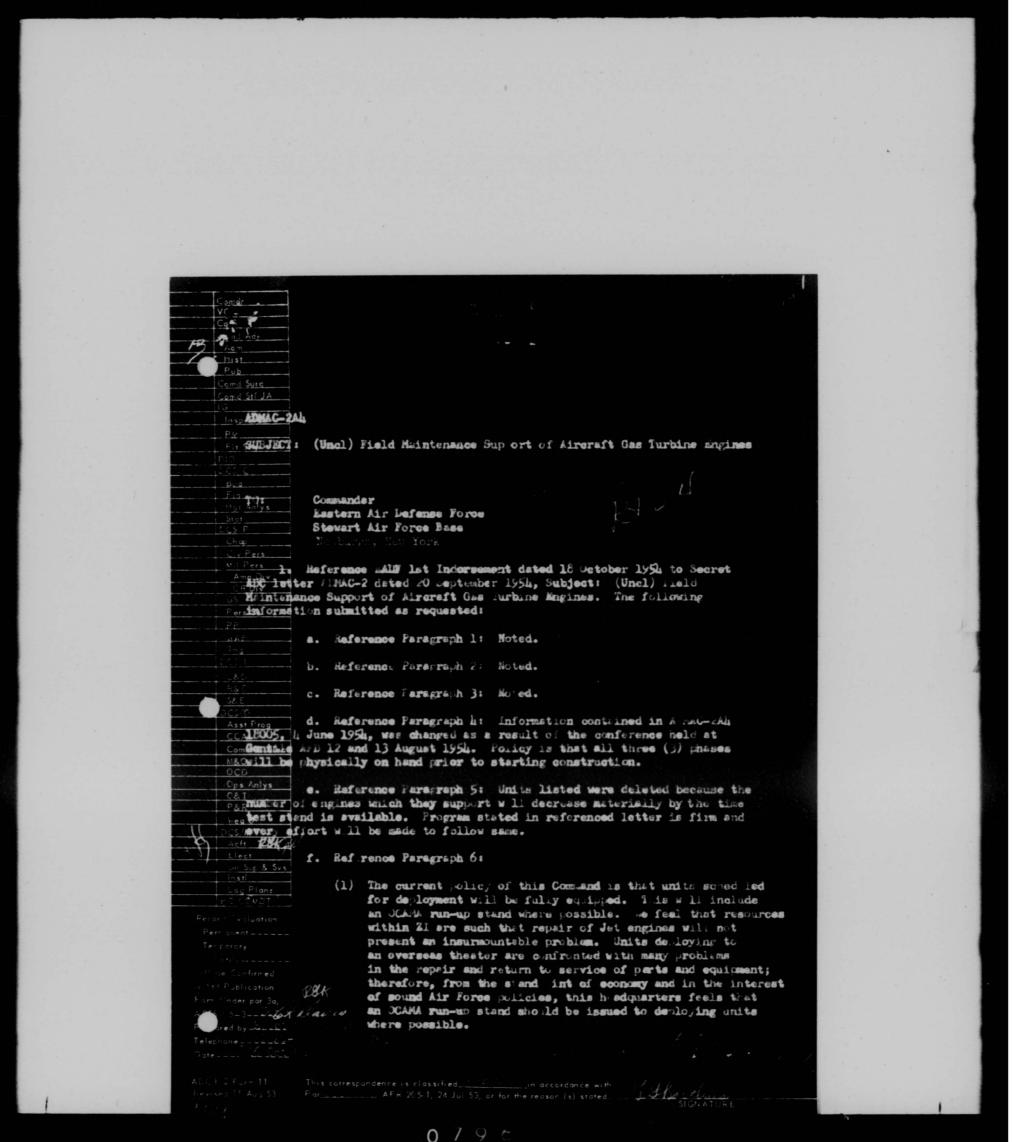

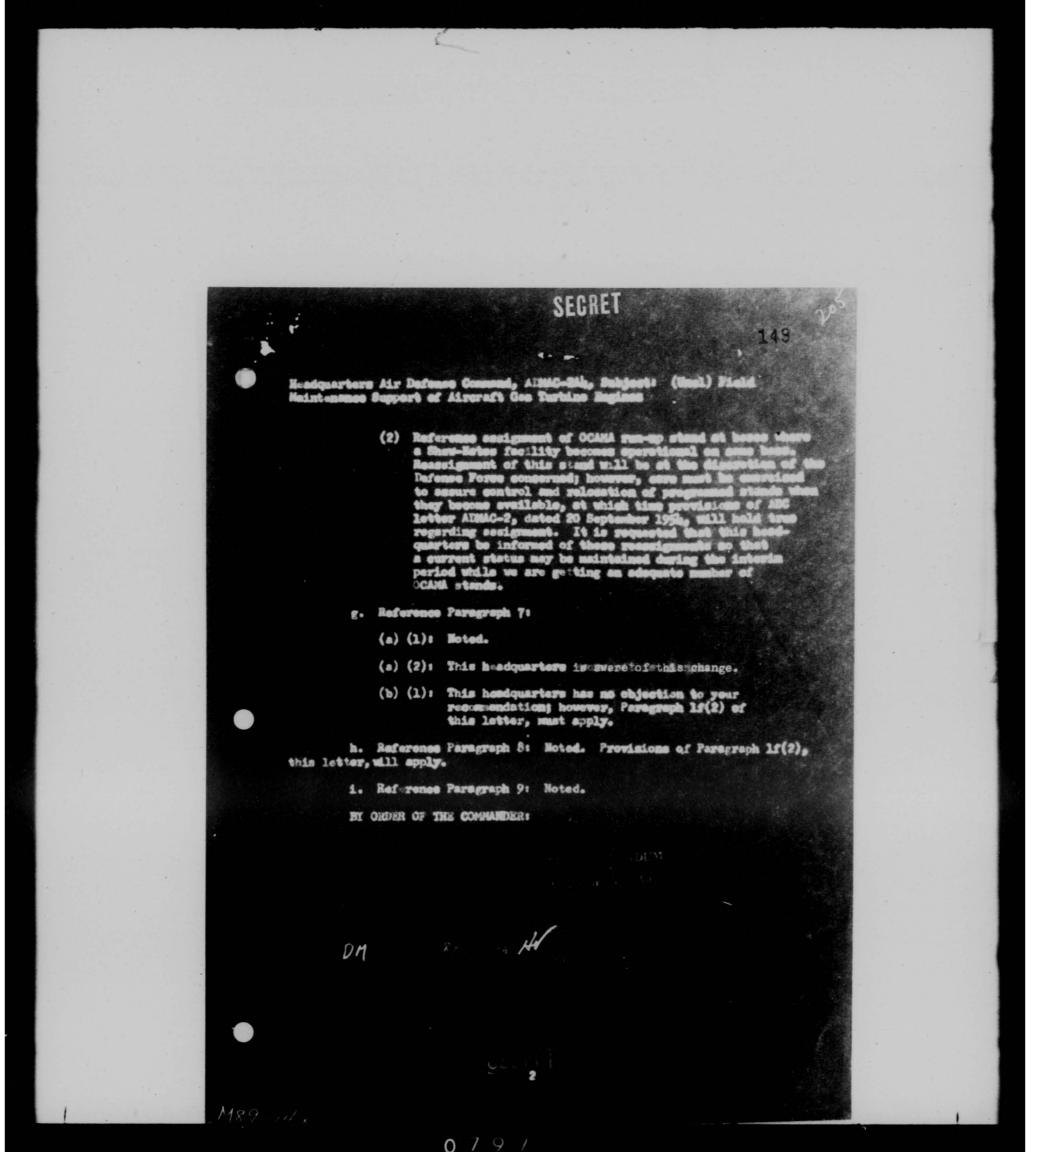

Hq ADC ADMAC-2 Subject: Field Maintenance Support of Aircraft Gas Turbine Engines (Uncl)

7. Reference paragraph 5 b, basic letter. Records of your headquarters and Gentile Air Force Depot should be amended to read as follows:

(a) Stands Delivered:

- (1) Item (12) Stand is not possessed by 500th Materiel Squadron, Greater-Pittsburgh, as subject stand was transferred to 95th Fighter Interceptor Squadron, Andrews Air Force Base, in March, 1954.
- (2) 568th Materiel Squadron, McGuire Air Force Base, received one stand and it is now possessed by 1611th Air Transport Wing, (MATS), Squadron since change in command at McGuire Air Force Base.
- (b) Recommend following changes in stands programmed and scheduled for delivery list:
- (1) Item (2) Since 519th Materiel Squadron, Suffolk County Air Force Base has a Shaw-Estes Facility assigned and operational, request stand be assigned to 97th Fighter Interceptor Squadron, Wright-Patterson Air Force Base, or the 27th Fighter Interceptor Squadron, Griffiss Air Force Base.
- 8. The information contained in this correspondence sets forth a definite program and ultimate goal of our JEMR Facilities and clearly defines our responsibility. Recommend letters of this type be prepared periodically to keep personnel in the field cognizant of the progress and planning concerning program. Request authority be granted to permit movement of OCAMA run-up stand from O'Hare Air Force Base to Wurtsmith Air Force Base, as the Shaw-Estes Facility at O'Hare can adequately handle support of squadrons on station.
- 9. This indorsement is classified Secret in accordance with paragraph 23c, Air Force Regulation 205-1, 15 December 1953.

FOR THE COMMANDER:

1 Encl
w/d
T0: ADMAC-20"

Non-Record

Temp-File

Action Art EADF

Signed

Then al Tranhead

(1) Copy pulled and actiched to Comback Capy. (Reguet returns in Ac MAC-244 Des/M)

12

30437

0.79

M89-12

Mq ADG ADMAG-2 Subject: Field Waint mance Jupment of Aircraft Gas Turbine Incines (Unel)

EAMAGHAGN (20 Sep 5h)

1st Ind

HQ LOTTE AIR DEFENSE FORCE, Stewart Air Force Base, Newturgh, New York

TO: Commander, Air Defense Command, Ent Air Force Fase, Colorado Springs, Colorado

- 1. Comments and recommendations concerning the adequacy of jet engine minor repair rrogram in conjunction with proposals set forth. This correspondence is forwarded as requested.
 - 2. Reference paragraph 1, 2, basic letter. Concur.
- 3. Reference paragraphs 3 a, and b, basic letter. The present agreements for field maintenance support of our JEMR requirements to squadrons which are tenants on bases of other commands are being reviewed by this headquarters to insure that all necessary support is being received in accordance with AFR 11-4, 7 July 1952. In the event satisfactory agreements cannot be worked out, the problem will be presented to higher headquarters.
- 4. Reference paragraph 4 a, basic letter. Your attention is invited to message, ADMAC-2A4 18005, 4 June 1954, which suggested Phase I construction be initiated at Ethan-Allen, New Castle, Stewart, Greater-Pittsburgh and Truax Air Force Pases. This information now conflicts with concept Gentile Air Force Depot has requiring all three phases to be on hand prior to initial construction for any phase of the Shaw-Estes Test Stand installation. Request clarification on this subject.
- 5. Reference paragraph 4 b, basic letter. The list submitted to Gentile Air Force Depot does not agree with our original programing for units scheduled to receive a Shaw-Estes Test Facility. Formerly your headquarters proposed that Ethan-Allen, New Castle, Stewart, Greater-Pittsburgh and Truax Air Force Fases receive the next facilities. Your present listing deletes Ethan-Allen and Greater-Pittsburgh from listing and includes Jurtsmith Air Force Lase. Request information if program as stated in this letter is firm, in order that units can be advised of change in program.
- 6. Reference puragraph 5 a, basic letter. This headquarters concurs with factors listed for computation of requirements for the OCAMA run-up stand, but recommends that, until such time as sufficient stands are available the OCAMA run-up stand not be assigned units deploying. In addition the OCAMA run-up stand should be assigned one per base for the present commitments, and if a Shaw-Estes Facility becomes operational on a base where a OCAMA stand is available, the stand be re-assigned to another base within the command as required.

SEGRET

HEADQUARTERS AIR DEFENSE COMMAND ENT AIR FORCE BASE COLORADO SPRINGS, CÓLORADO

302.9 glm

ADMAC-2

Subject: Field Maintenance Support of Aircraft Gas Turbine Engines (Uncl)

TO: Commander

Eastern Air Defense Force
Stewart Air Force Base
Newburgh, New York

- 1. The recent publication of Technical Order 00-25-145, dated 30 June 1954, and the results of a conference held at Gentile Air Force Depot on 12 and 13 August 1954 have necessitated a restudy of the Jet Engine Minor Repair Program.
- 2. First, we must change our line of thinking that Jet Engine Minor Repair is a special project, and think of this function in terms of routine field maintenance support. As such, JEMR becomes a responsibility of every field maintenance and material squadron in Air Defense Command. Therefore, it is the desire of this headquarters to put ADC field maintenance echelons in the business of JEMR and to see that the necessary equipments are made available for this function.
- 3. This JEMR concept is, in many cases, made difficult because of the tenant status of ADC tactical squadrons. Generally speaking, there are two conditions that prevail in "landlord" field maintenance support of our JEMR requirements. One condition concerns the field maintenance support of JEMR for ADC tenant squadrons by the landlord wing or depot. The other condition concerns the lack of such support for our tactical squadrons.
- a. If landlord wings of other commands are satisfactorily supporting the JEMR requirements of our tactical squadrons (in accordance with AFR 11-4) the ADF concerned must determine if such support will continue in the event of war emergency deployments. For example, if a TAC "landlord" wing presently supporting an ADC tenant squadron deploys we must insure that our JEMR field maintenance support functions will not be unattended. Special agreements must be made by the ADF concerned to cover such contingencies.

SECRET

1-77788/

149

Headquarters Air Defense Command, ADMAC-2; Subject: Field Maintenance Support of Aircraft Gas Turbine Engines

b. If a landlord wing of another command refuses to support the JEMR requirement of an ADC tenant squadron (in violation of AFR 11-4) the ADF concerned should refer the matter to this headquarters for indorsement to Headquarters USAF. In some cases it may be best for the ADF to seek a compromise agreement with the landlord command. In such instances, it may be necessary for the landlord to delegate the JEMR function from his field maintenance echelon to the ADC squadron. Such agreements should explore the placement of logistics support responsibilities for our JEMR, and the use of the landlord base shops to accomplish the JEMR function. In any event, it is the responsibility of the ADF concerned to effect the best possible solution to the field maintenance support of JEMR for ADC tenant squadrons. Headquarters ADC should be advised if assistance is needed at command level.

4. This paragraph will concern the Shaw-Estes Test Stand and ADC requirement for this stand. At a conference held at Gentile Air Force Depot 12 and 13 August 1954 it became apparent that the availability of this stand is at least one (1) year away. Only a limited number will be made available to units of Air Defense Command. Further, the complete ADC requirement cannot be satisfied for at least two years.

a. Planning and construction for the Shaw-Estes installation should be very carefully considered prior to actual programming. The programmed stands which we expect in approximately one year will require preparatory construction. However, due to the fact that the three (3) phases have to be matched, Gentile has directed that no Phase I construction be accomplished until all three (3) phases are physically on hand at the installation. Phase I consists of reinforcing steel, wire mesh, mastic joint, fuel tank, fuel pipe, conduit, pipe trench, anchor bolts and all miscellaneous fittings which are imbedded in concrete. In the past this material was furnished as a kit.Gentile AFD now advises that Phase I equipment and materials for future facilities will be purchased by the major Air Command. Phases II and III parts will be furnished by Gentile AFD. Those stands scheduled for delivery two (2) years hence may be of the type that do not require preparatory construction.

2

· SECRET

Headquarters Air Defense Command, ADMAC-2, Subject: Field Maintenance Support of Aircraft Gas Trubine Engines

b. Due to the slow delivery of the Shaw-Estes equipments and the limited number available it can readily be seen that we must take a closer look at our requirements. We must keep in mind that the number of engines supported will vary to a great extent by the time the stand is available. In some cases the number of engines will not justify a Shaw-Estes facility when it is erected. For this reason, the following total requirement for Shaw-Estes Test Stands was submitted to Gentile Air Force Depot, up to and including FY 57.

Installations programmed for Shaw-Estes St nd to be delivered approximately September 1955

- (1) Yuma County Municipal Airport
- (2) Paine Air Force Base
- (3) New Castle County Airport
- (4) Stewart Air Force Base
- (5) Minn-St Paul International Airport
- (6) Wurtsmith Air Force Base
- (7) Truax Air Force Base

Installations proposed for a Shaw-Estes Facility to be delivered in approximately two (2) years.

- (1) McGhee Tyson Municipal Airport
- (2) Grandview Air Force Base
- (3) Duluth Air Force Base
- (4) Oxnard Air Force Base
- (5) Minot Air Force Base
- (6) Benzie County Municipal Airport
- (7) Glasgow Air Force Base
- (8) Grand Fork Air Force Base

3

SECRET

Headquarters Air Defense Command, ADMAC-2, Subject: Field Maintenance Aircraft Gas Turbine Engines

5. This paragraph will concern the OCAMA run-up stand. In many cases, where workloads are of such nature that it seems feasible and economically sound, Field Maintenance repair of aircraft Gas Turbine Engines in accordance with TO 00-25-145 will be accomplished through the use of an OCAMA run-up type stand. In order to make this stand acceptable for this usage Gentile Air Force Depot will prepare a TO (with applicable drawings) covering the modification of the run-up stands to include vibration equipment. For those OCAMA type stands already delivered, these parts will be furnished as a TO modification kit. Also furnished to make this stand acceptable is a Console Assembly Engine Test, P/N 1C1596, Appl: J-47-17 S/N 7CAC-NSL to enable complete testing of the fuel systems.

a. Factors for computation of requirements for the OCAMA run-up stand are as follows:

- (1) On those stations belonging to ADC, the field maintenance activity will be provided one (1) control house and one (1) dolly, with the Fighter-Interceptor Squadron or Squadrons on that base receiving one (1) dolly each.
- (2) On those bases where ADC Fighter-Interceptor Squadrons are tenants, the single Fighter-Interceptor Squadron will be provided with one (1) control house and one (1) dolly. Where two (2) squadrons are tenants, one (1) control house and two (2) dollies will be utilized by both Squadrons.
- (3) For those Fighter-Interceptor Squadrons scheduled to deply, one (1) control house and one (1) dolly will be provided.

b. Records of this headquarters and Gentile Air Force Depot indicate the status of the OCAMA run-up stand in Air Defense Command is as follows:

4

SECRET

SECRET Headquarters Air Defense Command, ADMAC-2A4, Subject: Field Maintenance Aircraft Gas Turbine Engines Stands Delivered (1) 521st Materiel Squadron, Sioux City (2) 520th Materiel Squadron, Truax (3) 525th Materiel Squadron, New Castle (4) 501st Materiel Squadron, O'Hare (5) 530th Materiel Squadron, Geiger (6) 517th Materiel Squadron, Ethan Allen (7) 516th Materiel Squadron, McGhee-Tyson (8) 534th Materiel Squadron, Kinross (9) 514th Materiel Squadron, Minn-St Paul (10) 503rd Materiel Squadron, Portland (11) 4700th Materiel Squadron, Stewart (15 (12) 500th Mat Squadron, Greater-Pitt (13) 533rd Materiel Squadron, Oxnard (14) 4750th Materiel Squadron, Yuma 548 W. Gun to 1611 Arw. Stands Programmed and Scheduled for Delivery Approximately November 1954. (1) 4676th Material Squadron, Grandview (2) 519th Materiel Squadron, Suffold A (3) 31st FIS, Larson (4) 29th FIS, Great Falls (5) 520nd Materiel Squadron, Youngstown (6) 85th FIS, Scott SECRET

Headquarters Air Defense Command, ADMAC-2Al, Subject: Field Maintenance Aircraft Gas Turbine Engines

- . (7) 518th Materiel Squadron, Niagara
 - (8) 94th FIS George
 - (9) 515th Materiel Squadron, Duluth
 - (10) 60th FIS Westover
 - (11) 529th Materiel Squadron, Paine

Stands Proposed for ADC Units

Units not appearing on this list for a dolly will obtain one (1) each dolly from activity indicated in inclosed ADC brochure.

COMPTON & ODDANTANTON	Control	D-124	SEE	
STATION & ORGANIZATION	House	Dollies	NOTE	
527th Materiel Squadron, Wurtsmith AFB	1	2	A	
567th Materiel Squadron, McChord AFB	1	1		
317th FIS, McChord AFB		1		
465th FIS McChord AFB		1		
528th Materiel Squadron, Presque Isle AFB	1	. 2	В	
575th Materiel Squadron, Selfridge AFB	1	1		
13th FIS Selfridge AFB		1		
56th FIS, Selfridge AFB		1		
564th Fld Maint Sq, Otis AFB	1	1		
58th FIS, Otis		1		
437th FIS, Otis		1 .		
42nd FIS, O'Hare AFB		1		
456th FIS, Truax		1		
539th FIS, Stewart		1		
11th FIS, Duluth	1	1	Deploys 1	./5

1			STATE STATE	CHI MINISTER		
		SI	CRET		214	
	Headquarters Air Defense Comme Aircraft Gas Turbine Engines	and, ADMAC	-2A4, Subject	t: Field M	aintenance	
			Control		SEE	
	STATION & ORGANIZATION		House	Dollies	NOTE	
	63rd FIS, Wurtsmith		1	1	Deploys 1/56	
	84th FIS, Hamilton		,1 .	1	Deploys 1/57	
	82nd FIS, Presque Isle		1	1	Deploys 2/57	
	hh5th FIS, Geiger		1	1	Deploys 4/56	
	318th FIS, Presque Isle		1	1	Deploys 2/57	
	469th FIS, McChee Tyson		1	1 ,	Deploys 4/57	
	58th FIS, Otis		1	1	Deploys 4/57	
	96th FIS, New Castle			1		
	322nd FTS, Geiger			1		
	5th FIS, McGuire			1		
	2nd FIS, McGuire			1		
	331st FIS, Suffolk			1		
	27th FIS, Griffis		1	1	Move 3/56	
N	95th FIS, Andrews		1	1		
	பூபூth FIS, Charleston		1	1		
	48th FIS, Langley		1	1		
	46th FIS, Dover		1	1		
	49th FIS, Dow		1	1		
	54th FIS, Rapid City		1	1		
	97th FIS, Wright-Patterson		1	1		
	15th FIS, Davis-Monthan		1	1		

SECRET . Headquarters Air Defense Command, ADMAC-2A4, Subject: Field Maintenance Aircraft Gas Turbine Engines Control SEE STATION & ORGANIZATION Dollies NOTE 323rd FIS, Larson 336th FIS, Perrin 538th FIS, Castle 522nd Materiel Squadron, Klamath Falls 98th FIS, Klamath Falls D 319th FIS, San Diego Area 321st FIS, Walker E 329th FIS, Griffis 498th FIS, Griffis 535th Materiel Squadron, Marquette E 327th FIS, Marquette 538th Materiel Squadron, Minot G 324th FIS, Minot 1 G 540th Materiel Squadron, Glasgow 536th Materiel Squadron, Grand Fork 302nd FIS, Lockbourne 541st Materiel Squadron, Benzie County 304th FIS, Portland 303rd FIS, Griffis Total

080/

SECT

Headquarters Air Defense Command, #DMAC-2', Subject: Field Maintenance Aircraft Gas Turbine Engines

Note:

M89-9

- A. The second dolly to be assigned to the 74th FIS upon return from overseas 2/56.
- B. The second dolly to be assigned to the 335th FIS when moved from Geiger 3/57.
- C. Not required prior to 2/56.
- D. Not required prior to 3/56.
- E. Not required prior to 4/56.
- F. Not required prior to 1/57.
- G. Not required prior to 2/57.
- H. Not required prior to 4/57.
- 6. In order to clarify the responsibilities and proposed capability of the 4750th Maintenance Squadron, Yuma County Airport, Arizona, we must realize the importance of this activity and its responsibility, not only to support aircraft assigned, but those aircraft which will be TDY at Yuma during rocketry training. It is the desire of this headquarters that the capability at Yuma be developed to support all ADC prime engines (J-33, J-35, J-48, J-47-17). As a step toward this responsibility a Shaw-Estes facility plus an OCAMA type facility is being authorized. Sufficient dollies will be authorized to enable TDY Squadrons to perform engine test before installation in aircraft and for checking engine malfunction, utilizing the OCAMA type run-up stand.
- 7. The inclosed ADC brochure is provided for your information and indicates Shaw-Estes and OCAMA run-up stand data, engine support data up to and including FY 57. It will be noted that specific type engines have been indicated. However, this Command's interpretation of T.O. OO-25-145 is that all types of jet engines should be supported by the base Field Maintenance activity regardless of type, provided capability for repair exists. Our ultimate aim should be to give full support of all base assigned aircraft and engines regardless of type.

9

SECR

SECRET Headquarters Air Defense Command, ADMAC-2, Subject: Field Maintenance Aircraft Gas Turbine Engines 8. It is felt that a program such as indicated herein is more realistic and sound than any program previously set forth. It will result in great savings for the USAF through the reduction of costly shipments of aircraft engines, to and from distant facilities. In addition it will assure ADC organizations of reliable and thoroughly tested engines prior to installation in an aircraft. Your comments and recommendations concerning the adequacy of this program are solicited. solicited. BY ORDER OF THE COMMANDER: 6 Frhungkrey ADC Brochure SECRET MQ9-11

COPY

HEADQUARTERS AIR DEFENSE COMMAND ENT AIR FORCE BASE COLORADO SPRINGS, COLORADO

150

ADMAC-2

20 September 1954

Subject: Field Maintenance Support of Aircraft Gas Turbine Engines (Uncl)

TO:

Commander Eastern Air Defense Force Stewart Air Force Base Newburgh, New York

- 1. The recent publication of Technical Order 00-25-145, dated 30 June 1954, and the results of a conference held at Gentile Air Force Depot on 12 and 13 August 1954 have necessitated a restudy of the Jet Engine Minor Repair Program.
- 2. First, we must change our line of thinking that Jet Engine Minor Repair is a special project, and think of this function in terms of routine field maintenance support. As such, JEMR becomes a responsibility of every field maintenance and material squadron in Air Defense Command. Therefore, it is the desire of this headquarters to put ADC field maintenance echelons in the business of JEMR and to see that the necessary equipments are made available for this function.
- 3. This JEMR concept is, in many cases, made difficult because of the tenant status of ADC tactical squadrons. Generally speaking, there are two conditions that prevail in "landlord" field maintenance support of our JEMR requirements. One condition concerns the field maintenance support of JEMR for ADC tenant squadrons by the landlord wing or depot. The other condition concerns the lack of such support for our tactical squadrons.
- a. If landlord wings of other commands are satisfactorily supporting the JEMR requirements of our tactical squadrons (in accordance with AFR 11-4) the ADF concerned must determine if such support will continue in the event of war emergency deployments. For example, if a TAC "landlord" wing presently supporting an ADC tenant squadron deploys we must insure that our JEMR field maintenance support functions will not be unattended. Special agreements must be made by the ADF concerned to cover such contingencies.
- b. If a landlord wing of another command refuses to support the JEMR requirement of an ADC tenant squadron (in violation of AFR 11-4) the ADF concerned should refer the matter to this headquarters for indorsement to Headquarters USAF. In some cases it may be best for the ADF to seek a compromise agreement

SECRET

150

Headquarters Air Defense Command, ADMAC-2, Subject: Field Maintenance Support of Aircraft Gas Turbine Engines

with the landlord command. In such instances, it may be necessary for the landlord to delegate the JEMR function from his field maintenance echelon to the ADC squadron. Such agreements should explore the placement of logistics support responsibilities for our JEMR, and the use of the landlord base shops to accomplish the JEMR function. In any event, it is the responsibility of the ADF concerned to effect the best possible solution to the field maintenance support of JEMR for ADC tenant squadrons. Headquarters ADC should be advised if assistance is needed at command level.

4. This paragraph will concern the Shaw-Estes Test Stand and ADC requirement for this stand. At a conference held at Gentile Air Force Depot 12 and 13 August 1954 it became apparent that the availability of this stand is at least one (1) year away. Only a limited number will be made available to units of Air Defense Command. Further, the complete ADC requirement cannot be satisfied for at least two years.

a. Planning and construction for the Shaw-Estes installation should be very carefully considered prior to actual programming. The programmed stands which we expect in approximately one year will require preparatory construction. However, due to the fact that the three (3) phases have to be matched, Gentile has directed that no Phase I construction be accomplished until all three (3) phases are physically on hand at the installation. Phase I consists of reinforcing steel, wire mesh, mastic joint, fuel tank, fuel pipe, conduit, pipe trench, anchor bolts and all miscellaneous fittings which are imbedded in concrete. In the past this material was furnished as a kit. Gentile AFD now advises that Phase I equipment and materials for future facilities will be purchased by the major Air Command. Phase II and III parts will be furnished by Gentile AFD. Those stands scheduled for delivery two (2) years hence may be of the type that do not require preparatory construction.

b. Due to the slow delivery of the Shaw-Estes equipments and the limited number available it can readily be seen that we must take a closer look at our requirements. We must keep in mind that the number of engines supported will vary to a great extent by the time the stand is available. In some cases the number of engines will not justify a Shaw-Estes facility when it is erected. For this reason, the following total requirement for Shaw-Estes Test Stands was submitted to Gentile Air Force Depot, up to and including FY 57.

2

SECRET

150

Headquarters Air Defense Command, ADMAC-2, Subject: Field Maintenance Support of Aircraft Gas Turbine Engines

Installations programmed for Shaw-Estes Stand to be delivered approximately September 1955

- (1) Yuma County Municipal Airport
- (2) Paine Air Force Base
- (3) New Castle County Airport
- (4) Stewart Air Force Base
- (5) Minn-St Paul International Airport
- (6) Wurtsmith Air Force Base
- (7) Truax Air Force Base

Installations proposed for a Shaw-Estes Facility to be delivered in approximately two (2) years.

- (1) McGhee Tyson Municipal Airport
- (2) Grandview Air Force Base
- (3) Duluth Air Force Base
- (4) Oxnard Air Force Base
- (5) Minot Air Force Base
- (6) Benzie County Municipal Airport
- (7) Glasgow Air Force Base
- (8) Grand Fork Air Force Base
- 5. This paragraph will concern the OCAMA run-up stand. In many cases, where workloads are of such nature that it seems feasible and economically sound, Field Maintenance repair of aircraft Gas Turbine Engines in accordance with TO 00-25-145 will be accomplished through the use of an OCAMA run-up type stand. In order to make this stand acceptable for this usage Gentile Air Force Depot will prepare a TO (with applicable drawings) covering the modification of the run-up stands to include vibration equipment. For those OCAMA type stands already delivered, these

3

150

Headquarters Air Defense Command, ADMAC-2, Subject: Field Maintenance Aircraft Gas Turbine Engines

parts will be furnished as a TO modification kit. Also furnished to make this stand acceptable is a Console Assembly Engine Test, P/N 1C1596, Appl: J-47-17 S/N 7CAC-NSL to enable complete testing of the fuel systems.

a. Factors for computation of requirements for the OCAMA run-up stand are as follows:

- (1) On those stations belonging to ADC, the field maintenance activity will be provided one (1) control house and one (1) dolly, with the Fighter-Interceptor Squadron or Squadrons on that base receiving one (1) dolly each.
- (2) On those bases where ADC Fighter-Interceptor Squadrons are tenants, the single Fighter-Interceptor Squadron will be provided with one (1) control house and one (1) dolly. Where two (2) squadrons are tenants, one (1) control house and two (2) dollies will be utilized by both Squadrons.
- (3) For those Fighter-Interceptor Squadrons scheduled to deply, one (1) control house and one (1) dolly will be provided.

b. Records of this headquarters and Gentile Air Force Depot indicate the status of the OCAMA run-up stand in Air Defense Command is as follows:

Stands Delivered

- (1) 521st Materiel Squadron, Sioux City
- (2) 520th Materiel Squadron, Truax
- (3) 525th Materiel Squadron, New Castle
- (4) 501st Materiel Squadron, O'Hare
- (5) .530th Materiel Squadron, Geiger
- (6) 517th Materiel Squadron, Ethan Allen
- (7) 516th Materiel Squadron, McGhee-Tyson

2

150

Headquarters Air Defense Command, ADMAC-2A4, Subject: Field Maintenance Aircraft Gas Turbine Engines

- (8) 534th Materiel Squadron, Kinross
- (9) 514th Materiel Squadron, Minn-St Paul
- (10) 503rd Materiel Squadron, Portland
- (11) 4700th Materiel Squadron, Stewart
- (12) 500th Mat Squadron, Greater-Pitt
- (13) 533rd Materiel Squadron, Oxnard
- (14) 4750th Materiel Squadron, Yuma

Stands Programmed and Scheduled for Delivery Approximately November 1954.

- (1) 4676th Materiel Squadron, Grandview
- (2) 519th Materiel Squadron, Suffold
- (3) 31st FIS, Larson
- (4) 29th FIS, Great Falls
- (5) 520nd Materiel Squadron, Youngstown
- (6) 85th FIS, Scott
- (7) 518th Materiel Squadron, Niagara
- (8) 94th FIS George
- (9) 515th Materiel Squadron, Duluth
- (10) 60th FIS Westover
- (11) 529th Materiel Squadron, Paine

Stands Proposed for ADC Units

Units not appearing on this list for a dolly will obtain one (1) each dolly from activity indicated in inclosed ADC brochure.

5

150

Headquarters Air Defense Command, ADMAC-2A4, Subject: Field Maintenance Aircraft Gas Turbine Engines

STATION & ORGANIZATION	Control. House	Dollies	SEE
527th Materiel Squadron, Wurtsmith AFB	1	2	A.
567th Materiel Squadron, McChord AFB	1.	1	
317th FIS, McChord AFB		1	
465th FIS McChord AFB		1	
528th Materiel Squadron, Presque Isle AFB	1	2	В
575th Materiel Squadron, Selfridge AFB	1	1	
13th FIS Selfridge AFB		1	
56th FIS, Selfridge AFB		1	
564th Fld Maint Sq, Otis AFB	1	1	
58th FIS, Otis		1	
437th FIS, Otis		1.	
42nd FIS, O'Hare AFB		1	
456th FIS, Trunk		1	
539th FIS, Stewart		1	
lith FIS, Duluth	. 1	1	Deploys 1/56
63rd FIS, Wurtsmith	1	1	Deploys 1/56
Shth FIS, Mamilton	1	1	Deploys 1/57
82nd FIS, Presque Isle	1	1	Deploys 2/57
445th FIS, Geiger	1	1	Deploys 4/56
318th FIS, Presque Isle	1	1	Deploys 2/57
469th FIS, McGhee Tyson	1	1	Deploys 4/57
58th FIS, Otis	1	1	Deploys 4/57
96th FIS, New Castle		1	
1			

150

Headquarters Air Defense Command, ADMAC-2A4, Subject: Field Maintenance Aircraft Gas Turbine Engines

	Control		SHE
STATION & ORGANIZATIONS	House	Dollies	
322nd FIS, Geiger		1	
5th FIS, McGuire		. 1	
2nd FIS, McGuire		1.	
331st FIS, Suffolk		1	
27th FIS, Griffis	1	1	Move 3/56
95th FIS, Andrews	1	1	
444th FIS, Charleston	1	1	
48th FIS, Langley	1	1	
46th FIS, Dover	1 .	1	
49th FIS, Dow	1	1	
54th FIS, Rapid City	1	1	
97th FIS, Wright-Patterson	1	1	
15th FIS, Davis-Monthan	1	1	
93rd FIS, Kirtland	1	1	
413th FIS	1	1	
323rd FIS, Larson	1	1	
336th FIS, Perrin	1	1	C
538th FIS, Castle	1	1	. D
522nd Materiel Squadron, Klamath Falls	1	1	D
98th FIS, Klamath Falls		1	D
319th FIS, San Diego Area	1	1	E

7

150

Headquarters Air Defense Command, ADMAC-2A4, Subject: Field Maintenance Aircraft Gas Turbine Engines

STATION & ORGANIZATION	Control House	Dollies	SEE
321st FIS, Walker	1	1	E
329th FIS, Griffis	1	1	E
498th FIS, Griffis		1	E
535th Materiel Squadron, Marquette	1	,1	E
327th FIS, Marquette		1	F
538th Materiel Squadron, Minot	1	1	G
324th FIS, Minot		1	G
540th Materiel Squadron, Glasgow	1	1	G
536th Materiel Squadron, Grand Fork	1	1	G
302nd FIS, Lockbourne	1	1	H
541st Materiel Squadron, Benzie County	1	1	H
304th FIS, Portland		1	H
303rd FIS, Griffis		1	Н
Total	37	- 59	

Note:

- A. The second dolly to be assigned to the 74th FIS upon return from overseas 2/56.
- B. The second dolly to be assigned to the 335th FIS when moved from Geiger 3/57.
- C. Not required prior to 2/56.
- D. Not required prior to 3/56.
- E. Not required prior to 4/56.
- F. Not required prior to 1/57.

8

150

Headquarters Air Defense Commund, ADMAC-2, Subject: Field Maintenance Aircraft Gas Turbine Engines

- G. Not required prior to 2/57.
- H. Not required prior to 4/57.
- capability of the 4750th Maintenance Squadron, Yuma County Airport, Arizona, we must realize the importance of this activity and its responsibility, not only to support aircraft assigned, but those aircraft which will be TDY at Yuma during rocketry training. It is the desire of this headquarters that the capability at Yuma be developed to support all ADC prime engines (J-33, J-35, J-48, J-47-17). As a step toward this responsibility a Shaw-Estes facility plus an OCAMA type facility is being authorized. Sufficient dollies will be authorized to enable TDY Squadrons to perform engine test before installation in aircraft and for checking engine malfunction, utilizing the OCAMA type rum-up stand.
- 7. The inclosed ADC brochure is provided for your information and indicates Shaw-Estes and OCAMA run-up stand data, engine support data up to and including FY 57. It will be noted that specific type engines have been indicated. However, this Command's interpretation of T.O. OO-25-145 is that all types of jet engines should be supported by the base Field Maintenance activity regardless of type, provided capability for repair exists. Our ultimate aim should be to give full support of all base assigned aircraft and engines regardless of type.
- 8. It is felt that a program such as indicated herein is more realistic and sound than any program previously set forth. It will result in great savings for the USAF through the reduction of costly shipments of aircraft engines, to and from distant facilities. In addition it will assure ADC organizations of reliable and thoroughly tested engines prior to installation in an aircraft. Your comments and recommendations concerning the adequacy of this program are solicited.

BY ORDER OF THE COMMANDER:

1 Incl ADC Brochure /s/ C. F. HUMPHREYS Captain, USAF Asst Command Adj

9

150

Hq ADC ADMAC-2 Subject: Field Maintenance Support of Aircraft Gas Turbine Engines (Uncl)

EAMAC-ACM (20 Sep 54)

1st Ind

18 Oct 1954

HQ EASTERN AIR DEFENSE FORCE, Stewart Air Force Base, Newburgh, New York

- TO: Commander, Air Defense Command, Ent Air Force Base, Colorado Springs, Colorado
- 1. Comments and recommendations concerning the adequacy of jet engine minor repair program in conjunction with proposals set forth. This correspondence is forwarded as requested.
 - 2. Reference paragraph 1, 2, basic letter. Concur.
- 3. Reference paragraphs 3 a, and b, basic letter. The present agreements for field maintenance support of our JEMR requirements to squadrons which are tenants on bases of other commands are being reviewed by this headquarters to insure that all necessary support is being received in accordance with AFR 11-4, 7 July 1952. In the event satisfactory agreements cannot be worked out, the problem will be presented to higher headquarters.
- 4. Reference paragraph 4 a, basic letter. Your attention is invited to message, ADMAC-2A4 18005, 4 June 1954, which suggested Phase I construction be initiated at Ethan-Allen, New Castle, Stewart, Greater-Pittsburgh and Truax Air Force Bases. This information now conflicts with concept Gentile Air Force Depot has requiring all three phases to be on hand prior to initial construction for any phase of the Shaw-Estes Test Stand installation. Request clarification on this subject.
- 5. Reference paragraph 4 b, basic letter. The list submitted to Gentile Air Force Depot does not agree with our original programing for units scheduled to receive a Shaw-Estes Test Facility. Formerly your headquarters proposed that Ethan-Allen, New Castle, Stewart, Greater-Pittsburgh and Truax Air Force Bases receive the next facilities. Your present listing deletes Ethan-Allen and Greater-Pittsburgh from listing and includes Wurtsmith Air Force Base. Request information if program as stated in this letter is firm, in order that units can be advised of change in program.
- 6. Reference paragraph 5 a, basic letter. This headquarters concurs with factors listed for computation of requirements for the OCAMA run-up stand, but recommends that, until such time as

10

150

Hq ADC ADMAC-2 Subject: Field Maintenance Support of Aircraft Gas Turbine Engines (Uncl)

sufficient stands are available the OCAMA run-up stand not be assigned units deploying. In addition the OCAMA run-up stand should be assigned one per base for the present commitments, and if a Shaw-Estes Facility becomes operational on a base where a OCAMA stand is available, the stand be re-assigned to another base within the command as required.

7. Reference paragraph 5 b, basic letter. Records of your headquarters and Gentile Air Force Depot should be amended to read as follows:

(a) Stands Delivered:

- (1) Item (12) Stand is not possessed by 500th Materiel Squadron, Greater-Pittsburgh, as subject stand was transferred to 95th Fighter Interceptor Squadron, Andrews Air Force Base, in March, 1954.
- (2) 568th Materiel Squadron, McGuire Air Force Base, received one stand and it is now possessed by 1611th Air Transport Wing, (MATS), Squadron since change in command at McGuire Air Force Base.
- (b) Recommend following changes in stands programmed and scheduled for delivery list:
- (1) Item (2) Since 519th Materiel Squadron, Suffolk County Air Force Base has a Shaw-Estes Facility assigned and operational, request stand be assigned to 97th Fighter Interceptor Squadron, Wright-Patterson Air Force Base, or the 27th Fighter Interceptor Squadron, Griffiss Air Force Base.
- 8. The information contained in this correspondence sets forth a definite program and ultimate goal of our JEMR Facilities and clearly defines our responsibility. Recommend letters of this type be prepared periodically to keep personnel in the field cognizant of the progress and planning concerning program. Request authority be granted to permit movement of OCAMA run-up stand from O'Hare Air Force Base to Wurtsmith Air Force Base, as the Shaw-Estes Facility at O'Hare can adequately handle support of squadrons on station.

11

4 50

Hq ADC ADMAC-2 Subject: Field Maintenance Support of Aircraft Gas Turbine Engines (Uncl)

9. This indorsement is classified Secret in accordance with paragraph 23c, Air Force Regulation 205-1, 15 December 1953.

FOR THE COMMANDER:

1 Encl w/d BEN D. MOORHEAD 1st Lt, USAF Asst Adjutant

12

COPY

450

ADMAC-2A4

29 October 1954

SUBJECT: (Uncl) Field Maintenance Support of Aircraft Gas Turbine Engines

TO:

Commander
Eastern Air Defense Force
Stewart Air Force Base
Newburgh, New York

- 1. Reference EADF 1st Indorsement dated 18 October 1954 to Secret ADC letter ADMAC-2 dated 20 September 1954, Subject: (Uncl) Field Maintenance Support of Aircraft Gas Turbine Engines. The following information submitted as requested:
 - a. Reference Paragraph 1: Noted.
 - b. Reference Paragraph 2: Noted.
 - c. Reference Paragraph 3: Noted.
- d. Reference Faragraph 4: Information contained in ADMAC-2A4 18005, 4 June 1954, was changed as a result of the conference held at Gentile AFD 12 and 13 August 1954. Policy is that all three (3) phases will be physically on hand prior to starting construction.
- e. Reference Paragraph 5: Units listed were deleted because the number of engines which they support will decrease materially by the time test stand is available. Frogram stated in referenced letter is firm and every effort will be made to follow same.
 - f. Reference Paragraph 6:
 - (1) The current policy of this Command is that units scheduled for deployment will be fully equipped. This will include an OCAMA run-up stand where possible. We feel that resources within ZI are such that repair of Jet engines will not present an insurmountable problem. Units deploying to an overseas theater are confronted with many problems in the repair and return to service of parts and equipment; therefore, from the standpoint of economy and in the interest of

SECRET

082

Headquarters Air Defense Command, ADMAC-2A4, Subject: (Uncl) Field Maintenance Support of Aircraft Gas Turbine Engines

sound Air Force policies, this headquarters feels that an OCAMA run-up stand should be issued to deploying units where possible.

- (2) Reference assignment of OCAMA run-up stand at bases where a Shaw-Estes facility becomes operational on same base. Reassignment of this stand will be at the discretion of the Defense Force concerned; however, care must be exercised to assure control and relocation of programmed stands when they become available, at which time provisions of ADC letter ADMAC-2, dated 20 September 1954, will hold true regarding assignment. It is requested that this headquarters be informed of these reassignments so that a current status may be maintained during the interim period while we are getting an adequate number of OCAMA stands.
- g. Reference Paragraph 7:
 - (a) (1): Noted.
 - (a) (2): This headquarters is aware of this change.
 - (b) (1): This headquarters has no objection to your recommendation; however, Paragraph 1f(2) of this letter, must apply.

h. Reference Paragraph 8: Noted. Provisions of Paragraph 1f(2), this letter, will apply.

i. Reference Paragraph 9: Noted.

BY ORDER OF THE COMMANDER

JAMES S. PURDUM Major, USAF Asst Command Adj

2

Mg CADF CDMIS F-5 Subj: Jet Engine Minor Repair Facility

CDMAC (25 Oct 54) 2nd Ind

HQ CENTRAL AIR DEFENSE FORCE, Grandview Air Force Base, Grandview, Mo.

- TO: Commander, Air Defense Command, Ent Air Force Base, Colorado Springs, Colorado
- 1. Request reconsideration of the proposal expressed in basic letter.
- 2. Present field maintenance hangars, including those completed and in use, and programmed but not constructed, do not provide adequate space for the performance of field maintenance of aircraft gas turbine engines. These hangars were constructed or programmed prior to the implementation of TO 00-25-145 dated 30.

 June 1954, and revised 30 September 1954. Engine build-up sections do not contain sufficient space to include JEFM. Approximately for engine build-up sections, and it can be assumed that such space was fully justified for its intended use. The addition of minor repair of jet engines is a function not included in these basic designs.
- 3. It is the understanding of this headquarters that future planning of field maintenance hangars will provide an area of approximately 3800 square feet that can be divided between JEFM, airborne electronics and the aircraft instrument shop (ADC drawing ADC-E-005, 26 July 1954). This area is not considered adequate to support one flinter-interceptor squadron; 5000 square feet is considered suitable for one F-05D squadron and 8000 square feet for two F-3(D squadrons or one F-89D squadron. Any consideration of space criteria should also include the support of the F-102 and similar aircraft. All bases within CADF, except Sioux City Air Base, Iowa, have inadequate space provided or programmed for JEFM.
- 4. In a telephone conversation between representatives of your headquarters and this headquarters, it was stated by your representative that Selfridge Air Force Base, Mt Clemens, Michigan, had 1850 square feet for JEFM. In order to aid in our study, the Group Deputy for Materiel at Selfridge Air Force Base was conacted and provided the information contained in Inclosure #2. It will be noted that 4936 square feet is being utilized; further, that this is inadequate, according to Selfridge. The following is quoted in part, from the Selfridge message, "Present allocation inadequate. Require additional 4000 square feet".

Hq CADF CDMIS F-5 Subj: Jet Engine Minor Repair Facility

5. In view of the critical shortage of serviceable jet engines, which will continue for some time, and the considerable saving to the Air Force in having adequate engine repair facilities, request complete review be made by your headquarters of this vital program.

FOR THE COMMANDER:

2 Incl Added 1 Incl 2. Selfridge JEFM C. D. BURLESON Major, USAF Comd Adjutant

COPY

151

Headquarters Central Air Defense Force, CDMIS F-5, Subject: Jet Engine Minor Repair Facility.

ADMAC-2A5 (25 Oct 54)

3rd Ind

28 Dec 54

HQ AIR DEFENSE COMMAND, Ent Air Force Base, Colorado Springs, Colorado

TO: Commander, Central Air Defense Force, Grandview Air Force Base, Grandview, Missouri

- I. This headquarters is well aware of the advantages and monetary savings derived from the Jet Engine Field Maintenance Program and will continue to assist Air Defense Forces and subordinate activities in every manner possible to achieve our ultimate goal of a well established jet engine field maintenance facility at each ADC base possessing the required number of engines. The requirement for space imposed by the JEFM Program, in addition to that originally required for jet and reciprocating engine buildup, is recognized; however, it does not necessarily follow that new construction of additional shops, buildings, or hangars is required. In many instances, available space can be adapted for use as a JEFM and Engine Buildup Shop. It is necessary, therefore, to determine the requirement for new construction in support of this program only after surveying the available space at each affected installation.
- 2. Reference paragraph 3, 2nd Indorsement. The space criteria proposed in this paragraph is considered excessive. The original 10,000 square feet recommended by OCANA in the JENR Implementation Manual was proposed for support of a normal wing with 75 or more engines installed. A large number of JEFM activities are operating successfully with less than a proportionate share of this space. No definite standard has been established by this headquarters, pending more complete data on space required to perform the additional functions proposed under the expanded scope of minor repair. However, it is believed that valid requirements will be approximately 3500 square feet per 25 installed jet engines to be supported. The field maintenance hangar most recently proposed by this headquarters to USAF contains approximately 3450 square feet of interior shop space allocated for engine buildup, JEFM, and prop shop in support of one squadron. An additional 360 square feet of covered exterior space adjacent to this shop and connected by a monorail has been proposed to be used for installing and removing engines from shipping containers.
- 3. Reference par 4, 2nd Indorsement. The total of 4936 square feet provided by Selfridge is misleading in that 1800 square feet of this total is an outdoor storage area and only

.151

Headquarters Central Air Defense Force, CDMIS P-5, Subject: Jet Engine Minor Repair Facility

3136 square feet are actually utilized for buildup, maintenance, and interior storage. The requirement for additional space at that installation is largely due to their responsibility for support of approximately 100 jet engines installed in aircraft possessed by an Air Force Reserve unit tenant on Selfridge and by two (2) ADC units located at Niagara Falls and Wurtsmith, in addition to the approximate 50 engines installed in the two F-86D equipped squadrons at Selfridge.

4. This headquarters is currently planning a JEFM conference to include representatives from the three Air Defense Forces. This conference is tentatively planned for February 1955 and will follow a visit to OCAMA and AMC by representatives of this command. Space requirements will be discussed during this conference. In the interim, it is strongly urged that your headquarters encourage all CADF JEFM activities to perform the maximum amount of maintenance possible in the area available.

BY ORDER OF THE COMMANDER:

2 Incl

COPY

7.50

ADMAC-2A4

17 December 1954

SUBJECT: Aircraft Jet Engine Field Maintenance

TO: Co

Commander
- Air Materiel Command
Wright-Patterson Air Force Base
Dayton, Ohio

- 1. Due to problems arising with other commands regarding JEFM support for ADC tenant organizations, this headquarters wishes to re-affirm its requirement for necessary support of these units.
- 2. When JEFM was phased into this command action was taken to support ADC tenant organizations from an ADC parent facility located on a nearby base. This was intended as an interim measure to provide support only until the landlord bases of other major commands could assume the responsibility in accordance with AFR 11-4.
- 3. Requirement for support was indicated to Headquarters, OCAMA, to include programming of OCAMAtype run-up stands for all tenant organizations; however, requirements for Shaw-Estes stands and tools were reflected only for those minor repair activities authorized or programmed within ADC since the authorization and requirements for these items is peculiar to a JEFM activity. Since JEFM is a field maintenance function, ADC squadrons tenant on other command bases are not authorized to accomplish this function and therefore cannot requisition the necessary equipment, spares and special tools. It is the opinion of this command that those tools and items of equipment peculiar to JEFM can only be programmed by and furnished to the major command possessing the minor repair authorization. This position is believed consistent with the provisions of Paragraph 3b(1)

 Technical Order 00-25-145, 30 September 1954.
- 4. Although this headquarters feels that AMC agencies are cognizant of the ADC deployment program a current listing of ADC deployments on non-ADC bases is submitted:

Mgs Air Defense Command, ADMAC-2A4, Subject: Aircraft Jet Engine Field Maintenance

	ADC ant Unit	Command and Location	Type Engine to be Supported
1,:	31st FIS) 323rd FIS)	TAC Larson AFB, Wash	J-47-17-17B-33
2.	413th FIS	SAC Travis AFB, Calif	J-47-17-17B-33
3.	94th FIS	TAC George AFB, Calif	J-47-17-17B-33
15.	29th FIS	SAC Great Falls AFB, Mont	J-48-P5,5A,7
5.	15th FIS	SAC Davis Monthan AFB, Ariz	J-47-17-17B-33
6.	93rd FIS	ARDC Kirtland AFB, N.M.	J-47-17-17B-33
7.	54th FIS	SAC Ellsworth, S. D.	J-47-17-17B-33
8.	85th FIS	ATRC Scott AFB, Ill	J-47-17-17B-33
9.	97th FIS	ANC WPAFB, Ohio	J-47-17-17B-33
10.	444th FIS	MATS Charleston AFB, S. C.	J-47-17-17B-33
11.	48th FIS	TAC Langley AFB, Va.	J-48-P5, 5A, 7
12.	95th FIS	MAIS Andrews AFB, Nd.	J- 47-17-17B-33
13.	46th FIS	MATS Dover AFB, Del.	J-48-P5, 5A, 7
14.	2nd FIS) 5th FIS)	MATS McGuire AFB, N. J.	J-47-17-17B-33
15.	60th FIS	MATS Westover AFB, Mass	J-47-17-17B-33
1.6.	27th FIS	ANC Griffiss AFB, N. Y.	J-48-P5,5A, 7
17.	49th FIS	SAC Dow AFB, Maine	J-47-17-17B-33

5. This information is forwarded for utilization by the prime AMA's in conjunction with affected Major Air Commands to


Hqs Air Defense Command, ADMAC-2A4, Subject: Aircraft Jet Engine Field Maintenance

determine if the ADC deployment program will necessitate further procurement of spares, equipment and special tools in support of the JEFM program. It is recommended that a comparison check be made between the ADC tenant deployment program and the JEFM program of the Landlord Major Air Command with Field Maintenance Support responsibility to assist the prime AMA concerned in determining whether the procurement of additional special tools, spares and equipment is required.

FOR THE COMMANDER:

Copies Furnished:

OCAMA, NAAMA, SAAMA, Gentile AFD

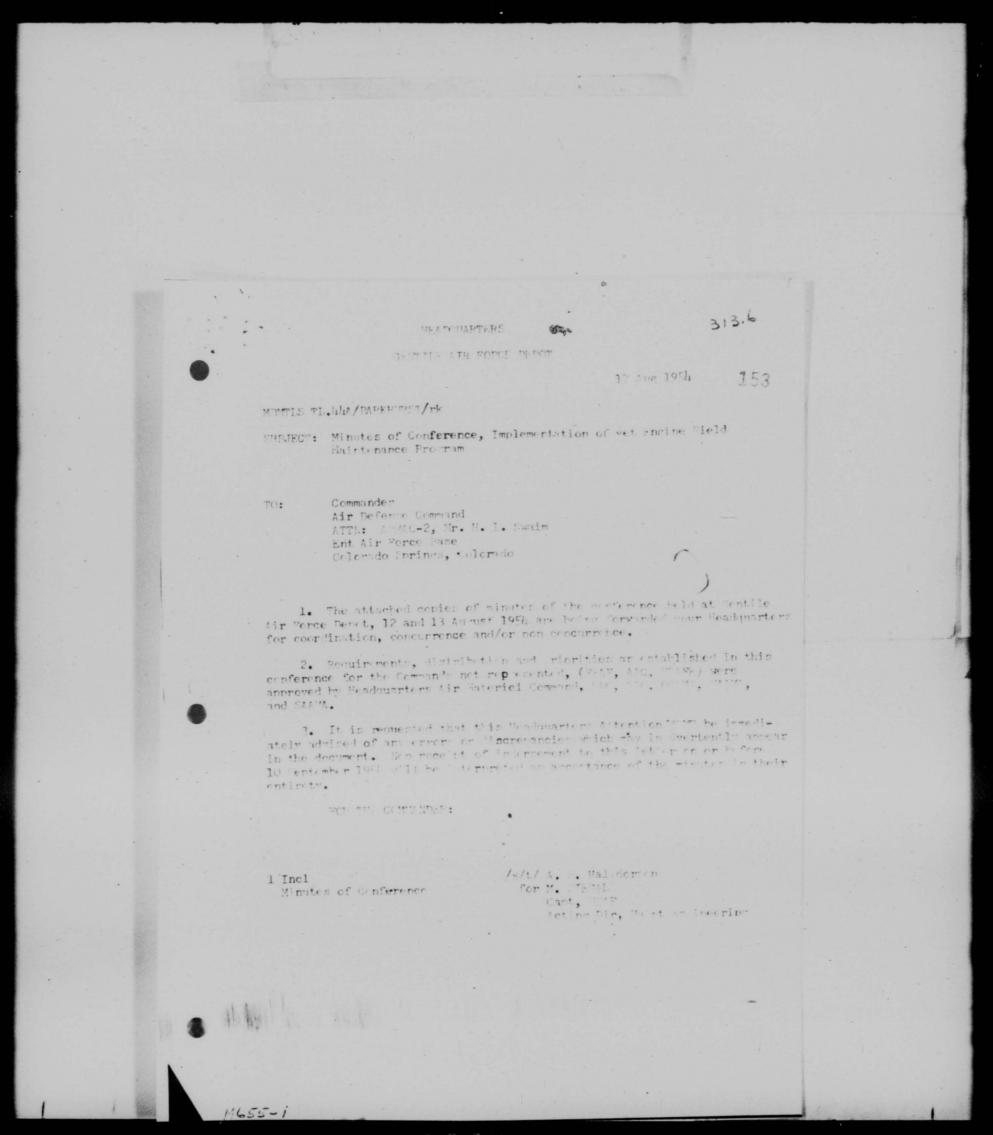

A. In ordation indice is the possibility that a phaw and a test tand if not be a mill at Fairbanks Air Force have. Negotiations are under say to permit the me of MADC cold weather stand at Ladd AFB by ALC. Bentile will check on this equirement and will take necessary action. (no Janke tand is present. In use at Elmendorf AFB.

- 5. Discussions have indicated that although future requirements may exist for dual capability, firm requirements do not exist at this time affect will require OCAMA run-up stands at Luke, Laughlen, Moody, Tyndall and Nellis Air Force Bases due to cancellation of dual kits on present procurement by Centile. Records indicate that shipment has been made of a dual facility to rellis Air Force Base. Cancellation of dual kits will be effected by te tile Air Force Depot.
- 6. Committed will submit new criteria to Hq ALC for possible revision to para, raph policy sub-para, raph (2)c of T.O. 00-25-145.
- 7. Sentile will coordinate with TADC on equipment requirements for conversion of existing test cell. Source of supply, existing items or from provisioned spares.
- e. The requested dual installation at George AFB Tentile will deter
 - any changes to quartity will be forward d entile and attention
- in inalized list as determined by this meeting will be the authority for excedence of original for funtile and reparalless of cits.
 - il. As entered objections to Faster and litheville FM's not being studed in distribution of 41 stands presently on presurement.
- a millional engine and program of 51 a millional engine and program of subtional engine and program results of review to Centile AFD.
- 13. Command priorities of receipt were not established on 51 programmed common it will indicated at the Conference that the 51 stands on the OCAMA proposes that may be fully portable units in lieu of the Shaw and Estes type. It was recommended that no action be taken by any of the Commands for installation of those I at any of the activities listed therein.
- In. Thuse I will be cancelled at Barksdale due to Engineering changes on new production Fem. and instructions from Hq USAF that Phase I will be produced from any funds available to base.

15. Of to change capability from 10,000 to 20,000 lb especity was firm for 35 test stands. ATRC requested that 6 be delivered without of non-ever, due to estimate of increased cost of \$2500 per stand and possible 90 day delay in delivery of stands and will confirm by 16 august 1952 if SCF can be applied to all 41 stands.

450

16. A review of the OCALA run-up stand relicense to or really recommended by OCALA (page 61 Brochure) inches the following a seried factors for computation of requirements:

CCLLAND	Org . Field	-125 yiera
JAC TAC ADC ATRC NEAC USAFE FEAF AAC		

All Commands are requested to review total run-up stand remains each time of 56 within 10 working days after receipt of the second to remained to centile. Immediate requirements exist for run up stands the ollowing bases to which first deliveries will be made: "1) fraud the ollowing farmen ARR, (3) clovis and, (4) for the fig. (5) and the second for the first days from the date of without diesent the second form the first days from the date of without diesent the second for a standard priorities would need to be stailed and the second for the first days from the date of without diesent the second for the first days from the date of without diesent the second for the first days from the date of without diesent the second for the first days are second for the first days and the second for the first days are second for the first days are second for the first days and the second for the first days are second for the first days

17. The fifty stands or sently being manufactured by odals and the fifty previously delivered consisted of 1 control bosses and 2 dellies additional quantities of dellies will be required in view of centerial established in paragraph 16. Control bosses and which would have separate air Force otock Numbers. Centile will interest any ottom for stocklisting and authorization of the delivered and the first soily for run-unstante may be disabled to the delivered at the soily of unations to make the delly-adoptable to all current tipe turbs jet on, income

18. It was agreed by all conferees that all accommon continuous the Jet engine test stands referred to herein will be form and to an additional form and the Command Headquarters to reduce as much as possible the world of or all concerned. Command Headquarters will disseminate all information to the interested Activities.

- 19. Operation of afterburners at field maintenance was discussed and it was generally accepted that determination of the necessity for the operation of afterburners would be the responsibility of the using Activity. Centile will include in the revision of the T.O. covering operation of the test stand the precautions necessary if afterburners are operated, and describe the limitations and capabilities of the thrust stand and thrust measurement equipment.
- 20. Maintenance data was discussed and although it has no direct relation to the proposed agenda of the conference it was indicated by NEAC that a requirement exists for a jet engine field maintenance repair implementation manual. It was generally agreed, however, that considerable assistance could be obtained by visits to the supporting area AMA's and that assistance had also been obtained from visiting teams from the engine prime AMA's.
- 21. It was indicated that no requirement exists for a handbook of operation and service instructions for the run-up stands. OCAMA have furnished two sets of drawings with each shipment of the run-up stands and will continue to maintain this procedure for the remainder of the stands presently being fabricated. Additional drawings may be obtained from Gentile upon request.
- 22. The T.O.'s 17-15A-1 and 17-15A-2 covering the 7CAD-732515 stand have been proven to be very inadequate. T.O. 17-15A-6 which covers the calibration kit, (7CAD-459700) that is used in the Chaw and istes Stand, may be used to supplement T.O. 17-15A-1 for calibration procedures of the thrust measuring equipment. Gentile are in the process of revising the referenced T.O.'s and anticipate completion of the preparation of the text within thirty days. Bata will be procured for overhaul of component instruments of the test stand which are peculiar to the test facility and which will require special training for calibration and overhaul. Lepairs of test stand and equipment may also be accomplished in accordance with T... 00-25-68.
- 23. Special training will be available to civilian and/or military personnel assigned to jet engine field maintenance bases, upon request to this Depot by the Headquarters of any of the Lajor Commands. Since the Commands must develop the capability for calibration and maintenance of the Shaw and Estes Juands, it is recommended that a training program be immediately established and that civilian and/or military personnel with experience on instrument repair and a good basis working knowledge of electronics be selected for this responsibility. Factory technical representatives from Brown Instrument Company, Linneapolis honeywell and Baldwin Lina Mamilton have offered their services to Chanute in their training program and will also render assistance to any of the hir Force Hases if possible, upon written or verbal report from any of the Commands.

- 24. Spare parts have been provided to support the test stands, however, due to the complex stocklisting and cotaloging system, the parts are not all available to date indictional items will be included in the selection of spares to support the additional quantities of stands currently on order and the Transcount the racts section will be revised accordingly.
- 25. An adapter set will be produced from General lectric to General the engine aircraft commonent items necessary to consent the console assembly to the J47-17 engine. Consends will be advised of the cort number and stock number as soon as available an excess of the cost will be available in approximately 15 mys.
- 26. It is recommended that perof irojects be established for manufacture of the quantity of run-ow stand required, one to the or ancy of the requirements.
- 27. Centile will prepare a T.C. which will be furnished with a licable drawings covering the modification of the run up stance to include a bration equipment. Action will be taken inacciately to produce the necessary arts to accomplish the modification of the run up stance now in use for those presently being manufactured and any additional quantity as required to meet the current program. The parts will be furnished as a T.C. modification kit. Unless otherwise notified by the various Commands, and fication hits for the original 50 delivered Commands and up stance will be able on to the activities listed in CC.MA Brochure pages 53 and 50 as organizations that have received the run-up stands.
- 28. For immediate longe to supert 47 engines field maintenance, a quantity of 70.0-036110 and lifters are and the for use with the 10.1 a miner which are satisfactory as an interm sites. 70.0-01724 perspenses than he obtained by requisition on special issue where an engine or vists, thus of libration equipment for engines other than the 347 will be forwarded the Meadquarters of all Commands on or before eptember 1754.
- 29. For information purposes only the new design shaw and istes stand will not incorporate the use of a fuel scalaring system, which will eliminate the flowmeter and interconnecting lines from the test cell.
- 50. The majority of the items in the proposed agenda were increased, although some were covered very briefly. It was the concensus of opinion that the conferees were well prepared to a scuss all the problems presented within the conference. The cooperative answer in which all phases of expressions were effected resulted in a satisfactory solution to the major problems of requirements, priority and instribution. The Communior at lengths blocks to express his apprection for the assistance given by all the conferees and in turn has passed to express his apprection for the assistance given by all the conferees and in turn has passed to express the agency possible to reveal adequate sq. out for Inclementation for the large result of the passed of the pa

SECRE APMRC-2 (27 Aug 54) 27 AUG 1954 HQ AIR DEPENSE COMMAND, But Air Perce 2000, Colorado & by OCAM. It is everaus that the ANC requirement is greatly by the distribution of stands to other unjor Commands. These changes to the USAP station lists in maragraph 2 or 3, Inclu-may alter the ANC requirements. ?. With reference paragraph ?, Inclosure \$1, the ANG stations list from 35 through \$1, inclusive should be changed to reads Yumn County Humisipal Airport Pains AFB Herr Cartle County Airport Stewart AFB Missepolic-St Paul International Airpor g. Truck Field 3. With reference paragraph 3, Inchesure fle the list of AND proposed by CCAMA to receive Shaw-Estes test stands should be characteristic. would justify a Shaw-Estee test stands. I heen proposed or programmed to receive a test stand installations at the following there hames may furnish jet engine, field a. Largon Air Peres Hariagac M655-6

80


My Centile Af Depots Subs Min of Conf, Deplementation of Jet Fng Fld Maint

153

- b. Grarge Air Perce Base, TAC c. Dover Air Perce Bases, MATS d. McDuire Air Perce Base, MATS c. Oriffic Air Perce Base, AMC
- So It is apparent that the Shaw-Estes test stand program has languished due to the lack of guidance and coordination between communis. Each Command has submitted its individual requirements; and the sum total is most likely in amoon to the total Air Perce requirements. This becomes a particularly confused problem when a large number of termant organizations are to be supported. Another facet of the problem of total USAF support is the presence of a large number of ANO jet squadrons. These ANO aircreaft must also be supported, and it is doubtful ANO support was considered in establishing commund-wide test stand requirements. It appears that Headquarters, USAF, should formulate the total USAF Shaw-Free test stand requirement, after receiving the requirements of each USAF Command, including the ANO. Such action would reduce costly duplications and provide a more thorough support program. vide a more thorough support programs
- 6. With reference paragraph 16, Inclosure #1, the factors for computation of OCAMA run-up stand requirements are not as agreed upon by the conference. The factors used by this Command to compute requirements were as follows:
- a. On those stations belonging to ATC, the field maintenance activity will be provided one (1) control house and one (1) dolly, with the Pighter-Interceptor Squadron or squadrons receiving one (1) dolly each.
- b. On these bases where APC Pighter-Interceptor Squadrons are temants, the Pighter-Inteceptor Squadron will be provided one (1) control house and one (1) dolly.
- es Per these Pighter-Interceptor Squ drons scheduled to denley, one (1) control house and one (1) delly will be provided.
- 7. It is this Command's intention to have a jet engine run-up empetility either operated solely by the Pighter-Interceptor Squadron, or operated by the field maintenance organisation, and evailable for use by the Pighter-Interceptor Squadron. In addition, certain field maintenance activities will be able to accomplish minor repair using the CCAMA reh-up stand rather than wait the 18 to 24 months for a Shaw-Estes facility.
- 6. This Command consurs in the distribution of OCAMA stands presently delivered. We recommend that the station list for the assignment of 50 OCAMA stands now being manufactured by amended to delete Oxnard and in its place add the 518th Materiel Equadron, Miagra Air Porce Base. Also, we request that the number of dellies to be shipped to Great Falls AFB and Sectt AFB be reduced to one each.
- 9. To complete this Command's requirements for CCAMA stands, in view of the criteria outlined in paragraph 6a, b, and c we recommend that previous lists of ATC stations proposed to receive these stands be voided and that

M655-7

3

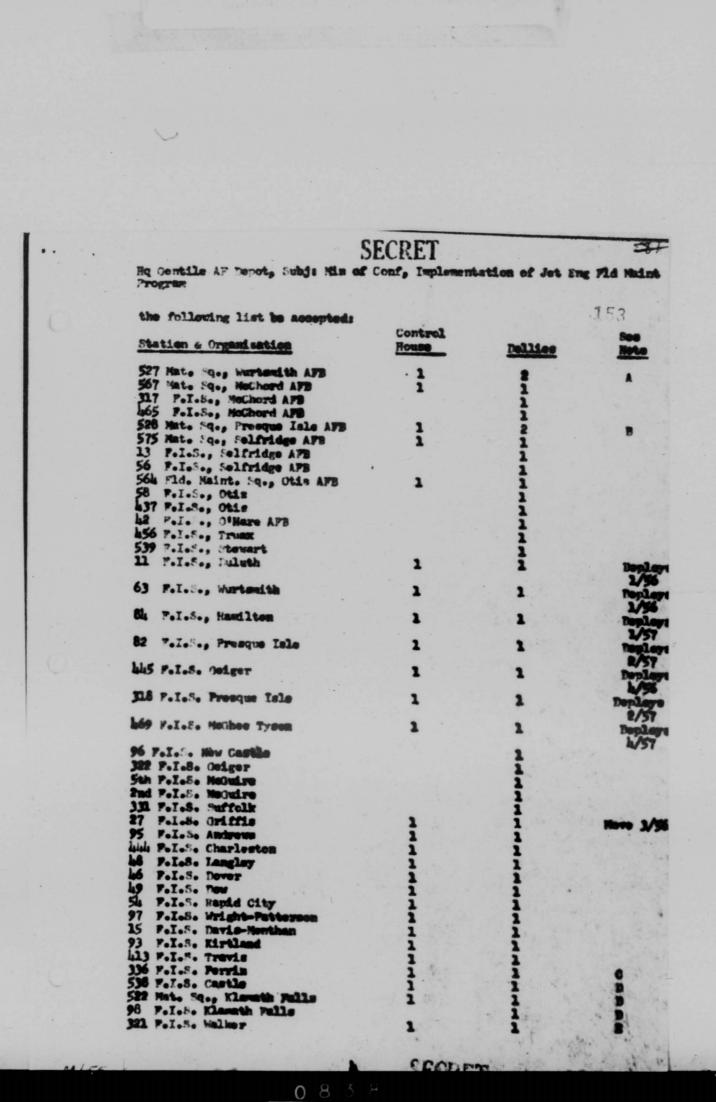

Hq Gent le AT Depot, Sub: Sin of conf, Inclementation of Jet on Tld Saint

Station - Organisation	Control Fouse	ollies	liote
329 F.I Griffis	1	1	153
190 W.I Oriffis 535 Wate q., Marquette	1	1	2
327 Jose Marquette 536 Mat. q., Minot	1	1	6
324 Fele Minot 540 Mat. 9., Glasgow	1	1	
302 Feles. Lockbourns	1	1	9
541 Mat. de, Benzie Co. 304 Felis Pertland	1	1	H F
303 F.T.S. Griffis		1	9
Total	34	56	


10. As you will note in maragraph 9, many AC and The bases are listed where this Command will operate tennant lighter-Interceptor quadrons mequiring a jet engine run-up capability. These same stations have received, or have been programmed (or proposed) to receive CCMM run-up stands for the land-lord organizations. These land-lord organizations are in cost cases a wing compliment. Hence it is doubtful that one run-up facility operated by a land-lord base will accomplate all jet engine run-up requirements. In addition, this Command has been advised by SAC and SAC that in the event their wings deploys a major portion of the field support personnel and equipment will also deploy. These are the basic reasons why this Command has established an additional tennant requirement (at such stations) for jet engine run-up capabilities within the tennant ACC righter-Intercentor Squadrons.

11. Pequest that all run-up stand equipment shipped to tensent *TO organisations be conspicuously marked to indicate the ultimate organisation of assignment. This will preclude a run-up stand being detained at base level when it is intended for a termant Fighter-Interceptor a cadron.

liote :

- A. The second dolly to be assi med to the 7hth FIS upon return from overseas 2/56.
- B. The second dolly to 'e assigned to the 335th FI when moved from Geiger 3/57.
- C. list required prior to 2/56.
- No Not required prior to 3/56.
- E. Not required prior to 1/56.
- P. Not required prior to 1/57.

M655-9

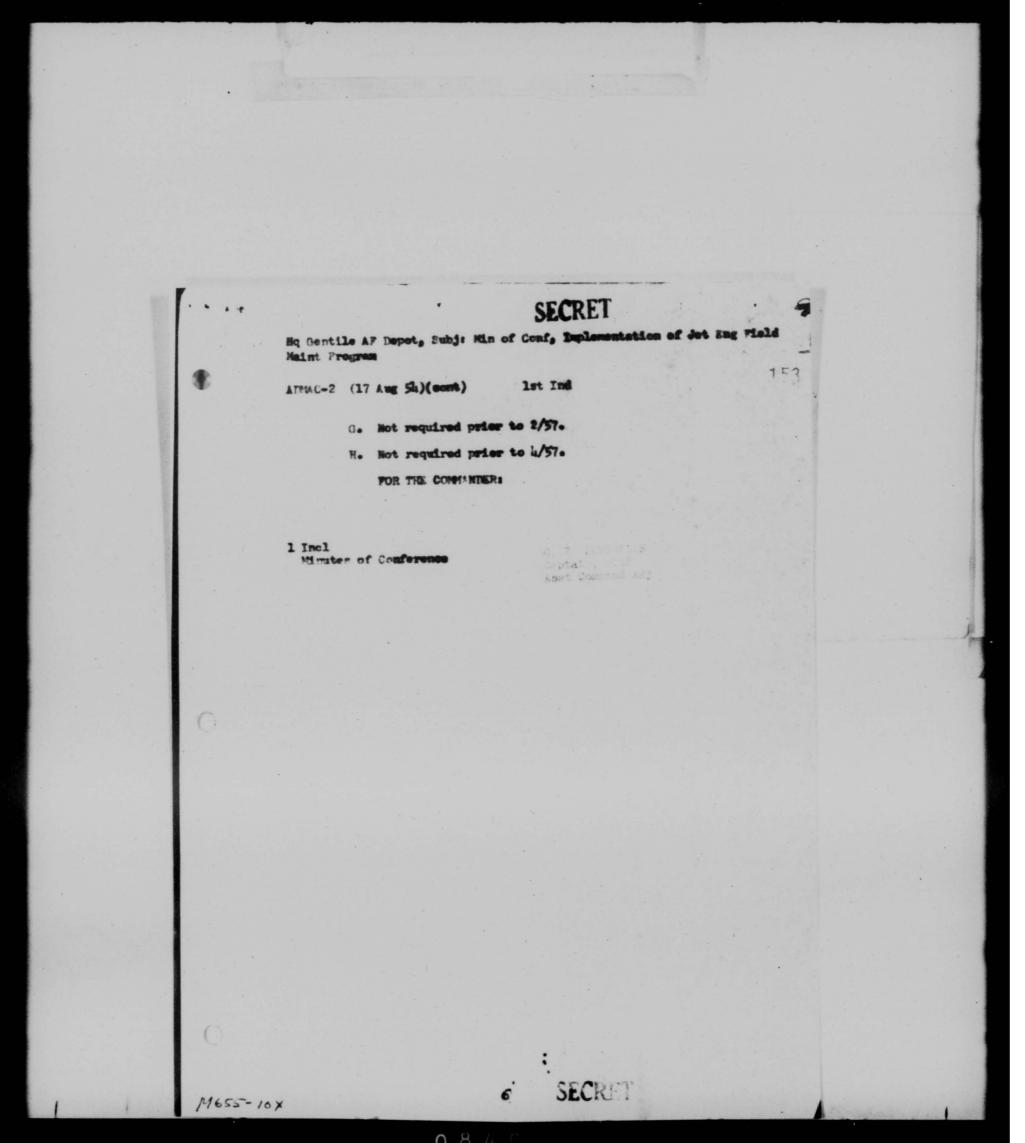

SASRDE

30 Nov 54

SUBJECT: Aircraft Engine Reporting Service Test - RCS-2AMC-A19


TO: Commander
Air Defense Command
Ent Air Force Base
Colorado Springs, Colorado

- 1. Forwarded herewith are copies of the quantitative and intransit report of engine distribution for the J-48 engine as reported under subject procedure. Your Headquarters has been added to the distribution list of this report.
- 2. Since 20 September 1954, the implementation date for the J-48, all except 72 engines have been located and entered into the system. Continued effort is and will be exerted until all engines have been located by serial number.
- 3. As a note of explanation, the report is broken out by engine configuration. In order to obtain the total number of spare engines in the system, the "total spares" and the "intransit" columns must be added. Likewise, in order to obtain a complete inventory of J-48 engines in the system the total spares, intransit, installed and lost columns must be totaled.
- 4. In order to provide for a more equitable distribution of engines, Headquarters, Strategic Air Command, has established operating levels for R 4360-41/41A/53 engine bases and this depot has been providing engines for the past several months based upon this level and utilizing reports obtained from subject system. This automatic supply system has alleviated the requirement for the AF Form 713 "Allocation" Report. It is felt that a like system could be applied to the J-48 engine, contingent upon concurrence of your Headquarters. Levels should be based upon Flyaway kit and normal peacetims operating requirements.
- 5. It is, therefore, requested your Headquarters determine the quantity of engines necessary to be on hand at all times at each Base or location under your Command in support of the F-940 aircraft and advise this depot at an early date.

FOR THE COMMANDER:

l Incl: Subj Rept Parts I & II for Jl8P7, JL8P5 & JL8P5A engines

H. R. LINDSEY
Deputy Chief
Deputy for Romts & Distr

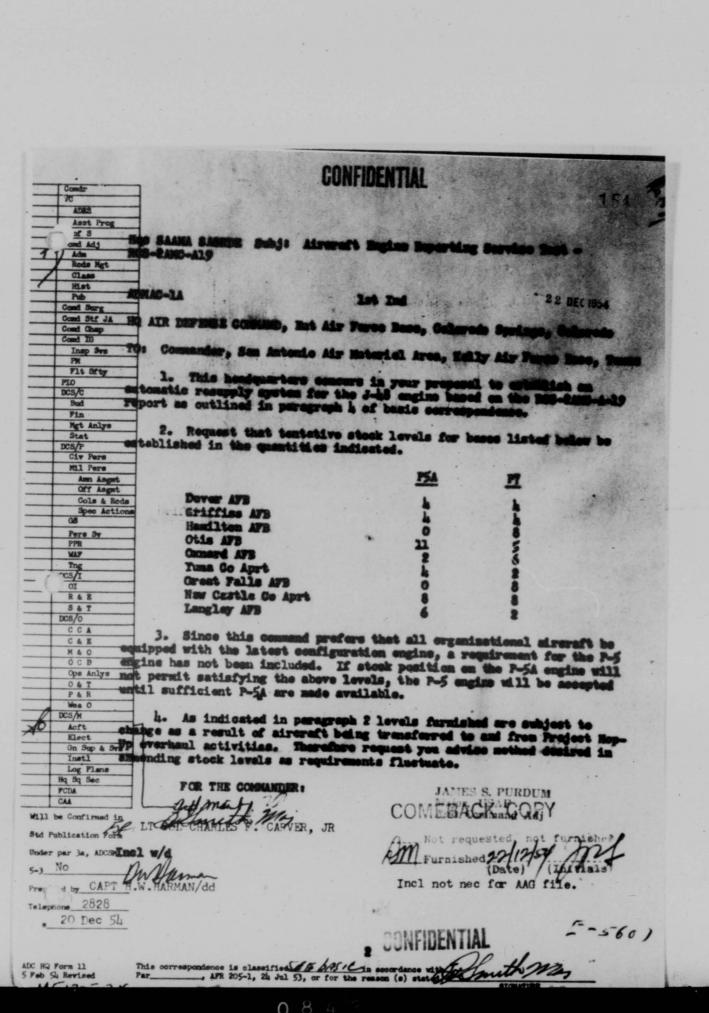

CONFIDENTIAL

COPY

ADMAC

20 September 1954

SUBJECT: (Unclassified) J-47GE-33 Engine Summary

TO: Command

Central Air Defense Force . Grandview Air Force Base, Mo.

- 1. The following information is submitted in answer to your message, CDM 6972, dated 31 August 54:
- a. I dispatched a message (ADMAC-2 1353) on 3 August to the Commander, Sacramento Air Materiel Area, with an information copy to the Commander, Oklahoma City Air Materiel Area, to determine the technical support status of these new J-47GM-33 engines. (See Inclosure No. 1).
- b. On 9 Aug 54, I received a reply from the Commander, Sacramento Air Materiel Area. (See Inclosure No. 2). This reply was discouraging, as it adds up to a situation that is not unusual these days; i.e., new equipments are often delivered to the field long before technical publications and logistics support items are available to the user.
- 2. I addressed the action copy of my message to Brigadier General Hofley, the Commander, Sacramento Air Materiel Area in an effort to put his Air Materiel Area in the business of insuring complete support of his product, the F-86D. Air Materiel Command property class decentralization complicates the overall logistics support of our aircraft and lends to situations where the prime aircraft Air Materiel Area may not know the support status of equipments used in their products. I want the prime aircraft depot to more closely scrutinize such details that have been previously overlooked. This J-47GE-33 engine situation is a good example.
- 3. We in Headquarters Air Defense Command knew nothing of this situation until F-86D's were delivered with J-47GE-33 engines installed. We had been advised that J-47GE-33 engines were to be installed in new production F-86D's starting in February 1955.

CONFIDENTIAL

COMPADENTIAL

200

ADMAC Subject: (Unclassified) J-47GE-33 Engine Surmary

However, it appears that the present installation of these engines in F-86D's "jumped the gun," so to speak. We are continuing to pressure Headquarters Oklahoma City Air Materiel Area and Headquarters Sacramento Air Materiel Area into a shorter period of void, so far as technical publications and engine spare parts are concerned. However, the supply status of complete engine spares for these new engines is good at the present time.

4. To insure that as much information as possible was available to the Air Defense Forces, I had a letter prepared, subject: Installation of J-47GE-33 and J-47GE-17B Engines in F-36D aircraft, dated 23 Aug 54. This letter contains all the information known and available from contractor sources to date on the new engine.

5. We will immediately forward new information as soon as it is made available to us.

BY ORDER OF THE COMMANDER:

2 Incls
1. Msg Hq ADC,
ADMAC-2 1353,
3 Aug 54
2. Msg Hq SMANA,
SMMTAA 1090,

MARSHALL S. ROTH Brigadier General, USAF Deputy Chief of Staff, Materiel

2

COPY Easy reading copy made

From: COMMANDER, ADC

28 Oct. 1954

To: COMMANDER, EADF, STEWART AFB, NEWBURGH, N. Y.
COMMANDER, WADF, HAMILTON AFB, HAMILTON, CALIF
COMMANDER, CADF, GRANDVIEW AFB, GRANDVIEW, MO
COMMANDER, 4750TH AIR DEFENSE WING (WEAPONS)
YUMA COUNTY AIRPORT, YUMA, ARIZONA

(UNCLASSIFIED). ADMAC-2A2 . Subject is Preservation of Engines for Overhauk. This message in two parts. Part I. Information furnished by Air Force Plant Representatives, General Electric Company, indicates provisions of Technical Order 2J-1-18 are not being complied with pertaining to the preservation of engines received for overhoul. Failure to comply with preservation requirements has resulted in the reported necessity for immediate represervation of about 50% of those engines recently received by the General Electric Company. In order to prevent unnecessary expenditures, resulting from deficiencies described, it is requested that the attention of all activities processing engine shipments be directed to the necessity for strict compliance with Technical Order 2J-1-18. Part II. Request the above information be disseminated to all activities under your Command jurisdiction as deemed necessary.

From: HQ ADC, ENT AFB, COLORADO SPRINGS, COLO 8 Nov 1954

To: COMMANDER, CADF, GRANDVIEW AFB, MO

> COMMANDER, 29TH AIR DIVISION, GREAT FALLS AFB, MONT DIG NORTON AFB, CALIFORNIA

(SECRET) ADMAC-5 1937 . Reference CADF message, Commander 884th, Classification SECRET, to General F. H. Smith and message, 29th Air Division DIG 3020302, Classification SECRET. Actions as indicated by inclosures hereto have been taken on the power problem experienced in above messages. The culmination of the unsatisfactory conditions expressed in these inclosed messages, letters and briefing notes resulted in certain modifications to the VGI as contained in the F-94C, F-86D and F-89D aircraft. Following is comment upon corrective procedures as instituted by 29th Air Division for correction of what were considered certain operational deficiencies. These will be treated subjectively by equipment. J-2. Certain of the corrective procedures instituted by the 29th Air Division are not correct in that they compound by mismanipulation of switches and aircraft breakers certain errors that could happen to the equipment through malfunction. Specifically, their local corrective action concerning the J2 gyro wherein they attempt to have the pilot phase the AC and DC into the instrument through the use of circuit breakers is worse and wrong. In the F-94C aircraft the action of the instrument inverter relays will prevent DC power

157

(SECRET) ADMAC-5 1937 .

being applied to the J2 compass system without AC power being available, therefore the J2 will have both AC and DC power applied simultaneously and there is no use for the pilot attempting to place the switch in normal after the indicator light goes out. The 29th Air Division should understand that the J2 compass system is in continual slow slave at all times during normal operation, after initial warm-up. The airborne procedure of pulling these gyro compass DC circuit breaker is correct, only if the pilot requires fast slave condition after aerobatic maneuvers. In the event of an inverter failure, or switching of instrument inverters, DC is automatically interrupted causing the J2 to go into fast slave condition, however, it is not necessary to wait the 3 to 7 minutes for the thermal relay to cool as it began to cool immediately after the last fast slave cycle was completed. VGI. As with the J2 compass, it is not necessary for the pilot to attempt to phase AC and DC into the VGI circuitry upon starting the aircraft. The DC drop has nothing to do with the so-called slow slaving action on the instrument (actually 29th Air Division should have said fast slave) as the slaving action and erect action is entirely an AC voltage function. In both the F-89D, F-86D and F-94C aircraft it is unnecessary to consider the circuit breaker as a switch for the operation of these instruments. On the F-94C and F-86D aircraft there are times that the pilot could damage the VGI system by improper manipulation of the DC circuit breaker.

SECRET

157

SECRET ADMAC-5 1937 .

On any and all of these gyro systems it should be considered that they are in a condition of slow slave during periods of normal operation. Slow slave calls for gravity electrolytic erection at all times during normal operation and when normal deviations have not exceeded zero degrees to three degrees. Fast slave conditions are automatically instituted when deviations for precessional errors have culminated in errors of over three degrees. Slow slave erects at a rate of around one degree per minute; fast slave erects at a rate of approximately 60 degrees per minute. Most modifications instituted as a result of unsatisfactory reports has corrected VGI circuitries for any discontinuities brought about by inverter changeover circuitry power interruptions or inverter failure. It is not known whether 29th Air Division performed their tests with modified or unmodified VGI systems, however this information will be obtained. Zero Reader. The Zero Reader Quick Erector, which governs fast or slow erection, is dependent on AC power only. Fast erection occurs only during the first two minutes that AC power is applied to the Zero Reader. Action of the thermal relay in this system prevents recycling of the Quick Brector, should there be a momentary power interruption as in the case of switching inverters. At any time the Quick Erector is cycling, putting the system into fast erection, the "Off" flag will appear on the face of the indicator.

3

SECRET

HEADQUARTERS
AIR MATERIEL COMMAND
Wright-Patterson Air Force Base
Ohio

7 50

udd

15 September 1954

SUBJECT: The Engine Manager Phase of the Weapons System Concept

TO: Commander, Air Defense Command Ent Air Force Base Colorado Springs, Colorado

- 1. The primary objective of the Weapons System Concept is to manage the Air Force inventory by making a "package" of a "Weapon" and all of its spares, and control each "package" separately. On the other hand, the primary objective of the Federal Catologing Program is to control the inventory by commodity classification, with no more than one stock number for one item of supply.
- 2. In an effort to achieve the basic objective of the Weapons System Concept, without violating the purpose or intent of the Federal Catologing Program, this Headquarters developed a proposed procedure which, once implemented, could be used as a testing grounds for the subject concept and as a base from which to expand the operation to other areas.
- 3. Basically the proposed procedure involves the use of management codes to relate all engine spares (02's), all fuel metering accessories (03-D), and all ignition accessories (03-H), to a specific engine model. A copy of the proposed procedure is attached for ready reference. The plan was presented in detail to personnel from AMC Depots and Major Commands at two conferences Western Zone activities met at Kelly Air Force Base on 3 and 4 August 1954, and Eastern Zone activities met at Olmsted Air Force Base on 26 and 27 August 1954. Reports on these conferences including recommendations submitted are attached.
- 4. If you concur with the proposed procedures as attached, request this Headquarters be advised. If not, request your recommendations for changes to the procedure, or proposed alternate procedures, be furnished this Headquarters. When submitting recommendations, it should be kept in mind that proposed changes must achieve the following objectives.

759

Ltr from MCS, Subj: "The Engine Manager Phase of the Wempons System Concept"

- a. Enable one point in the Air Force Supply System to have a knowledge of
 - (1) Materiel available to support a given end item.
 - (2) Materiel already consumed to support a given end
- b. Insofar as possible, prevent material procured for one end item being used to support another end item.
- c. Enable the central point responsible for a given end item to compute its requirements for that item.
- d. Enable one point in the Air Force Supply System to control the procurement of, and exercise distribution control over, a given component which may be used on several end items.
- 5. Request reply to this letter reach this Headquarters no later than 15 October 1954.

FOR THE COMMANDER:

F. J. DAU Brigadier General, USAF Director, Summly and Service

150

B/L from MCS AIR MATERIEL COMMAND, SUBJECT: The Engine Manager Phase of the Weapons System Concept

ADMAC (15 Sept. 1954)

1st Ind


3 Oct 51

HQ AIR DEFENSE COMMAND, Ent Air Force Base, Colorado Springs, Colorado


TO: Commander, Air Materiel Command, Wright-Patterson Air Force Base, Ohio


- 1. This Headquarters agrees in principle to the enginemanager phase of the weapons system concept provided it is limited
 at this time to the classes indicated and warehousing procedures
 are not revised. The number of common items in these particular
 classes, i.e., 02's, 03D and 03H, should not cause any great
 increase in workload at base supply. However, expansion of this
 procedure to other property classes such as the Fire Control System
 would place a greatly increased workload on each base supply.
- 2. It is felt that the proposed system should be incorporated in AFM 67-1 rather than as a separate publication.
- 3. This command has been advised that all bases will be mechanized from a base supply standpoint within the next 18 to 24 months. Obtaining consumption data by the weapons system concept could easily be a by-product of mechanization without increase in personnel strength. It is therefore recommended that expansion of the proposed system be withheld until such time as base mechanization has been fully implemented.


FOR THE COMMUDER:

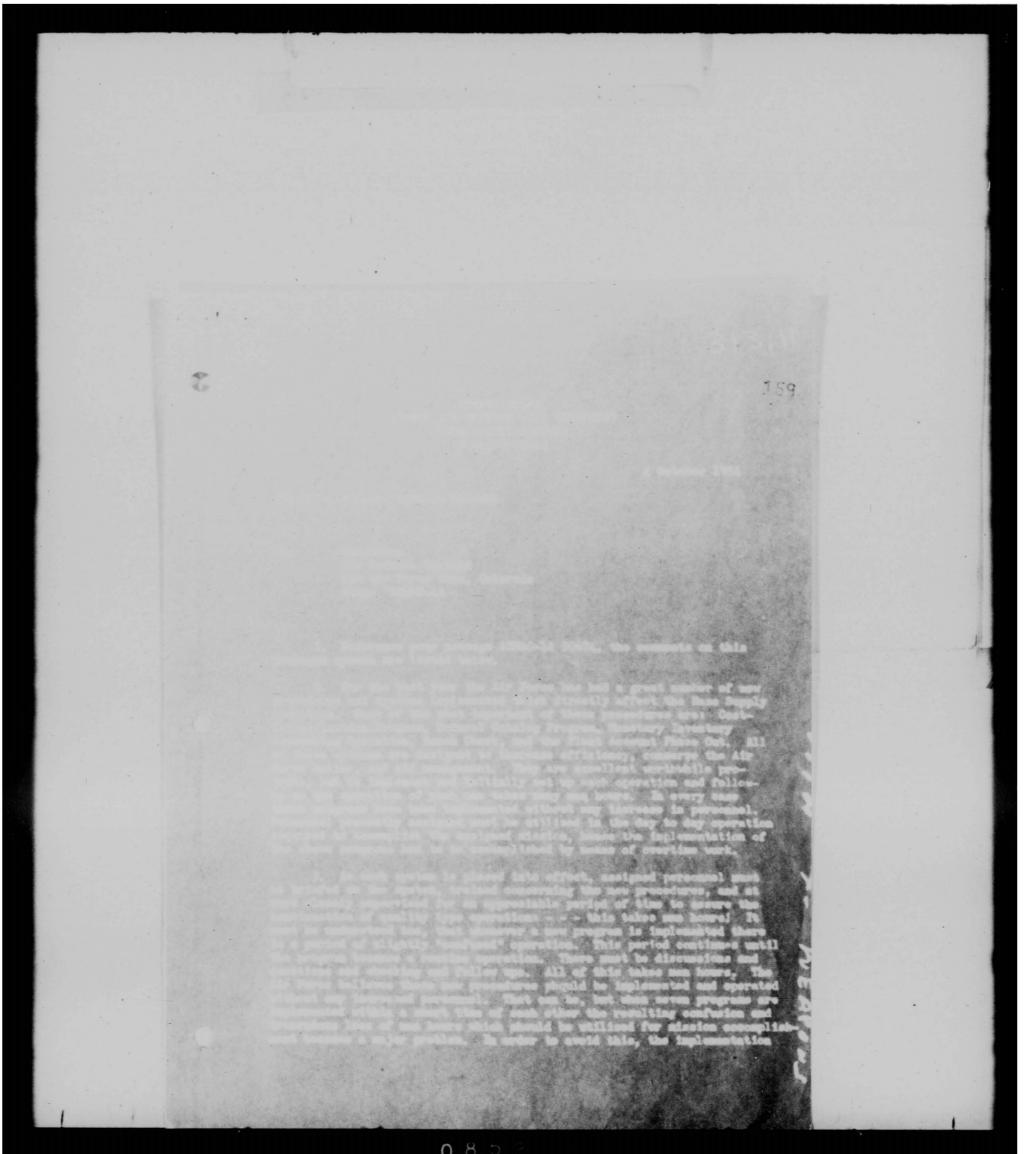


THIS PAGE IS DECLASSIFIED IAW EO 13526

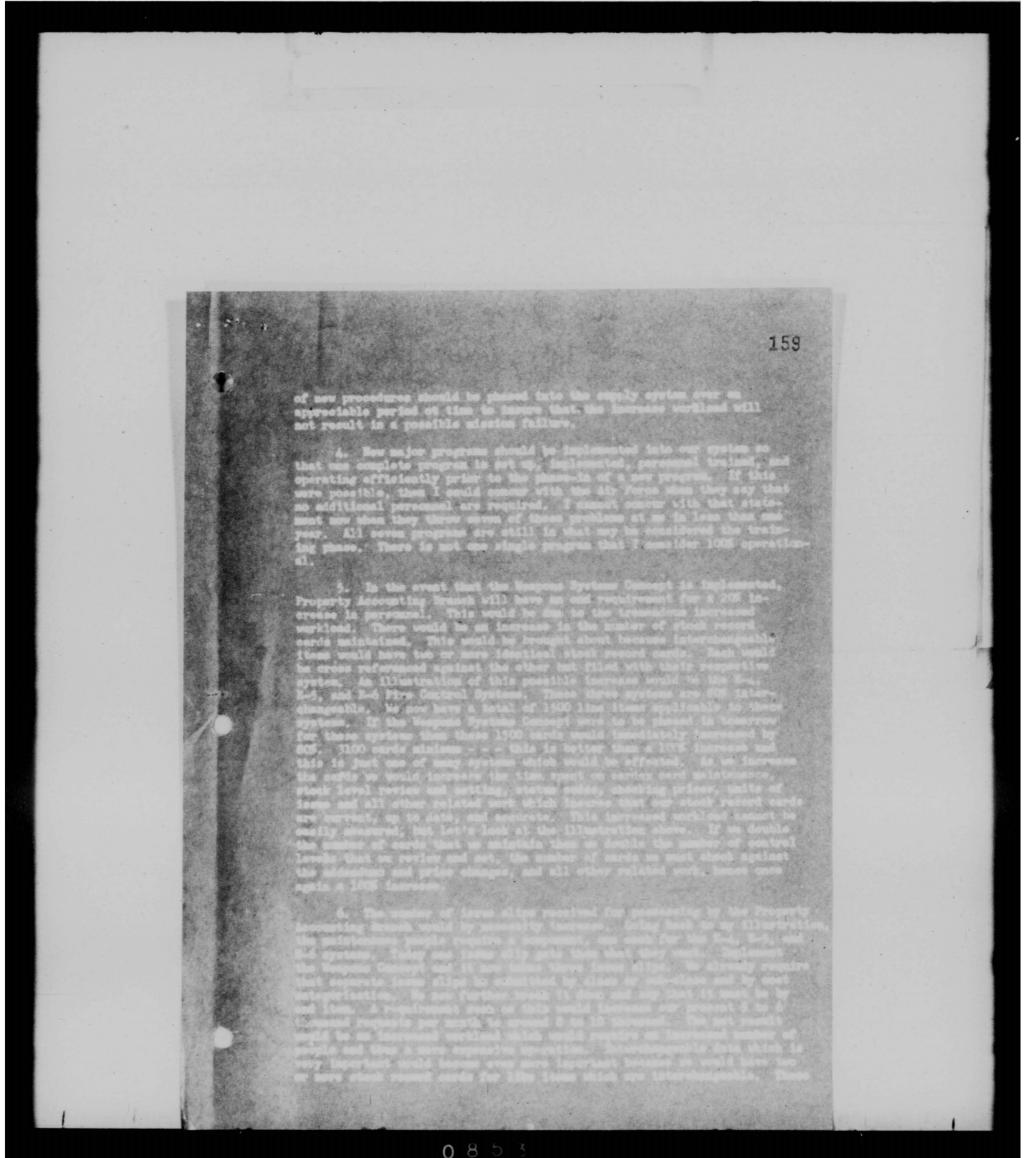

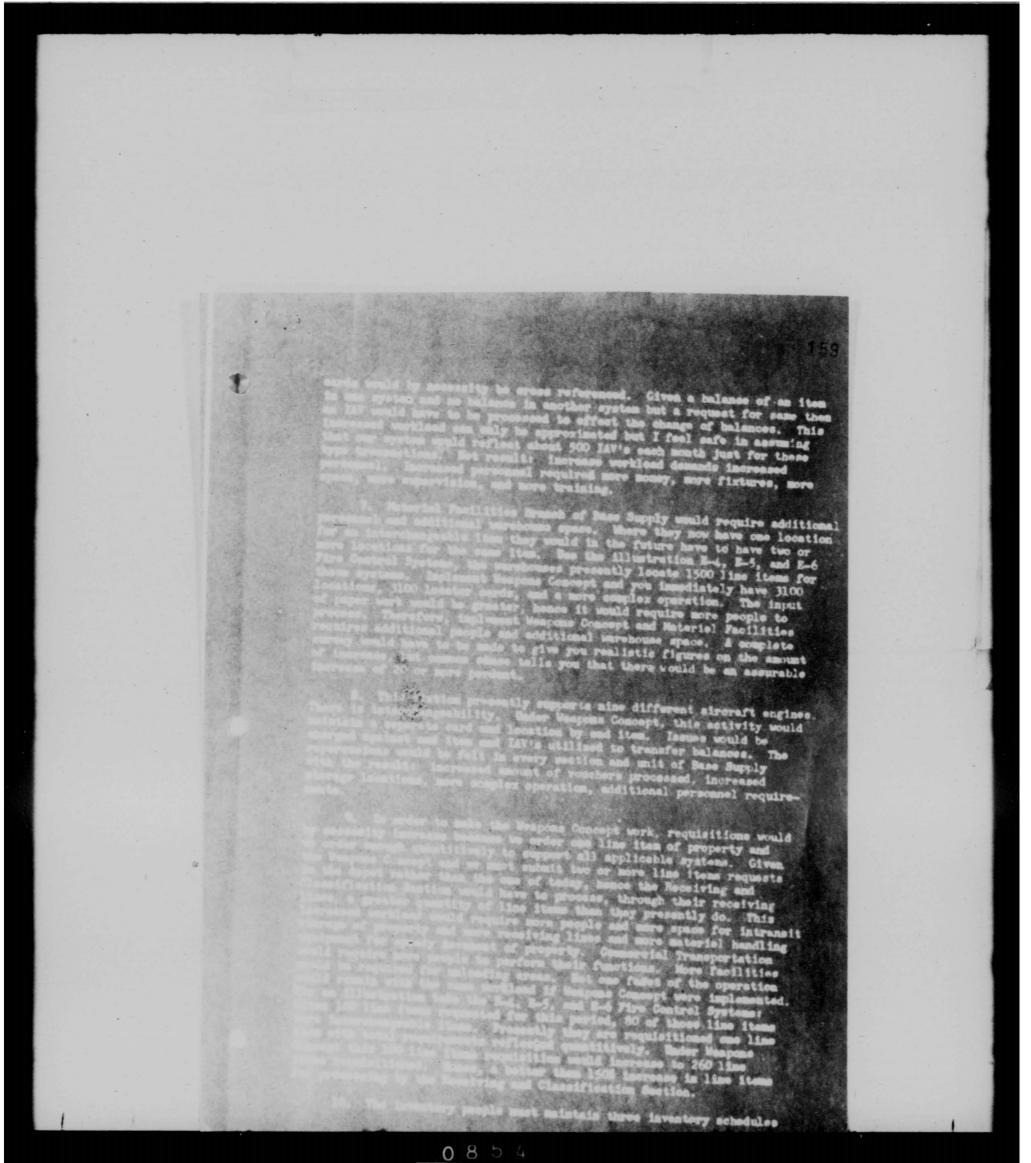


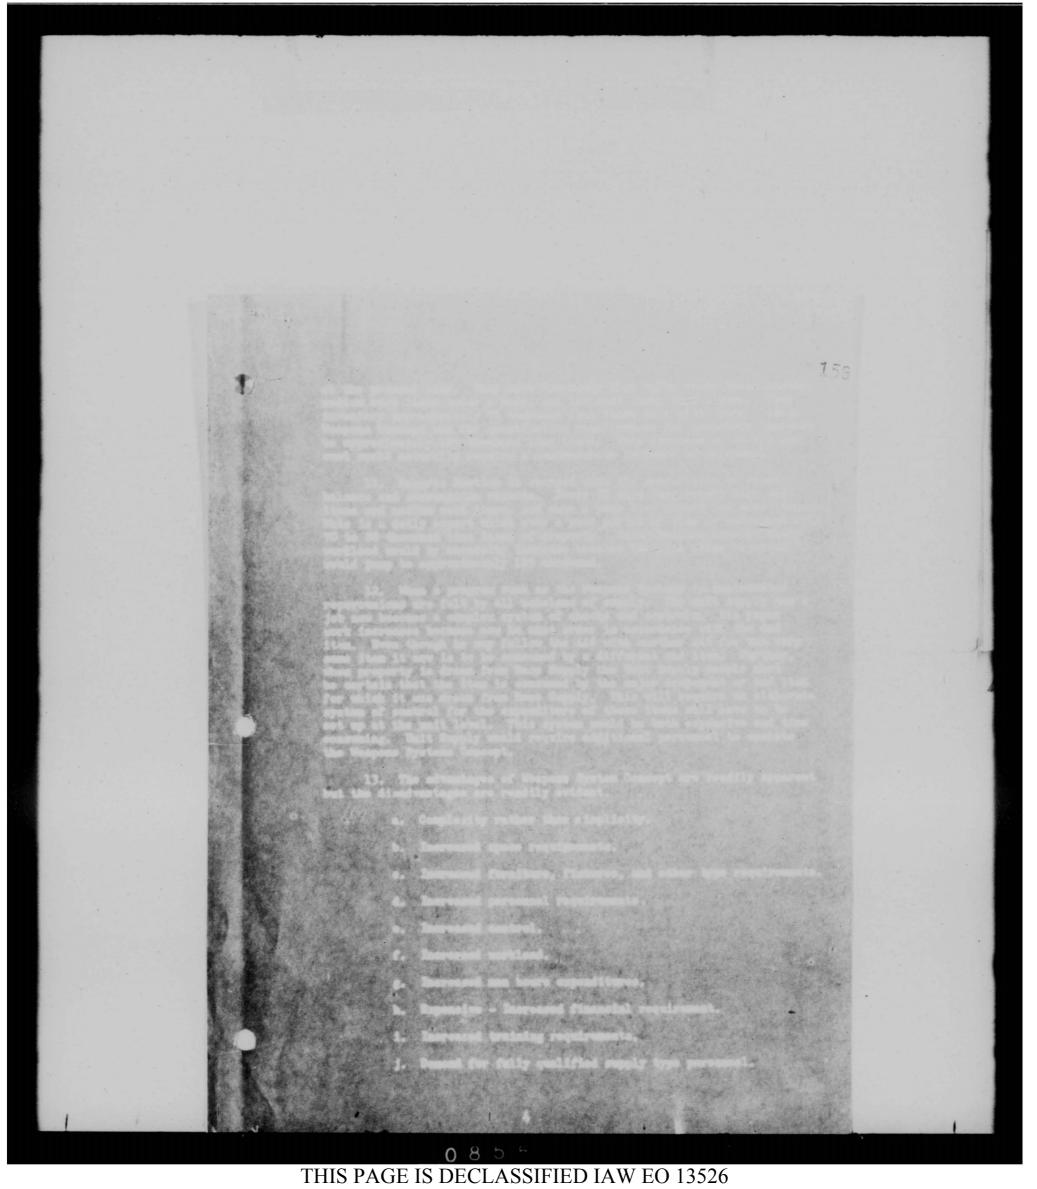



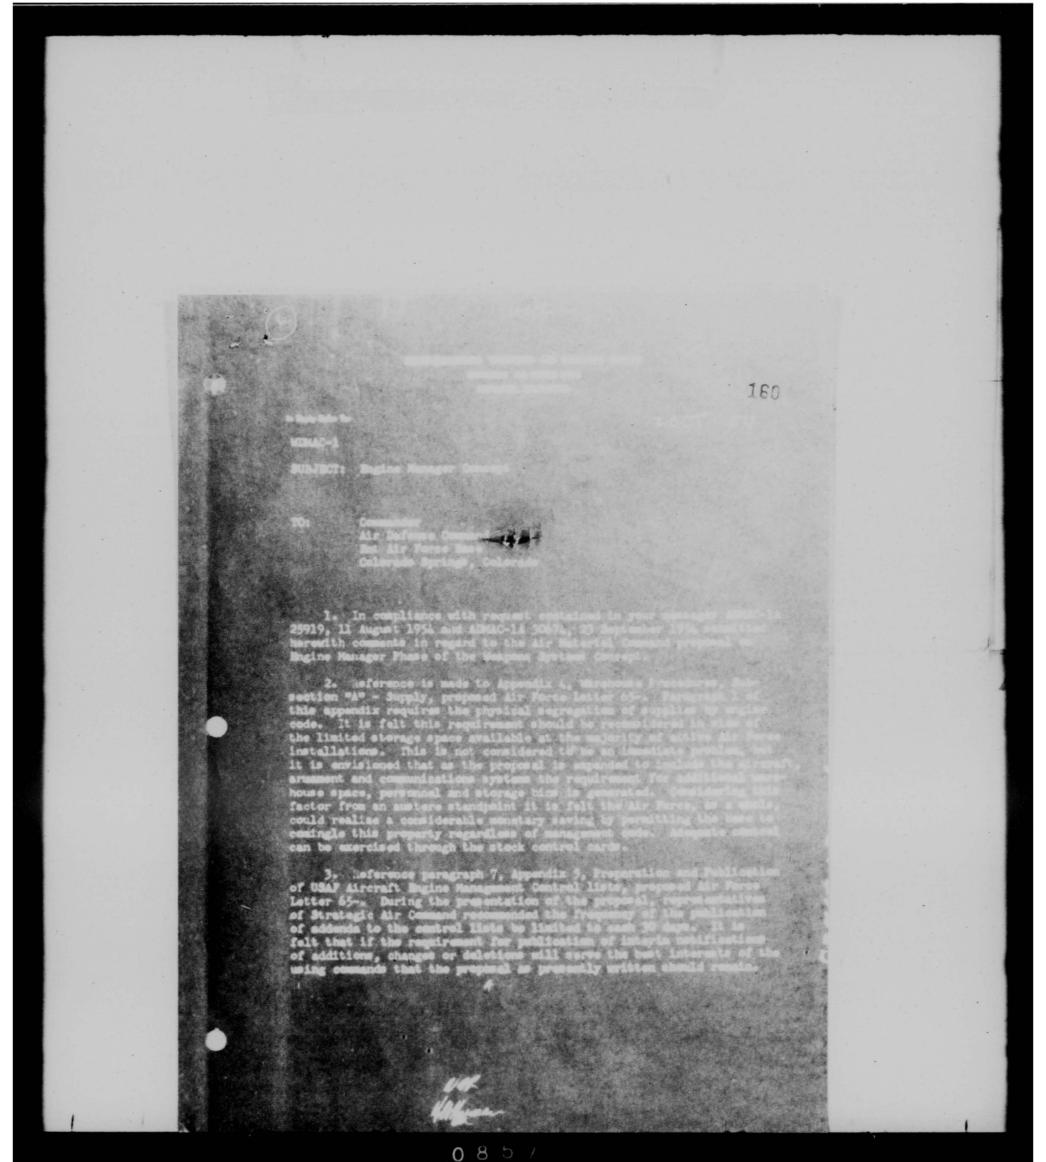

THIS PAGE IS DECLASSIFIED IAW EO 13526

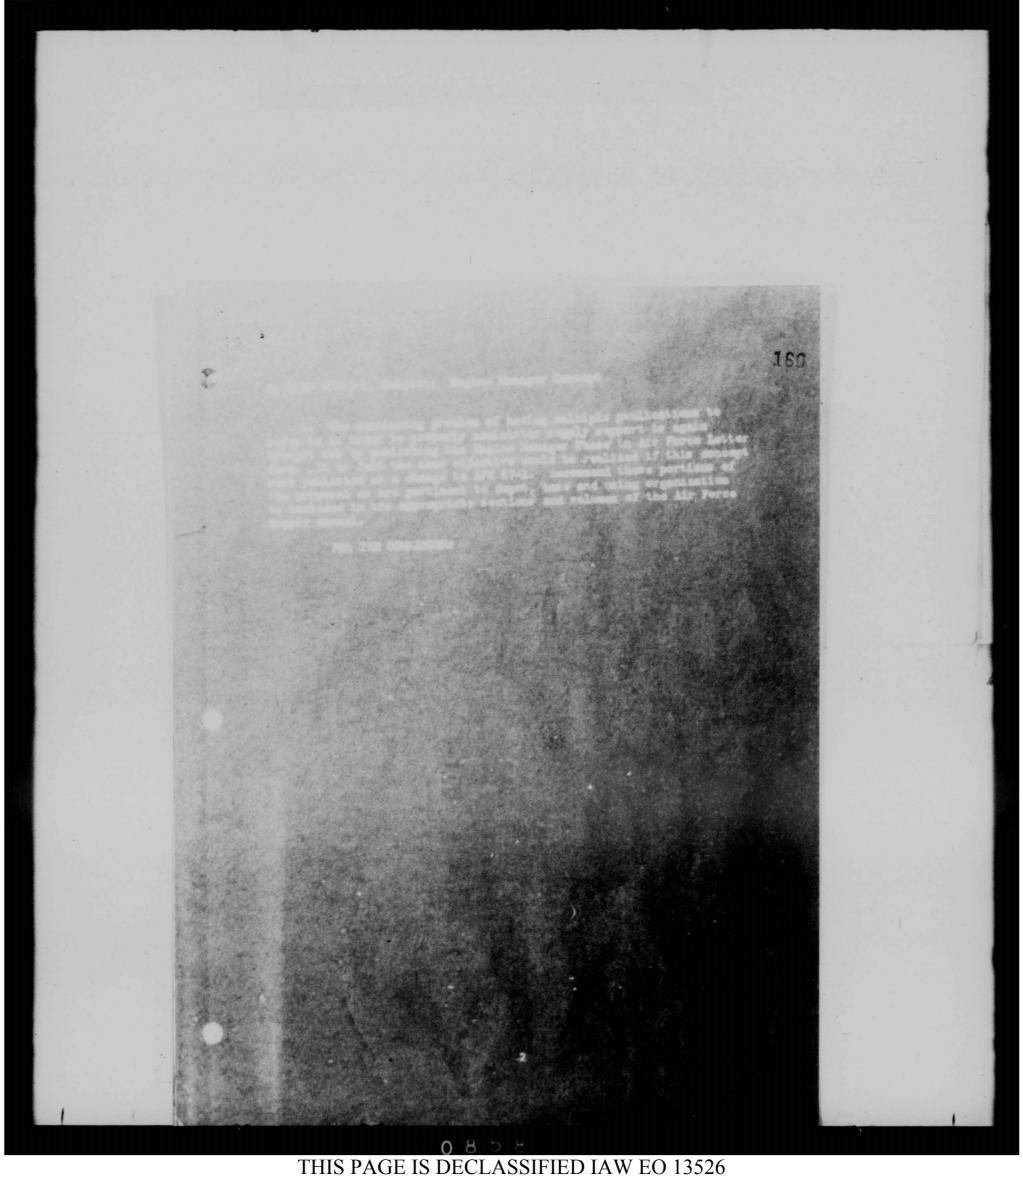

MNCL

HEADQUARTERS
CENTRAL AIR DEFENSE FORCE
GRANDVIEW AIR FORCE BASE
GRANDVIEW, MISSOURI

CDUC-1


SUBJECT: Engine Managers Concept

TO:


Commander Air Defense Command Ent Air Force Base Colorado Springs, Colorado

- 1. The objective of Engine Hanagers Concept, as written in AFL 65-Proposed and as outlined at a conference held at San Antonio Air Materiel Area, would group Class O2A, engines, Class O2, engine parts, Class O3B, carburetor and maintenance parts, Class O3H, ignition system. accessories and maintenance parts, under one code, designating a particular type engine, i.e., type Ju? engine would be identified by the code GA and also all Class O3B and O3H parts applicable to this particular engine. The code will follow the stock or part number. A fash will not be used following a number as the code will be used only to identify a type of engine but will not become a part of the stock or part number. The control of a particular type of engine will be placed at a designated "Engine Dapot" for both supply and maintenance. This would simplify requisitioning procedures and increase efficiency in that all engines, or O3B or O3H parts, pertaining thereto would be obtained from one supply point, the "Engine Dapot."
- 2. Under the Engine Managers Concept as outlined in AFL 65-Proposed, a very elaborate accounting system would be necessary. This concept would require a separate stock record card for the same item for each different engine code (different type engine) supported at a base; for example, AF-2352-80 currently is earrying 911 line items supporting nine (9) different type engines. Under the Engine Managers Concept, it would require, at a maximum, 5199 stock record cards where only 911 is presently maintained. Further, if an item is required for an engine but there is no stock for that particular code but the same item is available under a different code, an inventory adjustment decomment must be precessed in order that proper charge can be made against the appropriate engine code. All parts and material must be charged to the particular engine code for which they are used, including beach stock items.
- 3. Storage of property, as required under this Engine Hanagers Concept, requires that property must be stored by engine code rather than by a property class, which in the case of AF-2352-80 where nine (9) different


NAK

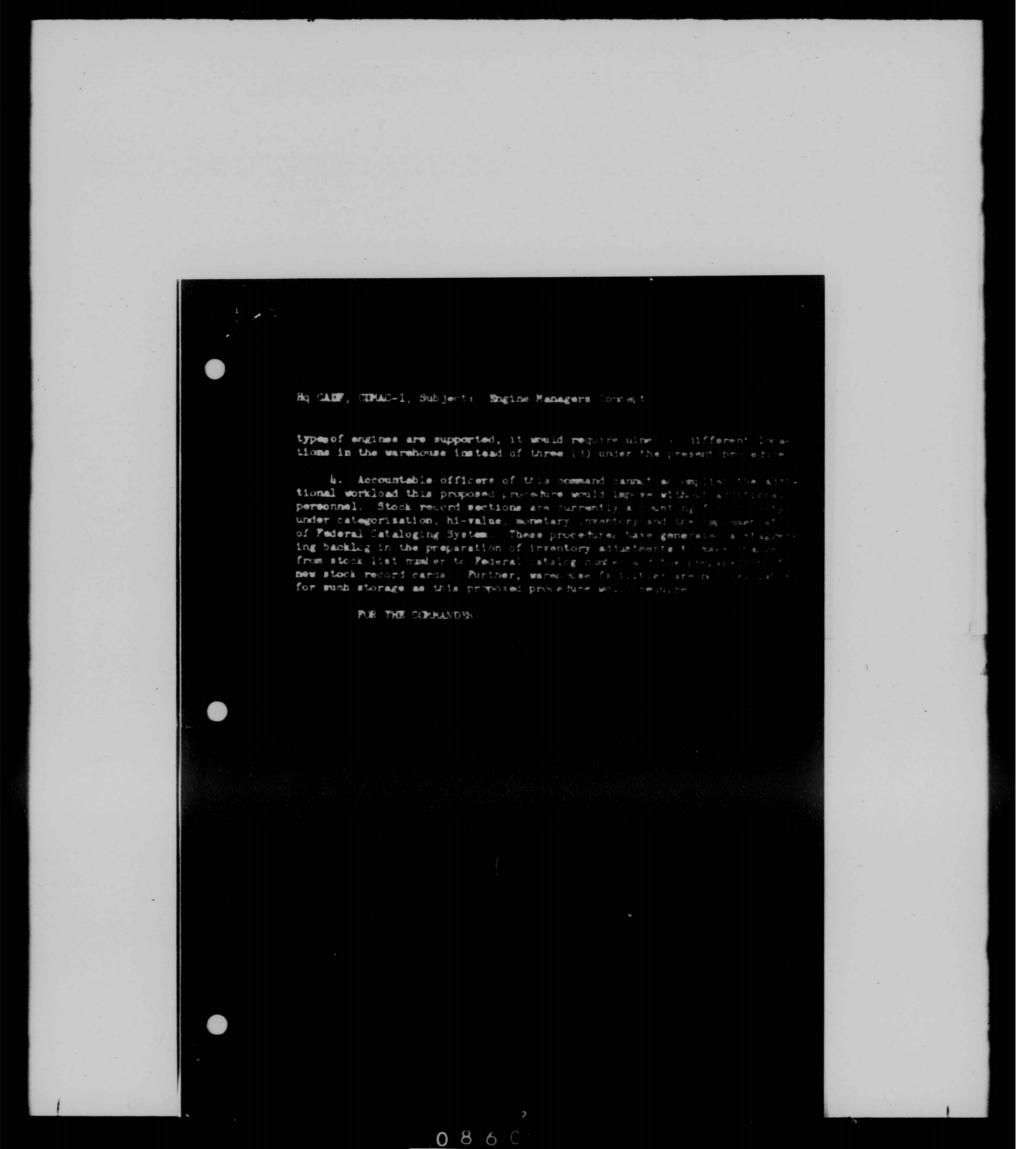


THIS PAGE IS DECLASSIFIED IAW EO 13526

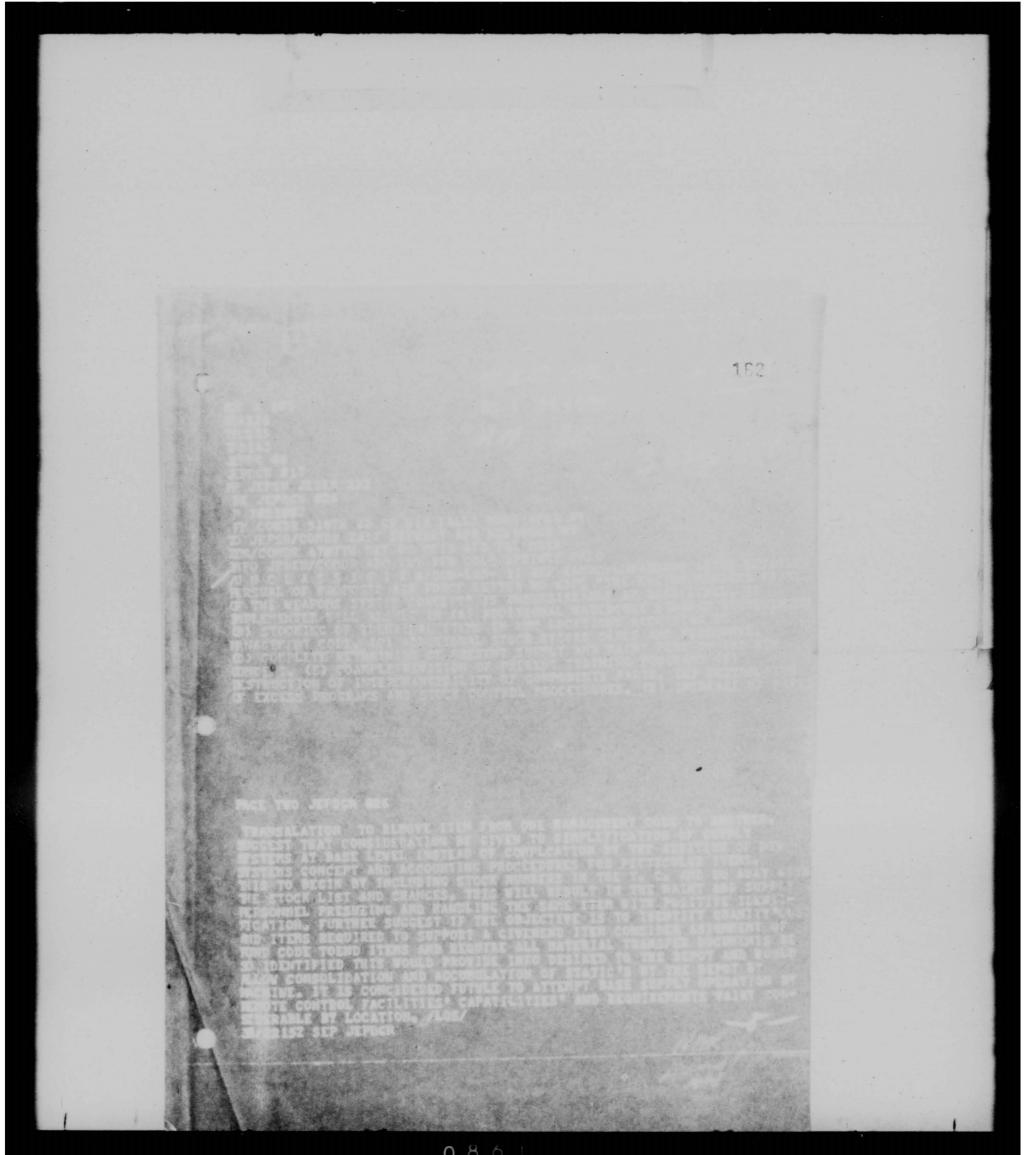

THIS PAGE IS DECLASSIFIED IAW EO 13526

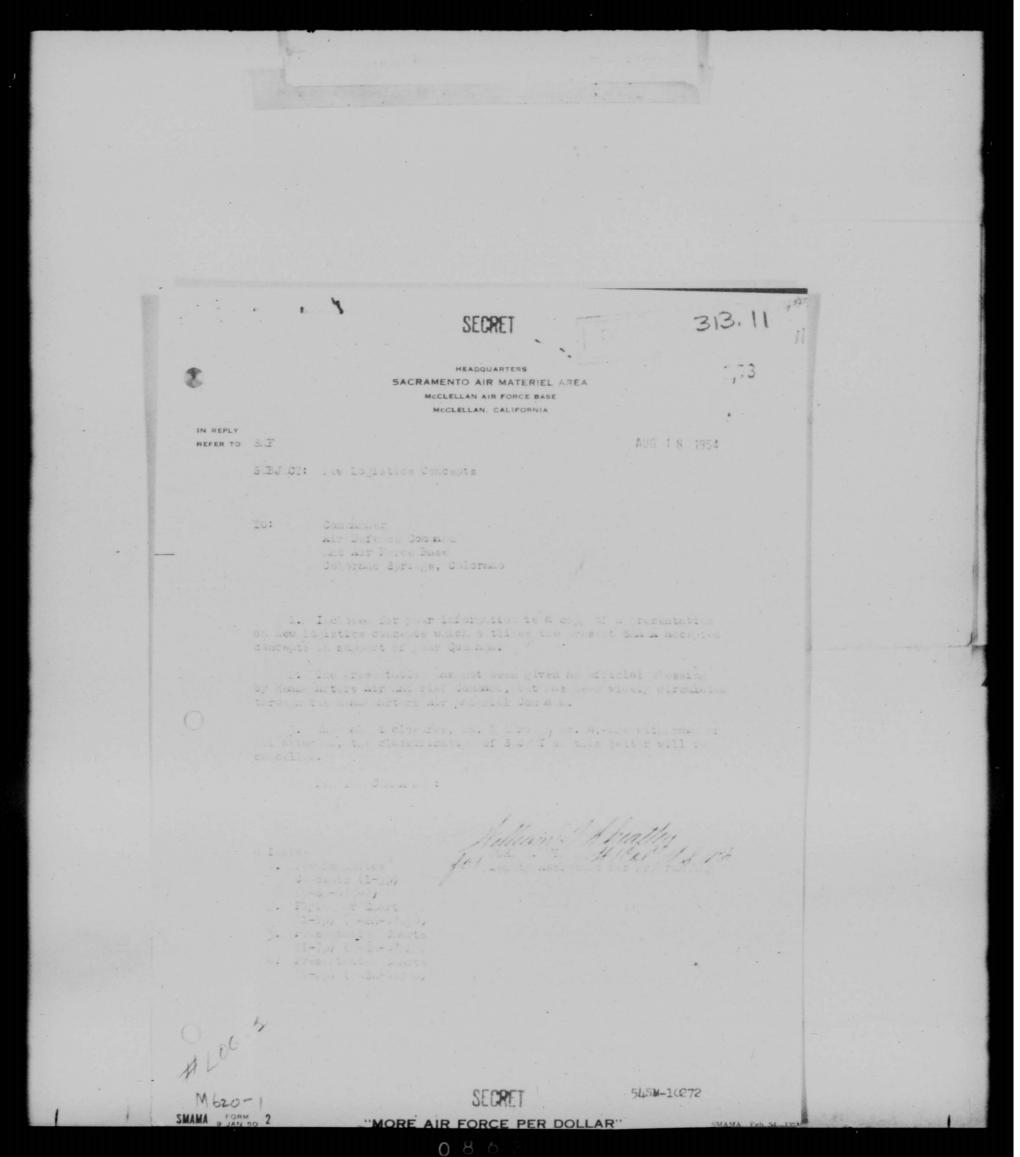



Presentation given by Mr. Frank L. Grow, Chief, Plans Division, Assistant for Programming, SMAMA, McClellan AFB, California.

SPECIAL REFERENCES 8

At the AMC Commanders' Conference of 26 Apr 54, the Commanders were given a presentation by General Brown on the "New Look" and new concepts of logistics. At this conference the Commanders were requested to study these new concepts of logistics as might apply specifically to their command.

On 24 May 54, General Rawlings gave a talk to the USAF Commanders and forwarded copies of his talk to each AMC Commander. This speech indicated a need for all AMC Commanders to give particular attention to the new concepts of logistics that are presently developing.

What I am to present to you in this presentation will represent the initial work of SMAMA in studying the application of new concepts of logistics to the mission of SMAMA.

IN TRODUCTION :

1 | ML-1-2

In the past the Air Force has planned its wartime operations around what might be called the conventional concept or one that has been built up by experience factors from previous conflicts that this country participated in. This concept generally concluded that the buildup phase would start on E-Day and would be one of holding actions by United States forces until our active forces and industrial capability could be built up. The initial phase would further be one of deployment and getting ready for what might be termed the decisive phase.

The buildup phase was to be followed by a decisive phase which was considered to be the time when large scale air, sea, and land action would take place. This decisive phase was generally planned to start about D+18 months and continue for at least 12 months. The decisive phase was then to be followed by the exploitation phase which was a follow-up action to get the greatest advantages from the decisive phase.

The concepts under which SMAMA has studied its future mission are that the initial or buildur phase is a phase that we are in today. It is a phase where we prepare for D-Day and take all actions that are necessary to carry ut a war prior to D-Day or declaration of hostalities. Thus, SMAMA has concluded that we are at the present time in our build-up phase and that the present time is the only time that we will have for build-up or for preparation for the mission we will have to accomplish immediately on D-Day. The decisive phase will begin with the declaration of hostilities, or on D-Day. It will be followed immediately by large scale air attacks on military and industrial installations with all types of weapons. The jecisive phase may decide the outcome of the war within a matter of weeks. The decisive phase is generally assumed to be from E-Day to E+180 days. The


Secret

549M-088LT


```
A. The defensive type forces with will be in defense if this your ry
3. The strategir forces which would be seployed against the USER to destroy the war making potential of the nation.
ASSUMPTIONS Reference over USAS WEN
       The assumptions was by SMAMA and their studies to
 Reference Chart No.
     A. Decision Phase
             la The delisive phase will be from 90 - 180 days in lengths
             . The principal weapons will be determine and strategic types
      B. Production efforts foring peacetime with constrain on Telensis strategic types. This is term of the constraint WPM.
and strategic types. This is been
       C. Frederica efforts will him follow / 10 Car from belowive as a
D. Support efforts on E. Day to Bea80 will be primarily for strategic and defensive weapons. Support efforts from Ee180 on will be principally
for tactical weapons.
       E. Weapone to be used will be atomic thermorphism and conventional
FACTS: (Reference Chart No. 3.
       The facts which SMAMA considers particularly applicable as affecting
SMAMA are as follows:
A. SMANA is prime for a major portion of the defensive aircraft types. Air Defense Command presently uses F-86D, F-94C, and F-89 aircraft. SMANA primes the F-86D and F-94C. These two aircraft comprise approximately
63.7% of the aircraft which are programmed for assignment to ADC as of 1 Jul 56. The F-89, primed at OOAMA, will make up approximately 15.3% of the ADC aircraft inventory as of 1 Jul 56.
B. 3 AMA is prime for tactical types which are presently used. These similar the F 26F and H. 3 AMA is also some for a tactical type that is scheduled for one in the future, the F-100C.
```


183 MAKA - - bajor at Force depot which employs approximately contains to job the degree which the ADC mission and the mission of contains with affect operations at SMANA, we have prepared a chart on the hours for the types of aircraft that are printed at SMANA, based a ISAF WPM stating. In State Reference Flying Hour Charts) A the lines to the desired are so that are in support of deploying forms to the start the start to the start the start to the start the CONCLUSIONS | Reference Chart No. 44 In these assumptions and farts which I have shown you, we have generally condition he following thinger A. M.M.A should prepare for an all-out effort to support ADC F-86g and F-outs. I delieve that the assumptions and facts presented previously well apport this denie abon. Of the forces which SMAMA will be supporting as of D-Dsy the defensive forces represents the major increment, SMAMA does not have prime aircraft which will be used by the Strategic Air Command in sarrying of their mission during the decisive phase. Since SMAMA primes approximately 85.7% of the ADC aircraft, we feel that it is our duty to insure support of these sircraft so that the decisive phase may be decisive. B. The SMAMA reporte for a transition to support the Tactical Also Command after 1980. This conclusion is a theoretical one based on the conclusion that the decisive phase will have terminated within 180 days following E Days. This is of importance to SMAMA because the aircraft which we prime are used by TAC and are different aircraft than those used by ADC for the decisive phase. We generally conclude that during this period we would be supporting F S6F and H and F=100C aircraft. Conclusions seached in regard to Maintenance ares 1. That MAMA should concentrate on support of ADC and that this support will include repair of battle damage during the period E to E+180. 11620-4

New Logistics Concepts (Conted) Secret The ADC will need all the aircraft they can get their hands on. Aircraft that are damaged will be required for use as soon as possible, and during this period the ADC will be concentrating on operations. They will have little time and few people to use in repairing sircraft that are damaged to the extent that they are not flyable. That MAMA should emphasize the training of traveling maintennance teams to express the com at 1. O.s. most combat organizations are presently operating under peacetime type T. O.s and will be under great stress to maintain the programmed flying hour level with the personnel that they have. They will need to use all of their personnel in operations and on immediate type maintenance. EMAMA feels that it is part of our mission. In prime depot for F 85D and F 940 to provide maintenance to the extent possible as required and needed by the ADC during the decisive phase. depot IRAN lines to the users immediately if possible or by E+30. We conclude that any aircraft that are not from down will be immediately returned if they are flyable, and that we will reassemble aircraft that have not been torn down to an extended degree. Aircraft that are torn down will continue on through the IRAN lines on a stepped up basis by putting the depot or an increased weekly was program. The priority support of 14-11 a types may be expected starting at Exist. teing one of organizing the ADC and the allow processy, our mission decisive there. that we have a complished this to a gleat degree in our overseas monitoring where we handle requisit no received for the Far Day in a very speeded name. We still be a improvements to make within a so in every speeded system in proliting material that the effect IMAMA. and the they had be passioned to dessite to a contrast endition given y beneat Stown of the Mr. Consent Conference trough out the point hat to approve them will be made to the contrast proceed in the event be required to prove that the contrast the contrast that if these reserves are to be required to prove that the contrast that if these reserves are to be required to prove that the contrast that if these reserves are to be required to prove that the contrast that if these reserves are to be required to prove that refer to the contrast to the contrast that if these reserves are to be required to the contrast that if the contrast of the contrast that if the contrast of the contrast that if the contrast the contrast the contrast that if the contrast the contrast the contrast that if the contrast the contrast the contrast that it is the con Tesurity should be filled. We realize that do and that the potential for air trying for a considerable period now to gain an airlift potential for the AMC. However, the adoption of these new concepts of logistics and of Secret 54.3M-08847

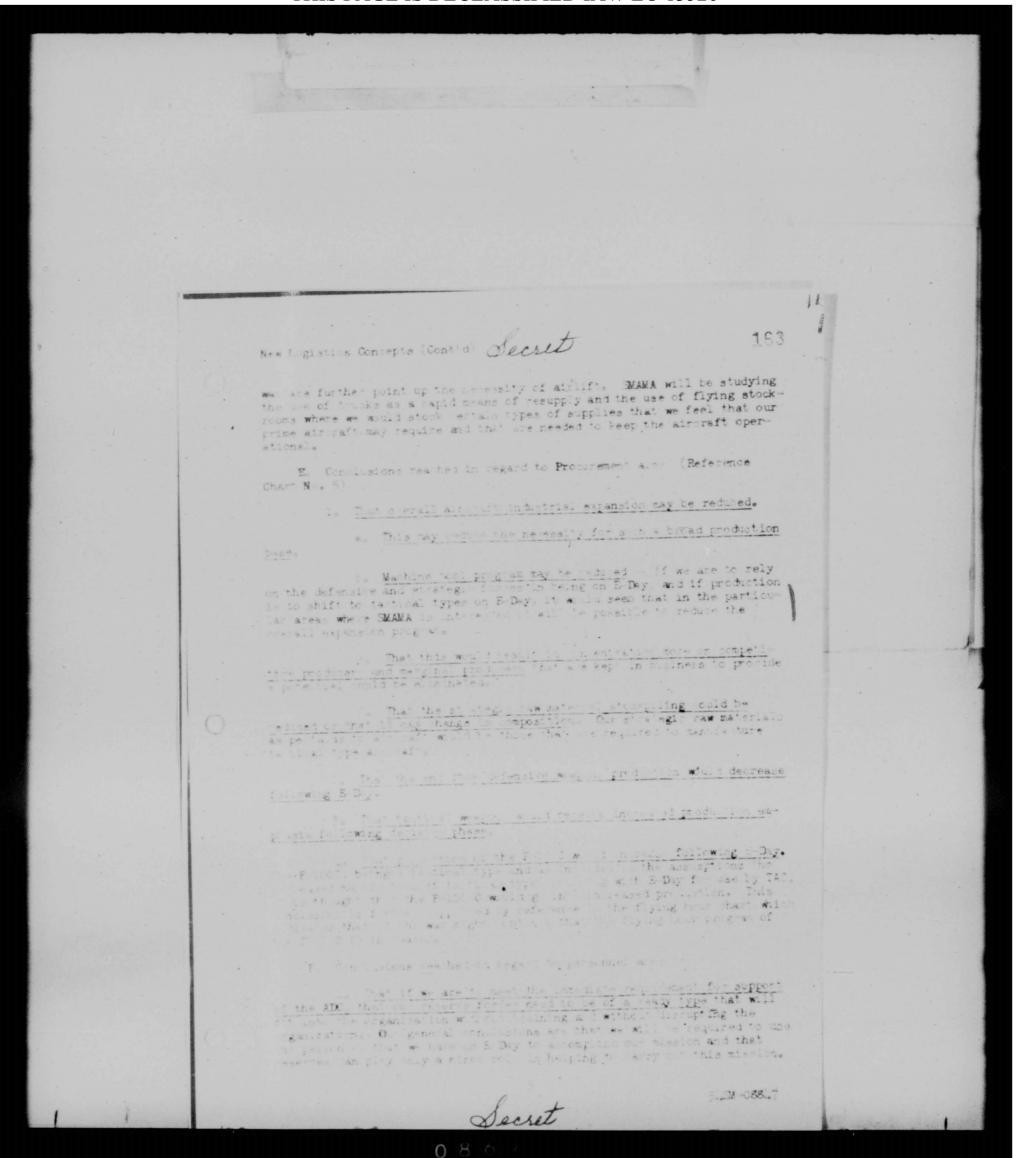

New Logistic Contepts Cont 1. Olecret The cur ivilian personner represent a positive for the and the USAF and that we dust make every effort institutions potential continues to exico ACTIONS PROPOSED OF CARES BY SMAMA Referen - Common The Antions which SKAMA has taken or se proposing to take on the basis of the inclusions reached & - as follows: they addise a of the anti-spaces requirements and warture conditions. B. SMANA will on entrate on the support of the Fig. and F 86D. At present we are scheduling F 50D and F-84C incomes the SMANA IRAN lines and are building in our ability and potential for handing these types of aircraft. We are further making direct contact with ADC using ages and are sending representatives to ADC mane, and to be extine how and the extent to which SMAMA an aid ADC. Co. SMAMA will study and dis is with ADC the part that SMAMA can play in the repair of battle damage to ADC at and I co. E . 2008 days. Do SMANA proposes to level p travel g maintenant teams while whe omposed of a spread of this had can han be jobs at have level and generally supplement the T. Oos of the combat organisations. E. SMANA will plane as a part of c. EWF to the IRAN aircraft belonging to ADC to ADC by E+3C. F. MANA will continue to indoctrinate personnel on their E-Day mission by inclusion of articles in all publications which reach the per-sonnel of McClellan AFB. This indoctrination is considered of particular importance and one which Hq AMC personnel people can help SMAMA in. The realization by our personnel of the importance of this installation and its wulnerability to enemy attack handicap our efforts in insuring that porsonnel will remain on their jobs and carry out the E-Day mission. G. SMAMA will place increased emphasis on resupply by air and use of base assigned aircraft for this purpose. At the present time we are upon every crossion that presents itself, making our requests for airlift known to Ho AMC and are making use of the Mero. Ty Service. We have experimented with the use of tase assigned aircraft for interdepot service, but since Mercury Service has come into being we have impped this type of service. We are now planning to use our base assigned aircraft for feeder Secret 5LSM-C8817 M620-7

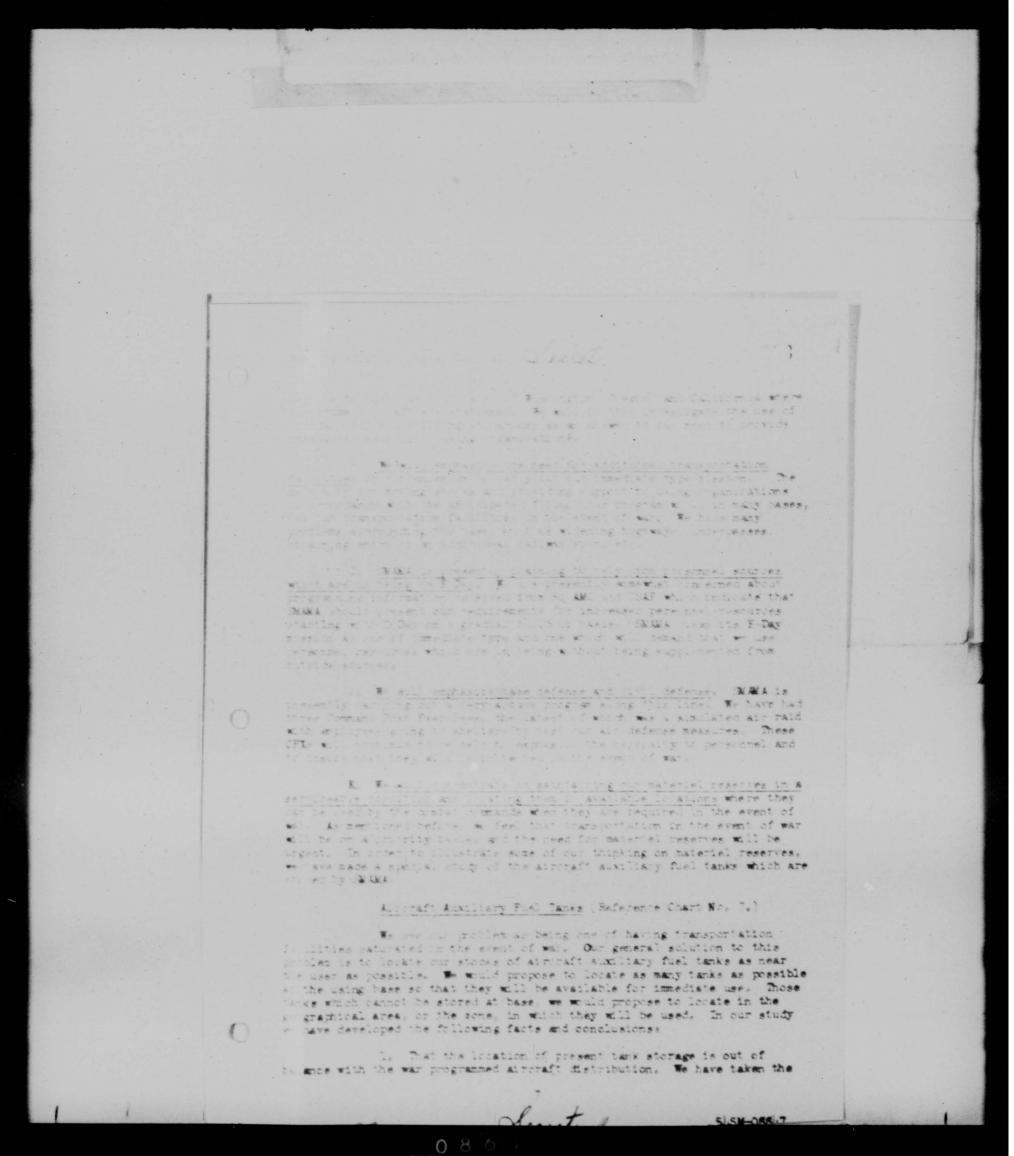

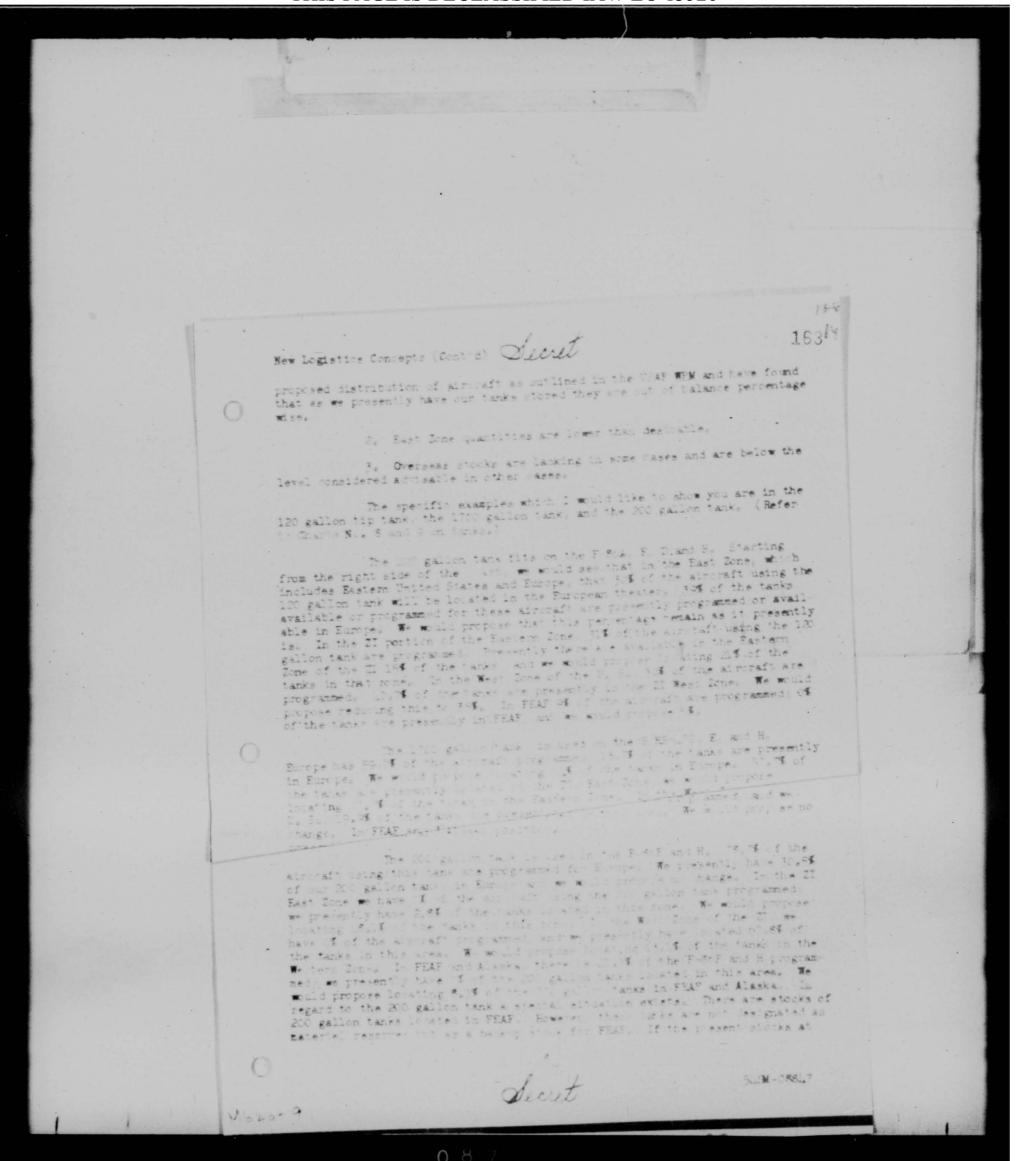

New Logistics Concepts (Cont'd) Secret

163

117

locations in FEAF were designated as materiel reserves, it would change our FEAF and Alaska proposal and reduce our overall requirements for this tank.


The 120 gallon, 1700 gallon, and 200 gallon tanks are only representative types. Our studies have included all types of tanks presently stored in material reserve quantities under SMAMA's jurisdiction.


The first action that SMAMA feels should be taken to correct the aircraft auxiliary fuel tank situation is for Hq AMC to contact Hq USAF and the using commands to see if the using commands can't store more tanks at base level. We feel this is the only sure way that using bases can have tanks available. A study will probably bring about the redistribution of tanks and the base levels of tanks increased. Following the redistribution of base level stocks, SMAMA would propose to readjust the depot level stocks. As indicated in the above examples, this would generally mean a movement of tanks from the Western ZI to the Eastern ZI and buildup of stocks in FEAF and USAFE.


SMAMA has forwarded a letter to Hq AMC requesting that, action be taken to bring about adjustment of the base stocks in tanks. Upon indication from Hq AMC as to what action they will take, SMAMA will start the readjustment of tanks between zones in accordance with the availability of space to store tanks.

Secret

5454-08847

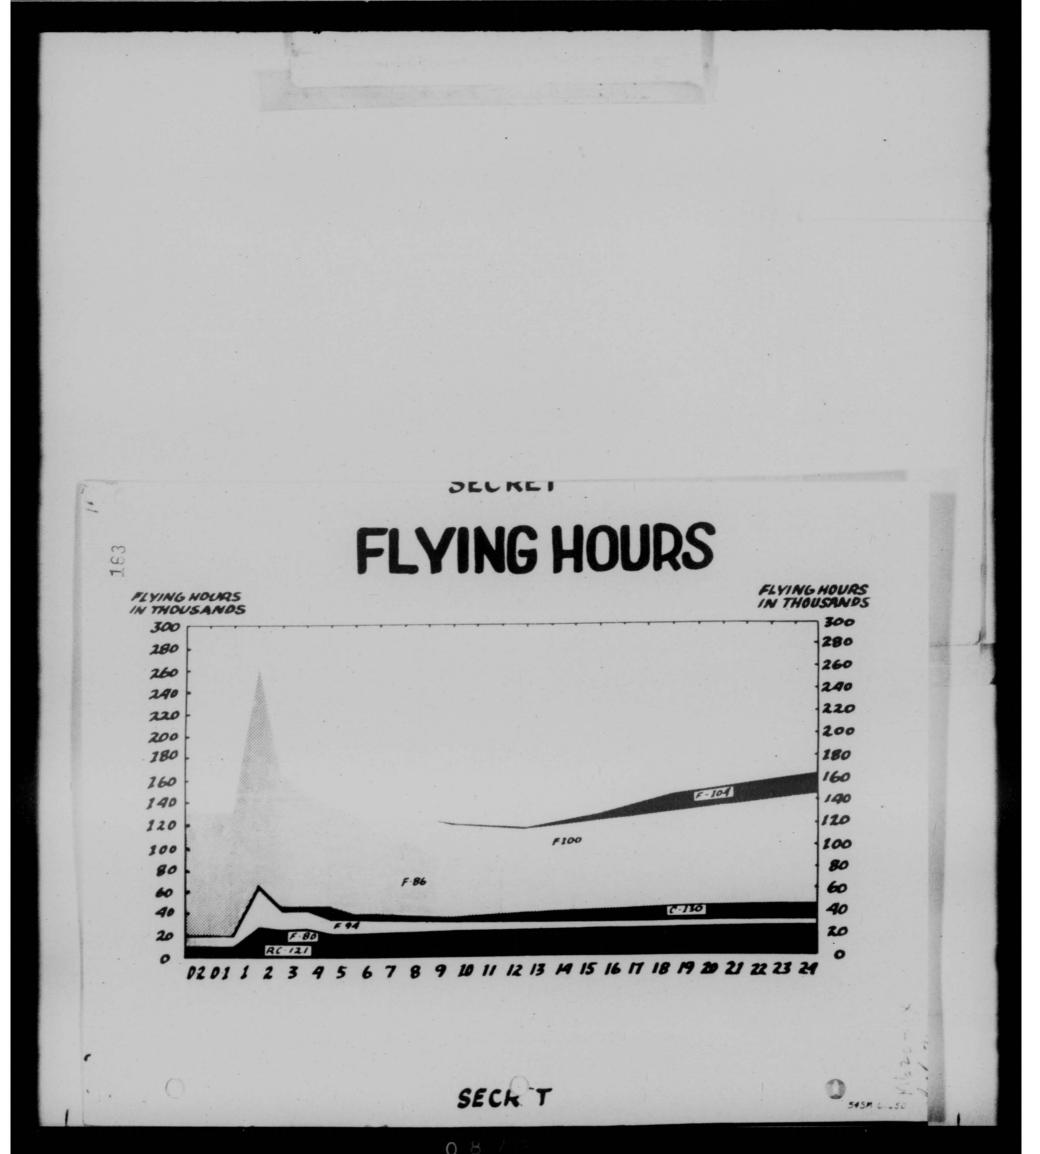

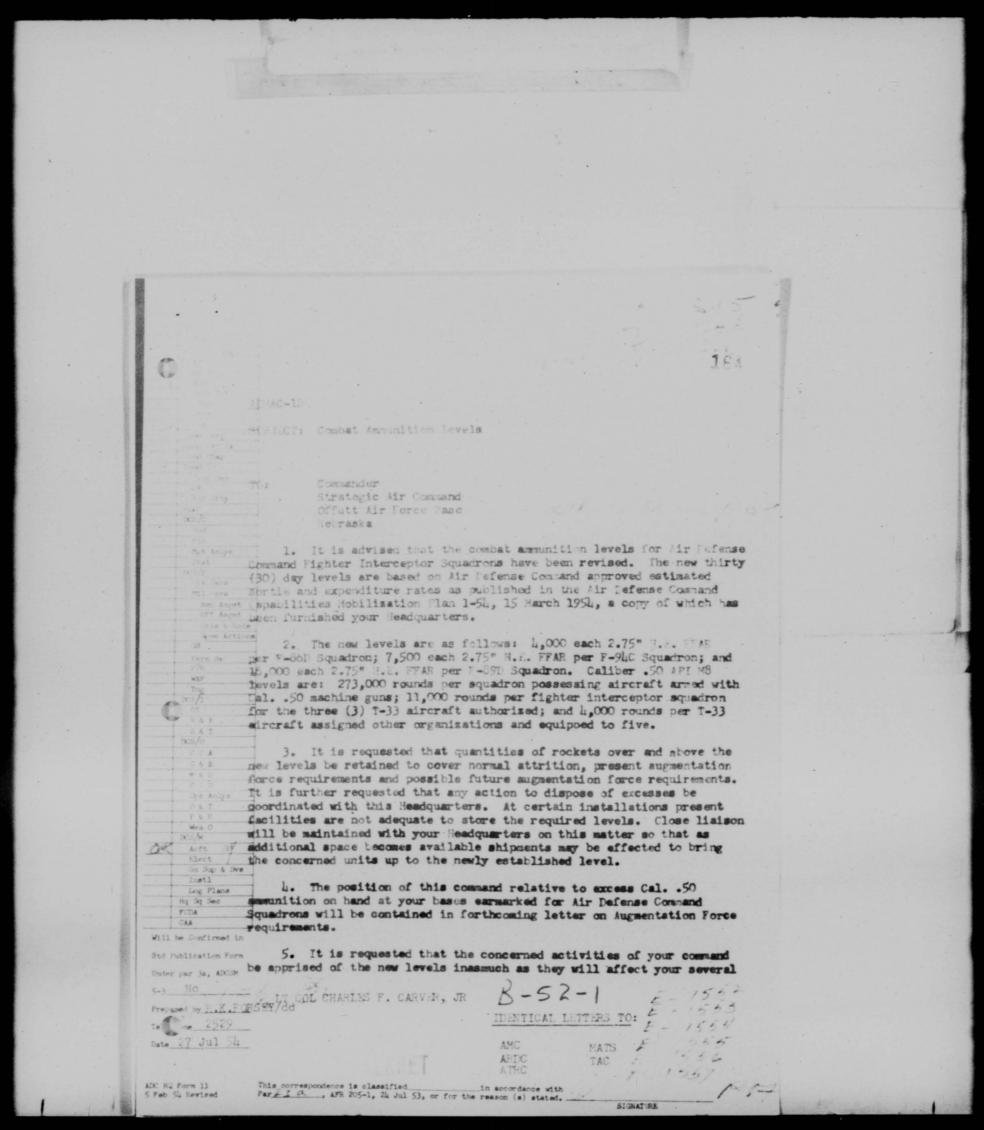

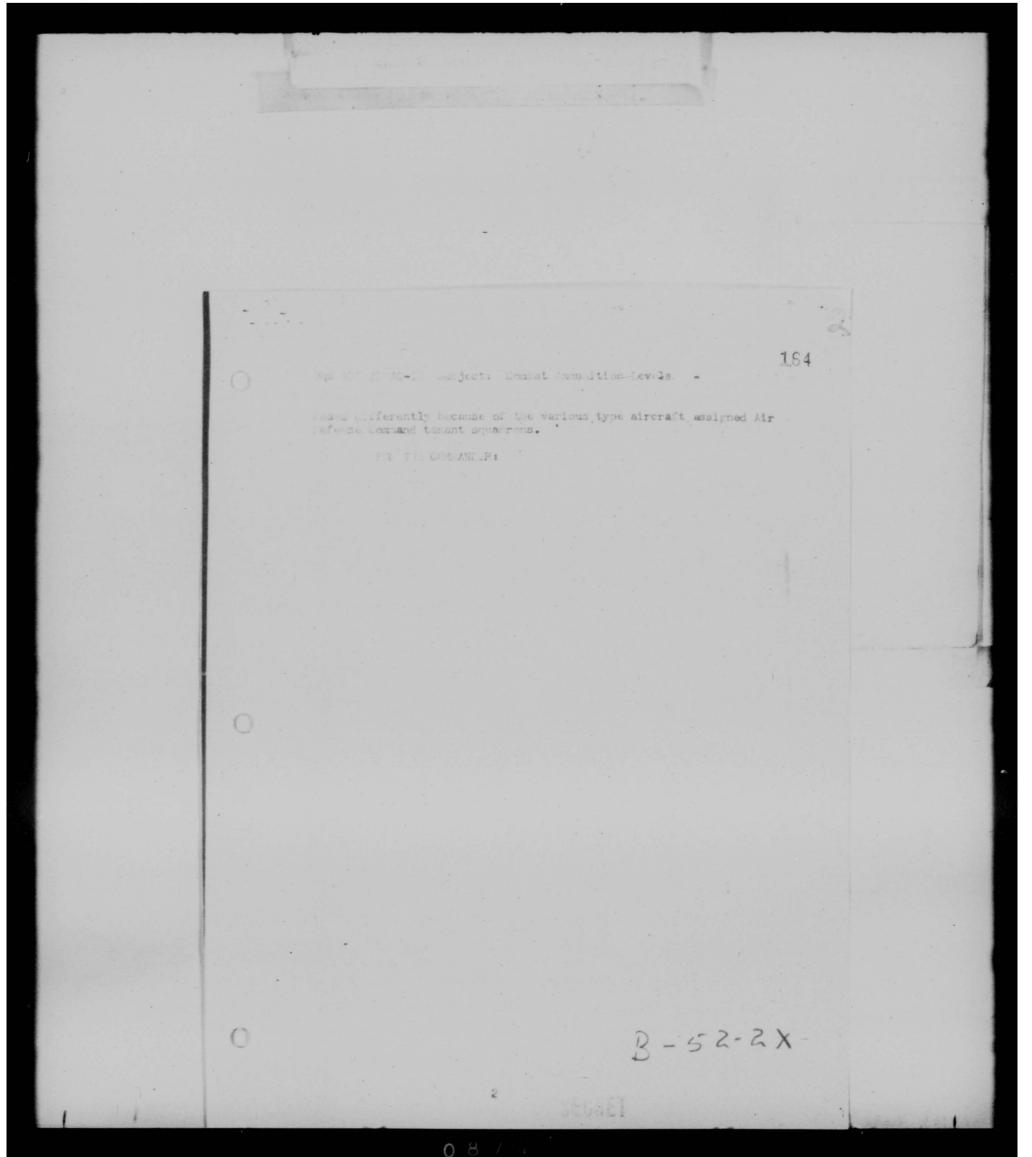

SECRET

COPY

165

ADMSV-3C

23 June 1954

SUBJECT: (UNCLASSIFIED) Bulk Storage Facilities FY 56 PWP

TO:

Commander Eastern Air Defense Force Stewart Air Force Base Newburgh, New York

1. Reference your message EAMSS-SOC 18943 dated 16 June 1954. Following data forwarded as requested in above message.

Requirements for five days WAR are computed as follows:

Standard wartime planning factors for ADC Forces

FACTORS

TOTAL SORTIES	F-86F	F-86H	F-86D	F-89D	F-94C	F-102A
1st Day (D-Day)	3	3	. 3	3	3	3
2d Day and ea day thereafter	r 1	1	1	1	1	1
Flying hours per sortie	1.5	1.5	1.5	2.	1.5	1.3
Gal fuel expended per hour	500	615	510	730	485	730

Squadrons are assumed to possess or are programmed for 25 each aircraft and the computations are based upon that number.

Considering above factor, the 5 day WAR time formula follows:

lst day - 75 Sorties x Length of Sortie x Fuel Consumption= gallons + 42 results in requirement in barrels.

2nd Day - Sorties x Length of Sortie x Field Consumption x Number of days (4) = gallons * 42 results in requirement in barrels.

Adding the results of above two formulas indicates a 5 day WAR time requirement.

Peacetime requirements for 10 day period are computed by Hq USAF for a 30 day period. These 30 day totals were divided by three (3) to arrive at a ten day requirement.

10 Day Peace Time Requirements

SECRET

SECRET

Hq ADC, ADMSV-3C "(Uncl) Bulk Storage Facilities FY 56 PWP"

TYPE REQUIREMENT

F-86D 9300 + 3 = 3100

F-89D 19700 + 3 = 6567

F-94C 8000 + 3 = 2667

F-102A 15500 + 3 = 5167

NOTE: a. Unless otherwise stated or indicated, all requirements are in barrels of 42 U.S. gallons.

- b. An authorized construction Factor 11.1% is applied to the totals.
- c. Due to the remote area in which Kinross AFB is located, this headquarters recommends an additional 5,000 barrels storage over and above indicated requirement to insure an adequate supply of fuel on hand at all times.
- d. Requirements for Presque Isle AFB are not considered adequate due to additional storage required in order to fully realize the benefits and savings which will result when the above base is connected to the Limestone Searsport Pipeline. Hq, MAAMA has recommended a minimum construction of two 10,000 barrels storage tanks which this headquarters concurs with.
 - e. Aircraft assignments end position FY 57 were used.
- f. Inclosure #1 is requirements as computed by this head
 - g. Inclosure # 2 Formulas for ADC Fighter Aircraft.

BY ORDER OF THE COMMANDER:


2 Incls


1. Romt by this comd

2. Formulas for ADC Ftr Acft

Info Cys: Comdr CADF Comdr WADF CECIL F. HUMPHREYS Captain, USAF Asst Command Adj

SECRET

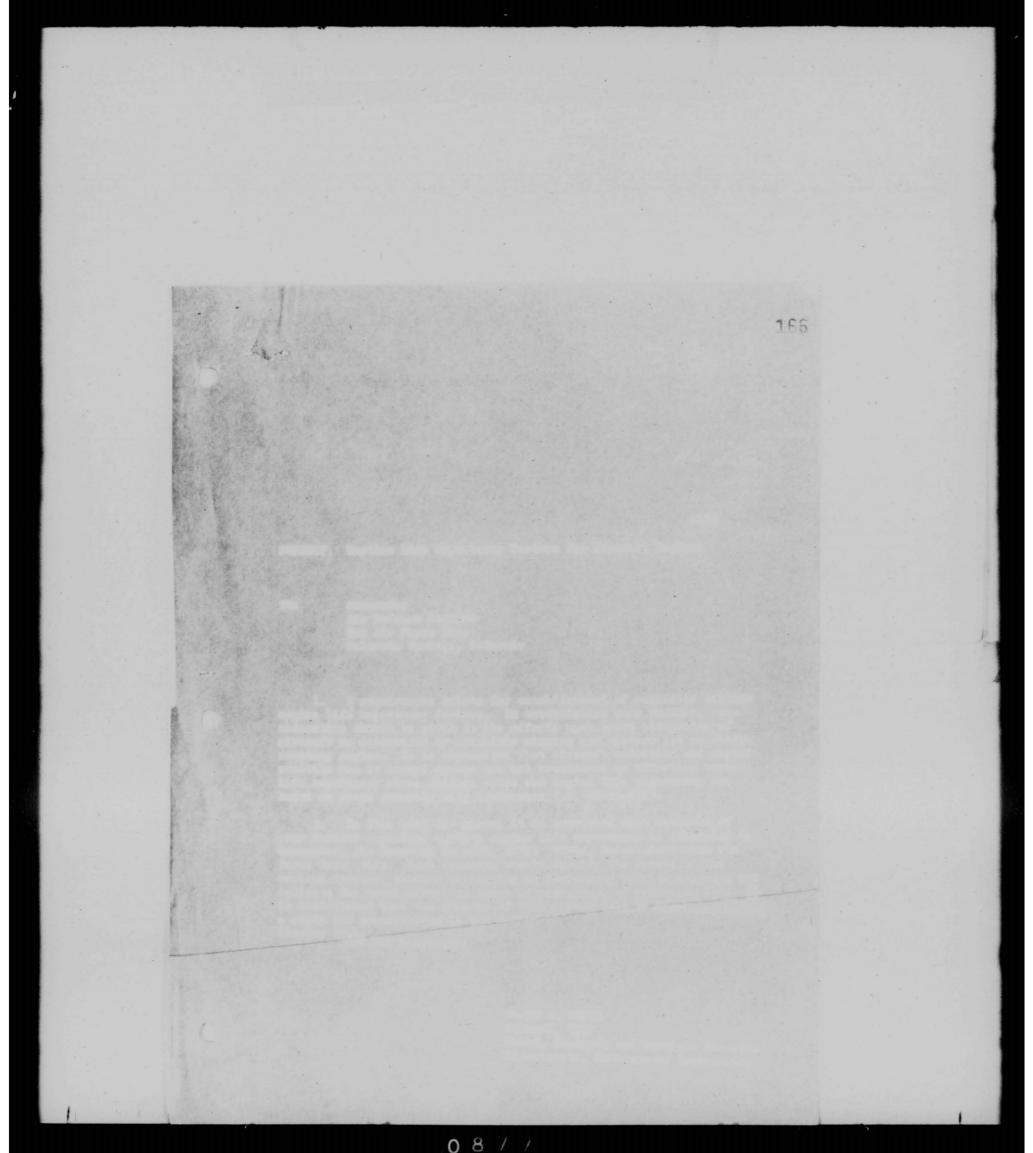

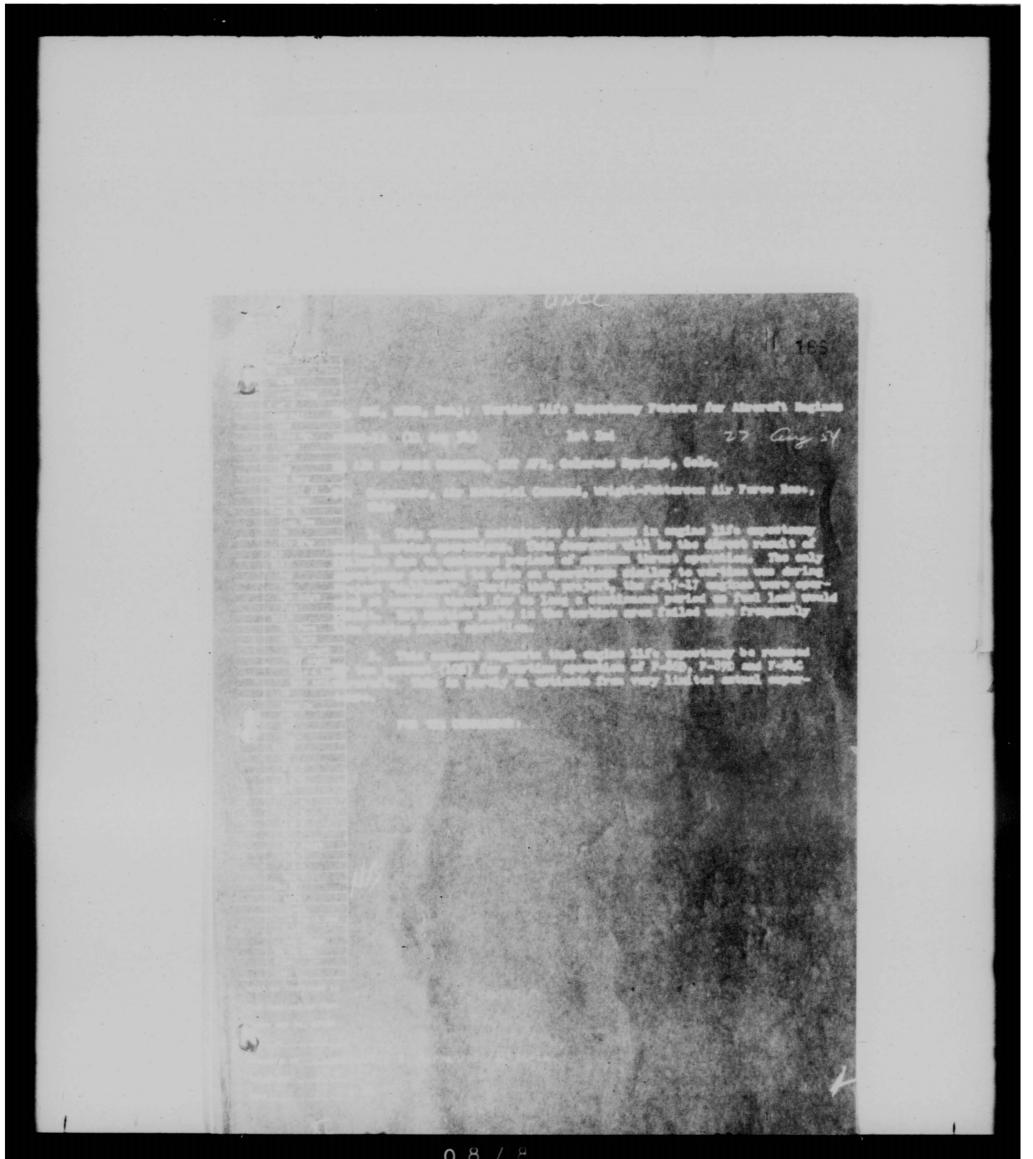

THIS PAGE IS DECLASSIFIED IAW EO 13526

167

RAMDM

3 December 1954

SUBJECT: On-Base Bulk Storage Facilities

TO: Commander
Air Defense Command
ATIN: AIMSV-3C
Ent Air Force Base
Colorado Springs, Colorado

- 1. Reference is made to message, your headquarters, ADMSV-3C 31859, dated 4 October 1954.
- 2. Authority is requested to reduce by 50% the JP-4 fuel requirements at the following bases of this command. Storage capacity for other types of aircraft fuel and oil is adequate.
- a. 500th Air Defense Group, Greater Pittsburgh Airport, Coraopolis, Pennsylvania:
 - (1) Total on-base storage for JP-4 fuel is 290,000 gallons.
 - (2) Reserve requirements are 250,000 gallons. This includes the requirement for Air National Guard aircraft currently assigned this facility and refueling requirements for augmentation forces deployed through this base.
 - (3) The difference, 40,000 gallons, is considered insufficient storage to support normal operations.
- b. 528th Air Defense Group, Presque Isle AFB, Presque Isle, Maine:
 - Total on-base storage for JP-4 fuel is 399,500 gallons.
 - (2) Reserve requirements are 384,500 gallons.
 - (3) The difference, 15,000 gallons, is insufficient storage to support normal operations.

107

Hq EADF EAMDM Subj: On-Base Bulk Storage Facilities

c. 534th Air Defense Group, Kinross Air Force Base, Michigan:

- (1) Total on-base storage for JP-4 fuel is 310,000 gallons.
- (2) Reserve requirements are 301,000 gallons.
- (3) The difference, 9,000 gallons, is insufficient storage to support normal operations.
- d. 4700th Air Defense Group, Stewart AFB, Newburgh, New York:
 - (1) Total on-base storage for JP-4 fuel is 175,000 gallons.
 - (2) Reserve requirements are 304,750 gallons.
 - (3) It will be noted that it is currently impossible to meet fuel reserve requirements.
- 3. The information requested by your message has been furnished in consolidated form by this headquarters since some of the units reported by radio message and others by letter. Upon receipt of your approval for maintaining reduced reserve requirements, a copy of this letter and your approving indorsement will be forwarded each unit affected.
- 4. This correspondence is classified Confidential in accordance with provisions of AFR 205-1.

FOR THE COMMANDER:

BEN D. MOORHEAD 1st Lt, USAF Asst Adjutant

107

Hq EADF, "On-Base Bulk Storage Facilities"

ADMSV-3C (3 Dec 54)

1st Ind

15 Dec 1954

HQ AIR DEFENSE COMMAND, Ent Air Force Base, Colorado Springs, Colorado

- TO: Commander, Eastern Air Defense Force, Stewart Air Force Base, Newburgh, New York
- 1. Authority is granted to assess 50% of the total on base storage capacity and assign that amount to the storage of War Emergency Fuel levels for bases indicated in basic letter. Totals maintained will be in lieu of those indicated by ADCR 67-20A.
- 2. For your information, this headquarters will include sufficient on base tankage in the FY 57 PWP to provide sufficient tankage for all operational requirements.

BY ORDER OF THE COMMANDER:


C. F. HUMPHREYS Captain, USAF Asst Command Adj

DOCUMENT NO. 118

THIS DOCUMENT MAY BE FOUND

IN VOLUME /// OF THE SUPPORTING

DOCUMENTS TO THIS HISTORY.

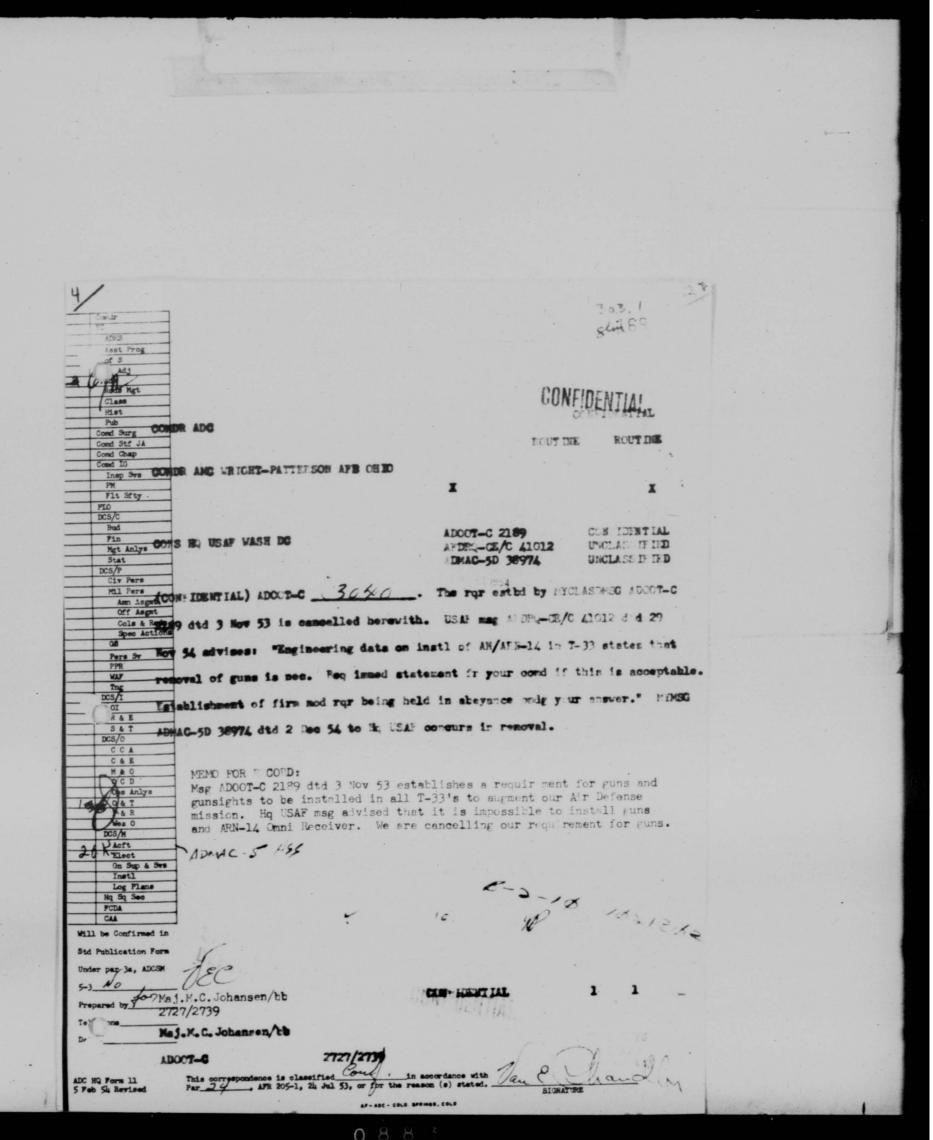

Easy reading copy made

170

1 September 1954

From: COMMANDER, HQ ADC, ENT AFB, COLORADO SPRINGS, COLORADO

To: COMMANDER, OCAMA, HILL AFB, UTAH

Info: COMMANDER, CADF, GRANDVIEW AFB, MO.
COMMANDER, EADF, STEWART AFB, NEWBURGH, N. Y.
COMMANDER, WADF, HAMILTON AFB, HAMILTON, CALIF.
COMMANDER, 4750TH TRAINING WING (AIR DEFENSE) YUMA
COUNTY AIRPORT, YUMA, ARIZONA

(UNCLASSIFIED) ADMAC-5D 28257 . During Phase I rocket firing of 3 F-89D aircraft at Portland International Airport a portion of the rocket tubes collapsed inward. The number of tubes affected varied from 10 to 12. Preliminary information indicates pressure from the rocket blast escapes around the rocket retaining detents. This pressure builds up under the rocket heating blankets and collapses the tubes. Limited tests indicate removal or venting of the heating blankets will prevent this tube collapse. Unsatisfactory Reports 54-188, 169 and 190 were submitted by the 497th FIS on 24 Aug 54. This problem affects the combat capability of this command. Request a solution be found as soon as possible.

HOWARD K. BEADE 1st Lt., USAF Asst. Command Adj

Easy reading copy made

Fromt HQ OQAMA

9 Sept 54

To: AAC: ADC: AFGC: ARDC: ATEC: NEAC:
MAAMA: MOAMA: OCAMA: SAAMA: SBAMA: SMAMA:
WRAMA: WADC: AFPR NAI HAWTHORNE CALIF:

Info: AMC: DIG NORTON AFB

For MCMR MCMT MCOF. Subject is: Suspected Deficiency on F-89D series Aircraft Rocket Pod Tubes. Reports have been received by this headquarters from activities on collapsing of tubes in wing tip rocket pods, caused by excessive pressures during firing of rockets. A 1-B priority project is established at this headquarters to correct this deficiency by a permanent engineering measure. Until such time as the permanent correction can be implemented, it is recommended that the rocket firing be limited to Phase III only, except in cases of emergency or because of combat necessity. We are working on an interim fix which is removal of center cluster and tube blankets. Any activities having local fixes which have proven beneficial are requested to furnish information to this headquarters. Request all commands notify subordinate activities accordingly. This information is furnished AMA Commanders for dissemination to contractors having bailed aircraft of type affected. Directorate Maintenance Engineer.

COPY
Easy reading copy made

172 770

From: COMMANDER, HQ ADC, ENT AFB, COLO SPRINGS, COLO 9 Sep 1954


To: COMMANDER, CADF, GRANDVIEW AFB, MO
COMMANDER, EADF, STEWART AFB, NEWBURGH, N. Y.
COMMANDER, WADF, HAMILTON AFB, HAMILTON, CALIF
COMMANDER, 4750TH TRAINING WING (AIR DEFENSE) YUMA
COUNTY AIRPORT, YUMA, ARIZONA

COMPONENTAL

(CONFIDENTIAL) ADMAC-5D 1573 . Reference your message ADMAC-5D 26257 pertaining to collapse of rocket tubes during F-89D aircraft firing. OCAMA advises they are working on an interim fix which consists of removal of the center cluster and tube blankets. Any activities having local fixes which have proven beneficial are requested to inform OCAMA. Until such time as this deficiency is corrected rocket firing will be limited to Phase 3. This restriction does not apply to emergency or combat conditions.

C. F. HUMPHREYS Captain, USAF Asst Command Adj

CONFIDENTIAL

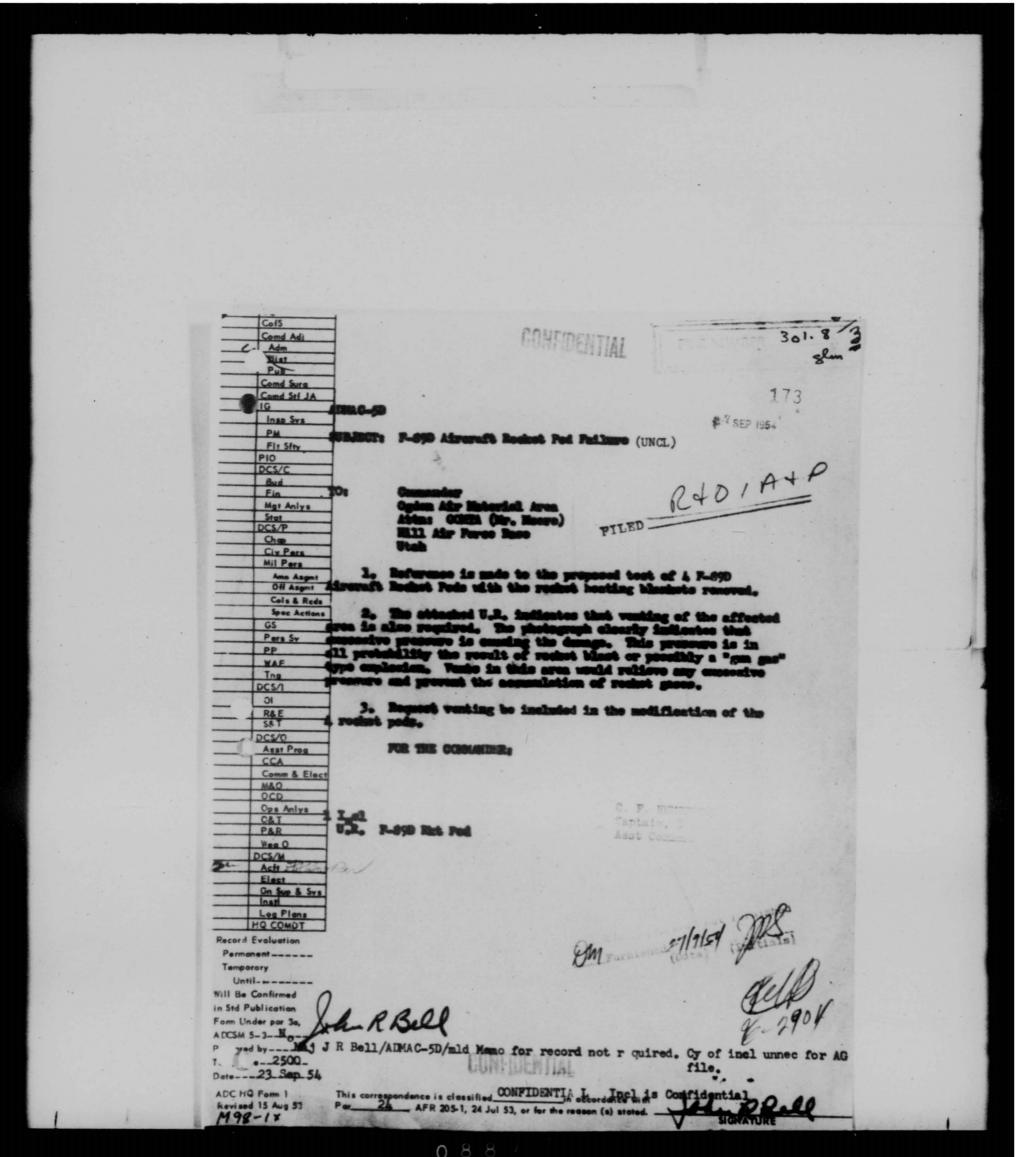

HEADQUARTERS
Ogden Air Materiel Area
Hill Air Force Base, Utah

COMTAF

29 Sep 54

SUBJECT: Maintenance of Rocket Pod F-P9 Aircraft

TC:

Commander
Air Defense Command
ATTENTION: DCS/Operations
Colorado Springs, Colorado

1. The inclosed information is forwarded to your headquarters for review.

2. Mr. R. J. Russell, OCAMA, will arrive at your headquarters approximately 29 September 1954, to discuss inclosed correspondence.

FOR TE COMMANDER:

3 Incls
1. WCOSS-14 cmt 3
14 Sep 54 w/cmt 1
and cy cmt 2
2. Cy WCLGF-5 cmt 1
24 Aug 54
3. Cy charts (2)

/s/ CHARLES L. MOOR, Chief Aircraft Branch Maint Engr Ser Division Maint Engr Directorate

LILIAL

```
303.7
       Cols
                                                                                                                     glin
     Man Adi
                                                                                                                      174
                B/Der fr Hq OOAMA, OOMTAP, Sulj: Maint of Rocket Pod F-89 Acft
       Lomd Stf JA
               ADMAC-5 (29 Sep 54)
                                                          1st Ind
        Insp Svs
       PM
               HO ATR DEFENSE COMMAND, But Air Force Base, Colorado Springs, Colorado
        Flt Sfty
               TO: Commander, Ogden Air Materiel Area, Hill Air Force Base, Utah
       Bud
                       1. Until definite fixes can be accomplished to correct the
      Mg: Anixdeficiencies in the F-89D aircraft recket pods, the maximum number of
Stot recket tubes that may be inoperative when firing various phases are listed
DCS/P as follows:
                              a. Phase 1, (104 rockets), 10 tubes per pod may be inoperative.
        Mil Pers
          Amn Asgmt
                              b. Phase 11, pass 1, (62 rockets), 6 tubes per pod may be
         Cols & Apaperative.
                              c. Phase 11, pass 2, (42 rockets), 4 tubes per nod may be
        Pers Svinoperative.
        PP
        WAF
                              d. Phase Ill, pass 1, (42 rockets), 4 tubes per pod may be
        Tng
               insperative,
                              e. Phase 111, pass 2, (32 rockets), 3 tubes per pod may be
               inoperative.
                              f. Phase 111, pase 3, (30 reckets), 3 tubes per pod may be
        CCA Lnon
 Cognyl Elect

ACC and Elect

ACC PAR the subset in one or two pulses to be inoperative and the pod would still

Wea O be accelidered serviceable. This condition would result in a "hole" in the


DCS/M reservices pattern reducing the kill probability dignificantly. To

Act proclude this possibility a minimum of two tubes per pulse must be


Elect


Gn Sup & Svs


Inst!
        insti
        Log Plans
                            FOR THE COM ANDER:
      HQ COMDT
Record Evaluation
  Temporary
   Until---- 3-Incle
Will Be Confirmed BA
in Std Publication
Form Under par 3a,
                       ohn R Bill
P od by --- May J R Bell/ADMAC-5/mld Memb for record not required. Cys of incls unnec for AC
ADCSM 5-3-10---
Dote--- - 6-Dee 54
                                                                                                      RBell m
                                                          Confidential
 ADC HQ Form 1
                         This compspondence is classified_
                                       __, AFR 205-1, 24 Jul 53, or for the reason (s) stated.
 Revised 15 Aug 53
                                                       M10-1
```

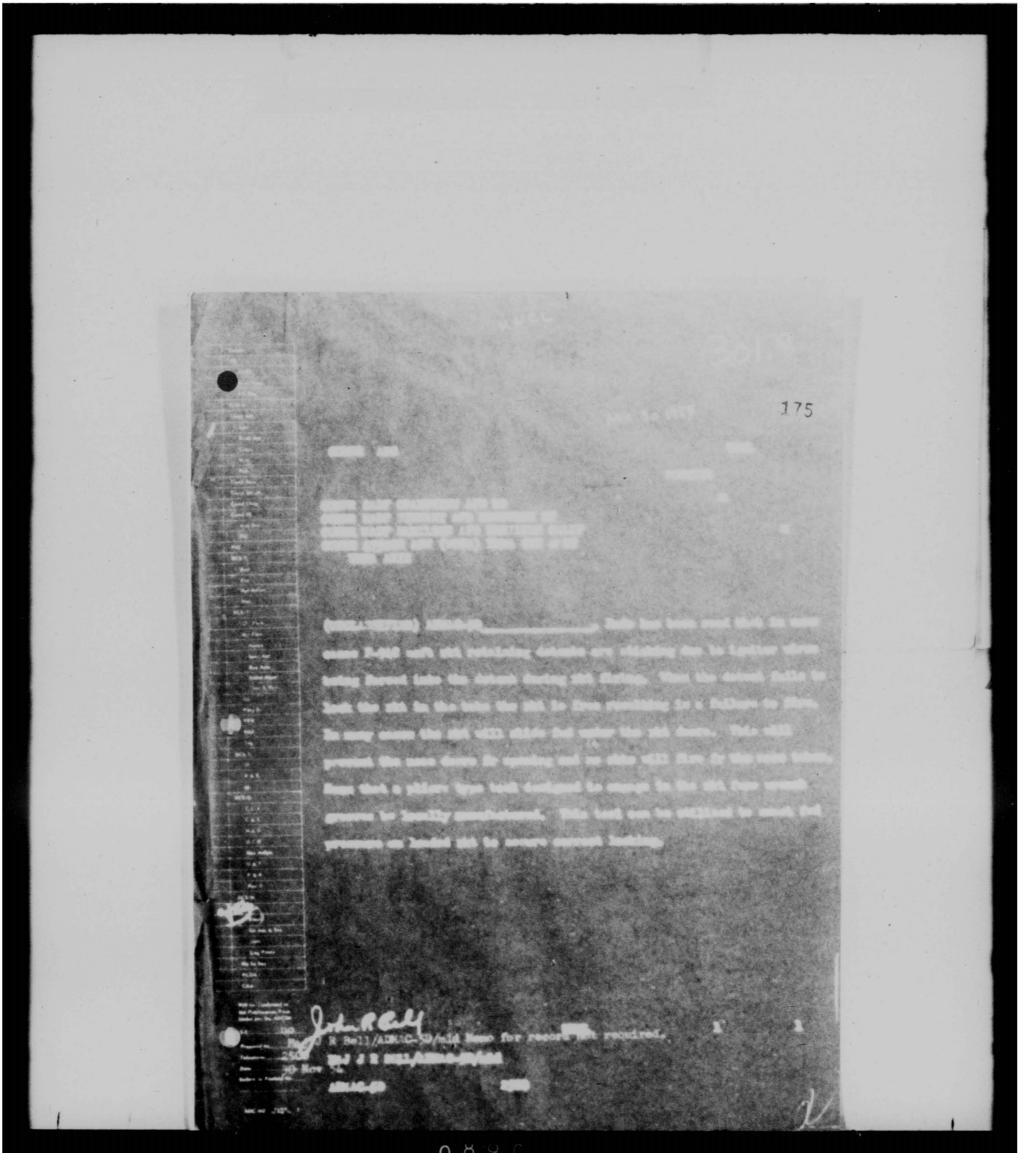


THIS PAGE IS DECLASSIFIED IAW EO 13526

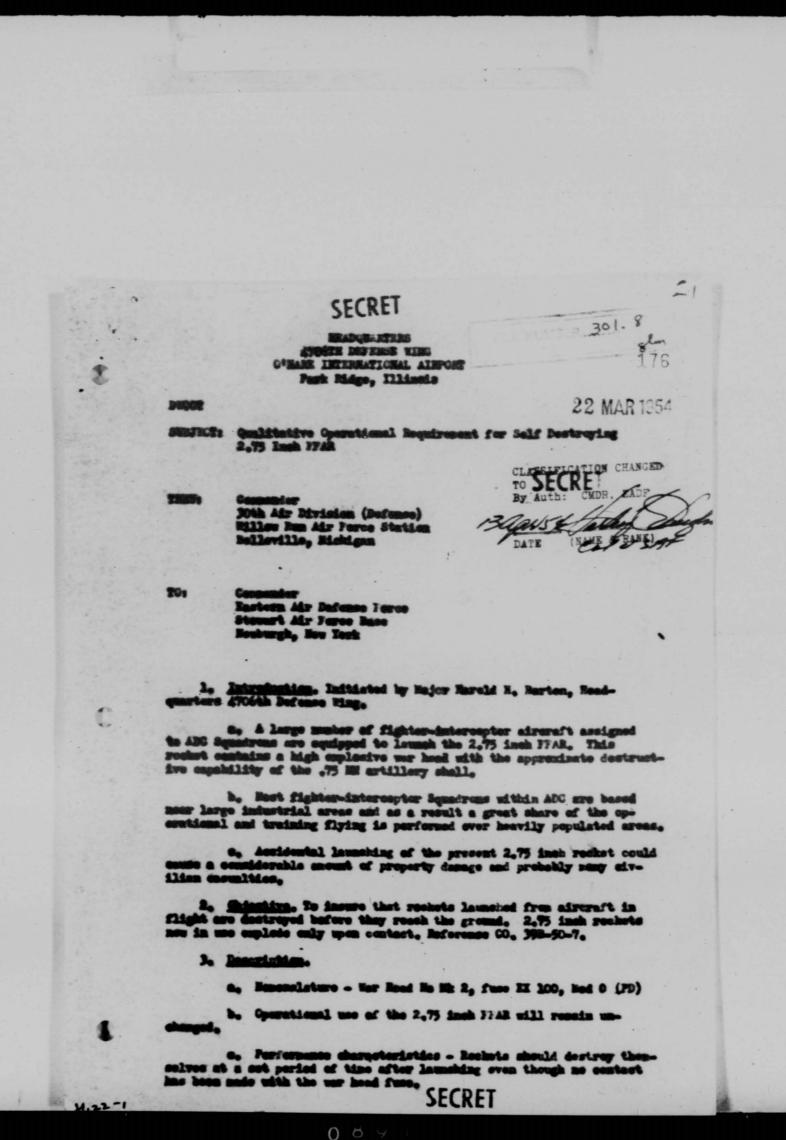


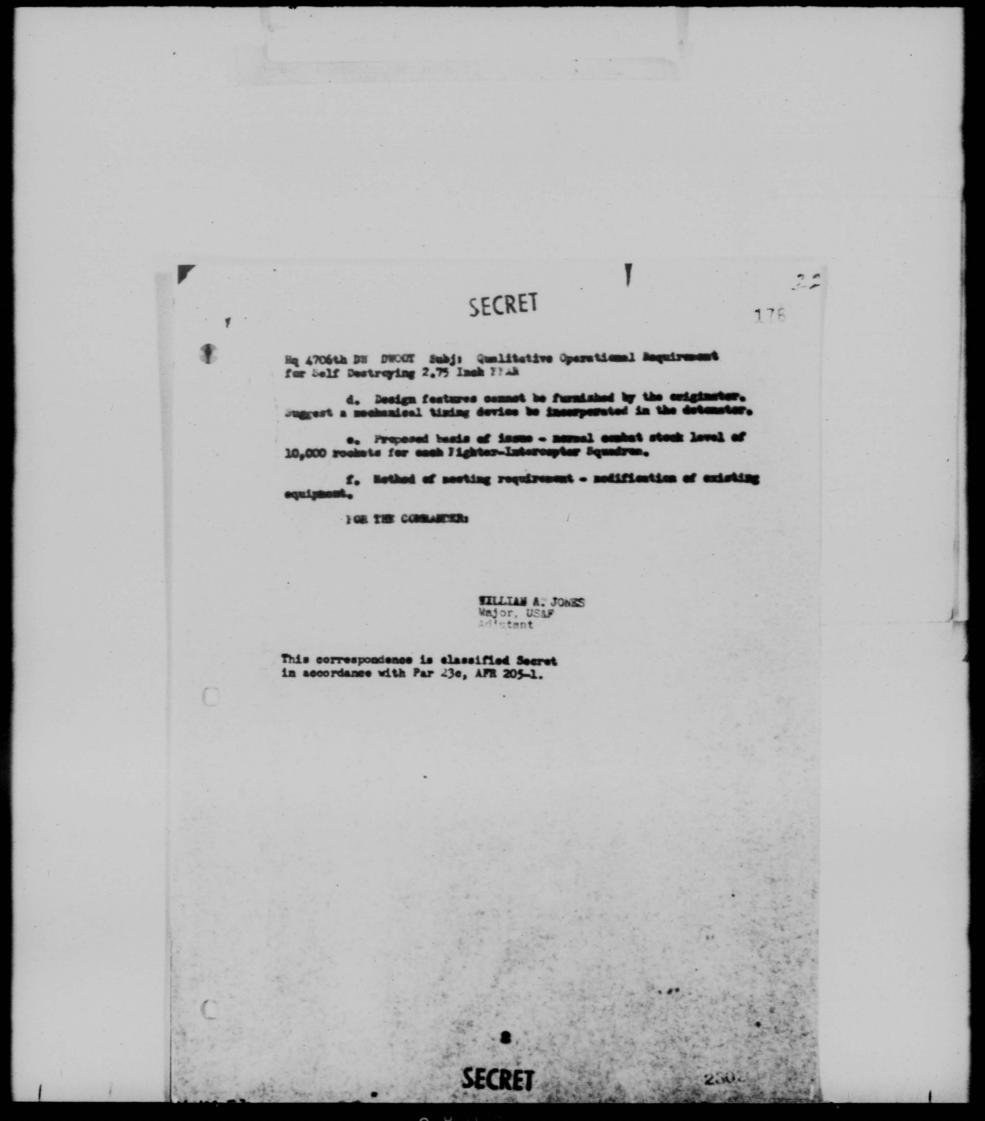

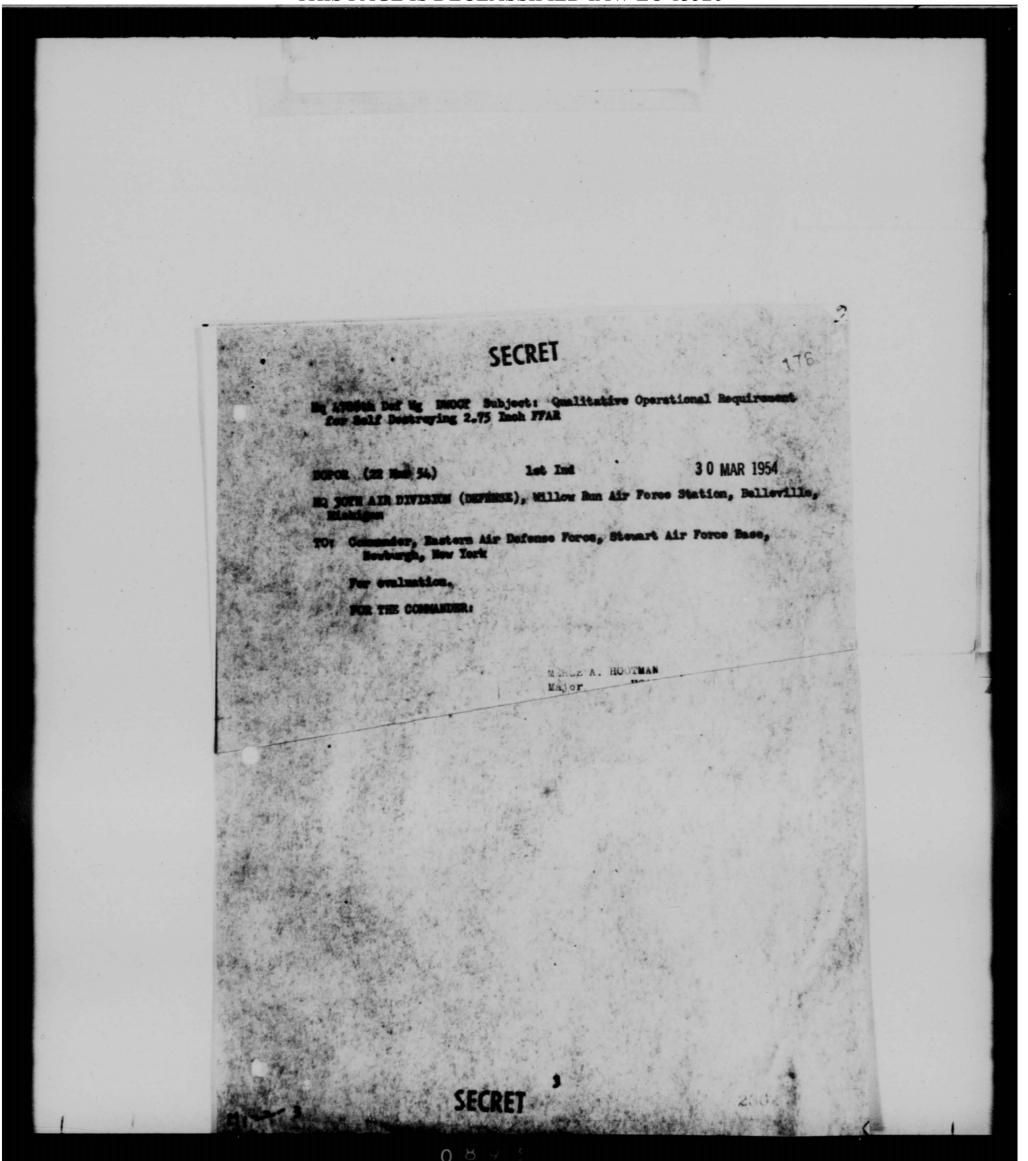

THIS PAGE IS DECLASSIFIED IAW EO 13526

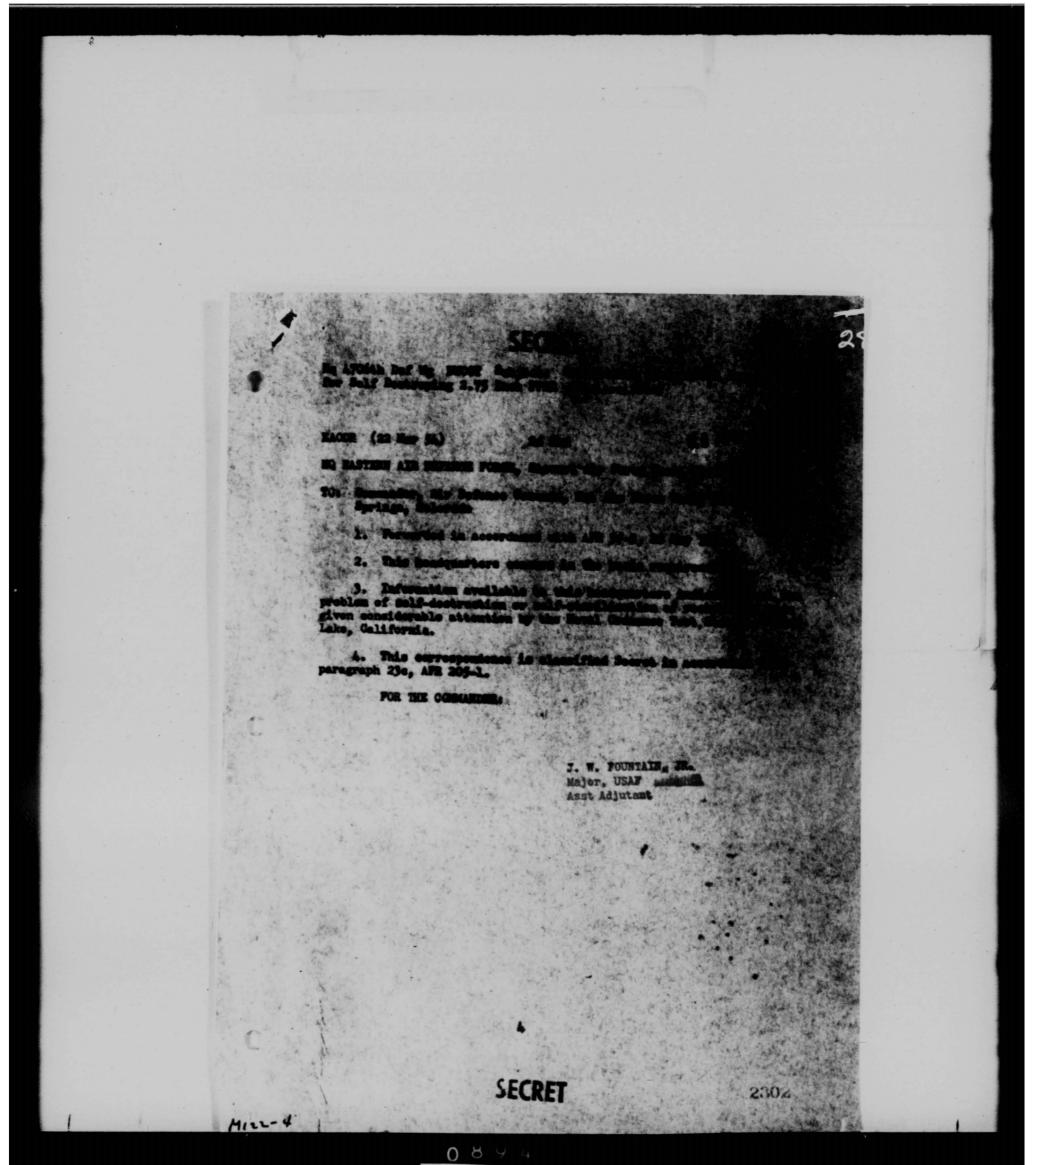

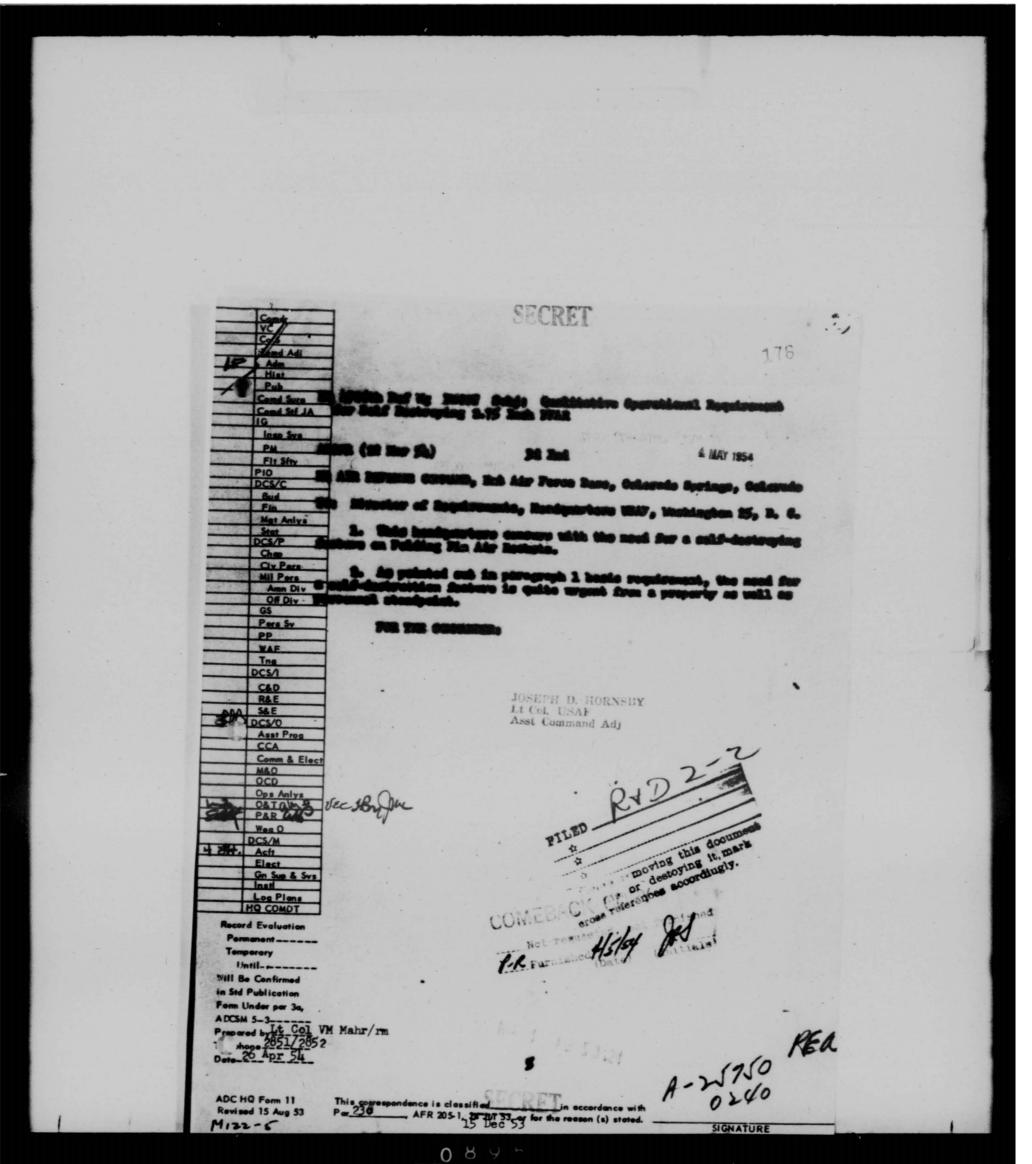

B/Ltr fm Hq 4706th Def Wg, Subj: Qualitative Operational Requirement for Self Destroying 2.75" FFAR, dated 22 March 1954

AFDRQ-AD/F

4th Ind

DEPARTMENT OF THE AIR FORCE, BQ USAF, Washington 25, D.C.,

TO: Commender, Air Defense Command, Ent Air Force Base, Colorado Springs, Colorado


- 1. This headquarters consurs with the need for a self-destructive fuse in air-to-air rockets. A Pirm Qualitative Operational Requirement to develop a self-destructive fuse which can be incorporated into the 2.75° FFMR has been in existence for some time.
- Both the Air Force and the Herry have development projects on this type face. Indications are that a self-destructive face for the 2.75° FFAR should be sufficiently developed for production in about one (1) year.
- 3. Your command will be informed when additional information on development progress of self-destructive 2.75° FFER face becomes available.

BY ORDER OF THE CHIEF OF STAFF:

J. L. Laughlin . Colonel USAF

Golemal, USAF Ghinel, Air Defunge Rivision B/Requirements, NGS/D

CONTIDENTIAL

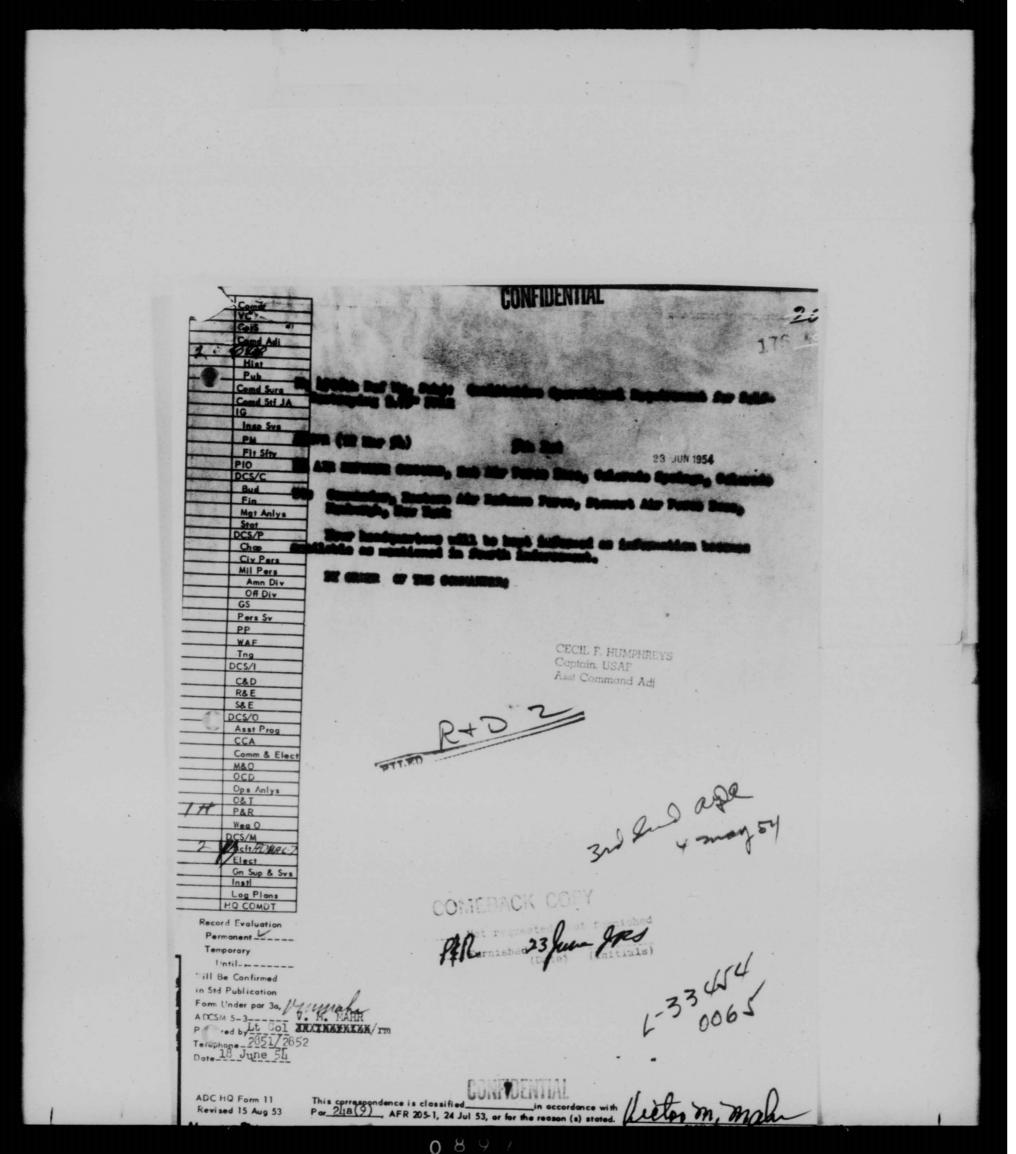

COPY
Easy reading copy made

777

From: COMMANDER, HQ ADC, ENT AFB, COLO SPRINGS, COLO.

24 Jun 54

To: COMMANDER, CADF, GRANDVIEW AFB, MO
COMMANDER, EADF, STEWART AFB, NEWBURGH, N. Y.
COMMANDER, WADF, HAMILTON AFB, HAMILTON, CALIF
COMMANDER, 4750TH TRAINING WING (AIR DEF) YUMA
COUNTY AIRPORT, YUMA ARIZONA

(CONFIDENTIAL) ADMAC-5D 1070 . This message in two parts. Part I. Reference is made to operation Check Point. To prevent any accidental rocket firings during this operation it is imperative that all safety precautions associated with rocket loading and firing be followed. There is a tendency for personnel to neglect normal safety precautions in the interest of speed when working on "pressure problems" such as the requirement to "turn around" a large number of aircraft in a limited period of time. This command desires that "turn around" requirements be met if possible, but not at the expense of ignored safety precautions and consequent accidental rocket firings. Part II. Commanders are responsible to assure that all safety precautions are taken including the following: (A) Weapons mechanics are utilized to load and unload rockets and check aircraft rocket circuits. Other personnel may be utilized to furnish non-technical assistance. (B) The rocket intervalometer circuit check is performed immediately prior to rocket loading regardless of previous checks. (C) Rocket fire circuit breaker is pulled and a safety clip installed until such time as firing is to take place. (D) That

when the aircraft is to be taken into the hangar or when a ground rocket firing check is to be accomplished all rockets are unloaded from all tubes. (E) That regardless of TO's no rocket continuity checks are performed on the flight line. (F) That rockets are not fired from the nose of F-94C aircraft prior to SN-51-5513 unless the rocket firing intervalometer retrofit has been accomplished. (G) That salvos of 24 Mrk II rockets are not fired from F-86D aircraft above 30,000 feet. (H) That salvos of 24 Mark I Mod 3 or Mark II rockets are not fired from F-94C aircraft above 25,000 feet unless a "Throttle Chopper" retrofit has been accomplished. (I) That rocket firing from the F-86D aircraft is accomplished with the intake duct screen in the extended position. (J) That rocket heads are taped to the motors when utilized in F-94C aircraft wing pods.

LEWIS E. SMITH Captain, USAF Asst Command Adj.

2

178

ADOOT-C

2 August 1954

SUBJECT: Accidental Rocket Discharge

TO:

Director of Operations Headquarters USAF ATTN: AFOOP-OC-F Washington 25, D. C.

- 1. Confirming telephone conversation between Col. Konosky, this headquarters, and Col. Mobbs, your headquarters, 20 July 1954. The role of the Air Defense Command in protecting the United States from air attack requires rocket-firing interceptors for maximum effectiveness. All-weather interceptor squadrons must be situated for maximum strategic advantage commensurate with maximum economy. This has resulted in basing fighter-interceptor squadrons at fourteen joint civilian-Air Force operated airfields. Every effort has been made and will continue to be made to ensure safe handling of the munitions carried by these interceptors.
- 2. A very few instances of accidental rocket discharge have been reported since the initial delivery of rocket-bearing interceptors to this command in February 1953. Every incident involving accidental discharge of munitions has been carefully analyzed at this headquarters to determine the cause. Methods are then devised to eliminate the cause. Experience has indicated that there are only two possible causes of accidental rocket discharge:
- a. Rocket-firing system malfunction. System malfunction encompasses any possible improper functioning of the system which might fire a rocket. Test equipment and techniques for system analysis have been developed which completely confirm proper system operation before any rockets are placed in the aircraft. The effectiveness of this test equipment and these techniques is proven by the fact that not one accidental rocket discharge has been attributed to system malfunction.
- b. Human error. The human error factor is being continually reduced by several means. In addition to published Technical Orders which establish safe handling procedures and testing techniques, this headquarters issues supplementary directives which disseminate information on new procedures and techniques as they are developed or found necessary. These directives and publications are augmented by continuing on-the-job training programs so that these techniques may be distributed and exercised. The extreme

ADOOT-C, Subject: Accidental Rocket Discharge (Contd)

complexity of present weapons systems and the rapid turnover of personnel necessitates the conduction of these continuing programs. Capable supervision is provided for junior mechanics when rockets are loaded or removed from an interceptor or when the system is being tested. These supervisors are senior non-commissioned officers with long experience in handling all types of munitions.

- 3. On 1 June 1954, one rocket was accidentally discharged at Minneapolis-St. Paul International Airport from an F-89D aircraft during a check on the rocket-firing circuitry. The rocket hit the ramp 225 feet forward of the aircraft, at which point the warhead separated from the rocket body. The rocket had not traveled sufficient distance to be armed, and therefore could not explode. It was later detonated without incident. There were no casualties and no property damage as a result of this discharge.
- a. The F-89D normally carries a load of 104 of these rockets. There had been 103 rockets removed from the aircraft. The armament man inadvertently overlooked one rocket, which fired when the circuitry was being checked. As a result of this accident, one man was court-martialled on 23 July 1954 and charges are pending on another.
- 4. On 18 February 1954, one rocket was discharged at 0'Hare Field, Illinois. Investigation revealed that two cannon plugs had been interchanged. Armament mechanics attempting to remove a loaded pod from an F-86D caused the rocket in tube #22 to be discharged. The rocket hit the foundation of a building causing some damage. No casualties were reported.
- a. On 10 March 1954, following analysis of the accident, a message was sent from this headquarters to all air defense forces whose context was as follows:

"Under no circumstances will rockets be loaded in aircraft prior to performing a complete rocket intervalometer test. This test will be accomplished immediately prior to each rocket loading regardless of the results of previous tests. It is suggested that the test on F-86D aircraft also include a test of the grounding of each rocket tube circuit by the use of an Ohmmeter or simple locally fabricated continuity tester."

- b. Another message was sent directing all tactical units in possession of this particular series of F-86D aircraft to modify cannon plugs so that they could not be interchanged.
- c. Both of these messages were issued as a result of the O'Hare incident and a detailed analysis of the causes of the accident.

ADOOT-C, Subject: Accidental Rocket Discharge (Contd)

5. This command will continue to analyze all munitions accidents and is making every possible effort to eliminate such incidents. As new munitions are developed, safe handling procedures will be devised to preclude possible future incidents.

FOR THE COMMANDER:

3

HEADQUARTERS 575TH AIR DEFENSE GROUP SELFRIDGE AIR FORCE BASE, MICHIGAN

00 5 August 1954

SUBJECT: Report of Inadvertent Rocket Firing (RCS: 4-AF-X9)

TO: Commander
4708th Defense Wing
Selfridge Air Force Base
Michigan

- 1. In accordance with AFR 136-9, the following letter report of an inadvertent rocket firing is submitted.
- 2. The incident occurred 11 July 1954 at approximately 09:10 EST, involving F-86D SN 52-3879, piloted by 2d Lieutenant Carl E. Sandmeyer, AO 3 004 521, 13th Fighter-Interceptor Squadron, Selfridge Air Force Base, Michigan, when twenty-three 2.74 F.F.A. Rockets, lot #RTCA-93-S-53, were inadvertently fired in the vicinity of Adair, Michigan. Adair, Michigan is located in St. Clair County, approximately midway between Selfridge Air Force Base and Port Huron, Michigan.
- 3. The pilot stated that while enroute to the gunnery range at 15,000 on heading of due east, he was attempting to set up the rocket firing system for manual firing. All armament circuit breakers were pushed in except for the "Rocket Fire" circuit breaker. The pilot placed the "Armament Master Switch" in the "Jettison Ready" position. The "Jettison Ready" lamp illuminated and due to some malfunction, the rocket package came down. The pilot then moved the "Armament Master Switch" to the "Package Only" position (this is the "Camera" position on 35 and earlier model aircraft) and attempted several times to raise the pod by using the rocket package "Over-ride Switch"; however, the rocket package remained down. Considering the possibility that all switches were not in the correct position the pilot then moved the "Armament Master Switch" to one of the firing positions. The pilot does not remember which of the three positions he chose: fire 6, 12 or 24. He then pushed the Rocket Fire Circuit Breaker in and placed the "Automatic Manual" Rocket Selector in the "Manual" position. As the "Automatic Manual" switch was placed in the manual position, all rockets (23) fired. The firing trigger on the stich grip had the safety pin installed and the trigger had not been depressed at any time.

GO Subject: Report of Inadvertent Rocket Firing (Contd)

4. Immediately after the incident occurred, the pilot requested that GCI give him a fix, however, he received no reply from the station which he called.

- 5. Farmers in the area of Meldrum and Lindsey Roads, 2 miles southwest of Adair reported that they witnessed the firing.
- a. Mrs. Fred Gordon of 6824 Belle River Road, Marine City, Michigan, reported that "something" struck her house. No evidence of fragments or damage could be found.
- b. An extensive search was made by personnel of this base, and the local State Police. The point at which the rockets contacted the ground could not be located, further; as of this date no other reports have been received regarding this incident.
- 6. Armament Systems Officers and Factory Technical Representatives, were unable to locate any deficiency in the aircrafts' firing system. The aircraft was flown and the rockets fired normally, no malfunctions occurred.
- 7. In that no deficiency could be located in the aircraft system, it is considered feasible, that a similar incident may occur at a later date on this or other aircraft. This possibility has a prompted this headquarters to require all pilots to perform system prompted this headquarters over the gunnery range where an inadchecks and arming of rockets over the gunnery range where an inadvertent firing could cause no loss of life or damage to property.
- 8. Fighter pilots have been rebriefed on the arming of rockets and associated systems in an attempt to reduce the possibility of inadvertent firing through pilot error.

/s/t/ WILLIAM A. TOPE Colonel, USAF Commander

1 Incl: Map of area surrounding Selfridge AFB

Info cy: Comdr, AMC, Wright-Patterson AFB, Ohio

179

Hq 575th Air Defense Gp, GO, Subject: Report of Inadvertent Rocket Firing (RCS: 4-AF-X9)

ADOOT-C (5 Aug 54)

4th Ind

18 Sept 54

HQ AIR DEFENSE COMMAND, Ent Air Force Base, Colorado Springs, Colorado

TO: Commander, Eastern Air Defense Force, Stewart Air Force Base, Newburgh, New York

- 1. The report submitted by the 575th Air Defense Group, Selfridge Air Force Base, Michigan is incomplete and inconclusive and this headquarters desires that an amended report be submitted. The report neither substantiates the theory of system malfunction, nor does it preclude the possibility of pilot error. Analysis of the report and the F-86D circuitry does not reveal any single malfunction which could cause the indicated results. At least two malfunctions would be required to cause the effects noted:
- a. For the pod to extend and remain extended with the Armament Master Switch in "Jettison Ready," the override switch would have to be thrown to the "Extend" position, or the manual extend relay would have to stick in the closed position. However, if this relay had stuck, the pod would not retract after the rockets fired. The ground loading switch would have to be actuated to retract the pod.
- b. To fire 23 rockets, the PT-2 relays must be energized. Because of the unreliability of trigger safety pins, it is quite feasible that the trigger switch was inadvertently closed, and the rockets fired in a normally functioning circuit. It must be noted that if these PT-2 relays had stuck, the pod would have extended in "Jettison Ready", but would have retracted automatically when the Armament Master was thrown to "Package Only."
- 2. Because of the extreme hazard associated with such an incident, every possible effort must be made to establish the exact cause. To determine the exact cause of this incident, the following information is desired:
- a. What were the positions of the armament switches and circuit breakers on take-off?
- b. What evidence did the pilot have for believing the pod was extended and did not retract after the override switch was actuated?
 - c. Did the pod retract after the rockets fired?
- d. What are your conclusions as to the specific cause of the incident?

ADOOT-C, Subject: Report of Inadvertent Rocket Firing (Contd)

3. The SOP outlined in message, COMDR 575-V, dated 21 July 1954, from the 575th Air Defense Group is presently considered satisfactory, except for the use of trigger safety pins. ADC Regulation 55-11 states that all aircraft equipped with rocket-firing circuit breakers, which are accessible to the aircrew, must have these breakers pulled and a safety clip with red streamer will be installed until it is desired to fire the rockets. All ADC rocket-firing interceptors are so equipped and strict compliance with this regulation is desired. Trigger safety pins in rocket-firing aircraft are considered unreliable and their use is not recommended.

BY ORDER OF THE COMMANDER:

1 Incl n/c

2

COPY Easy reading copy made

180

From: COMMANDER, ADC


22 Nov 1954

To: COMMANDER, AMC, WRIGHT-PATTERSON AFB, OHIO

Info: COMMANDER, ARDC, P. O. BOX 1395, BALTIMORE 3, MD. COMMANDER, WADC-WRIGHT-PATTERSON AFB, OHIO COMMANDER, NOTS, INYOKERN, CALIF

(UNCLASSIFIED) ADMAC - 5D ______. For MCSONF at AMC.

Reference is made to 4750th Air Defense Wing message ADR-ADS 4495
and previous unsatisfactory reports and correspondence pertaining
to aircraft damaged by colliding with rockets and/or rocket components during firing. In some cases the damage was of a nature
that could result in the loss of the aircraft and pilot. Under
certain conditions the cause of an accident of this type would
be very difficult, if not impossible, to determine. In order
to prevent rocket firing accidents the following action is
required: (A) Rockets are provided with fins that do not break
off in flight. (B) Rockets are inspected before delivery to
assure that the head seats properly. (C) A solution to the
problem of rocket tumbling is provided.

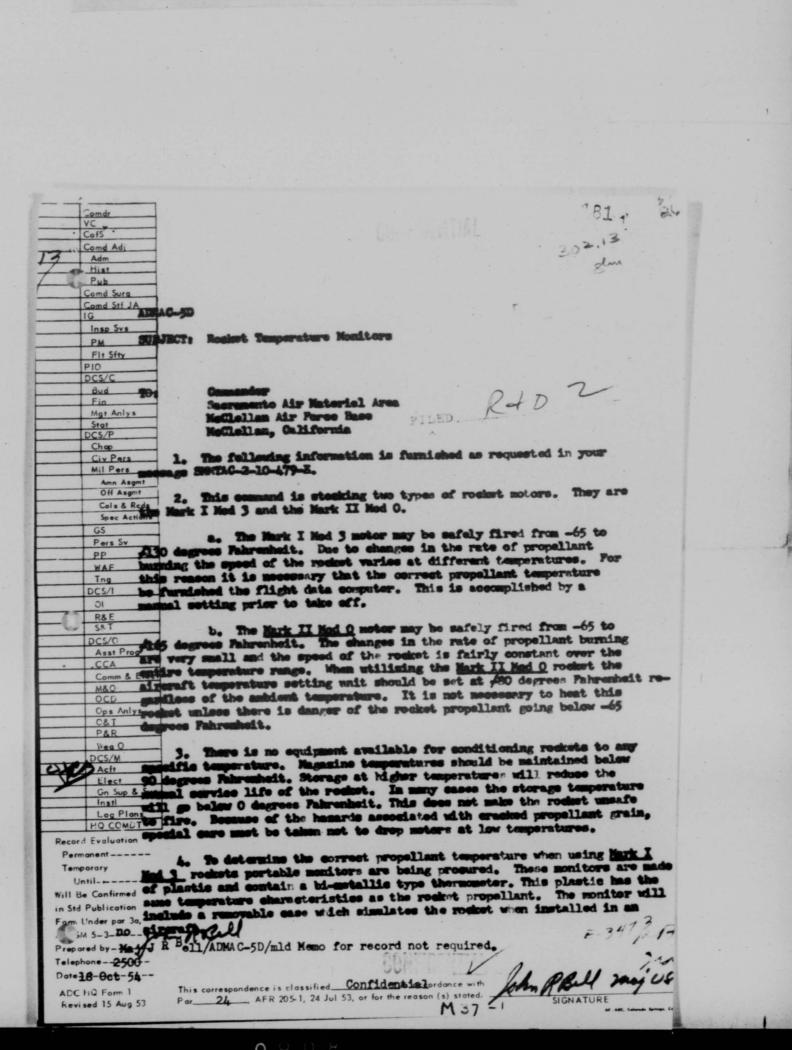

Mq ADC ADMAC-5D, Subj: Rocket Temp Monitors (Cont'd)

5. These portable monitors will be utilized as fellows with the F=86D, F=94C and F=89D aircraft.

a. Monitors will be placed in the regicet storage area with the case removed.

b. The monitors will stabilise at the rocket propellant temperature in approximately six (6) hours.

from the storage area with the reckets. The monitor will be placed in its case.

d. After the rockets are leaded the memiter will be placed in such a location as to be readily available and subjected to approximately the same temperature as the rocket pod.

e. When the aircraft are being prepared for ismediate take off a temperature reading will be obtained from the monitor. This reading will be approximately the temperature of the installed rocket prepalant.

f. As the F-66D aircraft does not have a rocket heating system eight degrees Fahrenheit should be subtracted to allow for propellant temperature drop during flight.

g. As the F-94C and F-89D aircraft have an internal rocket heating system it is not necessary to allow for any propellant temperature drop during flight. In the event the rocket heating system is not utilized subtract eight degrees Fahrenheit to allow for propellant temperature drop during flight.


h. The temperature reading is set into the sircraft.

i. In the event the temperature is below the lewest possible setting the lowest setting will be used.

6. Until such time as these monitors are available the Mark I Hed 1 rocket propellant temperatures will be entimated.

POR THE COMMANDERS

M 37-2

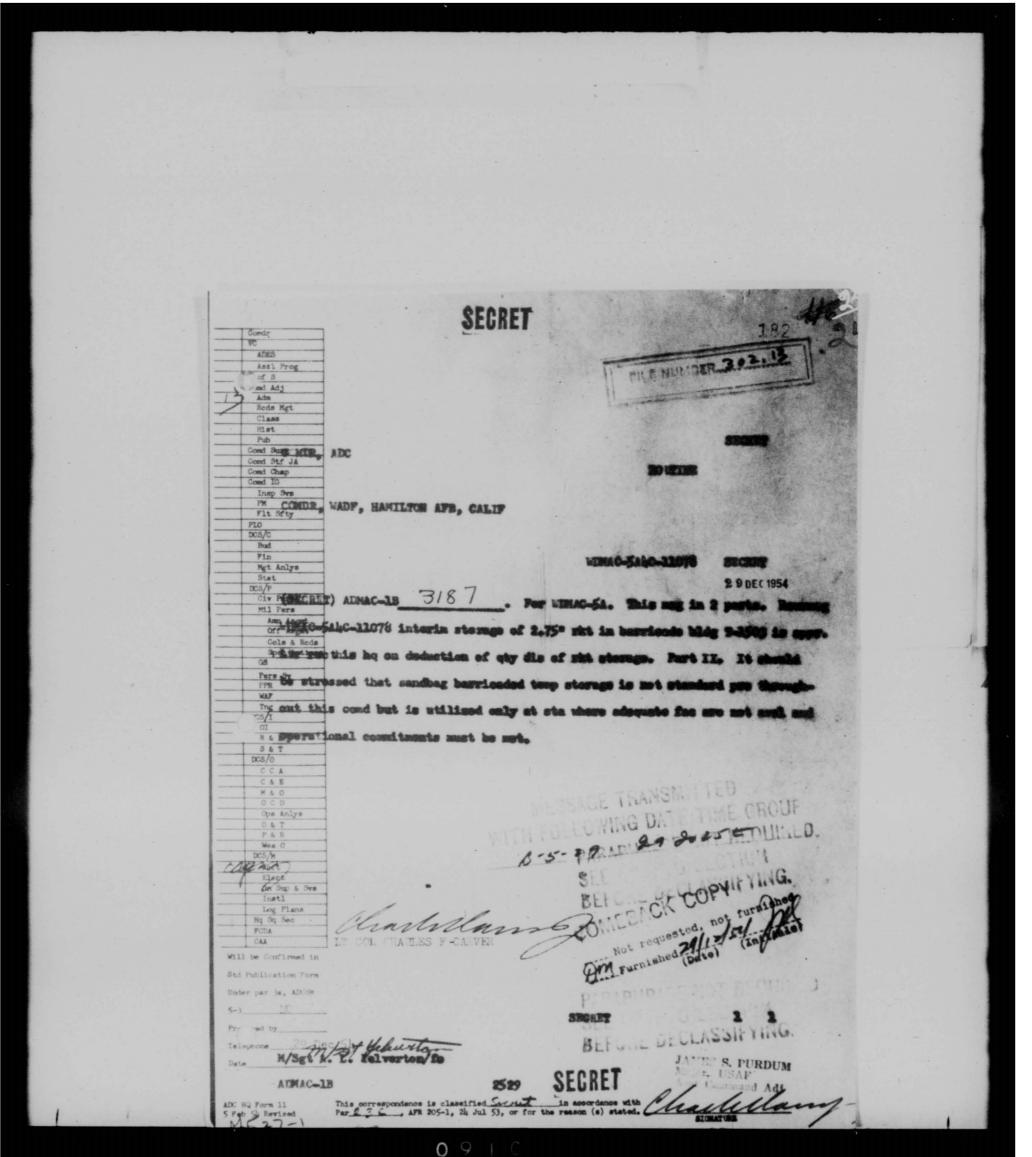

HEADQUARTERS
528TH AIR DEFENSE GROUP
Presque Isle Air Force Base
Presque Isle, Maine

193

DM-A

22 September 1954

SUBJECT: Inadvertent Firing of Rockets by Radar

TO:

Commander 4711th Air Defense Wing ATTN: Director of Materiel Presque Isle Air Force Base Presque Isle, Maine

- 1. Informal information received by this Headquarters indicates that the 2.75 FF rockets may be inadvertently fired if a loaded pod is placed directly in front of the E-6 radar during ground or air operation.
- 2. This Headquarters has found no information to substantiate the theory. If it were feasible, formation flying would be unsafe.
- 3. Desire you indicate if the E-6 radar will fire loaded rockets if the pod is placed in front of the radar set during operation.

FOR THE COMMANDER:

/s/ HAROLD H. MARQUIS JR. lst Lt, USAF Adjutant

Hq, 528th ADG, DM-A Subject: Inadvertent Firing of Rockets by Radar.

DN-Arn (22 Sep 54)

1st Ind

30 Sep 1954

HQ, 4711TH AIR DEFENSE WING, Presque Isle AFB, Maine

TO: Commander, Eastern Air Defense Force, Stewart Air Force Base, Newburgh, New York, ATTN: EAMAC-ARN

Request any information pertaining to basic request be forwarded to the 4711th Air Defense Wing.

FOR THE COMMANDER:

/s/ KENNETH A. FULLER lst Lt, USAF Adjutant

EAMAC-ARN (22 Sep 54)

2nd Ind

No date

HQ EASTERN AIR DEFENSE FORCE, Stewart Air Force Base, Newburgh, New York

TO: Commander, Air Defense Command, Ent Air Force Base, Colorado Springs, Colorado

1. Latest information available this headquarters is contained in 1st Indorsement, 16 July 1953, to letter, this headquarters, RAMAC-ARN 471, 10 July 1953, subject: Request Clarification of C.O. 39B-50-7. The indorsement indicates that more current data may now exist as a result of tests by ARDC.

/s/ BEN D. MOORHEAD 1st Lt, USAF Asst Adjutant

700

B/Ltr fr Hq Presque Isle AFB, DM-A, Subj: Inadvertent Firing of Rkts by Radar

ADMAC-5D (22 Sep 54)

3d Ind

13 Oct 1954

HQ AIR DEFENSE COMMAND, Ent Air Force Base, Colorado Springs, Colorado

TO: Commander, Eastern Air Defense Force, Stewart Air Force Base, Newburgh, New York

- 1. This Headquarters has no information that indicates rockets installed in aircraft can be accidentally fired by RF energy. The metal of the rocket motor, fin protector, rocket tubes and aircraft skin provide an almost perfect shield against RF energy.
- 2. On 21 Sept 51 APG conducted tests to determine the possibility of firing rockets by RF energy beamed from an AN/APS-20E radar set. Rockets with fin protectors removed were exposed to the radar beam at various distances and in numerous positions. Attempts to fire rockets under the most dangerous conditions, as outlined in the "Blasters Handbook" (Du Pont di Memours and Co) were unsuccessful. Complete test procedures and results will be forwarded when received.
- 3. Based on all present information the possibility of firing rockets installed in aircraft by RF energy is considered remote. The remote possibility of firing rockets by RF energy can be eliminated by following standard safety precautions prescribed for rocket handling.

BY ORDER OF THE COMMANDER:

301.8 A

85TH FIGHTER INTERCEPTOR SQUADROW Scott Air Force Base, Illinois

21 October 1954

SUBJECT: Radiation Hazards

TO: Commander
33rdAir Division (Defense)
Tinker Air Force Base

Timker Air Force Base Oklahoma City, Oklahoma

- 1. This organisation has been contacted by the Chief, Plans and Programs, 3310th Technical Training Wing, Scott Air Force Base, in regard to the possible hazard created by exposure of destructors an i/or 2.75" Folding Fin Aircraft Rockets to high intensity radio-frequency-energy radiation.
- 2. The attached correspondence, furnished by the 3310th Technical Training Wing, includes a guide to safe operating distances for transmitters of various frequencies.
- 3. It has been determined that the fellowing listed transmitters are now in operation at Scott Air Force Base:


POWER EQUIPMENT

10205KC

1020

- 4. All of the transmitters listed apparently violate the guide to safe operating distances. Although the attached correspon ence deals directly with blasting caps, it is pointed out that rockets and destructers are fired electrically, as are blasting caps.
 - 5. It is requested that Headquarters, 33rd Air Division:
- a. Determine the validity of the guide to safe operating distances as applied to destructors and rockets.
- b. Determine the applicability of the guide to the radiations listed in paragraph 3 above. Special attention should be naid to differences between peak power, maximum power and average power, and to their respective effects on the munitions in question.

4627-

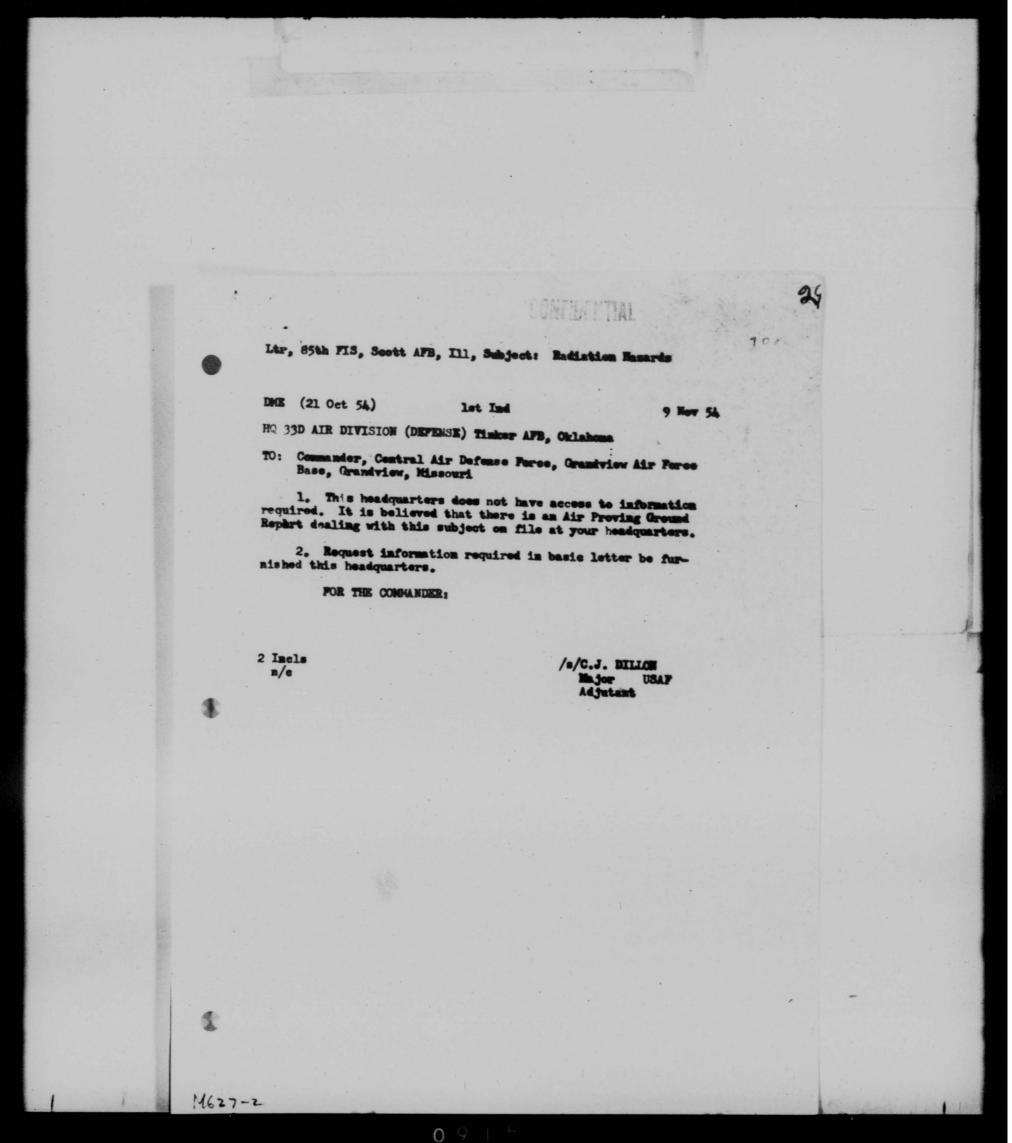

Ltr, 85th FIS, Scott AFB, Ill., Subject: Radiation Hazards

CDMAC-5 (21 Oct 54)

2e Ind

24 Nov 54

101

HQS CENTRAL AIR DEFENSE FORCE, Grandview AFB, Grandview, Mo

TO: Commander, Air Defense Command, Ent Air Force Base, Colorado Springs, Colorado

- 1. Information available at this headquarters regardi accidental ignistion of rockets and destructors by high intensity radio-frequency enerby is contained in the following correspondence.
- a. Letter classified confidential, Subject: Minutes of Conference on Air Defense Command Operational Problems concerning 2.75" FF R, Leted 2 February 1954 from Naval Ordnance Test Station, China Lake, Clifornia.
- b. Second indorsement from your headquarters to 33d Air Division letter file DMM471, Subject: Request for Rocket Advisor for A5th Fighter-Interceptor Squadron, dated 30 September 1953.
- November 1954.
- 2. Although the above reference correspondence offers limited information, no conclusive facts can be mathered as to the actual hazard effects radio frequency has on 2.75" inch rockets and destructors.
- 3. It is the opinion of this headquarters that safety precautions as outlined inCADF letter 136-2, Subject: Interim Readiness Storage of Turn-Around Ammunition (2.75" Inch Folding Fin Aerial Rockets) as amended, contains adequate safety methods for handling and storage of rockets. Letter from this headquart ers ACFT 5-471, Subject: Storage of MK2 Mod O Destructors, dated 15 September 1953 covers the safe storage of destructors. (See attached inclosures number 3 and 4.)
- 4. Request your headquarters assist in obtaining comies of alltests conducted relative to effects of radio frequency on 2.75" inch rockets and destructors. Further request your opinion recarding the hazards existing at Scott Air Force Base, Ellinois, as outlined in basic correspondence.

FOR THE COMMANDER:

4 Incls
Added two inclosures
3. CADF Ltr, Storage of MK2
Mod O Destructors
4. CADF Ltr, 136-2 as amended

/s/MILTON A. HE. ON Capt, USAF Asst Adjutant

M627-3X

Easy reading copy made

From: COMMANDER, ADC

19 November 1954

To: COMMANDER, CADF, GRANDVIEW AFB, MO

COMMANDER, 4750TH ADW (WEAPONS), YUMA COUNTY AIRPORT, YUMA, AREZONA

(UNCLASSIFIED) ADMAC-5D____. Following information furnished as per telephone conversation with Captain Eckols your headquarters. This headquarters has no information that indicates rockets installed in aircraft can be accidentally fired by RF energy. The metal of the rocket motor, rocket tubes, aircraft skin and fin protector cap when installed provides an almost perfect shield against RF energy. On 21 September, APG conducted tests to determine the possibility of firing rockets by RF energy beamed from an AM/APS-20E radar set. Rockets with fin protectors removed were exposed to the radar beam at various distances and in numerous positions. Attempts to fire rockets under the most dangerous conditions as outlined in the "Blasters Handbook" were unsuccessful. Complet test procedures and results will be forwarded when received. Resed on all present information the possibility of firing rockets with the fin protectors on, or when installed in aircraft, is considered remote. This remote possibility can be eliminated by following standard safety precautions prescribed for rocket handling.

COPY
Easy reading copy made

188

From: COMMANDER, ADC


6 Dec 1954

To: CHIEF OF STAFF, USAF, WASHINGTON 25, D. C.

Info: COMMANDER, AMC, WRIGHT-PATTERSON AFB, OHIO
COMMANDER, ARDC, P. O. Box 1395, BALTIMORE 3, MD.
COMMANDER, APC, Eglin AFB, Florida
COMMANDER, EADF, STEWART AFB, NEWBURCH, N. Y.
COMMANDER, CADF, GRANDVIEW AFB, MC.
COMMANDER, WADF, HAMILTON AFB, HAMILTON, CALIF.
COMMANDER, 4750TH A DIV (WEAPONS) YUMA COUNTY AIRPORT
YUMA, ARIZONA

(UNCLASSIFIED) ADMAC-5 . Since the receipt of 2.75 inch rockets this headquarters has been attempting to determine the possibility of an accidental firing resulting from exposure to an RF energy source. There has been considerable correspondence and limited tests to determine if and/or what hazards exist. The information obtained as of this date is not conclusive enough to be utilized to determine what safety precautions should be taken. The present safety precautions as pertain to RF energy consist of the following: (A) Keeping the fin protector installed until immediately before rocket loading. (B) Not storing rockets in or near radio or radar apparatus. In the event a rocket can be accidentally fired by RF energy, additional safety precautions are required. This headquarters has no information indicating any rockets have ever been fired by RF energy. However, considerable information is available on accidental explosions of electric blasting caps exposed to RF energy from radio transmitters of various power outputs and radar. Commercial concerns utilizing

electric blasting caps utilize a chart indicating safe distances from various sources of RF energy. These distances depend on the power output of the equipment. As the rocket ignitor squibs contain a bridge wire that is almost identical to the circuit in an electric blasting cap it appears that the squib may possibly be expected to ignite under certain conditions when exposed to RF energy. Request a priority project be established to determine the following: (A) If a rocket can be fired by any known source of RF energy (1) with the fin protector installed (2) with the fin protector removed (3) when installed in aircraft. (B) In the event it is determined that a rocket can be fired (1) Safety distances from all RF energy sources (2) Additional safety precautions required.

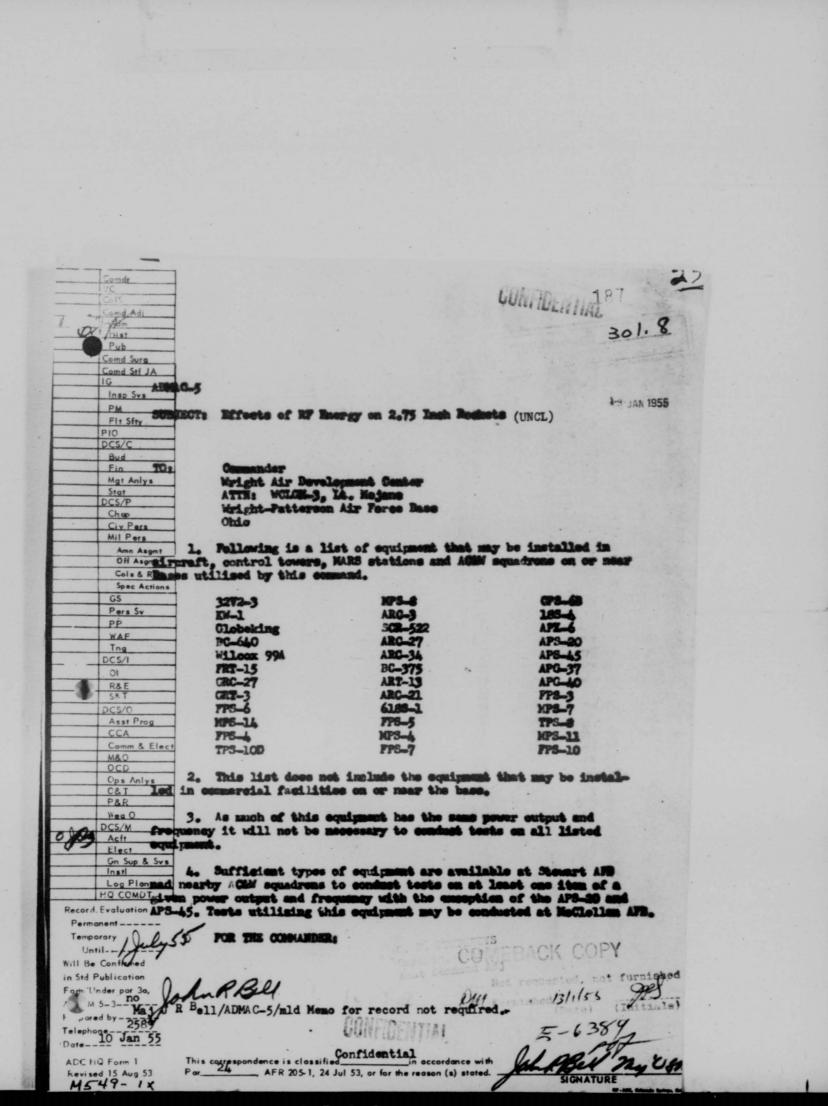

COPY Basy reading copy made

198

From: COMMANDER, ADC

11 September 1954

EADF, STEMART AFB, N. Y.

HIER, CADF, GRANDVIEN AFR, MD. HIER, WADF, HANTLION AFR, CALIF. HUER, 4750 TRAINING WING, YUMA COUNTY AIRPORT, ARIZONA

(UNCLASSIFIED) ADOUT-C 29256 . Desire the following changes made to UPD 10-4, 1 Sept 53. Under Part 1, a. Paragraph 4d (5) add an additional sub-paragraph (c) "Scoring Firing Interesption: A training interception on which 6 or more rockets are fired at the target and the results assessed." b. Under Part 2, "Flying Training Susmry, delete "Aerial Rocketry" mission and change totals accordingly. Under Interception Missions, add an additional type mission "OCI-AI rocketry" with 24 interceptions under head of weather and one night intercept. Change total accordingly. Delte paragraph at bottom of page 6 which requires 320 rockets to be fired annually and substitute the following: "A minimum of 24 scored firing and one night familiarisation firing intercept will be flown at an ADC Weapon Raployment Center." c. On page 9, change paragraph 6 to read "Aerial Rocketry: Each pilot will be required to fire a minimum of the scored air to air intercepts per year. In addition, one night familiarisation intercept will be flown on which 24 rockets will be fired simulteneously.

DOCUMENT NO. 189

THIS DOCUMENT MAY BE FOUND

IN VOLUME VI OF THE SUPPORTING

DOCUMENTS TO THIS HISTORY.

SECRET

COPY

190

ADOOT

31 Dec 1954

SUBJECT: (Unclassified) Flying Hour Utilization

TO:

Commander Central Air Defense Force Grandview Air Force Base Grandview, Missouri

- l. My attention has been drawn to the fact that this command used only sixty-three percent of its flying hour allocations for fighter interceptor aircraft in FY '54. It is not our intent to overburden the Defense Forces with an unrealistic flying hour program; therefore, this command has based its flying hour allocation program on the minimum requirements for our squadrons to maintain a combat capability.
- 2. Underflying of our allocated hours, as we did in FY '54, will make it extremely difficult to justify our requests for the required hours in the following progremmed years. Since we have not fully utilized our allocated flying hours, which were slightly less than those requested, it becomes evident that we did not accomplish even the minimum requirements of our Unit Proficiency Directives. We believe these requirements—approximately 20 hours per aircrew per month—are sound and should be flown. Further, unit commanders are encouraged to provide aircrews with hours over and above these requirements to bring units to a maximum state of proficiency.
- 3. I believe the majority of the difficulties which we encountered in FY '54 have been overcome by this time. Consequently, we should make every effort to comply with the UPDs during FY '55. In this respect I believe 700 hours per month per squadron on UE aircraft, or 20 hours per available aircrew, whichever is the larger, is a reasonable requirement. There are two ways of approaching this requirement: one by staging an all out "flying time war", and the other by efficient management. We have learned by bitter experience that "time wars" inevitably produce substandard effectiveness and high accident potential over the long haul. In General Chidlaw's letter of 27 August 1954, his views on this subject were made clear, i. e., we must avoid at all costs the "time war" approach. Fulfillment of the UPDs rather than flying time, per se, is the criterion.

SECRET

092:

SECRET

190

Hq ADC Subject: (Uncl) Flying Hour Utilization (contd)

Successful UPD accomplishment is predicated on several factors, most important of which is the maintenance capability of the squadron. The squadron commander must find the practical limit of this capability, design his UPD scheduling around the unit's sustained pace, and then utilize to the maximum the flying time at his disposal.

4. In order to pinpoint our deficiencies and give command assistance in overcoming them, I desire that squadrons forward a report through channels to this headquarters when a quarterly figure of 2100 hours, or 60 hours per available aircrew, has not been achieved. This report should give complete and substantiated reasons for the underflying and should be submitted in the format shown in Attachment 1. Reports Control Symbol ADC-F8 will apply to this report.

1 Attachment Example, Flying Time Deficiency Report FREDERIC H. SMITH, JR. Major General, USAF Vice Commander

2

SECRET

SECRET

COPY

EXAMPLE

190

FLYING TIME DEFICIENCY REPORT - JAN THRU MARCH 1954

479TH SQUADRON

a. Total hours inclement weather reduced or precluded flying: 78

(30 hours below IFR minimums 11 for strong crosswind 37 for snow and/or ice on runway)

b. Total hours runway was closed due to aircraft accidents, construction, ect.: 101

(96 for runway light repairs 5 for B-29 accidents)

c. Directives which have resulted in a limitation on flying:

TO 1 F-86D 109 grounding of F-86Ds due to malfunction of auto-pilot

TO 1 F-86D 114 grounding of F-86Ds due to leak in A/B fuel line

Letter Hq 37th ADiv, Subject: Preparation for Exercise Blue Nose, 3 July 1954. All aircraft except alert commitment stood down in preparation for subject exercise.

d. Other pertinent comments:

This squadron's flying schedule is based on the availability of 10 fighter aircraft per day for an average of 20 days per month. By flying these aircraft 40 hours per day we normally complete the month with 800 hours in UE. The non-flying periods shown in Item "a" above resulted in the reduction of 78 flying hours. Two hundred twenty-three (223) hours were lost due to T. O. groundings and forty hours (40) were lost due to preparation for Exercise Blue Nose.

3

SECRET

COPY
Easy reading copy made

101

From: COMMANDER, ADC

31 August 1954

To: COMMANDER, CINCUSAFE, WIESBADEN, GERMANY

(unclassified) ADOOT-C . For Director O&T, DCS/ OPNS. Your classified message 6133, 26 Aug 54. Following is proposed requirements for alert qualified pilots of this command. a. Ground training: 10 hours radar work in flight simulator, 1 hour lecture on cruise control, 2 hours on armament, 4 hours fire control system, 4 hours airborne intercept, 3 hours VOR, ILAS, and zero reader, 1 hour UHF, IFF, and radio compass, 4 hours tactics and techniques. b. Flying training. $1\frac{1}{2}$ hours basic instruments, $1\frac{1}{2}$ hours radio range procedures, 3 hours VOR and ILAS, 3 hours penetration and recovery procedures for home station (scramble and normal), 10 hours alternate basic recovery procedures, 3 hours OCA, 10 stern attacks (zero degrees plus or minus 30 degrees), 15 quartering stern attacks (45 degrees plus or minus 15 degrees) 15 beam attacks (90 degrees plus or minus 30 degrees) for a total of 40 day attacks. c. Night. 3 hours transition, 5 hours airborne intercept consisting of 5 stern attacks, 5 quartering stern attacks, 5 beam attacks, for a total of 15 night attacks.

COPY

HEADQUARTERS
534TH AIR DEFENSE GROUP
KINROSS AIR FORCE BASE
Kinross, Michigan

192

KROT

18 Oct 54

SUBJECT: Waiver on UPD Requirements

TO: Commander

4706th Air Defense Wing O'Hare International Airport Park Ridge, Illinois

- 1. It is requested that the 438th Fighter-Interceptor Squadron be granted a waiver for flying training requirements regarding "Simulated Flame-out Landings" as directed in the ADC Unit Proficiency Directive 10-4.
- 2. The above request is based upon the fact that simulated flame-out landings are not considered necessary operational training requirements for a twin-engine jet aircraft. The loss of an engine in flight, which may be considered in a comparative light between single and twin engine jet type aircraft, does not always result in similar type emergencies. As a result, the single engine jet aircraft would necessitate a dead stick landing and, therefore, would necessitate proficiency and practice in simulated flame-out landings. However, the F-89D which is the U/E type aircraft presently utilized by 438th FIS, under similar incidents of loss of one engine, would not result in the same type emergency. Pilots of F-89D's would be required to execute routine single-engine procedure, thereby resulting in safe landings. Therefore, proficiency and practice in simulated flame-out landings are not considered as necessary operational training requirements.
- 3. It is recommended that in lieu of the requirements pertaining to simulated flame-outs, pilots should be proficient in and should perform 24 simulated single-engine landings per fiscal year.

Hq 534th ADG KROT Subj: Weiver on UPD Pequirements

100

DWOOT (18 Oct 54)

1st Ind

27 Oct 54

HQ 4706TH AIR DEFENSE WING, O'Hare International Airport, Park Ridge, Ill.

TO: Commander, 30th Air Division (Defense), Willow Run Air Force Station, Belleville, Michigan

- 1. This Headquarters concurs with the Commander, 534th Air Defense Group. However, it is believed that some requirement exists for practice flame—out landings. In event of total fuel exhaustion, no power would be available from either engine.
- 2. Recommend that ADC Unit Proficiency Directive 10-4 be amended to require one (1) simulated flame-out landing and one (1) single engine landing per month for pilots in F-89D equipped units.

Hq 534th ADG KROT Subj: Waiver on UPD Requirements

DOTFT (18 Oct 54)

2d Ind

4 Nov 54

700

HQ 30TH AIR DIVISION (DEFENSE), Willow Run Air Force Station, Belleville, Michigan

TO: Commander, Eastern Air Defense Force, Stewart Air Force Base, Newburgh, New York

Recommend the change to Air Defense Command Unit Proficiency Directive requirements contained in paragraph 2 1st Indorsement, be adopted.

FOR THE COMMANDER:

EAOOT-TW (18 Oct 54)

3d Ind

12 Nov 54

HQ EASTERN AIR DEFENSE FORCE, Stewart Air Force Base, Newburgh, New York

TO: Commander, Air Defense Command, Ent Air Force Base, Colorado Springs, Colorado

Concur with provisions of Second Indorsement.

192

B/L Hq 534th ADC, KROT, Subj: Waiver on UPD Requirements

ADOOT_C (18 Oct 54)

4th Ind

6 Dec 54

HQ AIR DEFENSE COMMAND, Ent Air Force Base, Colorado Springs, Colorado

TO: Commander, Eastern Air Defense Force, Stewart Air Force Base, Newburgh, New York

- 1. This headquarters concurs with recommendation contained in paragraph 3, basic letter. "Simulated flame-out landings" as directed in ADC Unit Proficiency Directive 10-4 will be changed to read, "Simulated single engine landings", for F-89D aircraft.
- 2. Reference recommendation in 1st Indorsement to the basic letter. This headquarters is studying the requirement for simulated flameout UPD 10-4 will be revised accordingly and an F-89 flameout landing pattern published.

BY ORDER OF THE COMMANDER:

COPY

HEADQUARTERS
AIR DEFENSE COMMAND
Ent Air Force Base
Colorado Springs, Colorado

90

ADOOT_C

8 Sep 1954

SUBJECT: (Uncl) Qualitative Revisions to Flying Training Program

TO:

Commander
Eastern Air Defense Force
Stewart Air Force Base
Newburgh, New York

- 1. The attached copy of a USAF letter on the above subject is forwarded for your information, action and comments.
- 2. It is requested that replies to the specific questions asked in paragraphs 3.a. and 3.b. be sent to this headquarters not later than 1 October 1954.

BY ORDER OF THE COMMANDER:

1 Incl USAF 1tr

/S/ C. F. HUMPHREYS Captain, USAF Asst Command Adj

193

Hq ADC ADOOT-C Subject: (Uncl) Qualitative Revisions to Flying Training Program

EAOOT-TW (8 Sep 54) 1st Ind

30 Sep 1954

HQ EASTEFN AIR DEFENSE FORCE, Stewart Air Force Base, Newburgh, N. Y.

TO: Commander, Air Defense Command, Ent Air Force Base, Colorado Springs, Colorado

- 1. In accordance with paragraph 2 of basic letter, the following areas of deficiency in aircrew member products of the Air Training Command are outlined with recommendations to improve and alleviate these problem areas:
- a. <u>Deficiency</u>: Pilots lack the instrument proficiency required to accomplish the all-weather mission and have received little or no actual weather experience during formal training. This is by far the most prevalent and serious deficiency command-wide.

Recommendations: More emphasis should be placed on basic instrument procedures, radio range flying and actual weather training. Each pilot should receive a minimum of 5 hours actual weather time prior to assignment to a tactical unit. This should be accomplished in an interceptor aircraft, if possible, during the Applied Phase. Take-offs, climb-outs and landing should be accomplished under marginal weather conditions (800-1000 feet ceilings).

b. <u>Deficiency</u>: Pilots lack competence in formation flying.

Recommendations: Added emphasis on formation flying to include formation take-offs, formation tactics and techniques and formation discipline.

c. <u>Deficiency</u>: Aircrews lack aerial discipline and the desired degree of judgment.

Recommendations: Aerial discipline must be emphasized during all phases of training. Students should not be controlled to such an extent that individual initiative and a normal development of judgment is inhibited.

d. <u>Deficiency</u>: Aircrews lack a thorough and complete indoctrination concerning ADC functions, equipment and organization particularly the role and functions of an ADC fighter-interceptor

2

103

EACOT-TW Subject: (Uncl) Qualitative Revisions to Flying Training Program (Contd)

squadron. This has resulted in a negative mental attitude toward the type flying involved to accomplish the air defense mission.

Recommendations: Prospective AI crews should be given an indoctrination by ADC fighter-interceptor crews during the basic stage of pilot training. All aircrews chosen for assignment to ADC interceptor squadrons should satisfactorily complete the instrument and interceptor schools should be drawn from ADC resources and such personnel should be highly capable of imparting a desire to become a skilled all-weather interceptor crew. In short, newly graduated aircrews must be thoroughly "sold on the product".

e. <u>Deficiency</u>: Pilots and radar observers are very weak in crew coordination.

Recommendations: Each student pilot and RO should be required to fly a minimum of three flights with an instructor pilot or radar observer prior to permanent crew assignments. This action would give each crew member a better idea of what is expected of them as individuals and how to coordinate their actions to obtain better teamwork. Each pilot and RO team should complete interceptor training and be assigned to and transferred between tactical units as a team rather than as individuals.

f. <u>Deficiency</u>: Radar observers are very limited in navigational experience.

 $\frac{\text{Recommendations:}}{\text{Interceptor aircraft radio and navigational equipment should be}} \\ \text{made more detailed and comprehensive.}$

g. <u>Deficiency</u>: Newly graduated crews have demonstrated considerable apprehension and nervousness during initial assumption of alert duties and lack confidence in themselves and the aircraft.

<u>Pecommendations</u>: Emphasis be placed on physical set-up of squadron alert, actual scrambles, periodic alert duty, intercept procedures and aircraft identification during the interceptor phase of training and aircrews should be given the opportunity to fire aerial rocketry missions. Of particular importance is a thorough indoctrination in the duties and functions of the ACW director.

h. <u>Deficiency</u>: Radar observers are arriving from ATRC with a minimum of actual airwork using UE aircraft radar. In some cases ROs have not even seen a UE fire control system.

3

103

EACOT-TW Subject: (Uncl) Qualitative Revisions to Flying Training Program (Contd)

Recommendations: Aircrews should not be assigned to ADC interceptor squadrons until they have completed all of the interceptor crew course.

- 2. In general it is recommended that the "tiger" concept of training be abandoned for those pilots earmarked to fill cockpit requirements within the Air Defense Command. A great deal of time and effort is being expended indoctrinating pilots in the fact that as interceptor pilots they must be professionally higher qualified.
- 3. Another problem which exists within this command relative to newly assigned aircrews can be solved by action at Headquarters ADC level. This concerns the assignment of newly graduated officers to tactical squadrons with primary duty as Training Officer, AFSC 7524. This action places a burden on the squadron concerned and tends to adversely affect the morale of the pilot. The position can be more adequately filled by one of the experienced interceptor squadron pilots and the new pilot can be sent to a formal course of training in the UE aircraft for subsequent reassignment as a 1124B or C.
- 4. This indorsement is classified Confidential in accordance with paragraph 24e (8) of AFR 205-1.

FOR THE COMMANDER:

1 Encl n/c /S/ JAMFS R. WORLINE Captain, USAF Asst Adjutant

COFY

CONFIDENTIAL

901

Hq ADC, ADOOT-C, Subject: (Uncl) Qualitative Revisions to Flying Training Program

WDOTN-2 (8Sep 54)

1st Ind

28 Sep 1954

HQ WESTERN AIR DEFENSE FORCE, Hamilton AFB, Hamilton, California

TO: Commander, Air Defense Command, Ent AFB, Colorado Springs, Colorado

- 1. This headquarters recently completed a study to determine training deficiencies of air crews newly graduated from the various ATRC flying schools. The study considered approximately 250 ATRC aircrew products received during the past 18 months. Nearly all individuals lacked one or more specific flying training accomplishments such as jet qualified instrument cards, instrument training, GCA practice in jet aircraft, etc. In general, the new graduate is completely unfamiliar with the basic ADC mission and the functions of an ADC interceptor squadron.
- 2. Specific areas of deficiency in aircrew members arriving from the training system are:
 - a. Instrument training, both simulated and actual.
 - b. Night flying in tactical jet aircraft.
- c. Knowledge of maximum performance operation of tactical aircreft. This includes operation at maximum altitude, range and radius of action and high speed interceptions.
 - d. Lack of familiarity with the airborne radar equipment.
 - e. Lack of knowledge of GCI-Interceptor procedures.
 - f. Radar observers are graduated without any jet flying time.
 - 3. Recommendations to improve deficiencies noted above (pilot)
- a. Instrument training should include the following minimums:
 - 1. 20 hours of hood time in jet aircraft.
 - 2. Qualification for and issuance of a jet instrument card.
 - 3. Be proficient in making GCAs in jet aircraft.

2

904

Hq ADC, ADOOT-C, Subject: (Uncl) Qualitative Revisions to Flying Training Program

WDOTN-2 (8 Sep 54)

1st Ind (Cont'd)

- 4. Have working knowledge of all approach systemsrange, ADF, ILAS, GCI-GCA.
- 5. Accomplish at least one flight, including departure and approach, under actual instrument conditions prior to graduation.
- b. Require complete proficiency in night operation of tactical jet aircraft prior to graduation.
- c. A reasonable percentage of training flights be conducted at maximum altitude and include long range and maximum radius of action problems. At least 50% of interceptions be made at high speed (.78 to .95 mach).
- d. Require proficiency in ground mapping and beacon operation of the airborne radar system.
- e. Require proficiency in GCI-Interceptor procedures and techniques.
- 4. Recommendations to improve deficiencies in radar observer training (reference paragraph 2f above).
- a. Require radar observers to have graduated from the allweather interceptor school and be proficient in jet tactical aircraft.
- 5. It is further recommended that the ground school include sufficient instruction to insure a thorough knowledge of the ADC mission and the function of an interceptor squadron in the Air Defense Command.

FOR THE COMMANDER:

/S/ P. E. HAUPT CWO, USAF Asst Adjutant

3

CONFIDENTIAL DEPARTMENT OF THE AIR FORCE Headquarters United States Air Force Washington 25, D. C.

COPT

195

AFPIR

18 August 1954

SUBJECT: Qualitative Revisions to Flying Training Program

TO:

Commander
Air Defense Command
Ent Air Force Base
Colorado Springs, Colorado

- 1. Immediately following the United States participation in the Korean conflict, the pilot training program was expanded rapidly to support increased pilot requirements for both the Korean effort and the programmed buildup of the Air Force. The problems (base development, equipment, personnel) which have affected other elements of the Air Force have also dictated over-all training capability.
- 2. Because of shortages of aircrew personnel, flying training programs were developed to satisfy quantitative requirements first, and qualitative requirements, secondly. This has resulted in the production of some marginally qualified aircrew members from the training system, even though the majority of the flying training graduates have been able to proceed to tastical units and perform duties in unit equipment with a minimum amount of additional training. As the new weepon systems, with their increased demands on aircrew skills, are introduced into the Air Perce inventory the gap between the ATRC product and the aircrew skills necessary to efficiently operate tastical unit equipment will widen. This problem has been recognized and remedial action is already being initiated. The major actions which will have the most immediate effect are:
- A. Immediately adjust the output from the Grew Training Air Force schools to the number required to support cockpit seat requirements.
- h. Establish a long range program of medermining the trainer aircraft in the pilot program.
- g. Flams are being developed to adjust the new pilot production to a long range sustaining rate as the 197 Wing Purce objectives are not. The immediate implementation of g. and the future adjustment of the training rate will permit the allocation of additional flying hours to training such will result in a greatly improved product from the flying training system.
- 3. ATRC has been directed to study the entire pilet training program to determine those areas where improvement is needed. In order that ATRC may be provided with all assistance possible in this study, request that your command analyse the qualifications of the new airgrey product you have received in the past and provide this headquarters with your communic and recommendations for improving airgrey qualifications in the flying training program. Your communic and recommendations, although not limited to the

CONFIDENTIAL

CADF-6043 -54

COPY

CONFIDENTIAL

105

following, will include specific consideration of the following:

- a. Identify areas of deficiency in aircrew members arriving your command from the training system.
- b. Provide specific recommendations to improve identified deficiencies in order of priority by type aircrew member (Fighter Filet, Interceptor Filet, Navigation-Bombardier, etc).
- 4. Your recommendations will be evaluated along with those received from other major commands and will be accomplished within the resources and equipment available.

BY ORDER OF THE CHIEF OF STAFF:

/s/t/ N. B. HARPOID

Major General, UBAP

Director of Personnel Procurement
and Training, DCS/P

CONFIDENTIAL

CADF-6043 -54

M 25:-6

COPT

CONFIDERIAL

-1 N 1 - Sew

195

 ${\rm Hq}$ ADC ADOOT-C, Subj: (Uncl) Qualitative Revisions to Flying Training Program

310.9

PO&F-R (8 Sep 54)

1st Ind

18 OCT 1954

HEADQUARTERS CENTRAL AIR DEFENSE FORCE, Grandview Air Force Base, Grandview, Missouri

TO: Commander, Air Defense Command, Ent Air Force Base, Colorado Springs, Colorado

l. Specific information requested as outlined in paragraph 2 of basic letter is furnished as follows:

a. Areas of Deficiency in Air Crew Members Arriving From Training System:

- (1) Pilots are not being sufficiently screened by Air Training Command as to their quality and timber. They are not all able to perform a safe and industricus job which is definitely required by all-weather pilots assigned to an air defense interceptor unit.
- (2) Much more stress should be placed upon actual weather and instrument flying.
- (3) Serious lack of navigational experience in unit-equipped aircraft associated with navigational experience is cruise control technique. Graduate pilots from Training Command have not been exposed to enough cruise control possibly due to lack of navigational flights. They know how long an airplane can stay aloft, but they have little knowledge of the best "miles per pound of fuel" which can be obtained by proper altitude and power settings.
- (4) More GCI intercepts and let-downs during actual weather conditions.
- (5) Filots are not combat ready.
- (6) Lack of total flying experience.

b. Lecom endations:

(1) Air Training Command should establish at the very beginning of a pilot's career a system whereby his quality, timber and desire for all-weather intercept type flying

25-1


CUMEIDENTIAL

Hq CADF PO&R-R 1st Ind to 1tr Hq ADC ADCOT-C, Subj: (Uncl) Qualitative Revisions to Flying Training Program

can be determined. When pilots have been screened as indicated above, additional emphasis should be placed on their all-weather and GCI training prior to graduation and during subsequent assignment to further air defense training. If it can be determined early enough, a cadet's training should be slanted toward all-weather type flying and should also include specialized ground school training.

- (2) Greater emphasis should be placed on the techniques of cruise control, and to obtain this cruise control experience, more long distance navigation flights should be made in tactical type aircraft.
- (3) Air Training Command should establish an air defense "CTU" to complete the final training phase of chosen graduate interceptor pilots prior to their assignment to an air defense tactical unit. This CTU should be located in an area of frequent bad weather, near a good rocket range, and possess full air defense type radar and facilities. When graduated from this CTU, the pilots should be well-qualified in all-weather flying in tactical aircraft, have fired rockets and be combat ready or combat capable in air defense first line tactical aircraft.
- (4) All-weather pilots should have more flying time and experience prior to being assigned to air defense units.
- (5) If it is possible to accomplish within the Training Command those factors mentioned above, a final and obvious recommendation would be to hand-pick the most qualified pilots for assignment to areas of the United States known to have the most severe weather conditions. It is anticipated that if the above recommendations were carried out, we would realize the following advantages:
 - (a) More "capable and combat ready" all-weather pilots for ADC.
 - (b) The most qualified all-weather pilots will be assigned to severe weather areas.
 - (c) Anticipate a marked reduction in flying accidents.

M25-2

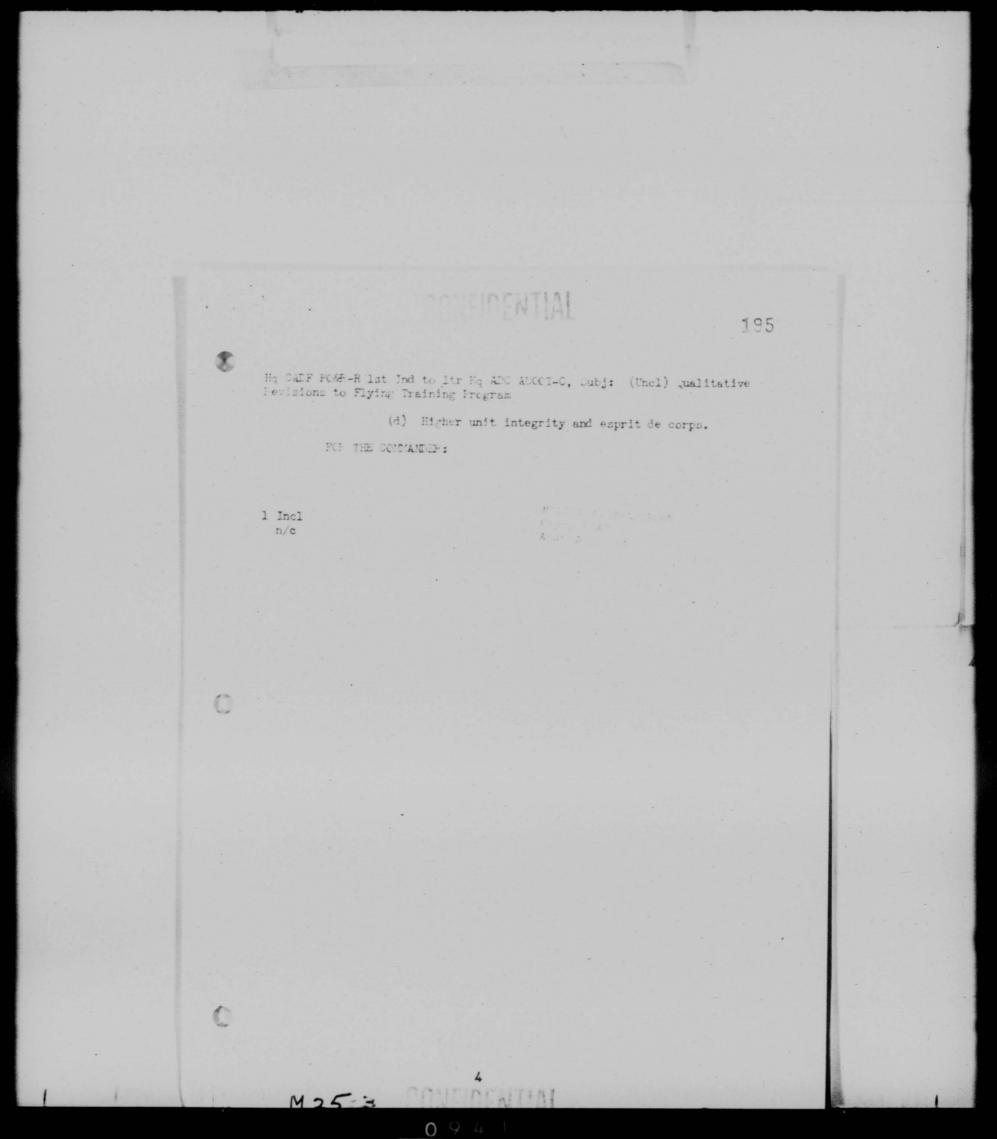

COPY

HEADQUARTERS WESTERN AIR DEFENSE FORCE Hamilton Air Force Base Hamilton, California

108

WDOTN-1

23 Oct 54

SUBJECT: Qualitative Revisions to Flying Training Program

TO: Commander
Air Defense Command
Ent Air Force Base
Colorado Springs, Colorado

- 1. It has become increasingly apparent that pilots graduating from Advanced Flying School-Interceptor are not receiving sufficient indoctrination in the mission and structure of the Air Defense Command, the operations of GCI stations, and procedures employed in the utilization of interceptor attack positioning. In addition, graduates of the Aircraft Controllers' School are not familiar with the fire control systems utilized in our fighter-interceptor aircraft and have many erroneous ideas concerning the capabilities of these systems.
- 2. Conversations with recent graduates of Advanced Flying Schools-Interceptor indicate that the only indoctrination presented concerning the Air Defense Command is a forty to fifty minute lecture on the organizational chart of the Command. Visits to GCI stations are hurried affairs during which students are afforded the opportunity to observe the operations, but are not required to spend a specified amount of time observing practice intercepts, ect. It is requested that the following training requirements be established with the Air Training Command for student pilots in Advanced Flying Schools-
- a. A minimum of ten hours of lectures on the missions, procedures, problems, etc. of the Air Defense Command. At least five of the hours should be spent on Air Mass Positioning techniques presented from both the pilot's and controller's viewpoint.
- b. A minimum of six hours spent in a GCI station to include a thorough briefing on communications and operations procedures. A minimum of three hours should be spent in watching controllers conduct practice intercepts with students required to observe a minimum of twenty intercepts and, if possible, to control five intercepts.

109

Hq WADF, WDOTN-1, Subject: Qualitative Revisions to Flying Training Program

- 3. It is further requested that the following training requirements be established for students undergoing training in the Aircraft Controllers' School.
- a. A minimum of two hours of lectures and movies on each of the E-series fire control systems, stressing system capabilities and limitations.
- b. A minimum of five practice intercepts per student controller as observer in the back seat of a T-33 or interceptor aircraft.
- 4. It is believed that the inclusion of these requirements in the training programs would greatly enhance the value to Air Defense Command of newly graduated students from subject schools, and would shorten appreciably the amount of time spent in getting new graduates indoctrinated into our present Air Defense System.

COPY

907

ADOOT -C

29 Nov 54

SUBJECT: (Uncl) Qualified Revisions to Flying Training Program

TO: Director of Personnel Procurement and Training Headquarters USAF Washington 25, D. C.

1. Reference is made to your letter AFPTR, subject as above, dated 18 August 1954, and letter, this headquarters, subject as above, dated 8 September 1954. Following comments and recommendations are submitted concerning those deficiencies in the flying training program affecting this command.

a. Fighter-Interceptor Pilots.

- (1) Instrument Training.
 - (a) Deficiency: Pilot graduates lack the instrument proficiency required to accomplish the all weather mission. Only a limited amount of actual weather experience is gained during formal training.
 - (b) Recommendation: More emphasis should be placed on basic instrument procedures, radio range, omni, where applicable, and actual weather flying, prior to assignment to the Air Defense Command. Preferably the actual weather experience should be gained in an interceptor aircraft during the Applied Phase and should include take-offs, penetration and recovery when weather ceilings of 800 to 1,000 feet exist.
- (2) Performance Training.
 - (a) Deficiency: Pilot graduates lack a thorough knowledge of maximum performance operation of interceptor aircraft. This deficiency includes operation at high altitude, range and radius of action problems, and high speed interceptions.

907

ADOOT-C, Subj: (Uncl) Qualified Revisions to Flying Training Program

- (b) Recommendations: A reasonable percentage of training flights should be conducted at maximum altitudes and include long range navigation and radius of action problems. At least fifty per cent of interceptions should be made at high speeds (.78 to .95 mach).
- (3) ADC Indoctrination Training.
 - (a) Deficiency: Aircrews lack a thorough and complete indoctrination concerning the Air Defense Command mission, organization, functions, and capability of equipment. Failure on the part of instructors to instill a high regard for the Air Defense Command concept has resulted, at times, in a negative mental attitude toward the type flying and mission importance.
 - (b) Recommendations: Prospective Air Defense
 Command crews should be given continuous
 indoctrination in the Air Defense Command concept.
 Most important, however, the instructors should
 instill in the student confidence in his equipment
 and the importance of his assignment to the Air
 Defense Command.

b. Radar Observers (Aircrew).

- (1) Practical Application.
 - (a) Deficiency: Radar Observers are arriving from Air Training Command with a minimum of actual airwork using UE radar during flight in interceptor aircraft. In some cases Radar Observers have received no training in jet aircraft of any type.
 - (b) Recommendations: Require more adequate training in actual utilization of UE radar during flight in interceptor aircraft.
- (2) Navigation.
 - (a) Deficiency: Radar Observers are limited in navigational experience.

107

ADOOT-C, Subj: (Uncl) Qualified Revisions to Flying Training Program

- (b) Recommendation: Navigation training and the use of interceptor radio and navigational equipment should be made more detailed and comprehensive.
- 2. During recent months a definite improvement in the quality of fighter-interceptor aircrews has been realized. Inclusion of the above, however, will substantially reduce time required to train newly graduated aircrews to the status of combat ready.

FOR THE COMMANDER:

Info Cy: ATRC

JOSEPH D. HORNSBY Lt Col, USAF Asst Command Adj

108 100 *AFR 53-6

AIR FORCE REGULATION NO. 53-6

DEPARTMENT OF THE AIR FORCE WASHINGTON, 11 JANUARY 1955

SCHOOLS

USAF Interceptor and Fighter Weapons School

	Paragraph
Purpose and Scope	1
PolicyMission	2
Authorization	A
Englointy Decimeness	5
Administrative Procedures	6

- 1. Purpose and Scope. This Regulation announces the mission, student eligibility requirements, and administrative procedures of the USAF interceptor and fighter weapons schools and provides for research and development of interceptor and fighter weapons training methods, procedures, and techniques. This Regulation applies to all Air Force activities.
- 2. Policy. The policy is to maintain interceptor and fighter weapons proficiency at a high standard throughout the Air Force. Interceptor and fighter weapons training and research and development in weapons training methods and techniques will be conducted within the Air Training Command.
- 3. Mission. The USAF Interceptor and Fighter Weapons School will:
- a. Train instructors in all phases of interceptor and fighter weapons employment to provide replacements for Air Force operational interceptor and fighter units and schools conducting interceptor and fighter weapons training. Student quotas to using commands from Headquarters USAF will designate the type of aircraft in which training will be given. The number of students for each type of aircraft will be in agreement with the equipment assigned to the school.
- b. Continuously conduct research to develop, evaluate, and standardize interceptor and fighter weapons techniques and training methods, starting with the initial delivery of interceptor and fighter aircraft and auxiliary supporting equipment to operational units.
- c. Conduct continuous liaison visits to Air Force interceptor and fighter units worldwide to disseminate and obtain information concerning interceptor and fighter weapons training and employment.
- d. Training instructors in all phases of interceptor and fighter weapons training for intra-

- service and interservice, Air National Guard, Air Force Reserve, and foreign nations as directed by Headquarters USAF.
- e. Evaluate the effectiveness of the interceptor and fighter weapons training course by periodic monitoring of graduate instructors.
- f. Indoctrinate senior Air Force officers in the employment of interceptor and fighter weapons as directed by Headquarters USAF.
- g. Review and initiate changes to AFM 335-25 as required to provide Air Force interceptor and fighter units with current training data.
- h. Publish a periodic "Newsletter" and distribute it to all Air Force interceptor and fighter units and other agencies concerned with interceptor and fighter weapons training to keep those units and agencies informed of the activities of the USAF interceptor and fighter weapons schools.
- 4. Authorization. Personnel assigned to the USAF interceptor and fighter weapons schools are authorized to visit the following units and agencies in connection with the mission as outlined in paragraph 3 when authorized by the unit or agency:
- Air Force, Army, Navy, and Marine units and agencies.
 - b. Civilian educational agencies.
 - c. Industrial agencies.
 - d. Civilian study and advisory groups.

5. Eligibility Requirements:

- a. Applicants must be either Regular officers or Air Force Reserve officers serving on an indefinite service statement and meet the following qualifications prior to entry:
 - (1) Interceptor:
 - (a) Pilot. Applicant must:
 - 1. Possess AFSC 1124B or 1124C.

* This Regulation supersedes AFR 53-6, 29 September 1953.

AFR 53-6 5-6

- 2. Have a total of not less than 300 hours' jet fighter, jet trainer, and/or jet interceptor aircraft flying time.
- 3. Have a total of not less than 50 hours in the aircraft to be flown in interceptor weapons training, at least 20 hours of which have been obtained in the 90 days preceding course entry date.
- 4. Be of flight commander caliber.
- (b) Radar Observer. Applicant must:
 - Possess Primary AFSC of 1564.
 Have 3 years' rated service and 500 hours of total flying time.
 - Have 50 hours' flying time in type of aircraft in which training will be received, 20 hours of which will be in the previous 60 days.
- (c) Controller. Applicant must:
 - 1. Possess AFSC 1641.
 - Have a minimum of 6 months' experience in the field as a controller.
- (2) Fighter. Applicant must:
 - (a) Possess AFSC 1124A.
 - (b) Have a total of not less than 200 hours' jet fighter aircraft flying time.
 - (c) Have at least 30 hours' jet fighter time in the previous 90 days.
 - (d) Be of flight commander caliber.

b. Requests for waivers to the criteria prescribed in a above will be forwarded to the Director of Personnel Procurement and Training, Headquarters USAF, Washington 25, D. C.

6. Administrative Procedures:

- a. Quotas. Headquarters USAF will furnish quotas and starting dates of classes to major air commands.
 - b. Crew Composition:
 - Dual place interceptor weapons training is conducted for a crew of pilot, radar observer, and GCI director. Application for training will be made as a crew.
 - (2) Single place interceptor weapons instructor training is conducted for a crew of pilot and GCI director. Application for this training will be made as a crew.
- c. Orders. Orders will be issued in accordance with AFM 30-3 and the current USAF Training Prospectus. Five copies of orders will be mailed to reach the commandant of appropriate USAF interceptor or fighter weapons school 5 days prior to starting date of the course. Student will attend the course on a temporary duty status.
- d. Programing. Aircraft, supporting equipment, and personnel will be programed separately for:
 - (1) Interceptor weapons training.
 - (2) Interceptor weapons research and development.
 - (3) Fighter weapons training.
 - (4) Fighter weapons research and development.

By Order of the Secretary of the Air Force:

OFFICIAL:

E. E. TORO Colonel, USAF Air Adjutant General

DISTRIBUTION:

N. F. TWINING Chief of Staff, United States Air Force

2


TO U. S. GOVERNMENT PRINTING OFFICE: 11


DOCUMENT NO. 199

THIS DOCUMENT MAY BE FOUND

IN VOLUME VII OF THE SUPPORTING

DOCUMENTS TO THIS HISTORY.

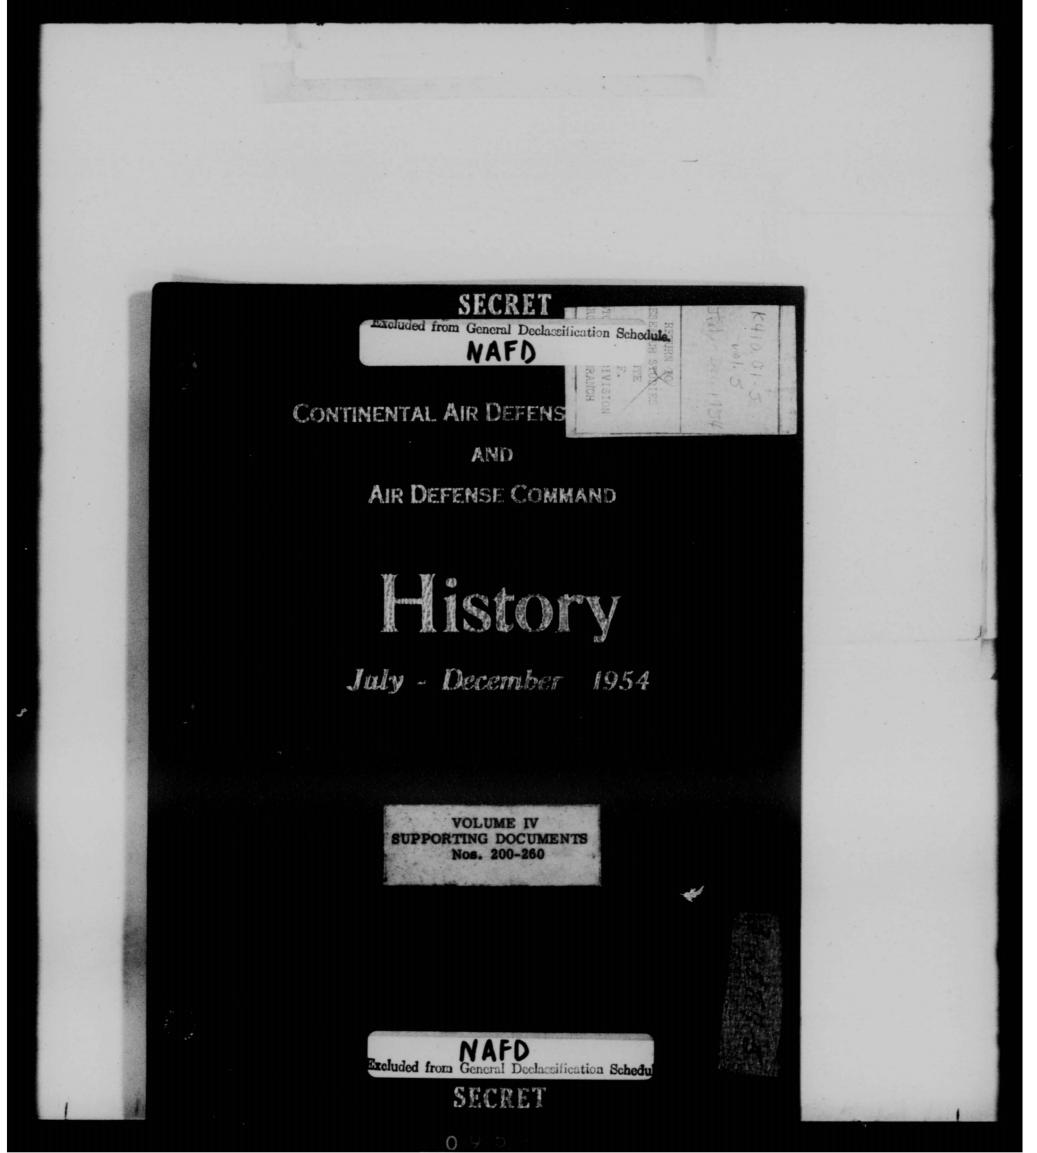

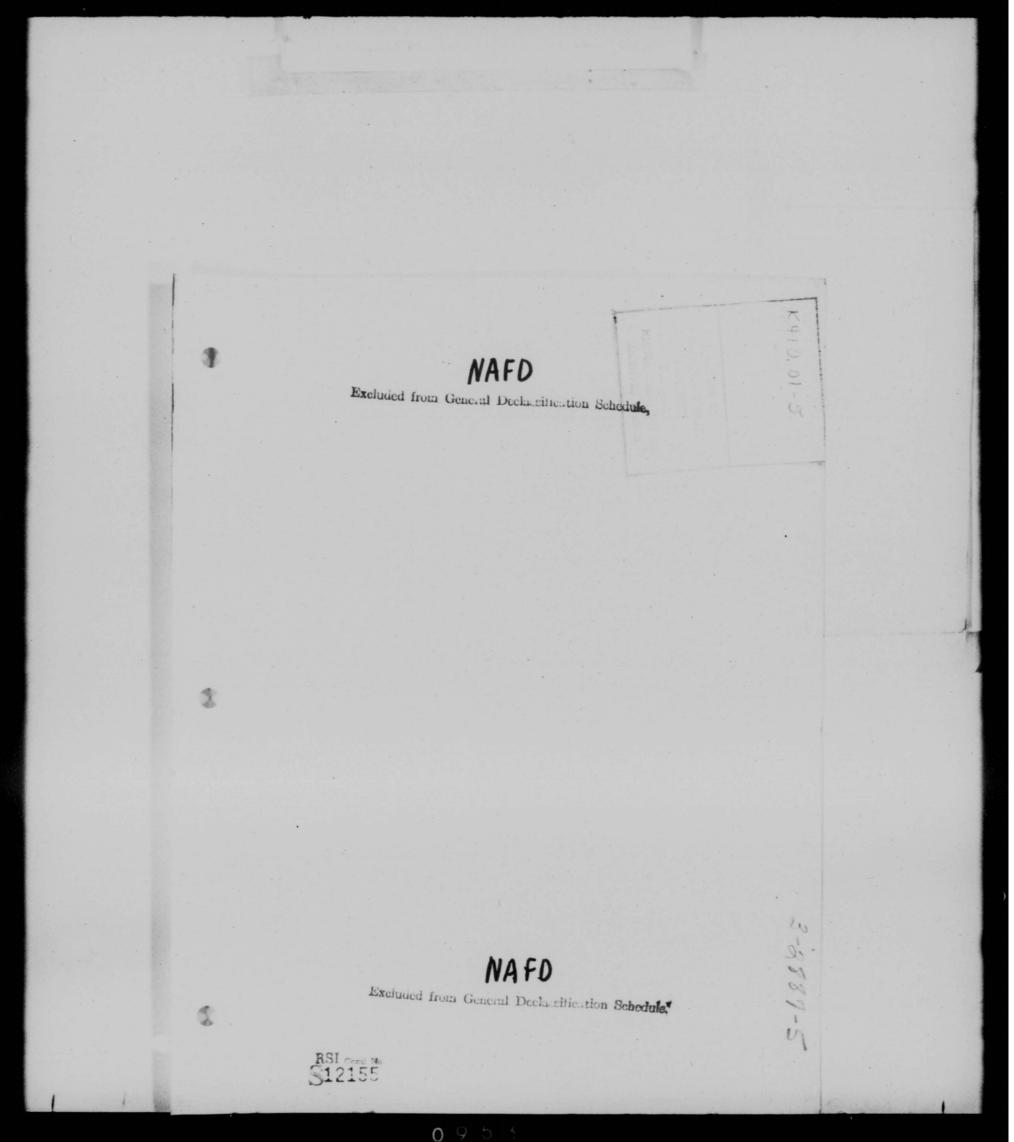

DOCUMENT NO. 200

THIS DOCUMENT MAY BE FOUND

IN VOLUME VII OF THE SUPPORTING

DOCUMENTS TO THIS HISTORY.

Easy reading copy made

201


From: COMMANDER, ADC

18 Nov 54

To: COMMANDER, EADF, STEWART AFE, NY
COMMANDER, CADF, GRANDVIEW AFB, MO
COMMANDER, WADF, HAMILTON AFB, CALIF
COMMANDER, 4750 AIR DEF WING (WPNS) YUMA CNTY AFRT, AFIZ
COMMANDER, 4600 AIR BASE GP, ENT AFB, COLO, /COURIER/

(UNCLASSIFIED) ADOUT-C_____. Subject is Psychological Training. Reference paragraph 5a, AFR 50-27, "Training During Actual Flight at High Altitude." Except in aircraft where physical access to trainee by instructor is possible (B-29, etc.) refresher training by actual high altitude flight, in lieu of a low pressure chamber flight, is not authorized.

MORNING REPORT: Central Air Defense Force indicated that high altitude flights are being used in lieu of low pressure chamber flights, to provide refresher psychological training. Since close observation of the pilot is impossible in T-33 or fighter aircraft, this office does not consider this practice safe or adequate, nor is the instructor always qualified to conduct such training. In B-29 type aircraft such training is feasible, if properly supervised.

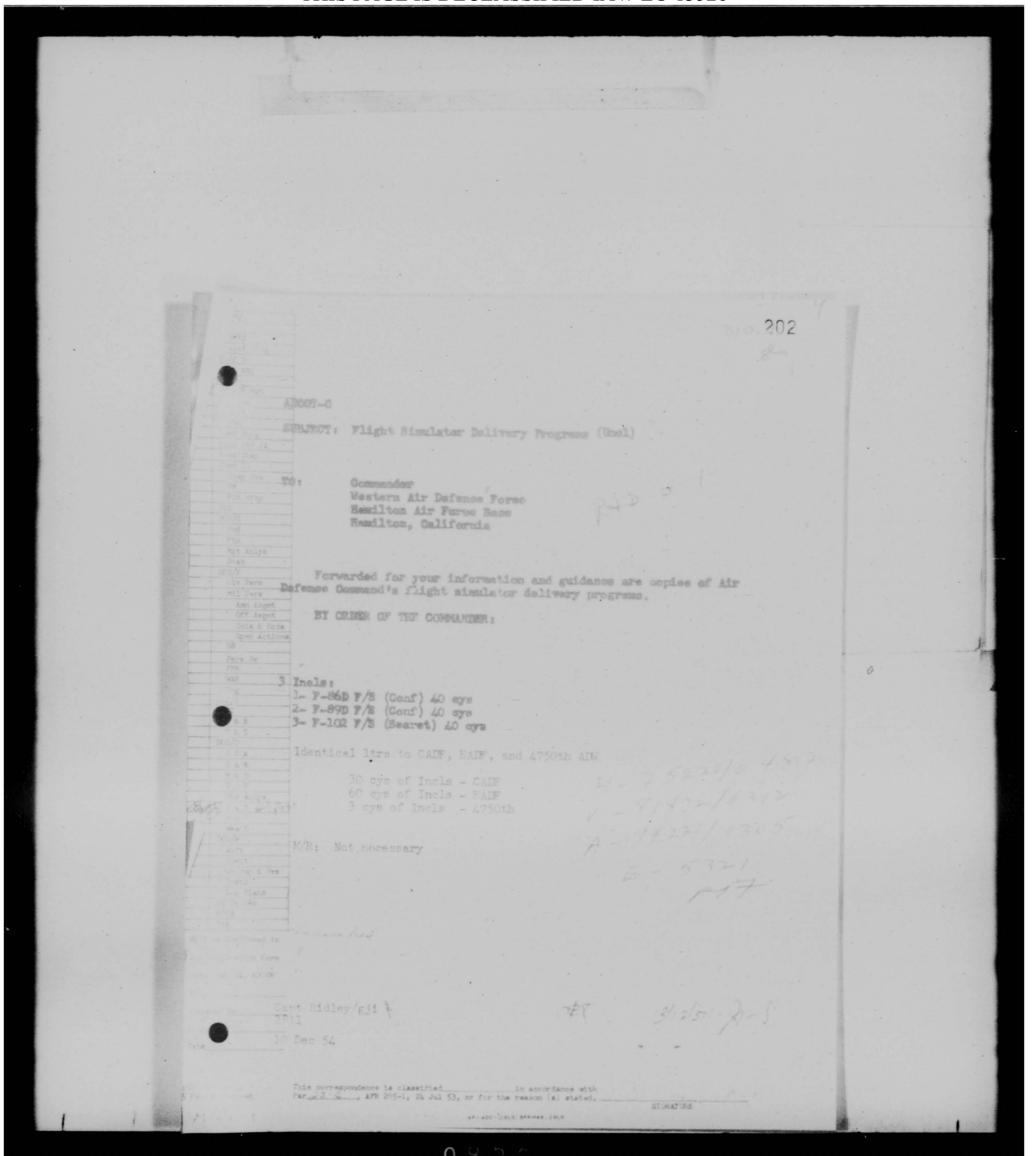

		U TARRETON AC OF T	nec 1954	
	F-86D FLIGHT SIMULATOR ALLOCATIONS AS OF 1 DEC 1954 (This Schedule Supersedes all Previous Schedules)			
,				202
	Part I. Operational Units Assigned F-86D Flight Simulators.			Mfg
	Station	Accountable Unit	Type	
	George AFB, Calif	94 Ftr-Intep Sq	S2-A-5	ERCO-10
	O'Hare Intl Aprt, Ill	501 Air Def Gp	S2-A-5	ERCO-12
	Westover AFB, Mass	60 Ftr-Intep Sq	S2-A-5	ERCO-13
	Andrews AFB, Md	95 Ftr-Intep Sq	S2-B-5	Westh-1
	McChord AFB, Wash	567 Air Def Gp	S2-B-5	Westh-2
	Duluth AFB, Minn	515 Air Def Gp	S2-B-5	Westh-3
	Scott AFB, Ill	85 Ftr-Intop Sq	S2-B-5	Westh-4
	Selfridge AFB, Mich	575 Air Def Gp	S2-B-5	Westh-5
	Yuma Co Aprt, Ariz	4750 Air Def Wng	S2-B-5	Westh-6
	Wright-Patterson AFB, Ohio	97 Ftr-Intep Sq	S2-B-5	Westh-7
	Truax Field, Wis	520 Air Def Gp	S2-B-5	Westh-8
	Larson AFB, Wash	323 Ftr-Intep Sq	S2-B-5	Westh-9
	Suffolk Co AFB, NY	519 Air Def Gp	S2-B-5	Westh-10
	Davis-Monthan AFB, Ariz	15 Ftr-Intep Sq	S-2A-35	ERCO-20
	Geiger Fld, Wash	530 Air Def Gp	S-2B-5	Westh-11
	McGuire AFB, NJ	568 Air Def Gp	S-2A-35	ERCO-22
	Burlington Aprt, Vt	517 Air Def Gp	S-2B-5	Westh-12
	Sioux City Muni Aprt, Iowa	521 Air Def Gp	S-2B-5	Westh-13
	Grandview AFB, Mo	4676 Air Def Gp	S-2B-5	Westh-14
	Hamilton AFB, Calif	566 Air Def Gp	S-2B-5	Westh-15
	Kirtland AFB, NM	93 Ftr-Intep Sq	S-2B-5	Westh-16
	McGhee Tyson AFB, Tenn	516 Air Def Gp	S-2A-35	ERCO-23
	Travis AFB, Calif	413 Ftr-Intep Sq	S-2C-5	Westh-17
	Niagara Falls Muni Aprt, NY	518 Air Def Gp	S-2C-5	Westh-18
		Confidential	1	

	Confedential		202
Part I. Operational Unit	s Assigned F-86D Flight Simu	lators (Cont'd)	
Station	Accountable Unit	Type	Mfg.
Ellsworth AFB, S.D.	54 Ftr-Intep Sq	S-2C-5	Westh-19
Paine AFB, Wash	529 Air Def Gp	S-2C-35	Westh-24

Westh-25

Westh-27

Westh-30

S-2C-35

S-2C-35

S-2C-35

Part II. Units Scheduled to Receive F-86D Flight Simulators.

Youngstown Muni Aprt, Ohio 502 Air Def Gp

Stewart AFB, NY 330 Ftr-Intep Sq

Gtr-Pittsburgh Aprt, Pa 500 Air Def Gp

Station	Accountable Unit	Del Dt	Type	Mfg & Pri
Charleston, S.C.	444 Ftr-Intep Sq	May 55	S-2C-35	Westh-31
Hanscom AFB, Mass	49 Ftr-Intep Sq	Jun 55	S-2C-35	Westh-32*
Walker AFB, N.M.	321 Ftr-Intep Sq	3/56		
Castle AFB, Calif	538 Ftr-Intep Sq	3/56		
Griffiss AFB, NY	329 Ftr-Intep Sq	3/56		
Palmdale AFB, Calif	322 Ftr-Intep Sq	3/56		
Lockbourne, Ohio	484 Ftr-Intep Sq	3/57		

*Simulators will, in all probability, be stored until simulator housing facilities become available at location.

Confidential

Confidential F-89D SIMULATOR

202

As of 1 Dec 1954

(This Schedule Supersedes all Previous Schedules)

Mfg Priority	Station	Accountable Unit	Date of Del Simulator	Acft
5-	Minneapolis-St Paul	514 Air Def Gp	Delivered	0/H
8_	Presque Isle AFB	528 Air Def Gp	Dec 54	O/H
9-	Portland AFB	503 Air Def Gp	Dec 54	-O/H
12-	Wurtsmith AFB	527 Air Def Gp	Jan 55	3/55
13-	Duluth Muni Aprt	515 Air Def Gp	Feb 55	4/55
10-	Kinross AFB	534 Air Def Gp	Apr 55	O/H
15-	Otis AFB	564 Air Def Gp	Apr 55	1/56
17-	Paine AFB	529 Air Def Gp	May 55	1/56
19*	Yuma Cnty Aprt	4750 Air Def Wng	Sep 55	
20*	Griffiss AFB	27 Ftr-Intep Sq	Nov 55	3/56
21*	Hamilton AFB	566 Air Def Gp	Jan 56	4/56
22*	Oxnard AFB	533 Air Def Gp	Mar 56	4/56
	Glasgow, Mont	545 Ftr-Intep Sq	3/57	4/57
	Grand Forks, N.D.	544 Ftr-Intep Sq	3/57	4/57
	Geiger Fld	520 Ftr-Intep Sq	4/57	1/58

*F-89-H Flight Simulator

-To be modified to E-9 system

Confidential.

	LE TOUR BELLEVIE			
				3
		Lieut		202
		F-102 SIMULATOR	As of 1 D	ec 1954
	(This Schedu	le Supersedes all Previous So		
	Station	Accountable Unit	Date of Di Simulator	Acft
	George AFB	94 Ftr-Intep Sq	3/56	1/57
	Klamath Falls, Ore	98 Ftr-Intep Sq	3/56	1/57
	Otis AFB	58 Ftr-Intep Sq	4/56	2/57
	Wurtsmith AFB	63 Ftr-Intep Sq	4/56	2/57
	Yuma Cnty Aprt	4750th Def Wng (Tng)	4/56	
	Suffolk Cnty AFB	75 Ftr-Intep Sq	4/56 .	3/57
	Truax Fld	432 Ftr-Intep Sq	1/57	3/57
	K. I. Sawyer, Mich	327 Ftr-Intep Sq	1/57	3/57
	Griffiss AFB	329 Ftr-Intep Sq	1/57	3/57
	Hamilton AFB	63 Ftr-Intep Sq	1/57	3/57
	Truex Fld	456 Ftr-Intep Sq	2/57	4/57
	Benzie Cnty, Mich	546 Ftr-Intep Sq	2/57	4/57
	Minot AFB	483 Ftr-Intep Sq	2/57	4/57
	Seymour Johnson AFB	482 Ftr-Intep Sq	2/57	4/57
	Portland Intl Aprt	497 Ftr-Intep Sq	3/57	4/57
	Suffolk Cnty AFB	331 Ftr-Intep Sq	3/57	1/58
	Otis AFB	437 Ftr-Intep Sq	3/57	1/58
	McChord AFB	317 Ftr-Intep Sq	3/57	1/58
	Travis AFB	413 Ftr-Intep Sq	4/57	1/58
	Dover AFB	46 Ftr-Intep Sq	4/57	2/58 •
	Langley AFB	48 Ftr-Intep Sq	4/57	2/58
0	McGuire AFB	5 Ftr-Intep Sq	4/57	2/58
	New Castle AFB	96 Ftr-Intep Sq	4/57	2/58
0.7		Lecret		CONTRACT OF THE PARTY

36		Lecut	Date of De	202
	Station	Accountable Unit	Simulator	Acft
	Wurtsmith AFB	324 Ftr-Intep Sq	1/58	2/58
	McChord AFB	465 Ftr-Intep Sq	1/58	2/58
	Ft Meyers, Fla	4756 Tng Gp (Def)	1/58	_
	Andrews AFB	95 Ftr-Intep Sq	1/58	3/58
	Dover AFB	76 Ftr-Intep Sq	1/58	3/58
	New Castle AFB	332 Ftr-Intep Sq	2/58	3/58
	Bunker Hill, Ind	498 Ftr-Intep Sq	2/58	3/58
	Great Falls AFB	29 Ftr-Intep Sq	2/58	3/58
	McGuire AFB	2 Ftr-Intep Sq	2/58	4/58
	Kansasville, Wis	42 Ftr-Intep Sq	2/58	4/58
	Niagara Falls Muni Aprt	47 Ftr-Intep Sq	3/58	4/58
	K. I. Sawyer, Mich	519 Ftr-Intep Sq	3/58	4/58
	Larson AFB	31 Ftr-Intep Sq	3/58	4/58

Suret

COPY

203

ADOOT-C

26 Jul 1954

SUBJECT: (Uncl) Simulators vs. TF-102's

TO:

Commander
Air Materiel Command
Wright-Patterson Air Force Base, Chio

- 1. It is the understanding of this Command that some question has been raised concerning the need for both the F-102A Flight Simulators and TF-102's, from a monetary savings standpoint.
- 2. The Air Defense Command has a definite requirement for both the TF-102 and the F-102A Flight Simulator. This position was established with due consideration given to the need for economy, as well as to the requirements of the air defense mission. It was concluded that the extra cost of supporting both the TF-102 and the simulator would be more than compensated for by the resultant savings in material which would have been lost in aircraft accidents. This, coupled with the fact that the quality of training is greatly increased, outweighs any disadvantages involved in operating both types of equipment.
- 3. In support of the above position, outlined in this paragraph are important training functions of the TF-102 and the F-102A Flight Simulator. These functions cannot be adequately duplicated by the other.
- a. <u>Flight Simulator</u>. The simulator is a procedure trainer and is extremely valuable in teaching aircraft operating procedures, both normal and emergency.
- (1) The prime consideration at this point is the important contribution to safety. Emergency procedures, to include those for flame-outs, engine fires, engine malfunction, hydraulic failures, electrical failures, bail-out procedures, etc., can be duplicated and practiced until the pilot is thoroughly familiar with them. This results in pilot confidence and skill which will enable him to tring an aircraft down safely under conditions which otherwise might result in an aircraft accident. These emergencies cannot be adequately or safely duplicated in the aircraft for training purposes.

ADOOT-C, Subj: (Uncl) Simulators vs. TF-102's

- (2) Normal operating procedures can be taught at a substantial savings in superviser and student time, as well as in the cost of operating the equipment. The simulator will permit more effective utilization of students' training time for familiarization and teaching of basic procedures.
- (3) In combat readiness training, the student can be taught basic operating procedures of the fire control system in the simulator. With this background his radar training in the TF-102 can begin with practical application, thus resulting in a savings in operating costs of the TF-102.
- b. <u>TF-102</u>. Although the value of the simulator is realized, it cannot substitute for airborne practice under hooded conditions nor the checking of student pilots in practical application. TF-102's are needed in addition to simulators for the following reasons.
 - (1) The pilot must receive realistic training under supervised hooded conditions. The simulator provides familiarization and teaches procedures but does not provide the realism necessary to duplicate actual flight. Also, in an F-102, the necessity of having to keep a visual check on the target precludes attaining the proficiency necessary to complete a combat attack under conditions of zero visibility. It is a requirement that pilots have practical supervised training in the proper utilization of the system to include attacks against targets employing ECM, chaff, and evasive action.
 - (2) From a safety standpoint, a pilot may develop considerable skill in procedures in a simulator but lack the skill and confidence necessary to safely fly the interceptor. In the interest of economy, as well as safety, this phase of training should be checked, taught, and developed in the TF-102. To allow a pilot to go directly from a simulator to an F-102 would be to invite accidents which the Air Force can ill afford.

4. Attached hereto (Attachment #1) are copies of a TF-102 staff study which was presented to Headquarters USAF on 15 Feb 1954 by Major General F. H. Smith, and, also, copies of a message (Attachment

2

SEURET

203

ADOOT-C, Subj: (Uncl) Simulators vs. TF-102's

#2) which was dispatched to Headquarters USAF on 14 April 1954, as further justification for our requirement for TF-102's. The TF-102's flying requirement specified in paragraph 5 of Attachment #2 was based on the assumption that simulators would be available. If simulators were deleted from the program, the following would result.

a. A requirement for additional flying time in TF-102's in order to accomplish combat readiness training.

b. An increase in accident potential due to the lack of the ideal emergency procedures training afforded by the simulator.

c. A substantial increase in the length of calendar time required to accomplish combat readiness training.


5. In summary, it is the Air Defense Command position that the F-102A Flight Simulator will be needed as a procedure and familiarization trainer, and the TF-102 will be needed as an application trainer. Each is required to supplement the other in the interests of economy, as well as quality of air defense.


FOR THE COMMANDER:


2 Incls 1- Staff Study 2- Msg to USAF


JOSEPH D. HORNSBY Lt Col, USAF Asst Command Adj


3

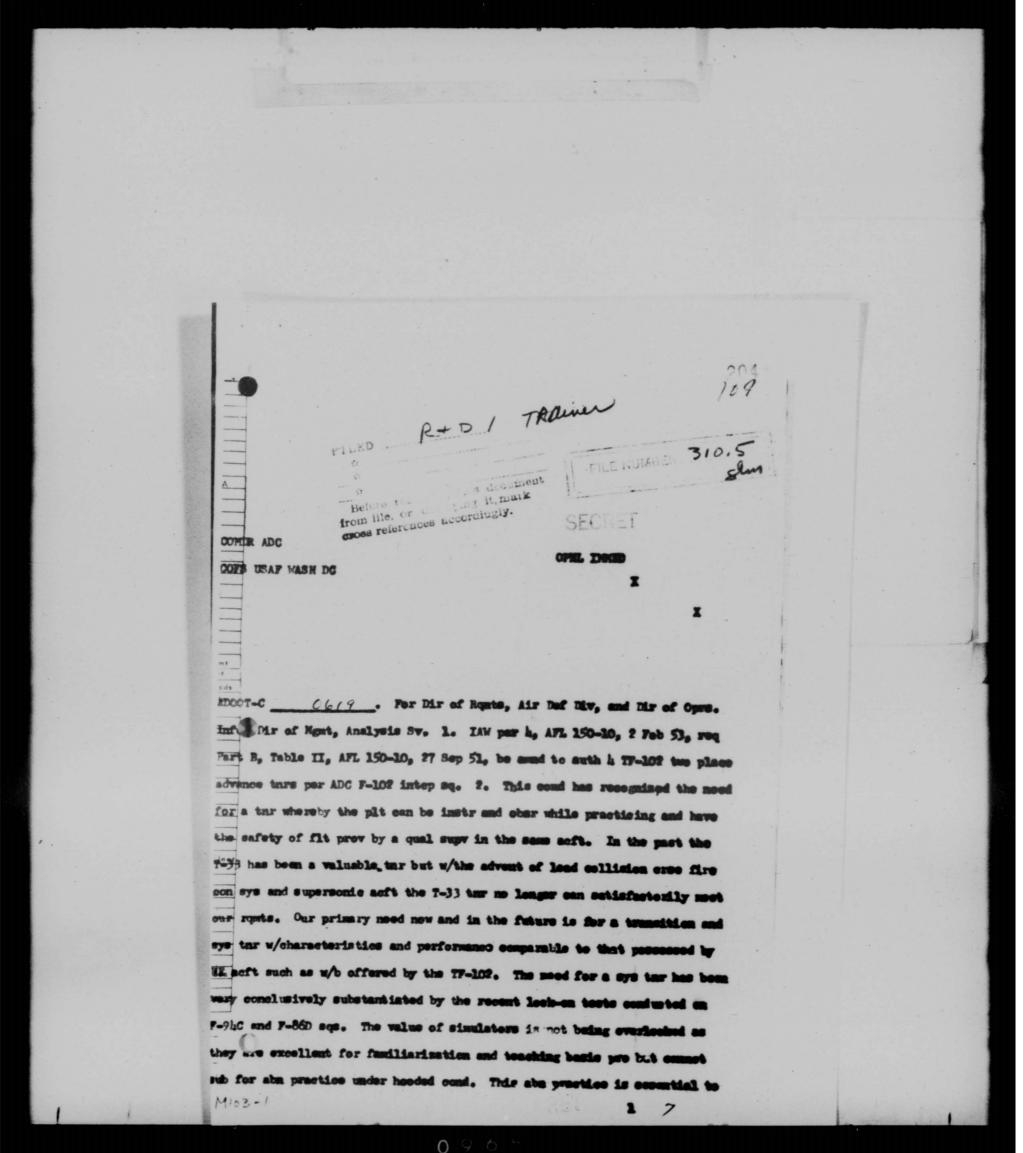


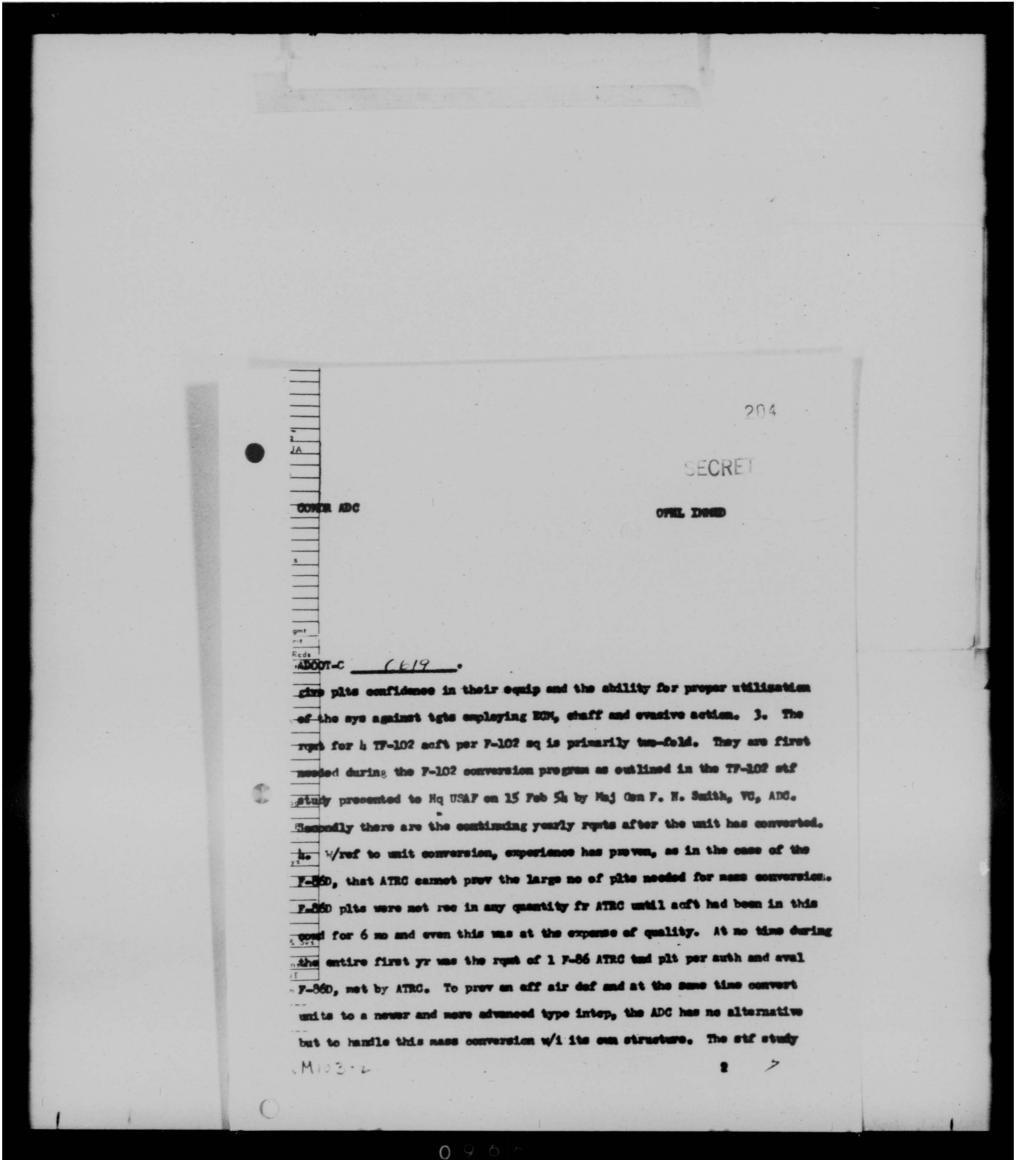


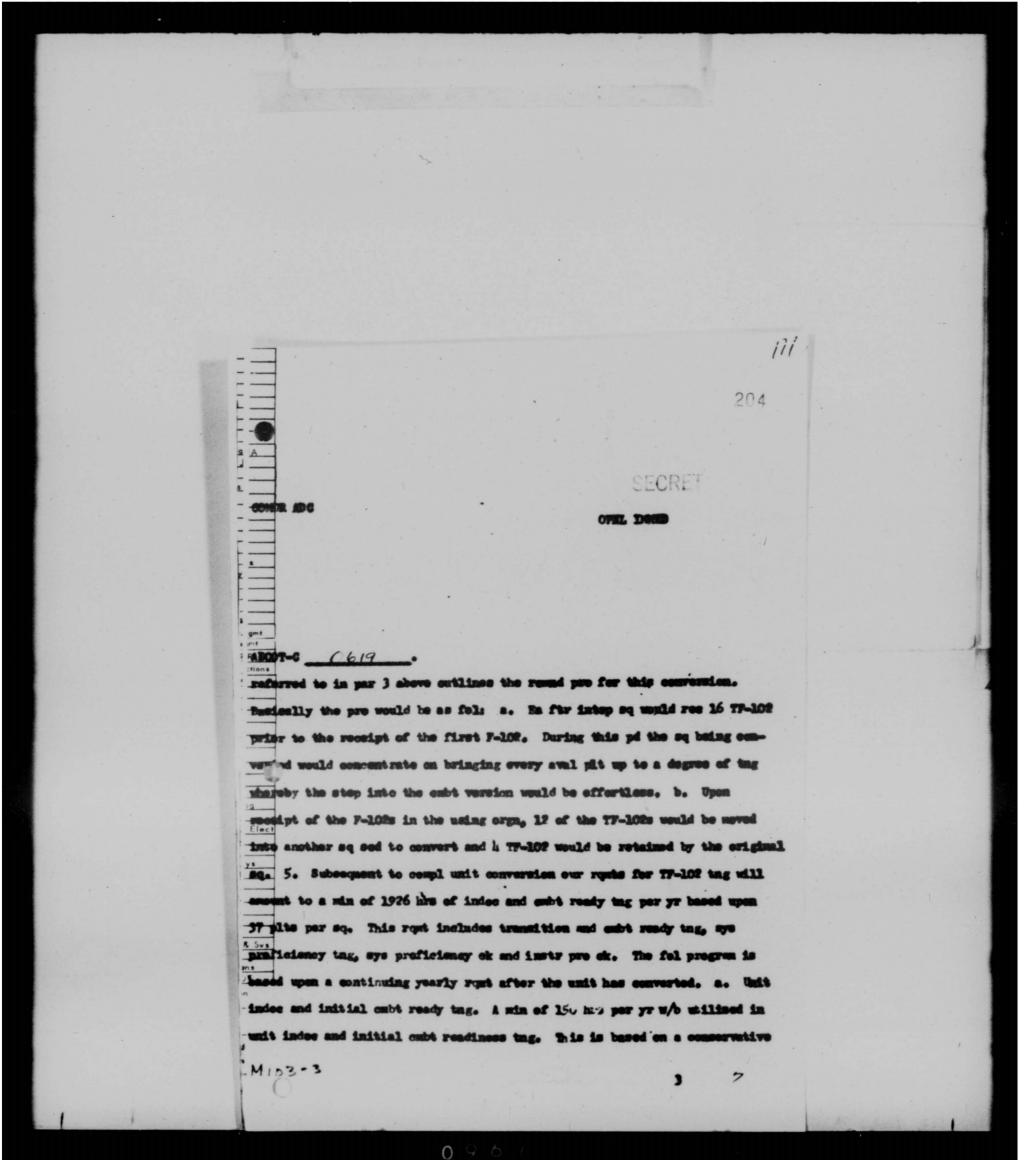

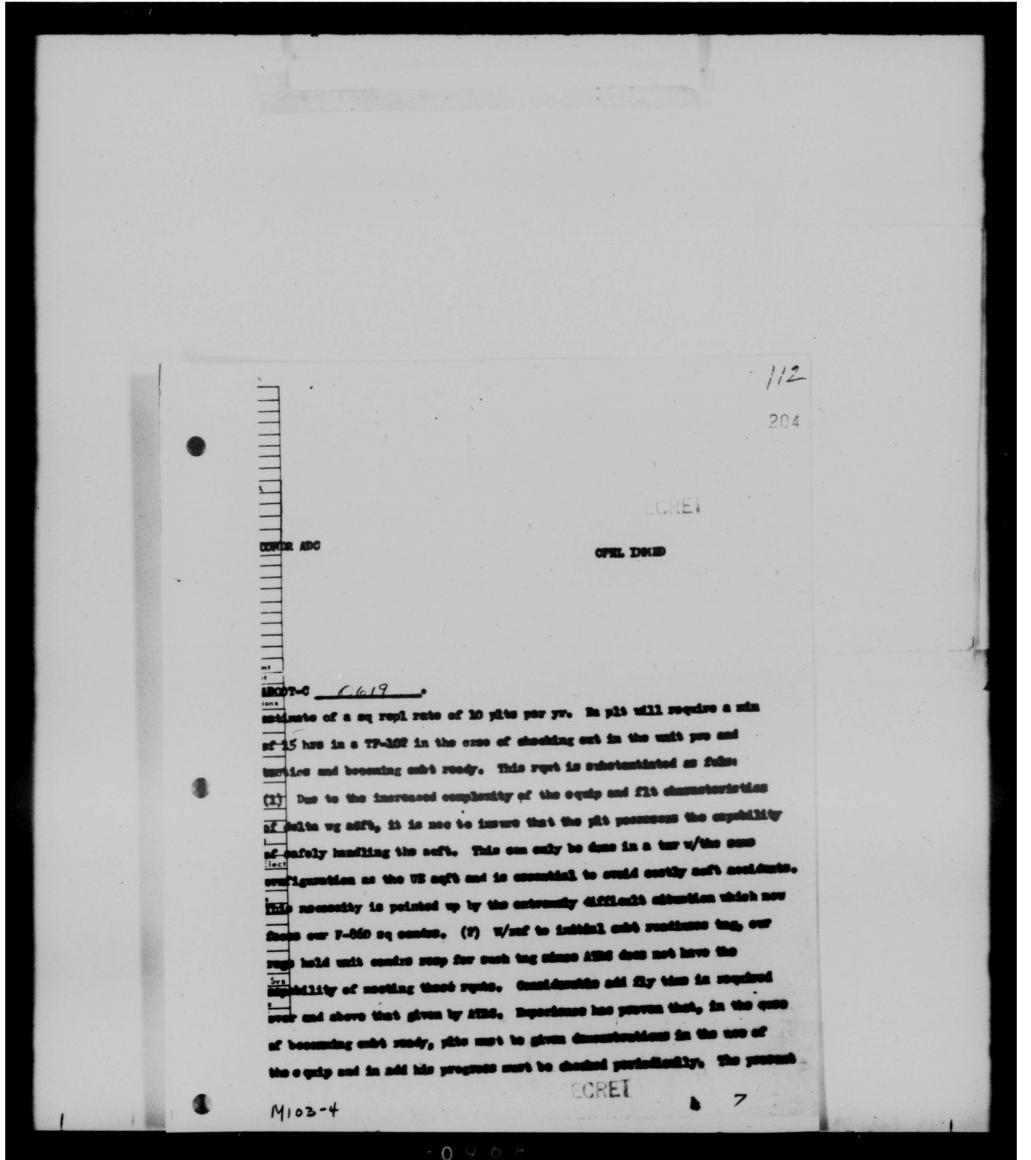

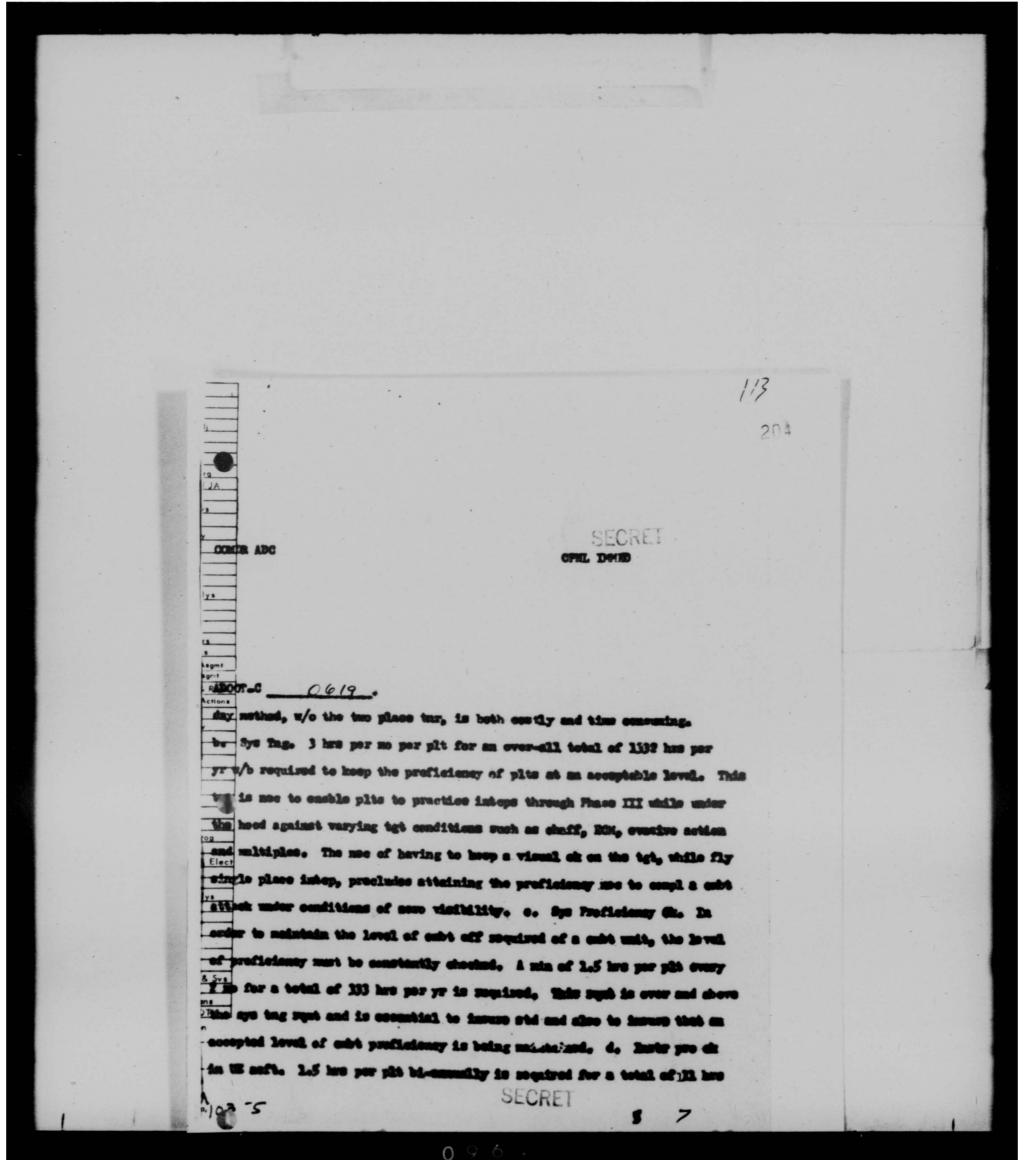

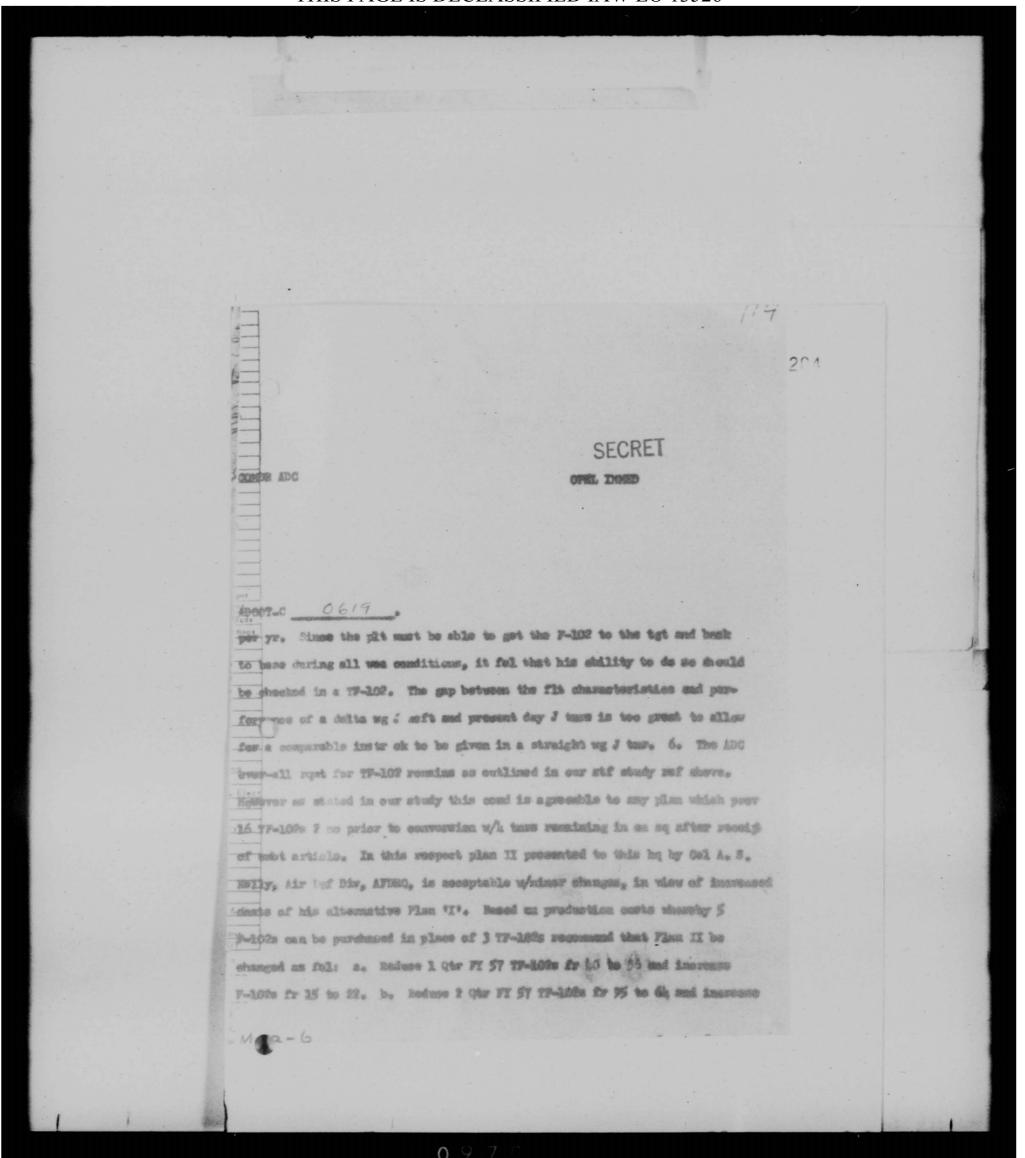

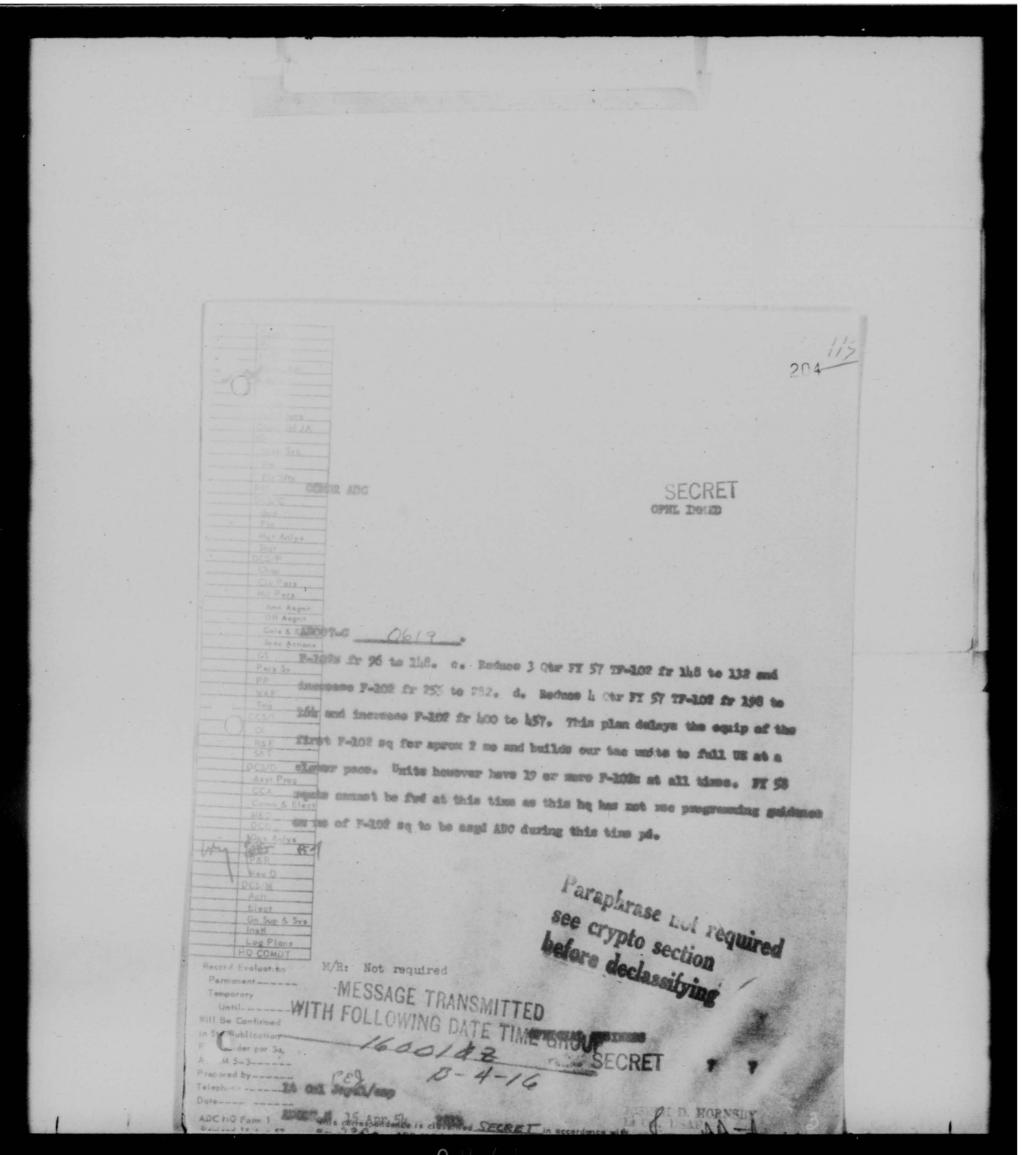

THIS PAGE IS DECLASSIFIED IAW EO 13526

OFFICE OF ADC PROJECT OFFICER EDWARDS AIR FORCE BASE Edwards, California COPY

205

9 September 1954

SUBJECT: Proposed TF-102A Production Schedule

TO: Commander, ADC

ATTN: Director of Plans & Requirements Ent Air Force Base, Colorado

1. The following production schedule has been proposed by Weapons System Project Office (F-102), Headquarters AMC, for the TF-102A. As of this date, the proposal is unofficial and has not been approved. Included also is the presently approved TF/F-102A schedule from January 1955 to March 1957 for a comparison with the proposed trainer schedule.

1954						1	.955					
Dec	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Present 2 F-102A	1	1	1	. 1	2	3	3	3	3	3	3	3
Present TF-102A								1			1	1
Proposed TF-102A								1			1	1
						1	956					
1	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
F-102A	3	3	3	3	3	5	8	12	17	23	30	38
TF-102A	2	3	3	3	. 3	3	5	8	12	16	16	16
Proposed TF-102A	1	1	1	2	2	2	2	2	2	2	3	5
						1	957	*				
F-102A	Jan 48	Feb 58	Mar 62	Apr	-							
TF-102A	16	16	16									
Proposed TF-102A	8	12	16									

CONFIDENTIAL

205

Office of ADC Proj Off, Edwards AFB, Calif., Subj: Proposed TF-102A Production Schedule

- 2. As of the present time no FY 1955 procurement money has been released for the TF/F-102A program. It is understood that the FY 1955 monies will not be released until the flight data from the "Hot rod" F-102A with the improved nose, improved canopy, "coke bottle" fuselage, aft body (yellow canary) fillet and synthetically reduced weight, has been received. As the "Hot rod" is scheduled to be flown sometime in late 1954, it is the opinion of the AMC side of the Weapons System Project Office (F-102) that the FY 1955 monies will be released about February 1955.
- 3. Due to the fact that the TF-102A utilized most of the basic configuration of the F-102A, it is felt that the FY 1955 monies cannot be released on the TF-102A prior to the release of funds for the F-102A. From a continuity standpoint on both programs, funds for both aircraft will be released at the same time.
- 4. Convair requires at least 19 months lead time on the F-102A and 21 months lead time on the TF-102A. A quick look at the calendar shows you that the FY 1955 funds would have to be released immediately if the production buildup (July 1956) of the TF-102A is to be met on the presently approved TF production schedule. If the FY 1955 funds are not released until February 1955, then a production gap of four (4) months will result in the production of TF-102's. In order to eliminate this gap, AMC has proposed the stretch-out of the production schedule as presented in Par. 1, above.
- 5. The presently approved production schedule for TF/F-102A aircraft fits nicely into the plans for conversion of ADC Squadrons to F-102A aircraft. This is due to the fact that TF-102A's will be received at least concurrently with the buildup and receipt of F-102A's. If the proposed TF-102A schedule is approved, our present conversion plan will suffer since a substantial number of F-102A's will be manufactured and received prior to the production buildup of the TF-102A and receipt of this trainer into our inventory.
- 6. This office has requested the Weapons System Project Office (F-102), Headquarters WADC and AMC to re-examine the TF-102A production problems in an effort to keep the TF-102A production schedule as presently approved. Your Headquarters will be kept advised of any new developments in regards to this subject.

/S/ ROYAL N. BAKER
Colonel, USAF
ADC Project Officer

CONFIDENTIAL

COPY
Easy reading copy made

205

From: COMMANDER, ADC, ENT AFB, COLORADO SPRINGS, COLO 16 Jun 54

To: CHIEF OF STAFF, HQ USAF, WASHINGTON 25, D. C.

Info: COMMANDER, EADF COMMANDER, 30TH ADIV

ADODO 1027 . Your message AFOOP-OP-D 5717, dated 7 May 1954. Part I. It should be carefully pointed out to the Secretary that our recommended Fighter Interceptor Squadron deployments are the result of long planning and any radical change of plan inevitably starts a chain reaction which may well degrade the whole system. Also, it is anticipated that a concession in the Chicago area will bring about demands from other localities, such as Madison, Minneapolis, Portland, and Wilmington. Part II. Detailed planning and war gaming by this Headquarters and JADB indicates that the FIS strength in the northeast U. S must be maintained at a ratio to rest of U. S. at least as high as now exists. This dictates retaining the two O'Hare squadrons in the Great Lakes area. From a purely tactical viewpoint the two FIS at O'Hare are for defense of Chicago-Gary. They are the last ditch intercepts in defense of these critical targets. FIS at K. I. Sawyer, Traverse City, Kinross, etc., are periphery defenses to provide depth to the defense for the northeast U. S. Detailed war gaming shows most probable routes of attack to Chicago are from NW quadrant. Thus, if we are forced from O'Hare the movement of these

206

ADODO . 1027

two units should be in a northwesterly direction but close enough to provide protection against attack on Chicago-Gary from any direction. A movement in any other direction, such as to Muskegan, or doubling up on existing or programmed ADC Bases, will degrade defense of Chicago-Gary to an unacceptable degree. Fart III. It is therefore recommended that: a. the decision to evacuate the FIS from O'Hare be reconsidered. b. If decision to evacuate remains unchanged, a new two squadron base be built within a northwesterly quadrant from Chicago not to exceed 70 nautical miles distance.

Copies to:

General Crabb

General Roth General Macrum

Colonel Horton Colonel Oldfield Colonel Maxwell

COMMANDER, ADC

COPY

HEADQUARTERS
AIR DEFENSE COMMAND
ENT AIR FORCE BASE
COLORADO SPRINGS, COLORADO

207

1 October 1954

AIR DEFENSE COMMAND COUNCIL MEETING REPORT

- I. Subject considered.
 - A. FIGHTER PROGRAM.
- 1. A meeting of the Air Defense Command Council was held at 1000, 1 October 1954, in the Air Room.
 - 2. The following members were present:

Major General George F. Smith, Chief of Staff
Brigadier General Kenneth P Bergquist, DCS/Operations
Brigadier General Marshall S. Roth, DCS/Materiel
Brigadier General Robert S. Macrum, DCS/Comptroller
Colonel John H. McCann, representing DCS/Intelligence
Colonel John C. Horton, DCS/Personnel
Colonel Delbert H. Hahn, representing the Inspector
General

The following interested persons were present:

Colonel Charles R. Bond, Jr., Asst DCS/O
Colonel H. H. Green, O&T
Colonel D. M. Hamilton, D/M
Colonel B. I. Mayo, O&T
Lt Colonel H. J. Mazur, Asst for Programming
Lt Colonel S. T. O'Dell, Asst for Programming
Major B. E. McKenzie, Asst for Programming
Major R. D. Littlejohn, O&T

3. Fighter Program. Colonel Mayo explained to the Council that this was one of a series of presentations which are made to the council on the Fighter Program conversions and movements into new bases. He stated that the last briefing was held last March and since that time, certain changes have been dictated by Hq USAF and other considerations, thus necessitating presentation of the revised program for council approval. He went on to state that the approved program must bein Washington next week for

207

inclusion in the new programming documents. For information of the Council members, it was pointed out that the program being presented was extended one year further into the future (through FY 58) than programs heretofore presented. At this point, Colonel Mayo turned the formal presentation over to Major Littlejohn. As a prelude to the briefing, Major Littlejohn explained that the factors, over which we have no control, but which form the foundation for programming actions, were:

- a. Number of aircraft programmed by USAF.
- b. Availability of base facilities.
- c. Deployment of ZI units to and from overseas.
- d. Special projects, such as "Pull Out," "Hop Up," etc.

By the use of a large map of the United States, Major Littlejohn gave a running account of new activations, conversions, deployments and equipping of squadrons from the current time period through FY 1958. A number of these programming actions were discussed as follows:

a. While going through the actions for the 2d Qtr, FY 55, Major Littlejohn stated that we had been directed to prepare to move one squadron out of O'Hare by 1 November and that EADF had recommended Wurtsmith for the proposed move. Further, that we concurred in EADF's recommendation. In this connection, General Bergquist stated that we had not yet received a directive from USAF ordering us to make such a move, and that we should not include this action in our programming data. He went on to state that the original idea was to merely prepare a plan for this action in the event we are forced to do it. He emphasized that we must remain constant in our position that any move out of O'Hare will seriously degrade the defense of the Chicago-Gary area. Council members agreed that a move from O'Hare should not be reflected in the program at this time.

b. The council approved activation of the 716th Sq at Sioux City in lieu of Perrin during 3d Qtr, FY 55.

c. At the end of FY 55, Air Defense Command will have:

41 86D Squadrons
7 89D Squadrons
10 94C Squadrons
Total ADC Fighter-Interceptor Squadrons

2

207

d. At the end of FY 56, Air Defense Command will have:

44 86D Squadrons
5 89D Squadrons
8 89D/H Squadrons
9 94C Squadrons
1 F-102 Squadron
7 Total ADC Fighter-Interceptor Squadrons

- e. The following recommended changes in the FI 56 program were approved by the Council:
 - (1) Activate 324th at Ethan Allen in lieu of Minot, since Minot will not be ready for occupancy until 4th Qtr, FY 57.
 - (2) Activate 498th at Bunker Hill in 3d Qtr, FY 56 instead of activating at Griffiss and moving the 27th Sq to Bunker Hill.
 - (3) Reverse activation sequence of Geiger and Ethan Allen to preclude having three squadrons at Geiger for one quarter.
 - (4) Convert Wurtsmith to F-89D/Hs in 3d Qtr, FY 56.

 One Otis Sq to F-89D/Hs in 3d Qtr, FY 56.

 Griffiss to F-89D/Hs in 3d Qtr, FY 56.

 Oxnard and Paine to F-89D/Hs in 4th Qtr, FY 56.

 Kinross to F-89D/Hs in 4th Qtr, FY 56.

 Minneapolis-St Paul to F-89D/Hs in 4th Qtr, FY 56.

f. During the 3d Qtr, FY 57, Major Littlejohn showed the F-102 Sq (331st) at Suffolk being deployed to Alaska and ADC receiving a squadron (18th) back from Alaska which we equip with F-102s at Suffolk. General Smith voiced disapproval of this action, stating that Suffolk would be left with an insufficient air defense capability in view of the amount of training which would be going on at that station. In reviewing the FY 57 portion of the program, the following actions were scheduled for Suffolk:

3

lst Qtr, FY 57 - 75th Sq converts to F-102s. 2nd Qtr, FY 57 - 75th Sq deploys to NEAC. 2nd Qtr, FY 57 - 59th moves from NEAC to Suffolk and is equipped with F-102s. 2nd Qtr, FY 57 - 331st converts to F-102s 3rd Qtr, FY 57 - 331st deploys to Alaska 3rd Qtr, FY 57 - 18th moves from Alaska to Suffolk and

is equipped with F-102s

General Smith went on to state that with the amount of training involved in the above actions, there would not be a single squadron at Suffolk qualified for air defense. He emphasized that this was an extremely important air defense base and that he could not approve that portion of the program. General Bergquist stated that the reason for this programmed action was because Hq USAF directed that we deploy F-102 squadrons to Alaska and NEAC. The comment was made that deploying F-102 squadrons overseas so soon might result in the same problems we had with the F-86D. Col Bond suggested that we propose to Hq USAF that we not deploy F-102 units to NEAC and Alaska and deploy F-89 units instead. Council members agreed that this point should be taken up with Hq USAF next week. It was also agreed that if we must send F-102s overseas, it would be better to take a squadron out of Otis first.

g. At the end of FY 57, Air Defense Command will have:

86D Squadrons 89D Squadron 89D/H Squadrons 94C Squadrons 102 Squadrons Total ADC Fighter-Interceptor Squadrons

h. The following recommended changes in FY 57 program were approved by the Council:

- (1) Deploy Hamilton to Spain instead of Larson, thereby saving a move from Hamilton to Larson.
- (2) Activate at Glasgow, Grand Forks, and Benzie County in lieu of Portland, Griffiss, and Wurtsmith, respectively, thereby saving three moves of established squadrons.
- (3) Move 470th from George to Palmdale in 1st Qtr,

207

- (4) Convert following bases to F-89D/Hs:

 Portland in 1st Qtr, FY 57.

 Langley in 2d Qtr, FY 57.

 Otis in 2d Qtr, FY 57.

 Glasgow in 4th Qtr, FY 57.

 Grand Forks in 4th Qtr, FY 57.

 Benzie County in 4th Qtr, FY 57.
- i. At the end of FY 58, Air Defense Command will have:
 - 23 86D Squadrons
 10 89D/H Squadrons
 36 102 Squadrons
 Total ADC Fighter-Interceptor Sqs
- j. Considering the fact that numerous changes will undoubtedly be necessary in the FY 58 program, the Council approved that portion of the presentation.
- 4. There being no further business to come before the Council, the meeting adjourned at 11:45.

GEORGE F. SMITH Major General, USAF Chief of Staff (Actg Chairman, ADC Council)

5

COPY Made Tesy reading copy made

208

From: HQ EADF, STEWART AFB, N. Y. 14 July 1954
To: COMMANDER, ADC, ENT AFB, COLORADO SPRINGS, COLORADO

/CONFIDENTIAL/ EAOPR-2 C774 Report of EADF Air Base
Review Committee on Air Base Suitability. This message in two parts.
Part I. EADF Owned Bases. Reference following list, it is recommended that future UPN deployment incorporate withdrawal from the first five listed bases but retention of the remaining listed bases.

O'Hare International Airport, 1 mile from Des Plaines, 16 miles from Chicago. Transfer of two Air National Guard Squadrons equipped with Jet aircraft to O'Hare and diversion of portion of Chicago Midway civilian traffice to O'Hare will increase the total number of takeoffs and landings to 700 daily. This will create over-saturation of EFC control facilities and possible conflict between Civilian Agencies, Air National Guard, and Air Force Units. Additionally four small civilian airports are located within two to four miles of O'Hare resulting in overlapping traffic patterns with resultant hazards. Quit Claim Deed between the Air Force and City of Chicago states that Air Force has right to use the airport at all times in common with others, but that the CAA can limit this use to not more than 25 percent of airport capacity. Nothing in the deed requires USAF to pay proportionate share of cost or maintenance. Airport is presumably maintained to CAA standards which are acceptable for conventional aircraft

CONFIDENTIAL

208

EAOPR-2 C774 .

but not for Jet aircraft. City will not sign a formal document permitting the Air Force to maintain the field at its own expense but so far has not objected to the performance of such maintenance when it is necessary to eliminate a hazard. CAA proposal for handling additional civilian and military traffic at O'Hare is to install additional navigation aids to the northwest and west. This action will close the uncontrolled area which is now used for IFR scramble and recovery at O'Hare. Airport facilities granted in Quit Claim Deed are being utilized to the maximum by ADC Units and programmed arrival of ANG Units, 20 C-45 aircraft of AFRCTC and 5 C-47 aircraft of Air Transport Squadron will require additional space and facilities rendering the provisions of the Quit Claim Deed inadequate.

Greater Fittsburgh Airport, four and one-half miles from Coraopolis, ten miles from Pittsburgh. High noise level exists during runup and takeoffs which if continued may cause deterioration of relations with division users of the airfield. Aerial congestion around the field is extremely heavy with little or no local air space available for instrument flights, test flights or acrobatics. Traffic is of course particularly heavy during IFR. Only minimum instrument training is possible. Continued increase in civilian and military traffic is expected with resultant pressure on the part of civilian operators and local residents to have Air Force move from field.

0

208

EAOPR-2 C774

Niagara Falls Municipal Airport, five miles from Niagara. Jet instrument let down for Niagara is complicated due to maze of civilian airways directly over and surrounding the base. In addition there is a radio tower 951 feet high directly west of the runway 27R/only Jet runway available which is a hazard to all weather flying. Plans call for the construction of a TV antenna 941 feet high south of the airfield. Miagara Defense Group had offered no objection to construction of this tower except those listed in AF Reg 86-3. Station WCR in Buffalo is the applicant for the tower and is very influential in the Buffalo vicinity. Due to local influence of Station WCR and desirability of maintaining good relations in the area the Defense Group is withdrawing their objection to the proposed construction and recommending waiver of AFR 86-3 to allow construction to proceed. A serious potential hazard exists in the location of the alert hangars which directly face the Bell Aircraft Corporation plant. Several thousand employees will be concentrated in the direct line of fire when the aircraft are in the alert hangars, starting up and taxiing straight ahead to the scramble runway. Even though all precautionary measure known are taken the possibility of rockets firing accidentally must inevitably be realized by the Bell Corporation and may eventually have some effect on the morale and efficiency of that organization.

New Castle County Airport, five miles from Wilmington, Del.

The primary instrument approach runway is over a highly congested

ONFIDENTIA

208

EAOPR-2 C774 .

highway intersection and a filling station is in a position that is presently interfering with the ILS glide path. Other runway approaches pass over densely populated areas and in one instance so close to civilian houses that red obstruction lights have had to be placed on their roofs to facilitate night operations. To combat adverse opinion traffic patterns are designed as much as possible to avoid populated areas and an aggressive campaign of civilian indoctrination is pursued. However, the basic problems of operating from a civilian airport in a congested housing area will continue to exist.

been received in the past regarding noise of Jet aircraft over Madison. Problem was resolved for present by indoctrination program through newspapers, luncheons, meetings at service clubs and conducted tours of the base for civilian VIP. Operations conducted from a civilian field near a major city will continue to be a problem as at other similarly located bases. Additional problem at Truax involves approach ends of runways 22, 27 and 31 being too close to highway 51. Problem again temporarily solved by closing runways to Jet aircraft except for emergency.

Ethan Allen AFB, three miles from Burlington. ILS and ground controlled approach brings aircraft over Winooski, Vt. at an altitude of 400 feet. This presents a hazard, however,

CONFIDENTIAL

200

relations have been excellent with local community. A recent protest by a small group of people was quickly suppressed by Mayor of Winooski. Mayors and civilians of all surrounding communities have been briefed on Jet operations from field and

have expressed desire for continued operation of Air Force from

Burlington.

EAOPR-2 C774

Youngstown Municipal Airport, eleven miles from Youngstown.

Excellent relations exist with local community and no particular hazard, noise, joint use of air space problems exist at the present.

Selfridge AFB, three miles from Mt. Clemens, eleven miles from Detroit. Takeeff to the west necessitates low altitude climb over Mt. Clemens jeopardizing operation of mink farms in area. Pilots have been instructed to make right turn as soon as practicable after takeoff.

5

COPY

HEADQUARTERS 500TH AIR DEFENSE GROUP Greater Pittsburgh Airport Corapolis, Pennsylvania

200

OT

30 July 1954

SUBJECT: Operational Restriction of Flying Facility

TO: Commander 4708th Defense Wing Selfridge Air Force Base

Michigan

- 1. Under provisions of paragraph 50, AF 60-23, it is requested that transient military jet traffic at Greater Pittsburgh Airport be restricted to those jet aircraft on official business only during IFR conditions between the hours of 1600 EST and 2100 EST daily.
 - 2. Justification for this request is as follows:
- a. Greater Pittsburgh Airport has experienced incidents reflecting adversely on the United States Air Force due to the arrival of transient IFR jet aircraft at this base during peak periods of civil air traffic, e.g., on 19 March 1954, seven transient T-33 aircraft consumed more than one hour in accomplishing IFR letdowns to the airfield. This resulted in a recorded eleven hours, 49 minutes of delay to other aircraft in the Pittsburgh area. This occurrence is adequately contained in a letter Headquarters USAF, AFOOP-OC-FL, dated 19 May 1954, subject: "Military Jet Training Activity," which was forwarded from your headquarters.
- b. A permanent method of identifying peak civil air traffic periods at this base would be provided by publishing the requested restriction in Radio Facilities Charts.
- c. It is considered that the air traffic at this base is peculiar in that it is not analogous to that at any other joint/use installation, i.e., a high density of civil air traffic combined with all weather jet operation. With this situation existing, the imposition of transient IFR jet traffic during peak traffic loads should be avoided to prevent recurrence of dangerous incidents.
- d. Repetition of an incident similar to that referred to in paragraph 2a above would subject the United States Air Force to

209

.Hq 500th ADG OT Subj: Operational Restriction of Flying Facility

criticism which could be avoided in addition to presenting an undesirable accident potential.

3. It is recognized that the imposition of any restriction is undesirable; however, it is felt that the restriction requested would prove to be in the best interest of the United States Air Force and would represent a minimum decrease in the transient service presently provided.

WALLACE B. FRANK Lt Colonel, Commander

WC (30 Jul 54)

1st Ind

6 August 1954

HEADQUARTERS, 4708TH DEFENSE WING, Selfridge Air Force Base, Michigan

- TO: Commander, 30th Air Division (Defense), Willow Run Air Force Station, Belleville, Michigan
- 1. I concur with the request contained in paragraph 1, basic letter.
- 2. Although this headquarters is cognizant of the Air Force policy concerning "Official Business Only" restrictions, the traffic problem peculiar to Greater Pittsburgh Airport is believed to be of sufficient magnitude to warrant reconsideration.
- 3. Recommend approval of the requested restriction at Greater Pittsburgh Airport.

G. R. GREENE, JR. Colonel, USAF Commander

200

Hq 500th ADGp OT Subject: · Operational Restriction of Flying Facility

DOOFO (30 Jul 54)

2d Ind

16 August 1954

HQ 3CFH AIR DIVISION (DEFENSE), Willow Run Air Force Station, Belleville, Michigan

TO: Commander, Eastern Air Defense Force, Stewart Air Force Base, Newburgh, New York

- l. Greater Pittsburgh Airport is in a high density traffic area of such proportions that IFR scramble and recovery training in accordance with ADCR 55-28 is affected normally, and is practically curtailed during peak periods of traffic.
 - 2. Recommend approval of the restrictions as requested.

FOR THE COMMANDER:

RICHARD A. HOKELANHT WOJG USAF Asst Adjutant Hq 500th ADGp OT Subject: Operational Restriction of Flying Facility

EAOOT-SF (30 Jul 54)

3d Ind

23 August 1954

HQ EASTERN AIR DEFENSE FORCE, Stewart Air Force Base, Newburgh, New York

TO: Commander, Air Defense Command, Ent Air Force Base, Colorado Springs, Colorado

- 1. Forwarded as a matter for your consideration.
- 2. In view of the incident of 19 March 1954, paragraph 2a, basic letter, and the conditions known to exist at Greater Pittsburgh Airport insofar as traffic density is concerned, it is not deemed unreasonable to effect, during IFR conditions, an "official business only" period for the five hours of peak traffic density. Such action would minimize the accident potential of the Pittsburgh Area during this peak density period and eliminate undue criticism from civilian agencies because of traffic delays.
- 3. This headquarters recommends approval of request outlined in paragraph 1, basic letter.

FOR THE COMMANDER:

J. W. FOUNTAIN, JR. Major, USAF Asst Adjutant

200

Hq 500th ADCp, OT, Subject: Operational Restriction of Flying Facility

ADOOT-G (30 Jul 54)

4th Ind

11 September 1954

HQ AIR DEFENSE COMMAND, Ent Air Force Base, Colorado Springs, Colorado

TO: Director of Operations, Headquarters USAF, Washington 25, D. C.

1. Recommend approval.

2. The curtailment of jet traffic between the hours of 1600 EST and 2100 EST daily, if IFR conditions prevail, to "Official Business Only" will improve the control of air traffic in this dense area.

FOR THE COMMANDER:

COPY

210

18 October 1954

General Thomas D. White Vice Chief of Staff, USAF Headquarters USAF Washington 25, D. C.

Dear Tommy:

Several months ago Secretary Talbott visited this Headquarters. During a discussion of some of our more critical airbase problems, the Secretary stated that he had firmly decided that the Air Force would evacuate its fighter-interceptor squadrons from O'Hare (Chicago) at some time in the future -- the quicker the better. Our arguments on the defense side of the picture failed to sway his decision. During a visit of Mr. Douglas, the Under Secretary, earlier this week, this question again came up for discussion, so it occurred to me that I should give you and Nate a brief report on actions we have taken toward implementing the Secretary's decision.

Your message, AFOOP-OP-D 5717, dated 7 June 1954, directed a study to determine the possibility of locating our fighter-interceptor units at existing bases outside the Chicago Metropolitan area. A very thorough study by this Headquarters determined that this proposal was not operationally feasible without seriously degrading the Chicago defenses and your Headquarters was advised accordingly. Because of the operational necessity to remain within the general Chicago area, a new base in the NW quadrant of a circle, 70 nautical miles in radius and centered at Chicago, was recommended and your Headquarters advised by message, ADODO 1027, 17 June 1954.

A survey team composed of representatives of your Headquarters, this Headquarters, Headquarters Continental Air Command, and the Corps of Engineers examined the area and selected a site which met the Air Defense requirements just to the south of Kansasville, Wisconsin. Funds to master plan Kansasville have been requested by message, this Headquarters, ADMIS P-2 1521, 30 August 1954.

CUNELL

210

General Thomas D. White

18 Oct 54

As a result of the approval of the Kansasville site, our FY-1956 Public Works Program contained the required line items for a complete base in the amount of approximately \$25,000,000. We have been advised that the Installations ADMOC Committee of your headquarters reduced this program to \$16,921,000 to cover the long lead time items, the balance of the program to be included in the FY-1957 Public Works Program. This lesser amount will not provide the facilities necessary to permit full and effective operation of the two squadrons currently stationed at O'Hare. Under this type of programming, it is quite probable that the move from O'Hare cannot be accomplished until the early part of calendar year 1958.

It is my feeling that sufficient money should remain in the FY 1956 Program to permit the move of both squadrons at the same and earliest time, in order to comply with the Secretary's announced decision, and that the Kansasville site should be made operationally complete before any move is attempted which might degrade the Chicago defenses.

Despite the Secretary's strong feelings on this matter, and despite the political and "airline" pressures being applied, I must continue to recommend from an operational standpoint, considering always the question of air defense of this important area, that both squadrons remain at O'Hare until the new Kansas-ville base is ready for occupancy.

Sincerely,

B. W. CHIDLAW General, USAF Commander

COPY .
Easy reading copy made

011

From: COMMANDER, WADF, HAMILTON AFB, CALIFORNIA 15 July 1954
To: COMMANDER ADC, ENT AFB, COLORADO SPRINGS, COLORADO

/UNCLASSIFIED? WDODO 11813 . The following information is forwarded in compliance with letter from General Smith to General Todd dated 11 June 1954. Bases are listed in recommended order of priority for elimination as Jet Operational Bases. Portland, Geiger, McChrord, Hamilton, Paine, Oxnard. The following general criteria were considered in establishing this priority: noise, community relations, hazards to the civilian populace, future operations and expansion. As an elimination of the noise problem it is recommended that solutions other than the evacuation of bases be given continued consideration. Possible solutions might be: Use of engine mufflers for 5.0. and ground operations, use of JATO for take off in lieu of afterburners, construction of take off runways that by-pass congested areas even though they may be of little use for landings, establishment of SOPS calling for a high rate of climb immediately after take off rather than a long flat climb to build up speed.

COPY
Easy reading copy made

212

JUPMC 94A

11 July 1954

From: COMMANDER, WADF, HAMILTON AFB, HAMILTON CALIFORNIA
To: COMMANDER, ADC, ENT AFB, COLORADO SPRINGS, COLORADO

/SECRET/ SECTION OF TWO SECTIONS. UDOPR 4 C-1601. This confirms telecon between Colonel Shoup your Headquarters and Lt Colonel Abel this Headquarters, 17 July 54. The following is extracted from the minutes of committee meeting at which selection was made: 1. Portland International Airport. The undesirable attitude of the Port of Portland and the anticipated continued problems between the Air Force and the Port of Portland renders this base as the most undesirable station even upon the completion of the presently authorized construction. Further, upon the consumnation of the present proposed leases and the completion of authorized construction, the land area made available to the Air Force is inadequate to permit the successful operation, and any necessary development of the ADC, AFRTC, and Reserve Units of the Air Force. Also taken into consideration is the potential flooding conditions. The following message received from the Commander, 503rd Air Defense Group at Portland International Airport was read and is quoted: DO286. 1A. Reference your message UDOPR 11392. Community relations have steadily improved as a result of intensified efforts to keep civilians in adjacent areas

212

JUPMC 94A abreast of our Air Defense Mission. This has been accomplished through: 1. Base indoctrination tours given to clubs and civic groups which include lectures on mission as well as a tour of physical plant. 2. Lectures and reciprocal aid agreement with volunteer Fire Department personnel of the adjacent areas. 3. Use of public information media. 4. Close liaison with the Port of Portland, Air and Ground National Guard, CAP, and Boy Scouts. 5. In an effort to forestall complaints by local civilians, and, as part of our noise abatement program, an instrument Jet departure plan has been devised which keeps the aircraft clear of the more heavily populated areas. Although this was publicized in local papers, there are still an average of three (3) telephone calls a day by local civilians complaining of the noise made by our afterburner equipped aircraft. During periods of relatively low ceilings (2000, to 6000,), the increased rate of complaining telephone calls raises sharply. "DO286. 1B. Foreseeable community relations problems include: 1. The disturbances caused by our Jet aircraft with the attenant noise factor. "D0286. 1C. No foreseeable problem. "D0286. 1D. This Air Base is situated at the junction of Amber Airways 1 and Red Airways 1. Both airways carry heavy traffic. Present Jet instrument departures are predominately to the southeast in an open quadrant of Portland low frequency range. This is necessary because of traffic congestion on the airways at intermediate altitude of 3 to 16,000, and the fact that CAA has

212

JUPMC 94A

difficulty diverting traffic on a minimum warning basis. This problem is currently under discussion with the appropriate agencies. There are no major problems on recovery procedure. 2. Geiger Field. The joint use of the airport facilities at this station makes it undesirable. The low revenue received by the city of Spokane from the commercial airlines and the Air Force precludes the city from accomplishing proper maintenance for the operation of Jet aircraft. It is estimated that a minimum of \$1,000,000.00 would be required to properly reseal and overlay the instrument runway at Geiger Field. Due to the limited area available for the parking of WADF aircraft, it is not possible to expand the presently stationed at Geiger and/or constructing additional apron in an area that will result in a split operation of the WADF mission. The following Council, however, the Mayor, City Council, and the Press immediately lined in support of the Air Force and no complaints have been received since. Fairchild AFB has periodically been the target in the past on the nose factor (B-36 type aircraft). This Headquarters took the following action as soon as any criticism was evident: 1. Explained problems to Chamber of Commerce. 2. To Aviation Committee of the Chamber of Commerce. 3. Furnished Press an explanation with diagrams of GCA and traffic patterns, which was published. 4. Arranged training night flights in early evening hours.

3

212

JUPMC 94A

The above action was taken promptly and was considered most effective as complaints by civilians ceased. Part II. No foreseeable community relations problems exists unless the noise problem arises again, however, it is believed that this could be easily resolved. The long-term outlook is for excellent community relations in this area between the military and Spokane. Part III. Geiger Field presently is a municipal airport with Air Force, Navy, and National Guard Tenants on a lease basis. City airport bounds Geiger AFB on one side and Navy on the other side. Future expansion space is, therefore, very restricted on the flight line. Future expansions to a permanent two-squadron base is possible at Geiger by building an additional hangar and ramp in vicinity of present alert hangar. Other land exists on other side of the field, and city has in every case made additional land available where it was requested. Relations with City Airport Manager at Geiger, Air National Guard, Navy, and Civil Air Lines are considered excellent. Part IV. Tower at Geiger is CAA controlled and tower officials and operators have evidenced a sincere desire to cooperate in ADC Jet operations. They are appreciative of the Air Force problems and will give Air Force personnel priority when required on scrambles and let downs. (It was suggested that a comment be added this recommendation to the effect that recommendation was made based on installations, etc.; that there was nothing in community relations to warrant the recommendation, except that Geiger Field

212 .

JUPMC 94A

is three miles from town.) 3. McChord Air Force Base. The undesirable weather condition at McChord is the primary factor affecting the desirability of this station. Following is quoted message from the Commander, 567th Air Defense Group at McChord, and which was read: "MCDDO-1 7280. Reference message WDOPR 11392. A. Community relations exceptionally good, no major problems. B. No major problems foreseeable. C. Expansion to north limits by ground contour, to south by Ft. Lewis Military Reservation. No contemplated expansion to east or west beyond present base boundaries. D. Base is located on amber airway. 1. which is main north-south airway and encircled to west by blue airway 71, and VOR airway 3, Victor 23 and Victor 27. This area immediately surrounding the base is all designated as control area. These airways and the air traffic control area definitely interferes with desired scramble and recovery procedures. Continued development of the areas to the east and west and north of the base will increase noise nuisance problems which are presently of a minor nature. 4. Hamilton AFB. The unstable soil conditions in the runway area places Hamilton in , the next order for undesirability. The runway at this station requires continual major reconstruction. Further, the present land available would prohibit any major expansion without the acquisition of additional land. 5. Paine AFB. The inability to economically extend the primary instrument runway at Paine makes this station next in line for undesirability of retention.

Easy reading copy made Punctuation true copy

213

From: COMMANDER, ADC

15 October 1954

To: CHIEF OF STAFF, HQ USAF, WASHINGTON, D. C.

Thru: COMMANDER, WADF, HAMILTON AFB, CALIFORNIA
COMMANDER, EADF, STEWART AFB, NEW YORK
COMMANDER, CADF, GRANDVIEW AFB, MISSOURI
COMMANDER, 4750TH AIR DEFENSE WING (WEAPONS)
COMMANDER, 4600TH AIR BASE GROUP, ENT AFB, COLO (COURIER)
YUMA COUNTY AIRPORT, YUMA, ARIZONA

(CONFIDENTIAL) ADMIS P-11 1819 . Reference your message AFCIE-3I 46213, 1 October 54, subject, Selection of FY-56 Public Works Project Critical Items of Construction. The following is a list of critical items in the FY-56 PWP for ADC with brief statement of criticality and required Beneficial Occupancy Date. Hamilton AFB: Runway primary, south end of existing runway failing requires replacement for safe operation of aircraft, BOD January 56; Fire Station, C&S, crash station building structurally unsound, structural fire equipment one-half mile from crash station and not on line, BOD December 55: Crash boat crew station, existing facilities inadequate due to silting of channel, BOD February 56; land, fee, condemnation required for construction of crash boat station, BOD July 55. Klameth Falls AFB: Hazard removal, existing structure in clearance zone and presents hazard to aircraft, BOD January 56. McChord AFB: Storage, base rocket and assembly, required for safe assembly testing and storage of ready missiles use by F-102 aircraft, BOD January 57. Castle AFB: Taxiway,

COLVE LIVEREN & LEAD

213

(CONFIDENTIAL) ADMIS P-11 1819 . Cont'd apron, access, required for parking fighter aircraft, BOD December 55. Travis AFB: Storage, base, rocket, assembly, required for . safe assembly testing and storage of ready missiles used by F-102 aircraft, BOD October 56. Yuma AFB: Lighting taxiway, provide safe apron access taxiway for night rocket firing by tactical fighter interceptor squadron, BOD April 56; 00, 196 men, tactical unit pilots flying jet aircraft and operating complex equipment do not receive sufficient rest when quartered in tents in this hot climate, BOD April 56. Dover AFB: Hangar, organization, 41,066 square feet, BOD March 56, essential for operation of Second Fighter Interceptor Squadron. Kansasville AFE: Apron, parking, runway, primary; taxiway alert; bulk jet fuel; operating storage gas; communication general; radio inner beacon; fire station CaS; base operations bldg; readiness crew building; hangar alert; hanger field maintenance; hangar organization; dining hald, airmen; dormitory, airmen; 00 men; utilities required for critical items; land, fee, pur; storage base rocket assembly; storage, ordnance, igloo; warehouse bulk supply, base; headquarters air base group; these items are considered to be the minimum facilities which would be required to provide an operating capability. Langley AFB: Flight simulator, BOD March 56. This facility required to house the F-102 simulator scheduled to arrive at this base 3rd quarter 1956. Storage ready rocket, this unit must be available to squadron before the type of ammunition

2

213

(CONFIDENTIAL) ADMIS P-11 1819 . Cont'd stored is received. Lockbourne AFB: Flight simulator building, BOD March 57. This facility required to house F-85D simulator scheduled to arrive this base 4th quarter 1957. Otis AFB: Hangar, nose, wing, BOD September 56. This facility required to provide minimum maintenance facility requirement to supply RC121D aircraft which will require frequent maintenance due to sustained flight operations involved in the mission; flight simulator 1,850 square feet, BOD July 56, the fighter interceptor squadron is programmed to be equipped with F89 aircraft by 3d quarter 1956; academic classroom, BOD July 56, this building contains classrooms and space for the RC121D training to supply the AEWAC wing; storage, base, rocket, assembly, BOD July 56, this unit must be available to squadron before the type of ammunition stored is received. Truax AFB: Storage, base, rocket, assembly, BOD January 57, this unit must be available to squadron before type of ammunition stored is received. Westover AFD: Storage, base, rocket, assembly, BOD January 57, this unit must be available to squadron before type of ammunition stored is received. Youngstown AFB: Hq Air Base Group, BOD September 56, this activity temporarily housed the training aids building, flight simulator presently being installed, therefore, headquarters activity must be vacated. Duluth Municipal Airport: Test stand, jet, to eliminate shipment of engines to Sioux City, BOD October 56, water supply, portable, provide adequate supply for fire protection, BOD October 56.

213

(CONFIDENTIAL) ADMIS P-11 1819 . Cont'd Glasgow AFB: Items required for new permanent base on which no facilities are existing; taxiway, apron, access, BOD December 56; fill stand, truck, BOD October 56; operational storage, aviation gasoline, BOD October 56; ILAS facility, BOD December 56; radio inner beacon, BOD December 56; test stand, jet, BOD December 56, flight simulator building, BOD October 56; utilities to support all critical items programmed, BOD March 57; heating plant, central, BOD December 56; base infirmary, no infirmary in immediate area, BOD October 56; ready rocket, storage, assembly, BOD 56; warehouse, bulk supplies, BOD December 56, no warehouse available in this vicinity; service club, BOD October 56; Headquarters Air Base Group, BOD October 56; AIO shop, BOD October 56; auto maintenance shop, BOD October 56. Grand Forks AFB: Items required for new permanent base on which no facilities are existing; apron, parking, TAB flight, BOD December 56; fill stand, truck, BOD October 56; operation storage, aviation gasoline, BOD October 56; communications building, BOD October 56; GCA mobile, BOD December 56; IIAS facilities, BOD December 56; radio inner beacon, BOD December 56; test stand, jet, BOD October 56; flight simulator building, BOD October 56; dormitory, airmen, BOD October 56; utilities to supply critical items, BOD March 57; heating plant, central, BOD October 56; infirmary, base, BOD October 56, no medical facilities available in the vicinity; storage, ordnance, igloo, BOD October 56; storage, base, rocket, assembly, BOD

213

(CONFIDENTIAL) ADMIS P-11 1819 . Cont'd October 56; warehouse, base, bulk supplies, BOD December 56; service club, BOD October 56; Headquarters Air Base Group, BOD October 56; AIO shop, BOD October 56; auto maintenance shop, BOD October 56. Minot AFB: Items required for new permanent base on which no facilities are existing; apron, parking, T&B flight, BOD December 56; fill stand, truck, BOD October 56; operation storage, aviation gasoline, BOD October 56; communications building, BOD October 56; GCA mobile, BOD October 56; ILAS facilities, BOD October 56; radio inner beacon, BOD October 56; fire station Cas, BOD October 56; ready crew building, BOD October 56; test stand, jet, BOD October 56; flight simulator building, BOD October 56; officers club, BOD October 56; 00, men, BOD October 56; utilities for critical items listed, BOD March 57; heating plant, central, BOD October 56; base infirmary, no medical facilities available, BOD October 56; storage, space, igloos, BOD October 56; storage, base, rocket, assembly, BOD December 56; warehouse, base, bulk supplies, BOD December 56; service club, BOD October 56; Headquarters Air Base Group, BOD October 56; AIO shop, BOD October 56; auto maintenance shop, BOD October 56. Grandview AFB: Hangar field maintenance with shops, no field maintenance hangar available to facilitate base maintenance work, BOD March 57; test stand, jet, to eliminate return engines to Sioux City depot, BOD October 56; headquarters command air conditioning, to facilitate loss of manhours during extreme hot weather for CADF personnel, BOD December 56. Minneapolis-St. Paul International Airport: Apron parking, provide adequate parking

CONFIDENTIAL

CONFIDANTALL

213

facilities for transient and base flight aircraft, BOD December 56; test call, jet, provide inclosed cell for testing jet engines, which will eliminate noise hazard to Veteran Hospital and nearby homes, BOD October 56; utilities to supply critical construction items listed, BOD December 56. Seymour-Johnson AFB: Hangar field maintenance, provide maintenance facilities for RC121 type aircraft, BOD March 57; storage, ready, rocket, assembly, BOD December 56, this unit must be available to squadron before the type ammunition stored is received. Ent AFB: Headquarters Group building, BOD October 57. For Benzie County Airport: Most of the items for FY-55 and FY-56 without critical when a firm site has been determined. BOD dates will then be established.

C. F. HUMPHREYS Captain, USAF Asst Command Adj

6

COPY

HEADQUARTERS
AIR RESEARCH AND DEVELOPMENT COMMAND
Post Office Box 1395
Baltimore 3, Maryland

214

RDSMCC

13 October 1954

SUBJECT: Communication-Electronics Support for 49th Fighter Interceptor Wing

anous och out with

TO:

Commander
Air Defense Command
Ent Air Force Base
Colorado Springs, Colorado

- 1. In accordance with current USAF Program documents, the 49th Fighter Interceptor Squadron (ADC) is scheduled to become a tenant organization at Laurence G. Hanscom Field, Bedford, Massachusetts during the second quarter, Fiscal Year 1956. This squadron will receive logistic support from the 6520th Support Wing (Test).
- 2. Laurence G. Hanscom Field is currently undergoing a major construction program. The existing Communication-Electronics facilities are being modified as required by the mission of the 6520th Support Wing (Test). Neither this wing nor this headquarters has ever received any specific information from your Command regarding the desired Communication-Electronic support to be required by the 49th Fighter-Interceptor Squadron (ADC). It is possible that the installed Communication-Electronics facilities at Laurence G. Hanscom Field are not adequate for air defense purposes.
- 3. It is requested that your Headquarters direct a staff visit to Laurence G. Hanscom Field for the purpose of inspecting the installed Communication-Electronics facilities. In the event these facilities are found to be below acceptable standards for support of a fighter interceptor squadron, it is further requested that this Headquarters be advised as soon as possible the additions or changes desired. Upon receipt of your requirements, this Headquarters will prepare appropriate amendments to our portion of the USAF Program, Communication-Electronics PC-56-1.

FOR THE COMMANDER:

/s/ ERIC D. THOMAS
Lt Colonel, USAF
Chief, Communications Division
Directorate of MS&C

COPY

21

Hq ARDC, RDSMCC, Subj: C-E Support for 49th Fighter Interceptor Wing

EAOCE-P (13 Oct 54)

2d Ind

30 Dec 1954

HQ EASTERN AIR DEFENSE FORCE, Stewart Air Force Base, Newburgh, N. Y.

TO: Commander, Air Defense Command, Ent Air Force Base, Colorado Springs, Colorado

- 1. Representatives of this headquarters made a staff visit on 27 December 1954 to the 6520th Support Wing (Test), Laurence G. Hanscom Field, Bedford, Massachusetts, to inspect installed communications-electronics facilities at Hanscom Field, and to determine additional facilities required to support the 49th Fighter-Interceptor Squadron.
- 2. Navigational aid facilities installed, or programmed for installation, are considered adequate. The AN/MPN-11B GCA unit which presently serves Runway #5 is to be moved to serve Runway #11 when extension of this runway is completed. CAA is installing an ILAS facility to serve Runway #11. The AN/URN-5 Homing Beacon programmed in PC 56-1-I, has not been sited to date but will probably be located at Fort Devans, approximately thirteen (13) miles out on the extended centerline of Runway #11 at Hanscom. A homing beacon presently located at the outer ILAS Marker is in operation.
- 3. An AN/TRC-ll radio circuit, with a relay station, will be required between the 762d AC&W Squadron at North Truro, and the 49th Fighter-Interceptor Squadron at Hanscoom for emergency scrambling in the event landlines fail. There is an AN/TRC circuit presently operating between South Truro and Hanscom, with a relay station at Magnolia. It may be possible to join these two circuits by providing an AN/TRC-ll circuit between North Truro and South Truro and thereby conserve equipment. This headquarters will request PC programming of necessary equipment for both ends of the circuit and the relay station.
- 4. Teletype equipment for a tactical teletype circuit between the 4707th Air Defense Wing at Otis and Hanscom Air Base will be required. PC Facility 6314 for this circuit will be requested by this headquarters. This circuit will be terminated in the Base Communications Center at Hanscom. In addition, an approved on-base teletype pony circuit, PC Facility 6317, will be required between the Base Communications Center at Hanscom and the Readiness Building for the 49th Fighter-Interceptor Squadron. This headquarters will request PC programming of the 6317 pony circuit teletype equipment. It is requested that the 6520th Support Wing provide

214

Hq ARDC, RDSMCC, Subj: C-E Support for 49th Ftr-Intep Wing, 2d Ind (Cont'd)

a cable pair between these two points. This is to be an approved circuit cleared for passing classified traffic in the clear up to and including Secret. It must meet the provisions of Paragraphs 406 through 408 of ACP 122(B).

- 5. Reference letter, Headquarters Air Defense Command, ADOCE-C, 8 November 1954, subject: Standard Fighter Alert Wire Communications Facilities, and letter, Headquarters EADF, EAOCE-CW, 1 December 1954, subject: Standard Fighter Alert Wire Communications Facilities (Encl #1). Requirements for wire facilities, as outlined in the above referenced letters, will be submitted by the Commander, 49th Fighter-Interceptor Squadron. Minimum outside cable requirements to each building are as follows:
 - a. Readiness Building to MDF 35 pair
 - b. Alert Hangar to MDF 7 pair
 - c. Readiness Hangar to MDF 8 pair
 - d. Academic Building to MDF 4 pair
- 6. The Wing Staff Communications Officer was furnished a copy of Enclosure #1 and informed of these outside plant cable requirements. It is requested that the 6520th Support Wing (Test) provide the above cable by the second quarter of Fiscal Year 1956.
- 7. It is requested that the 6520th Support Wing (Test) provide cryptographic support for the 49th Fighter-Interceptor Squadron. A normal Air Force account will satisfy this requirement.
- 8. The contents of this indorsement are classified SECRET in accordance with Paragraph 23.c., AFR 205-1.

FOR THE COMMANDER:

1 Encl Ltr, Hq EADF, EAOCE-CW, 1 Dec 54, Subj: Standard Ftr Alert Wire Comm Facs BEN D. MOORHEAD 1st Lt, USAF Asst Adjutant

5

COPY

214

HQ ARDC, RDSMCC, Subj: C-E Support for 49th Ftr-Intep Wing

ABOCE-A (13 Oct 54)

3d Ind

31 Jan 1955

HQ AIR DEFENSE COMMAND, Ent Air Force Base, Colorado Springs, Colorado

TO: Commander, Air Research and Development Command, P. O. Box 1395, Baltimore 3, Maryland

- 1. Forwarded for your information and action deemed necessary
- 2. PC revisions will be submitted to your headquarters on receipt from Headquarters Eastern Air Defense Force.

FOR THE COMMANDER:

1 Incl n/c W. J. BIRMELE LT COL., USAF Asst Comd Adj

MEMO FOR RECORD: HQ ARDC requested that C-E requirements in support of the 49th FIS programmed for L. G. Hanscom Field, be forecast to them. EADF replied by Ind of anticipated requirements and advised that PC revisions would be submitted. This info being forwarded to ARDC

/s/ GORDON F. PALMER Capt, USAF

6

DOCUMENT NO. 2/5

THIS DOCUMENT MAY BE FOUND

IN VOLUME \overline{VII} OF THE SUPPORTING

DOCUMENTS TO THIS HISTORY.

DOCUMENT NO. 216

THIS DOCUMENT MAY BE FOUND

IN VOLUME TO OF THE SUPPORTING

DOCUMENTS TO THIS HISTORY.

COPY

217

EAOPR-2

18 August 1954

SUBJECT: (Unclassified) Programmed Conversion of the 330th and

539th Fighter-Interceptor Squadrons to F86D Aircraft

0: Commander

Air Defense Command Ent Air Force Base Colorado Springs, Colorado

- 1. Reference is made to the July 1954 ADC Program Document and classified message, your headquarters, ADOAP 1839, 27 August 1953, wherein your headquarters agreed to delay the conversion of the 330th Fighter-Interceptor Squadron to F86D aircraft until the runway improvement at Stewart AFB was completed.
- 2. It is currently estimated that the construction on the runway extension which is programmed for Stewart AFB will commence in October 1954. Barring unforeseen delays, the construction on the runway extension should be completed in October 1955.
- 3. This headquarters has devoted considerable time and effort in studying all aspects and implications concerning the programmed conversion of the 330th and 539th Fighter-Interceptor Squadrons to F86D aircraft in the 3QFY55, and it is the concerted opinion of this headquarters that from a flying safety standpoint these units should not be converted to F86D aircraft prior to the completion of the runway extension.
- 4. Provided that the F86D aircraft were modified to permit the use of a drag chute, it is reasonable to assume that an interceptor unit with previous experience in the F86D could satisfactorily operate from Stewart AFB under the existing conditions; however, when it is considered that the 330th and 539th Fighter-Interceptor Squadrons are composed almost entirely of pilots with little or no F86D experience who must safely transition to a new aircraft and operate from relatively short runways with unsatisfactory approaches and inadequate recovery aids, it is believed that the accident potential that would exist if the conversion program is implemented is worthy of consideration and is a cogent reason to delay the conversion of these units to F86D aircraft until the runway extension at Stewart AFB is completed.

217

EAOPR-2 Subject: (Unclassified) Programmed Conversion of the 330th and 539th Fighter-Interceptor Squadrons to F86D Aircraft (Cont'd)

- 5. It is therefore recommended that action be taken to delay the programmed conversion of the 330th and 539th Fighter-Interceptor Squadrons to F86D aircraft until 2QFY56 when it is estimated that the runway extension at Stewart AFB will be completed.
- 6. This letter is classified Secret in accordance with paragraph 23b, AFR 205-1.

FOR THE COMMANDER:

JOHN L. WARREN Colonel, USAF Adjutant

5

COPY

217

Hq EADF, EAOPR-2, Subj: (Uncl) Programmed Conversion of the 330th and 539th Fighter-Interceptor Squadrons to F-86D Aircraft

ADHVP (18 Aug 54)

1st Ind

14 Sep 1954

HQ AIR DEFENSE COMMAND, Ent Air Force Base, Colorado Springs, Colorado

TO: Commander, Eastern Air Defense Force, Attn: EAOPR-2, Stewart Air Force Base, Newburgh, New York

- 1. Reference is made to basic letter and classified messages this headquarters, ADOOT-B1 2071 dated 9 October 1953, ADOOT-B 2264 dated 18 November 1953, and ADOOT-B 0022 dated 6 January 1954.
- 2. A runway barrier system and drogue equipped aircraft are scheduled for Stewart Air Force Base. Latest information from Wilkins Air Force Depot indicates that a runway barrier set will be available on or about 15 September 1954. The installation of the barrier system plus the use of drogue chute equipped aircraft is considered to provide an adequate margin of safety. Further, operations may be temporarily suspended, at your discretion, during particularly inclement weather conditions.
- 3. The maximum capability of this command can only be reached when all our interceptors are capable of operating under weather conditions. The assignment of F-86D aircraft to the 330th and 539th Fighter-Interceptor Squadrons will complete the conversion of all ADC squadrons to all-weather interceptors.
- 4. In view of the foregoing, the 330th and 539th Fighter-Interceptor Squadrons will convert to F-86D aircraft in the Third Quarter FY-1955 as shown in the ADC Program, dated 1 July 1954.

BY ORDER OF THE COMMANDER:

JAMES S. PURDUM Major, USAF Asst Command Adj

3

COPY

Hq USAF AFDRQ-CE/E Subj: Runway Distance Markers

218

ADOPR (23 Aug 54)

1st Ind

23 Sept 54

HQ AIR DEFENSE COMMAND, Ent Air Force Base, Colorado Springs, Colorado

TO: Director of Requirements, Headquarters USAF, ATTN: Communications and Equipment Division, Washington 25, D. C.

- 1. This Command recommends a uniform system of runway distance markings for all runways. A research and development project should be established to determine the most suitable system.
- From the standpoint of safety and operational utility, such markings should be readable day and night, in rainy or clear weather, and should extend the complete length of the runway.
- 3. USAF message AFOOP-OC-FL dated 4 September 1954 requires pilots of jet aircraft to enter, in remarks section of Form 175 or 113, the computed distance to become airborne. This information at present will only tell them whether or not the runway is long enough for take-off. Distance markings would show them where they should become airborne. This would be a useful indication of possible power plant malfunction and runway remaining for an attempted abort.

FOR THE COMMANDER:

MENO FOR RECORD:

This has been verbally coordinated with OMT and Asst for Flight Safety

COPY

219

EAODR

17 June 54

SUBJECT: Qualitative Operational Requirement - Zone Identification Lighting for USAF Runways

TO: Commander
Air Defense Command
Ent Air Force Base
Colorado Springs, Colorado

1. Introduction: Many aircraft accidents occurring within this command stem from pilots' inability to adequately determine their position on the runway during landing and take-off. With runways as long as 10,000 feet in use today, it is frequently impossible for pilots to see the full length of a runway because of terrain or atmospheric conditions. Consequently, uncertainty sometimes exists regarding the limits of the safe touchdown area, the amount of runway remaining after touchdown and just when it becomes necessary to effect a go-around or to revert to emergency action.

At night, or during periods of low visibility, this condition is aggravated by the lack of suitable references by means of which landing area, caution area, etc., are readily identified. A requirement exists to modify present runway lighting systems to include a positive visual reference to the safe touchdown zone on the approach end of the runway and the warning or caution zone on the far end of the runway.

Wright Air Development Center Technical Memorandum Report No. WCLE-54-23, 18 February 1954 (Inclosure 1) describes a runway lighting system which includes some identification. A test of this system was performed at Otis Air Force Base, Falmouth, Massachusetts. Results of this test are favorable (reference Inclosures 1, 2 and 3).

2. Objective: To increase the effectiveness of the USAF by reducing aircraft accident potential.

219

EAODR Subject: Qualitative Operational Requirement - Zone Identification Lighting for USAF Runways (Cont'd)

3. Description:

- a. Nomenclature: Zone Identification Lighting for USAF Runways.
- b. Purpose: To reduce aircraft accident potential by providing a runway zone identification capability in present runway lighting systems.
- c. Performance: The optimum runway and threshold lighting system should:
 - (1) Provide positive identification of the runway.
 - (2) Outline the runway.
 - (3) Distinguish between the touchdown zone, the center or intermediate zone and the caution or warning zone.
 - (4) Provide some identification during approach toward either end of the runway.
 - (5) Define the entrance threshold.
 - (6) Define the exit threshold.
 - (7) Require a minimum of electrical power for operation.
 - (8) Be susceptible to brightness control.
 - (9) Be physically compatible with present runway lighting systems.
- d. Design Features: Reference Wright Air Development Center Technical Memorandum Report No. WCLE-54-23, 18 February 1954 (Inclosure 1).
 - e. Special Features: Negative.
- f. Proposed Basis of Issue: Present runway lighting systems at all USAF air bases should be modified to include some identification lighting. Priority should be given to instrument runways on Air Defense Command bases.

EAODR Subject: Qualitative Operational Requirement - Zone Identification Lighting for USAF Runways (Cont'd)

g. Method of Meeting the Requirement: It is recommended that the runway lighting system designed by Wright Air Development Center and tested at Otis Air Force Base, Falmouth, Massachusetts, be adopted as standard throughout the USAF.

FOR THE COMMANDER:

1. WADC Tech Memo Rept
No. WCLE-5A-23, 12 Feb 54
2. Ltr, 564th ADG, subj: Rept
of Test Rwy Lighting, 16 Mar 54
3. Ltr, 564th ADG, subj: Final
Rept of Exper Rwy Lighting

Test, 8 Apr 54

COPY

271

Hq EADF EAODR Subj: Qualitative Operational Requirement - Zone Identification Lighting for USAF Runways

ADOPR (17 Jun 54)

1st Ind

5 July 51

HEADQUARTERS AIR DEFENSE COMMAND, Ent Air Force Base, Colorado Springs, Colorado

TO: Director of Requirements, Headquarters USAF, Washington 25, D. C.

This Command concurs with the requirement in basic letter. FOR THE COMMANDER:

3 Incls

4

DOCUMENT NO. 220

THIS DOCUMENT MAY BE FOUND

IN VOLUME VIT OF THE SUPPORTING

DOCUMENTS TO THIS HISTORY.

COPY
Easy reading copy made

221

From: HQ USAF, WASHINGTON, D. C. 8 July 1954
To: COMMANDER, AIR DEFENSE COMMAND, ENT AFB, COLORADO

/SECRET/ FROM AFCIE-4 58374 . Re message AFCIE-4 -8801 this Headquarters information to your Headquarters. The visit at Youngstown was extremely well-conducted by Colonel Vetort and proved to be very informative for the visiting group. In further prosecuting the study of airfield criteria, Office of the Secretary of Defense has obtained services of a consultant group consisting of L. G. Whitehead, USAF retired; M. G. Weikert, USAF retired; Vice Admiral Moss, USN retired; Mr. Froesch, Vice President, Eastern Airlines and Mr. Littlewood, Vice President, American Airlines. In addition, OSD is entering into a contract with an outstanding architect-engineering firm who will be responsible for preparing detailed criteria and back-up in accordance with ordnance provisions by the consultant group, the services involved, and OSD. The primary surpose of this study is to provide detailed justification and back-up for airfield criteria and requirements through 1965 in order to facilitate favorable congressional action on future new construction programs. It is expected that completion of study will require about one year's time. As a preliminary step in starting the study, the consultant group has requested that certain tentative air base layouts be prepared for them which will indicate the facilities required for manned

221

aircraft available in the 1960-65 period, utilizing dispersal to a sufficient number of bases to avoid a strategic concentration of aircraft at any one base. The Architect-Engineer will be responsible for final preparation of these layouts and will be ready to start work on them on or about 1 August with completion set for next meeting of consultant group, 27 August. It is desired to make certain that all possible guidance is furnished by your Command to the Architect-Engineer in his preparation of a typical Air Base layout for Air Defense Command Units. It is therefore requested you be prepared to send a representative to this Headquarters for a conference with Architect-Engineer on call on or after 26 July. This representative should bring with him a schematic layout of an Air Base to accommodate two F-102 Squadrons of 25 aircraft each and a listing of the structures required for such an Air Base together with recommended criteria for runway length and width, glide angles, clear zones, lateral clearances, etc. The schematic layout need not indicate all structures required but should show the ideal layout for major operational, maintenance and training structures such as hangars, maintenance shops, operations buildings, etc. Any questions or requests for additional information should be referred to Colonel W. T. Abbott, Acting Director of Facilities Support, this Headquarters, who has been designated as the USAF Liaison Officer with OSD for purposes of this study.

2

COPY

222

ADMIS P-2

1 December 1954

SUBJECT: (Unclassified) Site Selection Criteria

TO:

Commander Eastern Air Defense Force Stewart Air Force Base Newburgh, New York

- 1. Attached for your information and guidance are copies of USAF Document AFCIE-PS, October 1954, subject same as above.
- 2. Reference is made to Paragraph IV of the attached document. The sample field survey forms have been furnished your Headquarters previously and are therefore omitted.

BY ORDER OF THE COMMANDER:

1 Incl: a/s (10 cys) JAMES S. CAPLES Colonel, USAF Deputy Director of Installations

Identical letter sent to CADF and EADF.

COPY

AFCIE-PS

October 1954

SUBJECT: SITE SELECTION CRITERIA

I. PURPOSE:

The purpose of this paper is to outline policies, procedures and criteria which must be carefully considered when selecting new sites for Air Force bases.

II. GENERAL:

There is a current and continuing need for the evaluation and selection of airfields and virgin sites to meet projected Air Force base requirements. This need may be influenced by changes in mission and force requirements, local problems at existing air bases, new types of aircraft, or may be influenced by world affairs. Effective and efficient guidance and methods of selection are necessary in order to assure the proper base structure from which to conduct the many Air Force missions. Pre-planning and survey work should be accomplished 2 years prior to inclusion of air base in the Public Works Program.

III. POLICIES:

The following policies must apply when considering sites for possible use by the Air Force.

- 1. Proper analysis of the existing Air Force base structure must be made to assure that the requirement cannot be accommodated on existing bases.
- 2. Every effort must be made to meet air base requirements on existing bases (both military and civilian) within the designated geographical area of requirement subject to the criteria described in Part IV below. However, initial costs consideration must be secondary to long-term operational suitability and freedom from encroachment by urban development.
- 3. All prospective bases will be considered for multipurpose missions, with the exception of those bases for Air National Guard and Air Force Reserve missions when municipal or other existing airports are under construction.

Inclosure 1

SUBJECT: SITE SELECTION CRITERIA (CONTD)

222

IV. CRITERIA:

The following criteria are to be considered in the selection and development of Air Force bases or new sites. Attached is a sample survey form used by field survey teams, Tab A. The criteria and the survey forms together with topographical maps, aeronautical charts, photographs, and others, provides sufficient information to assure that the proper selection work is accomplished.

1. Geographical

Air bases are selected within specific geographical areas to meet the operational requirements which are established by Deputy Chief of Staff, Operations. Specific areas of requirement are usually identified by naming a community that is nearest the center of the area. The outer boundaries of a specific area are determined by the type of mission to be performed.

- a. The following general criteria will apply to the location of all air bases:
 - (1) Minimum population for community support, 25,000.
 - (2) All airfields or virgin sites will be located at least 15 miles from the known planned expansion of a city to avoid noise and safety problems. This criterion will not apply to Reserve bases, which will be given careful consideration on the basis of type of mission and existing bases in the area.
 - (3) No airfield will be located further than 25 miles or 45 minutes elapse driving time from the known planned expansion of a city. This will be the maximum allowable distance to provide for community support.
- b. The following geographic criteria will apply to the specific missions outlined below:
 - (1) ADC, Fighter-Interceptor Bases within satisfactory operational distance of controlling radar.

222

SUBJECT: SITE SELECTION CRITERIA (CONT'D)

- (2) TAC, Fighter Bomber Bases within 50 nautical miles of suitable bombing and gunnery ranges.
- (3) Cunnery Staging Bases within 50 nautical miles of suitable gunnery ranges.
- (4) SAC, Bomber Bases
 - (a) SAC recommends that SAC bases will be located north of a line extending from Cutbank, Montana through Miles City, Montana, Sious Falls, S. D., Rock Island, Ill., Columbus, Ohio to Washington, D. C.
 - (b) No closer than 250 nautical miles from Atlantic, Pacific or Gulf coastlines.
 - (c) Prevailing winds influence atomic radiation fall-out patterns over targets.

 Bases under consideration will be located outside of atomic radiation fall-out pattern of large industrial targets of over 100,000 population.

 In addition, such bases will be located at right angles to the prevailing winds.
 - (d) Within 15 to 25 miles of known planned expansion of cities of approximately 50,000 population, for community support.
 - (c) For launching and staging bases as far northeast as possible and, in any event, north of the 400 north latitude.
- (5) Strategic Fighter Bases Within 50 nautical miles of suitable gunnery facilities.
- (6) Air Training Bases
 - (a) Outside designated Air Defense Identification zones.
 - (b) Within 50 nautical miles of gunnery ranges for advance training fighter bases.
 - (c) Good weather area.

222

SUBJECT: SITE SELECTION CRITERIA (CONT'D)

(7) Air Force Reserve Bases

- (a) Fighter Bomber bases will be located primarily to provide Air Defense capability as required by the Air Defense Command.
- (b) Within 25 miles or 45 minutes elapse time of designated metropolitan cities, to provide required manning.

2. Vulnerability

a. Certain areas within the Continental United States are vulnerable to attack by guided missiles from submarines. It is therefore necessary to locate bases of the Strategic Air Command not closer than 250 nautical miles from the Atlantic, Pacific and Gulf coastlines.

b. Large industrial cities within the Continental United States are possible atomic targets. No air bases will be located within the probable atomic radiation fallout pattern of industrial cities of over 100,000 population, or other potential atomic targets. When siting in the general area of such cities, locate base at right angles to the prevailing winds outside the fallout pattern. Auxiliary bases to a primary base should also be located at right angles to the prevailing winds.

3. Size of Facility

The acreage required for an Air Force base is determined by the number of units involved in the base mission, the length, number, and layout of the runway system; navigation casements; ordnance storage areas; alert hangar facilities; communications-electronic facilities; and the general topography of the real estate under construction. The acreage can only be determined after careful master planning. During the preliminary selection phase, the following criteria will be met:

- a. Topography flat enough to lay out 15,000' runways with 1:100 clearance in the approach zone.
- b. Secondary runway 12,000', with 1:100 approach clearances. Site for secondary runway will be considered on the basis of a study of wind coverage, operational and air traffic control considerations.
- c. Approximately 5,000 acres of land, depending on the type of mission.

4

CUIVALDINALIFAL

222

SUBJECT: SITE SELECTION CRITERIA (CONT'D)

d. Air Force Regulation of the 80 Series will also be used to determine acreage through master planning.

4. Air Space Analysis

A careful study of existing and probable air traffic in the area of the proposed air base is necessary to assure that the air space will not become saturated. It is impossible to establish criteria to determine air traffic saturation in view of the widely varying weather conditions and amount and type of instrument control navigation aids available in different areas. Each area of a proposed base must be carefully studied in cooperation with AACS, CAA and other services involved to determine whether or not saturation exists, and what additional problems will be generated as a result of constructing a new base in an existing traffic control area. The following guide will influence the location of an air base:

- a. Airfields will be located at least 20 miles apart laterally, to avoid conflicting traffic patterns. There will be a minimum of 40-mile separation if proposed air base is to be located generally along the centerline of the instrument runway of an existing airfield.
- b. Airfields will be located as far from major civil airways as possible to reduce to the minimum the necessity to block off air space along the airways for instrument penetrations and approaches. In some areas it will not be possible to locate a site which will not conflict with existing or proposed civil airways. In such cases, the individual site study shall include coordination with the agency responsible for traffic control in the area to determine whether or not procedures can be devised to minimize the possibility of conflicting traffic between en route and terminal traffic.
- c. Aids to Navigation. Consideration must also be given to availability of real estate for radio, radar and other navigational aid facilities to permit all-weather operational capability. This includes plots on the extended centerline of the instrument runway at distances to 4,000', 4 to 5 miles, 7 to 12 miles on the downwind side, and at a distance of 1,000' to 2,000' on the upwind side.

5. Flying Safety and Noise Nuisance

a. To provide maximum safety and reduce aircraft noises to a minimum in the vicinity of populated communities, Air Force bases with exception of Reserve bases will not be located closer

CONFIDENTIAL

222

SUBJECT: SITE SELECTION CRITERIA (CONT'D)

than 15 statue miles from the known planned expansion of the nearest community. Runway centerlines must be oriented to assure that there will be no violation of the following sound and sound wave buffer criteria, for a distance of 15 to 25 miles from the air base.

- (1) The extended runway centerline will not pass within 4 miles of proposed expansion of populated communities.
- (2) The above criteria will provide adequate room for growth and expansion of both air base and city. It should also provide approach zones and traffic patterns over uninhabited areas as desired by existing criteria (AFR 86-3, 86-4 and 86-5).
- b. Acceptable heights and locations of television towers and other obstructions are contained in AFR 86-1, 86-2, 86-3, 86-4.
- c. With the advent of special jet fuel and take off Booster rockets having liquid propellants, it will be necessary to maintain a 5 mile safety zone with the currently approved lateral clearances off the end of each runway to assure a clear area to jettison rocket boosters and to provide for aborted take offs and crashes. Nuclear powered aircraft will have an equal effect on the location and characteristics of an Air Force base.

6. Topographical and Geological Considerations

- a. In this area, an engineering analysis is indicated to provide information on the following specific items:
 - (1) Profile of proposed runway centerline.
 - (2) Soil boring log to indicate types of soil encountered below the ground surface.
 - (3) Depth of water table.
 - (4) Permeability and drainage characteristics of soil to include frost heave characteristics when applicable.
 - (5) Compaction characteristics of soil.
 - (6) CBR (California bearing Ratio) rating or K value of soil. CBR values to be computed both in the Laboratory and "in place".

222

SUBJECT: SITE SELECTION CRITERIA (CONT'D)

- b. Rolling topography is not objectionable for the construction of the built up area of the base. However, steeply rolling land is not satisfactory for the airfield portion of the base due to the large amount of cut and fill required to prepare the ground for the runway with accompanying high costs. Gentle rolling terrain is the best for airfield construction because it usually provides better drainage. Very flat terrain usually poses problems of providing adequate storm drainage. The cost of providing adequate storm drainage on very flat terrain is usually quite high. Items (3) and (4) must also be considered together with terrain features in this drainage study. High water tables and soils with low permeability will make drainage a costly problem.
- c. The soil boring log is used to indicate the types of soil beneath the surface. From this analysis, factors such as water table depth, rock outcrops, soil permeability, availability of sub-surface water for base water supply, CBR, and bearing capacity of the soil can be determined together with cost of construction attributed directly to soil characteristics.
- d. CBR ratings of soils are used in determining the design for flexible type pavement (asphalt). K values of soil are used for determining the design of rigid type pavement (concrete). Both these values are necessary in the site selection stage of air base development in order to determine the relative cost of constructing asphalt vs concrete runway pavement.
- 7. Engineering Analysis of Expansion Capability of Existing Airfields
- a. There are several factors which must be considered in determining expansion capability. These are operational necessity to remain on base, terrain features including topography, streams, hills, etc.; man-made obstacles such as roads, railroads, canals buildings, urban development, and soil conditions such as rock outcroppings and soft muccy soil conditions.
- b. In the analysis of expansibility, some or all of these factors may enter the problem to varying degrees. The decision as to the feasibility of runway expansion must be based on a common denominator cost. The engineering analysis then must reduce to cost all the factors involved in the expansion, and the decision as to whether or not it is feasible to expand a particular runway will be based on the cost consideration.

22

SUBJECT: SITE SELECTION CRITERIA (CONT'D)

c. In the analysis of expansion capabilities, the engineer must take into consideration the criteria for meeting multi-purpose requirements. For example: If the mission calls for a base from which to operate medium jet bombers, then the requirements that must be met are a given length runway, taxiways, parking apron, POL, operating facilities, maintenance facilities, etc. The criteria for locating these facilities must be applied to the site at the time of the engineering analysis.

8. Evaluation of Real Estate Requirements

In developing land requirements for a new Air Force base, there are certain basic considerations which must be made to insure that the site selected is acceptable and feasible. These considerations are outlined below:

- a. Availability of sufficient land area. A preliminary survey is required to determine if land area at the site desired is physically large enough to meet current and potential multi-purpose requirements.
- b. Current ownership of the land. Special problems arise when the land is owned by private, municipal and state agencies, as well as the Federal Government. A preliminary analysis is required to predetermine current ownership.
- c. Present and potential highest and best use of the land. In taking large areas of land from public or private use, it is desirable to determine present and potential, highest and best use. It is normally undesirable to expand where land is under intensive cultivation or where commercial development is extensive.
- d. Land costs. A survey of land costs to include preliminary analysis of the cost of improvements; road, rail, utilities
 relocation, severance damage, and resettlements involved is considered essential. In addition a general knowledge of the number
 of tracts of land and the number of individual owners will reflect
 the extent of negotiations to be expected or condemnation procedures
 which may be required. Bare land values and the value of improvements thereon should be obtained so that excessively high cost
 areas can be avoided.
- e. Federal jurisdiction problems. The problem of ascertaining whether Federal jurisdiction can be obtained readily should be investigated. Normally this matter is no major problem; however, difficulties have been encountered with certain states due to the requirement for special legislation. This can be accomplished prior to field work.

SUBJECT: SITE SELECTION CRITERIA (CONT'D)

- f. Land interests. Determine whether fee title or long term nominal lease is in the best interest of the government. Also, investigate any special restrictions on the land such as the existance of mineral rights or, in the case of federally-owned property, the existance of oil rights, permits, grazing rights, pipelines, or other special conditions.
- g. Zoning and casements. Zoning ordinances from state or local sources should be obtained to prevent encroachment by private or commercial activities on the airfield and to eliminate the possibility of the establishment of industrial, commercial activities and vice establishments which might be detrimental to health, welfare and safety of personnel at the proposed air base. In addition, necessary restrictive and navigation casements should be obtained to prevent encroachment and construction in certain restricted areas and existance of flight hazards noise and shock wave damage in proposed runway approach zones.
- h. Access roads. The availability and suitability of supporting road and rail networks should be investigated to insure that these facilities are adequate to support the type and size of the proposed base. In this connection it may be necessary to acquire additional real estate for the base for the construction of adequate roads and rail networks.
- i. Off-base land requirements. The general survey of the area to be utilized should include an evaluation of possible land requirements for off-base activities such as remote communication sites, navigational aids, and ammunition storage facilities.
- j. Exclusive or joint use and control of an airfield is determined on the basis of operational necessity and is determined separately as each case develops.

9. Availability of Logistical support facilities.

The accessibility and transportation facilities should be considered, i.e.:

- a. Existing highway and railway facilities within the immediate regional area, utilization by adjacent military or industrial installations.
- b. Labor and material sources for initial construction and future maintenance (immediate sources of supply of construction materials reduce costs considerably.)

222

SUBJECT: SITE SELECTION CRITERIA (CONT'D)

c. Distance in miles to center of population, social outlets and commercial amusements.

d. Means and cost of transportation.

e. Location of existing or prospective areas of traffic congestion.

f. Civil air carriers and airport facilities within regional area.

g. Port facilities, POL, off-loading, intransit port facilities, warehousing, etc.

h. Pipeline, POL delivery.

10. Availability of Range Facilities.

When bombing and gunnery ranges are a necessary part of a base complex to assure adequate training ranges shall not be located beyond the following distances in nautical miles from the installation:

a. Jet fighter ranges: Air to Air - within 50 miles of Installations - 75 by 50 miles minimum area requirements.

(gunnery & rockets): Air to Air - within 100 miles of Installation - 2 by 6 miles.

b. Bomber gunnery ranges: Air to Air - within 100 miles of Installation - 20 by 50 miles.

Bomber rocket ranges: Air to Air - within 100 miles of Installation - 50 by 50 miles

Bomber bombing ranges: Visual - within 100 miles of Installation - 6 miles in diameter.

Bomber bombing ranges: Radar - within 100 miles of Installation - 10 miles in diameter.

11. Community Support Appraisal

a. Air bases will be located within 25 miles from known planned expansion of community. Having a minimum population

10

SUBJECT: SITE SELECTION CRITERIA (CONT'D)

.

of 25,000 with the exception of Reserve Bases. Can community provide support to the unit planned for the base, i.e.:

- (1) Schools, recreation, hospitals, cultural facilities, and shopping services.
- (2) Family housing obtain commitments when possible.
- (3) Utility connections to city systems are reasonable costs, electricity, sewage, gas, etc.
- (4) General
- (5) Availability of labor and construction material.

12. Community Attitude

Does community desire Air Force use and control of airfield? What positive efforts will community put forth to show their interest, such as land donations, nominal lease, obtaining aviation easements, airfield peripheral zoning, and new construction by local investor to provide family housing, etc.

13. Analysis of Weather Conditions

Can the planned mission be carried out with a minimum of interference from the weather? Factors to be considered are temperature ranges, amount of precipitation or snow fall, fog, smog haze, and number of days base is closed due to these factors. Is base or site located within hurricane, tornado, dust, earthquake or snow belts. Is base subject to flooding. Prevailing winds under both normal and instrument conditions for runway alignment and wind coverage.

- 14. Cost analysis of Proposed Development of an Existing Facility vs. a New Site.
- a. Should any of the major factors discussed above be sacrificed for purely economical reasons?
- b. Can the Air Force afford to settle claims from aircraft crashes, noise, and vibration damage?
- c. Determine cost of developing each base or site under consideration and compare results.

222

15. Comparative Analysis

- a. List all possible selections.
- b. <u>Determine suitability</u>. How many selections will accomplish the required mission and what will be the effect of future operations on the proposed base.
- c. Determine Feasibility. Are the means available to do the work. This includes both natural and artificial obstacles.
- d. Determine acceptability. Will the cost be acceptable.

16. Recommendation

That the foregoing site selection criteria be approved.

CONFIDENTIAL

COPY

222

ADOOT-C

28 December 1954

SUBJECT: (UNCLASSIFIED) Air Defense Command Navigation System Problem

TO: Director of Requirements
Headquarters USAF
Washington 25, D. C.

- l. The requirement for Air Defense Command to perform all-weather interceptions places an ever-increasing demand on our radio-navigation and aircraft recovery system. We feel that the many advantages of the TACAN system of navigation will enhance our capability to determine position precisely in all types of weather and to effect rapid and accurate return-to-base after intercept. The elimination of precipitation static alone will provide an increased reception certainty which will, in turn, accelerate and simplify this return-to-base problem for the pilot.
- 2. We do have an increasing problem in retaining our operational effectiveness during the period between the CAA introduction of VOR-TVOR and the USAF introduction of TACAW. Some of the facets of this problem are:
- a. Eventual USAF financial support of low frequency facilities will be required. If this results in a substantial reduction in low frequency facilities, our flexibility in all-weather recovery will be likewise degraded.
- b. Use of VOR-TVOR on Federal Airways and at civilian airports will limit the use of same to aircraft equipped with AN/ARN-14.
- c. The F-102A will be produced with the AN/ARN-14 installed and with no provisions for the AN/ARN-6.
- d. Only seventeen ADC bases are sufficiently near to VOR installations to allow a 500-foot low approach (12 miles, reference paragraph 2.0402 (C)(4), AMC Manual: Criteria for Standard Instrument Approach Procedures). Only five of these bases are programmed to be equipped with the F-102. This will cause a serious limitation on the operation of this Weapons System until TACAN is implemented. In no case do we have, or will we have, a navigation system common to all aircraft and all bases.



CONFIDENTIAL

222

ADOOT-C, Subject: (Uncl) Air Defense Command Navigation System Problem

- e. Promulgation of Project Broficon, which utilized standard broadcasting stations to control fighter-interceptor aircraft, will require inclusion of a small, light-weight N/F receiver in the electronic configuration of the F-102A.
- 3. It is felt that a solution to these problems must be reached and that this solution must be a progressive move. The following recommendations are made.
- a. That the implementation of TACAN be accelerated in any way possible to precede the present forecast date of 1 January 1957.
 - b. That we not retrogress to the AN/ARN-6 in the F-102A.
- c. In the event TACAN is not available until the January 1957 date, an interim system of navigation be provided for ADC use. This system should be compatible with Federal Airways and should provide common navigation and recovery facilities for all ADC interceptors at all ADC bases. We believe this system should be VOR-TVOR.
- d. If recommendation in paragraph 3c above is adopted, it is further recommended that commercially-tested VOR-TVOR equipment be installed as quickly as possible. This equipment is desired for ZI installation only; and if it satisfies the CAA and USAF requirements for position fixing, it need not satisfy mobility requirements and other stringent military requirements necessary for equipment to be used in combat zones.
- bg. That installation of a small, light-weight M/F radioreceiver/included in the electronic configuration of the F-102A.
- 4. This command is fully aware of the effort and money being expended on TACAN. We realize the military position which has been taken on the implementation of this system in favor of the CAA-developed VOR-TVOR system. This knowledge has been carefully weighed against the knowledge that the operational potential of our weapons systems will be seriously curtailed in the next two years or more unless a solution is reached immediately. We cannot afford to accept this curtailment, and feel that the recommendations in paragraph 3 should receive your utmost consideration.

FOR THE COMMANDER:

Info Cy: F-102 Proj Officer, Edwards AFB, Calif Comdr, WADC, Attn: WCSF-6 KENNETH P. BERCQUIST Major General, USAF DCS/Operations

CONTRACTOR

-2----

COPY

ECONOMIC EVALUATION DIVISION
DIRECTORATE OF MANAGEMENT ANALYSIS
DCS/COMPTROLLER
HEADQUARTERS AIR DEFENSE COMMAND

223

15 November 1954

SUBJECT: Recommendation for Establishment of a Requirement for

Economy Bases in Air Defense Plans

TO: ADC STAFF

1. This study attempts to solve the following:

a. Uneconomical manning of support units of Air Defense Command.

b. Alleviation of the Daily Early Combat Potential of Air Defense Command.

c. Noise and Danger problem of present air force bases to civilian populace.

d. Base modernization to keep pace with the Air Force SAGE System.

2. Factors Bearing on the Problem:

a. Support manning in Air Defense groups is excessive. A one squadron fighter base requires about 700 military and civilian personnel. These support personnel support the fighter squadron which consists of 320 personnel, 27 of which are pilots. So in order to put 18 combat ready aircraft in the air, it requires over 1,000 personnel, not considering supporting radar personnel in the area. This is an economic problem which faces top management in Air Defense Command.

b. Air Defense Command Early Combat Potential. As of October, 1954, only 79 aircraft (on the average) were available for combat from 5 minute alerts. In 30 minutes only, 141 were available for combat. A total of 1,192 aircraft were assigned to the command. Economically speaking, this is a low return for approximately a 3.9 billion dollar capital investment and a total personnel figure of 81,000 personnel. The above is a major problem area for extensive study in Air Defense Command.

223

Staff Study, Subj: Recommendation for Establishment of a Requirement for Economy Bases in Air Defense Plans

c. Force Balance: The enemy is making great strides in force buildup and in the 1960 era it is expected that he can bring to the attack on the Continental United States approximately 4,000 flying objects (aircraft, decoys and air-to-surface missiles). Force must be fought with force and will require Air Defense Command to build up a huge weapon force. Where to base this force is a major economic problem for top management in Air Defense Command. The electronics control of interception on a large scale is being modernized through the Air Force SAGE System and base modernization for large scale force is not yet being thoroughly considered.

3. Discussion of the Implications of the Economy Base:

a. Support manning - A review of manning data shows that 6 separate single squadron bases require almost 3,000 more support people than a concentration of six interceptor squadrons on one base. Below is shown the support manning required for 1, 2, 3 and 6 squadrons. A comparison of the 6 squadron base is made with the most common case in ADCR 54-60, 1 July 1954, 1960 Plan, a 2 squadron base.

Deployment			Manning		
1	Squadron		692		
2	Squadrons		796		
3	Squadrons		890		
6	Squadrons Squadrons		1,250		

Comparison:

3	Double Squadrons		2,388	Total	Support	Personnel
1	Six Squadron					Personnel
	Net Savings	*	1.138	Total	Support	Personnel

^{*} In addition to the above, ADC Staff Weather estimates a 40% savings on AACS and Weather personnel.

b. Force in the Large Target Areas - The location of a 6 squadron base in the large target areas such as Los Angeles, San Francisco, New York, Fhiladelphia, Detroit, Chicago, Pittsburg, Washington and St. Louis, would provide force comparable to the expected enemy attacks at these locations. This proposal would eliminate certain bases only, bases such as O'Hare which are practically on the edge of the cities. Possibly 10 each 6 squadron bases would provide deployment space for 60 squadrons of fighters and 20 squadrons of Bomarc.

2

223

Staff Study, Subj: Recommendation for Establishment of a Requirement for Economy Bases in Air Defense Plans

- c. Tactics No tactical disadvantage results in locating six squadrons of fighters on a single base. The original deployment as outlined in Air Defense Command Requirements 54-60 shows clusters of fighters in certain areas of the Continental United States. Clustered deployment is usual around the large target areas. These are the areas which are adaptable to economy base considerations. The economy base could be located in the center of these clusters, thereby enabling fighters to make, on the average, the same interception at the same point that they would make with the six single or three double squadrons. A preliminary check with the concept contained in Project Combine indicates that an economy base appears tactically feasible.
- d. Vulnerability The enemy will require his available bomber force to destroy critical industrial and population targets. When the enemy penetrates the radar, the fighter force will be in the air protecting its key targets as its primary mission. If the bases are bombed out, fighters could use alternate fields of which there is an abundance in the ZI. Single squadron bases now located on the edge of cities give the enemy a double return for a single effort, a bombed city and a bombed Air Force base. Economic location of Bomarc, Talos and even NIKE on these locations further reduces vulnerability since these weapons are simultaneously defending the base when firing at bombers in the area.
- e. Fighter Alerts An economy base with six squadrons will alleviate the alert situation in an Air Defense Command. With six squadrons located on one installation, 2 squadrons could train, 2 squadrons could stand alerts and 2 squadrons could be off but available for alert. Family quarters would necessarily have to be furnished due to the proposed hinterland location of the economy bases.
- f. Combat-ready Aircraft More combat-ready aircraft will be assured by having a six squadron base. The aircraft assigned to the units could be treated as an aircraft pool. In other words, fighter units scheduled for early alerts, and not having the necessary number of combat-ready aircraft could use combat-ready aircraft assigned to the squadron in released status. The centralized maintenance facility should provide a higher combat readiness rate than the small shop facilities now available at single squadron bases. More specialized tools could be justified, authorized and used by larger field maintenance facilities. Highly specialized, skilled military maintenance personnel, now at a premium, could be better utilized. Supply and logistics problems are minimized considerably.

3

223

Staff Study, Subj: Recommendation for Establishment of a Requirement for Economy Bases in Air Defense Plans

- g. Take-off and Recovery With the economy base having three parallel runways, aircraft could take off as rapidly as on a single squadron base. No problem is anticipated. By 1960 Volscan or some other similar type air traffic control device should be available. This should enable aircraft to be receovered on a parallel runway in 30 seconds.
- h. Bomarc Deployment Two or more Bomarc Squadrons could also be located on the economy base. As observed at the Boeing mock-up, these squadrons require large acreage. Bomarc, especially "A" head Bomarc, if located near populated areas would worry the civilian populace and through congressional pressure, it can be foreseen that the Air Force will be meeting considerable difficulty in deployment of Bomarc. The establishment of a six squadron plus two Bomarc squadron base at a considerable distance from a metropolitan area should bring about better civilian relations.
- i. Base Layout Savings in communications facilities could be realized in the Air Force SAGE System. Communication lines instead of being laid for 3 or 6 bases would only have to be laid to one base. A new type of base layout would be required for the handling of six squadrons. A preliminary check reveals that several types can be developed and would cost approximately \$35,000,000. One suggestion is a centralized support facility as the hub of a runway system, such as the one now being planned commercially for Chicago. The details of base layout are being held in abeyance till the concept is accepted in Headquarters, ADC that such a base could possibly be a future requirement. Family quarters will be more readily justified when the economy base is proposed to the USAF JCS or the National Security Council, due to the fact that the installation of necessity must be located away from metropolitan areas.
- j. Morale It would entirely be possible to have a much higher troop morale following the principle of Project "Arrow". All troop facilities could be built in a more permanent and satisfactory nature. From the congressional aspect the economy base can be justified as a long term investment amortizing itself by savings achieved as years went by. Family quarters which could be justified would provide retention of a high percentage of personnel on base after normal duty hours. Squadron competition would be keener and pilots wouldn't have to stay on alert for extended periods of time as they do presently. One small fighter wing headquarters be included on each such station with a Brigadier General as Commander. These wings could be numbered and so

223

Staff Study, Subj: Recommendation for Establishment of a Requirement for Economy Bases in Air Defense Plans

designated as to carry on the fighter tradition of former years. Esprit de corps is all important to any organization's performance and efficiency.

k. Cost - Using the Rand-ADC methodology it appears that a 20 million dollar savings will result from the 6 squadron "economy" base as compared to the 3 double squadron bases. This 20 million dollars represents a savings gained at the end of 1 year operation including initial construction costs. Following cost estimates have been reviewed for essential validity with personnel of the Economics Division of Rand:

RAND - ADC 1960 Cost Comparison

	Three Double Squadron Bases	6 Squadron Economy Base	Savings
Real Facilities	* \$ 42,000,000	* 35,000,000	\$ 7,000,000
Other Capital Investment	294,000,000	287,000,000	.7,000,000
(Including Aircraft)	254,000,000	201,000,000	. 1,000,000
Annual Operating Cost	110,000,000	103,500,000	6,500,000
End of 1st Year	\$446,000,000	1425,000,000	\$20,500,000

^{*} It may be possible to add to existing or already programmed facilities at a more reasonable cost. This would require detailed study by DCS/Operations, Director of Installations and DCS/Comptroller.

4. Conclusions:

- a. There is a definite indication that ADC economy bases in the large target areas would be very helpful, economically and tactically speaking.
- b. Approximately 10 each economy bases would be required to satisfy the needs of Air Defense Command in the 1960 to 1965 era. Ten such bases would be a capital investment of approximately 1/3 of a billion dollars. Medium or long range fighters could operate from these installations.
- c. The bases would have to be located 50 to 200 miles from large metropolitan areas. A 50 mile area around the economy base would be declared as a defense zone and civilian community development would be prohibited (Similar to defense Zones surrounding munitions, chemical plants and AEC installations.)

223

Staff Study, Subj: Recommendation for Establishment of a Requirement for Economy Bases in Air Defense Plans

5. Recommendations:

a. Recommend that an Economic Evaluation Committee be formed of representatives from Plans Analysis, Operations Analysis, Manpower, Logistics, Installations, Management Analysis and Intelligence for detailed study of the proposal.

b. Recommend that Plans Analysis personnel head this committee. The detailed report, after thorough study, should be presented to the Command Council in a formal briefing.

K

COPY

224

EAOPR-2

8 Jan 1955

SUBJECT: (Unclassified) Fighter-Interceptor Program

TO:

Commander Air Defense Command Ent Air Force Base Colorado Springs, Colorado

- l. A review of the revised ADC Fighter-Interceptor Program reveals programming actions which are considered undesirable. Of particular concern are the number of conversions which are currently programmed at Griffiss AFB. Conversion programs are always costly in time and money and place a severe overload on the support facilities of the base. In addition, experience has shown that the combat potential of a converting unit is seriously reduced for a period of several months.
- 2. Programmed conversions for units at Griffiss AFB call for the 27th Fighter-Interceptor Squadron to convert from F-94C aircraft to F-89D aircraft and the 329th Fighter-Interceptor Squadron to activate with F-86D aircraft and then convert to F-102 aircraft. The problems of supporting two types of fighter-interceptor aircraft on one base are well known, particularly the duplication of supply stocking, specialized maintenance setups and special tools and ground handling equipment. These problems assume major proportions when the units are tenant upon the base of another command and depend upon that command for support.
- 3. In view of the foregoing, the following changes to the Fighter-Interceptor Program are submitted for your consideration:
- a. The 27th Fighter-Interceptor Squadron at Griffiss AFB to retain its currently assigned F-94C aircraft in lieu of converting to F-89D aircraft.
- b. Activate the 329th Fighter-Interceptor Squadron at Griffiss as programmed but equip this unit with the F-94C aircraft presently programmed for the 498th Fighter-Interceptor Squadron.
- c. Activate the 498th Fighter-Interceptor Squadron at Bunker Hill as programmed but equip this unit with the F-86D aircraft presently programmed for the 329th Fighter-Interceptor Squadron.

224

EAOPR-2 Subject: (Unclassified) Fighter-Interceptor Progrem (Cont'd)

- d. Activate the 327th Fighter-Interceptor Squadron at K.I. Sawyer as programmed but equip this unit with the F-89D aircraft which are presently programmed for the 27th Fighter-Interceptor Squadron.
- 4. The changes recommended in the preceding paragraph will greatly simplify the support problems at Griffiss AFB in that it will eliminate abnormal supply actions and maintenance problems resulting from multiple conversions over a relatively short period of time.
- 5. Additional benefits which will accrue from the proposed changes are:
- a. The assignment of F-89D aircraft at K.I. Sawyer will provide greater defense in depth.
- b. The 30th Air Division (Defense) does not at present have any F-94C type aircraft and this proposal will eliminate problems involved in having one squadron of "orphan" type aircraft.
- 6. Homogeneity of aircraft is highly desirable and should be observed whenever practicable to simplify supply and maintenance functions. It is realized that adjustment of weapons deployment by conversion to an interim type aircraft pending assignment of a subsequent type is in many cases necessary and desirable; however, it is believed that these actions should be held to a minimum.
- 7. This letter is classified Secret in accordance with paragraph 23b, AFR 205-1.

FOR THE COMMANDER:

JAMES R. WORLINE Captain, USAF Asst Adjutant

224

Hq EADF EAOPR-2, Subj: (UNCLD) Fighter-Interceptor Program

ADOOT-B2 (8 Jan 55)

lst Ind.

HQ AIR DEFENSE COMMAND, Ent Air Force Base, Colorado Springs, Colorado

TO: Commander, Eastern Air Defense Force, Stewart Air Force Base, Newburgh, New York

- 1. The following objectives are used by this headquarters in developing and amending the Fighter Interceptor Program:
 - a. To match aircraft performance to defense requirements.
 - b. To meet Air Force expansion program.
 - c. To require a minimum of ZI moves.
 - à. To require a minimum of program changes.
 - e. To allow a maximum time period between conversions.
 - f. To mix aircraft types in major areas.
 - g. To standardize aircraft type on bases.

It is obvious that at times all objectives cannot be satisfied, but every effort is expended to meet as many as possible, usually in the order of priority shown.

- 2. We are aware of the disadvantages of mixing types of aircraft on a base, but in the interest of maximum utilization of the Ding Dong weapon capability (nuclear warhead), it was necessary to place an F-89DH squadron at Griffiss Air Force Base. The location of two such units at that base, however, was not feasible because of the limited number of programmed F-89DH squadrons.
- 3. Activation of the 329th at Griffiss Air Force Base was programmed only because of the lack of a suitable base and facilities elsewhere.
- 4. The F-94C type aircraft were selected for Bunkerhill to meet our programming objective, as stated in paragraph 1.f. above, to prevent area defense paralysis in event of grounding of a particular model.
- 5. Since F-89DH squadrons are already programmed for Kinross, Duluth, and Minneapolis-St. Paul, the allocation of these aircraft to K. I. Sawyer would cause complete paralysis of that area in event F-89s are grounded. Another equally important consideration is that these

224

HQ EADF EAOPR-2, Subj: (UNCLD) Fighter-Interceptor Program Contd.

aircraft with their anticipated high kill capability will be more urgently required elsewhere. As a result of this last consideration, other changes in the F-89DH program may be expected as further technical information on the Ding Dong weapon becomes available.

BY ORDER OF THE COMMANDER:

C. F. HUMPHREYS Captain, USAF Asst Command Adj

COPY

225

ADOPR

19 Aug 1954

SUBJECT: (Uncl) Improvements in the Air Defense System of the

Continental United States

TO:

Commander
Air Research & Development Command
P. O. Box 1395
Baltimore 3, Maryland

1. Reference:

a. Conference between General Chidlaw, General Power, and members of ADC and ARDC staffs, 8 July 1954.

b. Air Defense Requirements 1954-1960, dated 1 July 1954.

2. During the past few years, we have become increasingly concerned over the widening gap between the Soviets' ability to attack this country, and our ability to defend it. While we have been engaged in the slow task of constructing an air defense system designed to counter an attack by TU-4 type aircraft, the enemy's capability has progressed beyond this point to where it now consists of long-range jet and conventional bombers carrying thermonuclear weapons. Recently, we have learned that this force has been augmented by an extremely high performance medium jet bomber which is now ready for use against us in sufficient numbers to pose a serious threat to the United States. Finally, the great effort being expended by the Soviets upon development of an intercontinental ballistic missile -- current estimates hold that such a weapon may be operational in 1958 -- presages a threat against which known defensive devices will be powerless. This grave prospect demands that research and development of a weapons system capable of meeting all levels of this complex threat be pressed forward at as rapid a pace as can be economically maintained.

225

Mq ADC, ADOPR, Subj: (Uncl) Improvements in the Air Defense System of the Continental United States

- 3. Our studies, war games and exercises have revealed that the best tactic for meeting an attack involves distributing our weapons evenly against attacking forces, and assaulting them continuously with multiple waves of defense weapons. In order to do this, we must be able to rapidly identify an attacking force as soon as it comes within range of our detection system, ascertain quickly how many aircraft are in each track so that weapons may be assigned appropriately, and be aware at all times of how many of the hostiles have been attacked.
- 4. Our current equipment, and that programmed for our future use, will not allow us to perform these vital functions if we are attacked by the weapons described in the first paragraph. Inasmuch as a breakdown in any of these functions will probably result in a breakdown in our defensive system, we urge that specific improvements in ground and air equipment be made as soon as possible. For guidance, we have appended a listing which points out which of our needs are the greatest, and identifies those items which show the most promise of meeting these needs.
- 5. It is requested that necessary planning, re-programming, and budgetary actions be taken to provide this command with the increased operational capability that will result from emphasizing these requirements.

l Incl ADC Priority R&D Items

The Cy:
Dir of Requirements,
Hq USAF
(w/Incl)

B. W. CHIDLAW General, USAF Commander

FT

COPY

225

AIR DEFENSE COMMAND

PRIORITY RESEARCH AND DEVELOPMENT ITEMS

DATA GATHERING

A. Ground Radar

1. Prime Radar

Early improvements should be designed into prime radars to give them the ability to detect and track targets with the equivalent of one (1) square meter of reflecting surface at a range of 250 miles and at an altitude of 65,000 feet. The probability of detection should be between 95-98 per cent. By 1960-61 the detection capability must be increased to provide coverage of similar targets flying at altitudes of 90,000 - 100,000 feet with no decrease of horizontal coverage or probability of detection.

2. Low Altitude Surveillance Radar (Gap Filler)

Gap filler radars must be capable of providing surveillance data on aircraft representing the equivalent of one (1)
square meter of reflecting surface and flying at altitudes
from the surface to 6,000 feet. They must also have a probability of detection of 95-98 per cent and a maximum range of
about 48 miles. These units must be capable of operating on
an unattended basis and require a minimum of maintenance and
repair. They must be designed to automatically indicate
equipment failure or submarginal operation.

225

3. Raid Size Determination

Radar stations which operate in the air defense system must be capable of producing raid size data simultaneously with the initial detection or as soon thereafter as possible. This information is essential to rapid and accurate identification and to the realistic planning of air battles. The present methods of using expanded "A" and "B" scopes is entirely inadequate.

4. Doppler Radar

This radar will be installed in the Mid-Canada line in Southern Canada and is scheduled for operation 30 June 1956. This radar must be capable of detecting a one (1) square meter target from the surface to 65,000 feet altitude. By 1960-61 this capability must be increased to 90,000 to 100,000 feet. It must operate continuously unattended and be able to indicate to parent station submarginal operation or complete railure.

5. IFF

There is an immediate and urgent requirement for failproof identification at the perimeter of the combat zone.

This requirement becomes even more critical as the magnitude
of the threat increases. The SIF requirement for all manned
and unmanned interceptors is of equal importance. The most

2

225

desirable IFF equipment would provide positive identification simultaneously with the initial detection.

6. ECM

All communications and electronics equipment intended for ADC use should be designed for maximum security against jamming. The vulnerability of the ground-to-air communications link is of grave concern to this command. This vulnerability will become more critical with the advent of the Data Link. All ADC radars should be equipped with anti-jamming circuits, and provided all other means available to minimize the effects of jamming. This urgent problem requires continuous investigation.

7. Height Finding Capability

Future ADC search radars should be designed to provide height data simultaneously with the initial detection. Reight data accuracy on the order of approximately five hundred feet (500') is desired.

B. Airborne Radar

1. AMII

Because of the non-availability of a suitable AMTI, AEW&C aircraft are now forced to fly at low altitudes. This method of operation results in poor radar coverage and creates severe communications problems. The development program for this item should be accelerated to the highest degree.

3

225

2. AEW Radar

AEW Radar capability must be increased to permit it to detect and track aircraft, representing the equivalent of one (1) square meter of reflecting surface, from the surface to 65,000 feet at supersonic airspeeds. Initially, these radars must have an 30% probability of detection. In a later time period, this capability must be increased to 95 to 90% against the same targets at altitudes of 90,000-100,000 feet. Detection ranges in both cases should be at least 200 miles.

225

WEAPON CONTROL

A. Data Transmission Equipment

1. Ground-to-Air Data Link

The AN/GKA-1 must be improved to attain greater resistance to jamming and greater reliability at its expected maximum range. The development of a 10 EW UHF power amplifier or transmitter will contribute significantly toward overcoming these limitations. This equipment must be produced concurrently with the production of the AN/GPA-37.

2. Ground-to-Air Voice Communications

The ECM vulnerability of voice communications is of grave concern to this command. The development of a 1 KW UHF power amplifier or transmitter should be completed as expeditiously as possible. A minimum of 96 of these units must be operational within the air defense system by 31 December 1955.

B. Weapon Control System

1. Improved Manual Air Defense System

As specified by General Chidlaw and General Power, reference par 1-a basic letter, the capability of the Manual Air Defense System must be improved prior to the advent of a suitable semiautomatic air defense system. The AN/GPA-37 is now under production contract to G. E. Although this unit will increase the effectiveness of the system, additional

5

225

capabilities are desired. These additional requirements are now being studied by this headquarters and will be forwarded shortly.

2. Semi-Automatic Air Defense System

The continued development of an air defense system capable of timely, semi-automatic operation is essential to the defense of the United States. This system should be made available to ADC as soon as reasonable development and testing permit.

3. Weapon Recovery

This command must be capable of recovering its all weather interceptors from a range of at least 200 miles by programming and directing an optimum "return-to-base" course for them and automatically scheduling their final approach and landing.

The "Volscan System", developed by AFCRC, may meet this requirement.

6

225

WEAPONS

A. Nuclear Armament

1. Nuclear Warhead Air-to-Air Rocket

High priority should be maintained on the projects developing a nuclear warhead, air-to-air rocket. Although a non-guided timer-fuzed model of the rocket is expected to provide satisfactory kill probabilities in 1956-57, continued research and development may make possible improved rocket models which can produce greater kills in the period 1957-1960 when the enemy superbomb threat becomes greater.

2. Nuclear Warheads for Surface-to-Air Pilotless Interceptors

Nuclear warheads for medium range surface-to-air pilotless interceptors must be developed on a priority consistent with the accelerated need for more effective weapons systems.

3. Short Range Missiles

Research development and procurement of short range missiles with nuclear warheads should be accelerated. Such missiles should be available in 1956 and have a range from 0 to 50 miles and attack capability to 65,000 feet. This altitude should be increased to 100,000 feet by 1960-61.

B. Aircraft

1. Interceptors

Research must be continued to make possible Mach 3.0 manned interceptors capable of combat at 70,000 feet by 1960.

7

225

An urgent requirement exists to increase the performance of programmed fighters to obtain combat capability at 55,000 feet no later than 31 December 1955.

2. Long Range Interceptor

High priority must be given to produce a long-range interceptor by, or before, 1959, which can intercept and fight at 60,000 feet.

3. Nuclear Power

Continue research on development of nuclear powered interceptors.

4. Ballistic Missile Interceptors

Accelerate research to extend ceilings, range, speed, fire power and accuracy of unmanned interceptors to achieve a capability to intercept ballistic missiles by 1958.

C. Airborne Electronics

1. Fire Control System

Continue development of a fire control system capable of search ranges of 100-120 nautical miles and a lock-on range of 50 miles. This system should be available for the Long Range Interceptor.

2. Altitude Capabilities

Altitude capabilities of the fire control system must reach lower limits of 500 feet and must keep pace with the altitude increase of the systems aircraft, i.e., 70,000 feet by 1960.

8

225

3. Light Weight Search Radar

It is very important that augmentation aircraft be provided with a clear air mass interception capability. This requires the development of a light weight search radar or a light weight radar-infrared system packaged in a detachable pod or as an integral part of the aircraft.

4. Anti-Jamming Features for Fire Control Systems

Although the common synchronizer and tuneable magnetron have substantially reduced our vulnerability to spot and sweep jamming and chaff, we are highly vulnerable to barrage jamming. It is imperative that means be devised whereby we can obtain range information in the face of jamming, or fire our guns, rockets and missiles without benefit of accurate range information.

5. Terminal Navigational Equipment

Accelerate the development of the airborne and ground based short-range terminal navigation equipment (TACAN) for ADC. This system must be operational no later than 1 January 1957.

6. Automatic Navigational Equipment

To enable the LRI to operate at the required ranges and to be temporarily independent of GCI, a light weight, self-contained, automatic navigation system should be developed.

9

225

7. Ground-to-Air Data Link (Airborne Components)

Develop a suitable data link presentation for the present and future fighter-interceptor aircraft. Develop and install a data link system in all augmentation aircraft that will be compatible with the ADC data link system.

D. ECM

1. Ground-Based Jamming

In view of the urgency of our need for protection against effective radar bombing, we urge that the RADC ground-based jamming program be given all possible emphasis.

10

225

FEASIBILITY STUDY

A. Ballistic Missile Threat

The present, or programmed, Air Defense System will not be capable of countering the intercontinental "ballistic-missile" threat. Intelligence information indicates that such a missile may be tactically available to the USSR in 1958; therefore, the seriousness of this situation cannot be overemphasized. In view of this threat, overriding consideration must be given to study and development of a means of countering it. This is an urgent requirement.

B. Decoys

The USSR currently has the capability of using decoys to distract and dissipate our air defense capability to a degree sufficient to permit atomic bomb-laden aircraft to approach their targets with relative ease. The appropriate agency should launch a vigorous investigation to determine the feasibility or possibility of developing a detection device, or method, which can discriminate between a bomber and a decoy.

C. Air-to-Air Rocket

Continued research may make possible a reduction in size and weight of a nuclear warhead, air-to-air rocket. Therefore, a study should be made of the feasibility of equipping interceptors with 4 to 6 nuclear rockets.

11

COPY

221

Lt General Thomas S. Power Commander Air Research and Development Command P. O. Box 1395 Baltimore 3, Maryland

19 Aug 1954

Dear Tommy:

In response to your query at our recent conference concerning ADC's position on high altitude performance for its interceptors, I will try to give you a brief history of our aircraft requirements.

When the 1954 interceptor was decided upon, we anticipated this airplane as becoming tactically available in 1954. Had the F-102 come along as proposed, we would not be receiving in the system a Falcon-carrying interceptor capable of speeds and altitudes with superior performance over today's jet bomber threat.

By late 1952, our information and our war gaming began to show us that a 55,000 foot airplane would be marginal in its lifetime and, therefore, in January 1953, we submitted a requirement for the F-103 or like type interceptor which was to have altitude and speed characteristics at altitudes of 70 to 75,000 feet and Mach 3.0. This need was concurred in by Headquarters USAF and our requirement approved. We asked for the airplane to be tactically available in 1958, since this coincided with our estimate of the threat even though we recognized the fact that the successful development of this airplane required new advances in metallurgy, aircraft and engine design. We have never retreated from our need for this aircraft, and have continued to support it on every occasion presented.

On 7 April 1953, we submitted a requirement for a long-range interceptor which we expect to produce a successful engagement at altitudes of 60,000 feet. The concept of use of this airplane, as well as its performance, were questioned intensively by Headquarters USAF. Our requirement letter requested tactical availability in late 1957; however, we were finally, over much opposition, able to "jell" the requirement for late 1959.

225

Lt. General Power Page 2

I desire to point out that ADC has been considered in the past to be prone to stretch the technical capability of both our people and the enemy in our concept of the threat and the means to combat it. Subsequent events have proven that we have not been visionary, but rather, have been less than predictive of Soviet progress and ability. I refer, of course, to the Russian types 37 and 39 which have recently appeared to the consternation of our experts. The picture as we now see it is grim. Intelligence experts state that we could expect a Soviet capability by December of 1955 of attacking our major industrial targets and key SAC facilities with 200 heavy bombers at altitudes approaching 55,000 feet and at speeds of Mach .8 to .9 with the capability of delivering 1 to 5 megaton yield bombs. If this is true, then frankly, the interceptors currently considered for contract are of marginal value to us. In the case of the F-102A, for example, we are fighting to attain a maneuverable ceiling of 50,000 feet.

An interceptor must meet the following requirements, which are equal parameters. It must--

- (1) Have a speed advantage at combat altitude of 20% to 25%.
- (2) Achieve an altitude superiority.
- (3) Have armament for a minimum of two kills.
- (4) Have a fire control system capable of producing a nonvisual intercept.
- (5) Have a load factor adequate to permit required combat maneuvers at low altitudes and high speed.
 - (6) Be able to scramble within two minutes of a given signal.
 - (7) Be able to re-service within 15 minutes.
- (8) Be capable of high maintainability with reasonable numbers or ordinary people.

2

226

Lt Jeneral Power Page 3

In designing an interceptor which will meet these basic parameters, it may be found that an individual airplane is strong in some points and weak in others. In these cases there may be room for compromise, but this negotiation has to be accomplished on an individual basis.

As we see it, the indicated capability of the new Soviet aircraft clearly indicates that they have made a major step in engine design years ahead of our industry. We would like to emphasize strongly to you that ADC manned interceptors must be superior to any manned aircraft or cruising missile threat. We urge that ARDC should put every effort into engine development so that such engines as the Wright J-67-W-e/xRJ55-W-l dual cycle and the Allison 700-Bl be given an early opportunity to prove themselves. Growth potential of these engines indicates that we can have higher speeds and altitudes than thought feasible in January of 1953; therefore, ADC will give every support to R&D programs on engines which will give us Mach 3.7 - 4.5 at altitudes of 80,000 - 85,000 feet. We are fully aware that there is no magic airplane that performs at all altitudes, and we feel strongly enough in this position to be assured that air breathing vehicles which we will combat at high altitudes will be limited at low altitudes to the same degree as ourselves and that we will not therefore be ineffective.

I am attaching a weapon development plan projected through 1965 for your information. This is as we see it today and is based upon today's planning with the exception that it excludes the ballistic threat. We sincerely hope that this expression of ADC's views on the subject of interceptors will be of value to your approach to our problems. If at any time you feel the need for further backing on these views, please call upon us for help.

Sincerely.

1 Incl
Air Defense Weapons
System Long Range
Plan (1 cy)

B. W. CHIDLAW General, USAF Commander

Info Cy: B/Gen Price, AFDRQ, USAF

3

COPY

DEPARTMENT OF THE AIR FORCE
HEADQUARTERS UNITED STATES AIR FORCE
WASHINGTON 25, D. C.

227

AFDRD-AD

20 May 1954

SUBJECT: (UNCL) Offensive and Defensive Ballistic Missile Systems

TO:

Commander Air Defense Command Ent AF Base Colorado Springs, Colorado

- 1. Reference is made to your Top Secret letter, subject as above, dated 13 April 1954.
- 2. Your comments concerning ballistic missiles coincide with reviews of the ATLAS Project currently being conducted in this Headquarters to determine the best means by which acceleration of this project can be realized. Relaxing the CEP specification has been one of the factors under consideration in this regard. The project administration and technical supervision are now being realigned with the aim of producing results in a shorter time.
- 3. As you have pointed out, the ballistic missile threat is a serious one and by its nature presents a very difficult defensive problem. Although we do not at this time have an acceptable solution, the problem is being attacked through studies by Lincoln Laboratories and the Rand Corporation. The extensive studies of the University of Michigan with respect to defense against V-2 type threats are expected to be valuable contributions to these studies of the more difficult ATLAS type defense problem. As these studies determine items which are agreed upon as being likely components of the future complete ballistic missile defense system, development of these items will be initiated. For instance, development of the detection radar expected to be required is now being initiated.
- 4. Any further assistance you can provide in this difficult area will be appreciated.

BY ORDER OF THE CHIEF OF STAFF:

/s/ HUBERT B. HATCHER
Major General, USAF
Assistant
Deputy Chief of Staff, Development

COPY Easy reading copy made

228

FROM: COMMANDER, ARDC

17 June 1954

COMMANDER ADC/ATTN: MAJ CRISPEN P&R

EDGRD6-13-E 18701 . Reference conversation between Lt Col Barrett, this Headquarters and Maj Crispen on 26 May concerning research and development efforts toward providing an air defense capability against intercontinental ballistics. An active program is now underway in this area. A proposal made by RADC called ORDIR is now in a study stage under cognizance of Columbia University. The program will very shortly reach the initial hardware development stage. ORDIR (Omni Range Digital Radar) is a system employing a central transmitter in conjunction with several receivers and data processing computer scattered throughout a defense area. No detection capability figures can be given at this time, however it is anticipated that necessary ranges and altitude coverages can be obtained to cope with the intercontinental ballistic threat. This office will attempt to obtain additional information on ORDIR for your headquarters prior to our next visit. In addition USAF has directed ARDC to make a study of the intercontinental ballistics problem. In alternate direction this effort USAF has requested a feasibility study of Billboard of other radars to fulfill this type of requirement. Additional information on this subject will be furnished your headquarters as available.

COPY

229

AFDRQ-SA/D

Nov 10 1954

SUBJECT: Draft of GOR SA-5c-'56

TO:

Commander
Air Defense Command
Ent Air Force Base
Colorado Springs, Colorado

Attached is a draft of GOR SA-5c-'56 for your review and coordination. This is a <u>draft</u> GOR and will be revised upon receipt of recommendations of Air Staff agencies and major Air Commands.

Request that your comments be returned to this office by 30 November 1954.

BY ORDER OF THE CHIEF OF STAFF:

1 Incl Draft of GOR (2 cys)

JAMES W. GUTHRIE COLONEL, USAF DEPUTY CHIEF, STRATEGIC AIR DIVISION. DIRECTORATE OF REQUIREMENTS

229

Hq USAF AFDRQ-SA/D Subject: (Unclassified) Draft of GOR SA-5c-'56

ADOPR (10 Nov 54)

lst Ind

29 Nov 1954

HQ AIR DEFENSE COMMAND, Ent Air Force Base, Colorado Springs, Colorado

TO: Director of Requirements, Headquarters USAF, ATTN: Strategic Air Division, Washington 25, D. C.

This Command agrees that a long range decoy weapon system will reduce the overall effectiveness of the enemy air defense system. The attached GOR for such a system is concurred in except for the launch rate. We do not feel that 100 decoys per hour will cause a significant degradation in the enemy air defense capability. Our own planning for the 1960 time period is based on a threat of 1500 bombers and 2000 decoys striking this country simultaneously.

FOR THE COMMANDER:

1 Incl w/d 1 cy

C. F. HUMPHREYS Captain, USAF Asst Command Adj

COPY OF INCLOSURE NOT AVAILABLE FOR COMD ADJ FILE.

2

COPY Easy reading copy made

230

From: COMDR ADC, ENT AFB
COLORADO SPRINGS COLO

24 Nov 1954

To: CANAIRDEF ST. HUBERT QUEBEC

(SECRET) ADOPR 2051 . Reference telecon A/C Annis to Austin on 22 Nov 54. ADC(USAF) weapons available and performance data follows in three parts; part a - aircraft, date expected available for operational use, combat ceiling (feet) radius of action (NM): F-102A - 3d Qtr CY 56, 52,500, 577: F102B - 2d Qtr CY 58, 54,500, 550: F-101 AI - 1st Qtr CY 58, 49,800, 926; F-101 BI -2d Qtr CY 59, 54,300, 763; F-103 lst Qtr CY 60, 80,000, 328; F-104I 3d Qtr CY 57, 60,000, 375 armed with gatling gun; F-104 I - 3d Qtr CY 57, 51,000, 265 armed with infra-red missiles of falcon or sidewinder type. Part b - Missile, date expected available for operational use, effective altitude (feet) range (NM): NIKE B - 3d Qtr CY 57, surface to 80,000, 50; TALOS - 2d Qtr CY 57, surface to 60,000, 75: TALOS - 2d Qtr CY 58, surface to 80,000, 100; BOMARC (F-99B) - 3d Qtr CY 59, surface to 80,000, 250, Lockheed 253 - 3d Qtr CY 59, surface to 80,000, 250. Part C - Note. Above dates are earliest expected availability to ADC (USAF).

> C. F. HUMPHREYS Captain, USAF Asst Command Adj

COPY

231

ADOPR

27 January 1955

SUBJECT: (UNCLASSIFIED) Proposed GOR for Medium Range Interceptor

TO: Director of Requirements
Headquarters USAF
Washington 25, D. C.

- 1. On 24 through 26 January 1955, this Command was visited by Colonel J. L. Laughlin on behalf of the Director of Requirements, Headquarters USAF, for the purpose of coordinating a proposed General Operational Requirement for a Medium Range Interceptor to be used in the primary mission of CONAD.
- 2. This General Operational Requirement, as proposed by Colonel Laughlin, the provisions of which appear to be the result of a general misunderstanding of verbal remarks given in a briefing by Air Defense Command to the Air Council in December 1955, is not acceptable to this Command as a General Operational Requirement for an air defense weapon for use in the period 1961 to 1965.
- 3. Reference your letter AFDRQ-AD/F, 15 November 1954, subject: (Unclassified) "Draft Copies of a GOR for Piloted Interceptor Weapons System (Medium Range)" and our 1st Indorsement ADOPR, 28 December 1954. The comments on subject draft GOR as outlined in our 1st Indorsement have not changed. It is a concept of this Command that all weapons which are introduced as part of the air defense weapons system should provide an effective defense against air attack on the United States by air breathing weapons systems which have the capability of delivering one or more bombs, missiles carrying an integral warhead, or against long-range cruising missiles directed to targets on the North American continent.
- 4. This Command does not envision the use of manned interceptors against a ballistic threat, but only against air-breathing vehicles. Although the national intelligence estimate does not give the Soviet Union an intent to produce a "Navaho" type missile, it must be considered that such a device, the possible ultimate in air breathing weapons, can be built and launched against this country in the time period covered by this General Operational Requirement. Therefore, this and future interceptors must be designed with the capability of destroying this threat. Reference

231

Hq ADC ADOPR Subject: (Unclassified) Proposed GOR for Medium Range Interceptor

USAF Standard Aircraft Characteristics, "Green Book," the first configuration "Navaho," B-64A, will be designed to fly at Mach 2.75 at an altitude of 75,000 feet with ultimate development to Mach 3.25 at an altitude of 88,000 feet. In this respect, it is considered mandatory that an operational requirement be placed to provide an interceptor with a minimum capability against the earliest "Navaho," with growth potential sufficient to defend against ultimate "Navaho" development. This GOR must provide for an aircraft with a maneuverable operational ceiling of 75,000 feet and 20% to 25% speed advantage over Mach 2.75 or a minimum of Mach 3.3.

- 5. It is considered that in designing an interceptor which will fulfill the mission of Air Defense Command, in destroying enemy offensive weapons directed towards targets in continental North America, that the load factor as heretofore specified for a fighter type may be higher than that required for the new development cycle interceptor. It is considered possible that a relaxation of the current interceptor load factors may be feasible and desirable and might be a key factor in making possible the speed and altitude performances prescribed without sacrificing armament load or other key requirements. In order to determine the possible and desirable load factor for this interceptor, a study by ARDC must be conducted to determine the load factor required of an interceptor in carrying out all facets of a possible mission. This mission must include attacks on high speed cruising missiles, heavy manned bombers, FICON, air-to-surface missiles, and sub-launched missiles. This study must also include the maneuvering load factors required to convert to collision course at very high speeds on high speed targets, as specified in this GOR, at all altitudes, and in addition it must compute the maximum load factor required to successfully complete an attack using atomic guided or unguided rockets, including the escape maneuver. In addition, special consideration should be given to the interpretation of aircraft flight characteristics in the Mach 3.0 speed regime (sea level to in excess of 80,000 feet) as affects load factor. Such factors as inadvertent maneuvers, gust and dynamic pressure loads, and the reaction time required of the pilot or auto-pilot, should be considered in this investigation.
- 6. The use of the term "bomber-destroyer" in reference to Air Defense Command weapons, including the manned interceptors, is a descriptive term to differentiate between an aircraft which may be designed to engage in high speed individual combat with other enemy fighters and aircraft designed to intercept and destroy

2

231

 $\mbox{\rm Hq}$ ADC ADOPR Subject: (Unclassified) Proposed GOR for Medium Range Interceptor

hostile targets within the meaning of this letter. It is not considered that aircraft engaged in the defense mission of this continent will be engaged in fighter-to-fighter tactics, therefore this Command does not expect or require a fighter-to-fighter aircraft.

FOR THE COMMANDER:

Info cy Comdr ARDC

KENNETH P. BERGQUIST Major General, USAF DCS/Operations

3

COPY

HEADQUARTERS AIR DEFENSE COMMAND ENT AIR FORCE BASE COLORADO SPRINGS, COLORADO

232

AIR DEFENSE COMMAND COUNCIL MEETING REPORT

- I. Subjects considered:
 - A. WEAPONS REQUIREMENTS
 - B. LONG-RANGE INTERCEPTOR COMPETITION
- 1. A meeting of the Air Defense Command Council was held at 0900, 13 December 1954, in the Commander's Conference Room (410), Bldg 1.
 - 2. The following members were present:

Major General Frederic H.Smith, Jr. (Chairman)
Major General George F. Smith, Chief of Staff
Major General Kenneth P.Bergquist, DCS/Operations
Major General Marshall S.Roth, DCS/Materiel
Brigadier General W. M. Burgess, DCS/Intelligence
Colonel Robert J.Friedman, representing DCS/Comptroller
Colonel John C. Horton, DCS/Personnel
Colonel Delbert H. Hahn, representing Inspector General

The following interested persons were present:

General B. W. Chidlaw, Commander
Colonel Charles Bond, DCS/O
Colonel E. A. Herbes, P&R
Colonel W. H. Powell, P&R
Colonel Charles Slocumb, ADC Rep to AFSWC
Colonel Charles Slocumb, ADC Rep to AFSWC
Colonel Clay Tice, Asst for Programming
Lt Col C. J. Butcher, P&R
Lt Col R. Thornton, P&R
Lt. Col T. Scott, AFSWC
Major William Preble, P&R
Major Norman Bodinger, P&R
Major Robert Merrill, P&R

232

- 3. Weapons Requirements. Colonel Heroes explained to the Council that the purpose of the meeting was to present for approval and/or comment our recommendations for improvement of Air Defense weapons. He stated that an additional part of the presentation would be the results of the meeting at Headquarters ARDC on the Long-Range Interceptor competition. Following are the salient points covered during the meeting:
- a. Manned Interceptors Lt Colonel Butcher. Charts were shown which indicated inventories of various aircraft recommended for ADC by Fiscal Year. Problem areas confronting the manned interceptor were pointed out. The following recommendations for improvement were outlined to the Council:
 - (1) Emphasize requirement for supersonic speed at combat ceilings above 55,000 feet.
 - (2) Push development of FT-X medium range interceptor as first priority air defense development (F-103) to solve the high speed, high altitude problem.
 - (3) Pursue Falcon "snap-up" program vigorously as an immediate measure to increase combat ceiling of manned interceptors.
 - (4) Re-emphasize need for early availability of light weight search radar for augmentation forces.
 - (5) Urge Hq USAF-ARDC for a decision on 2.0" rocket.
 - (6) Performance figures as indicated should be minimum acceptable for following aircraft:
 - (a) F-102A 1.15 Mach at 35,000 feet

52,000 feet combat ceiling (500 foot min rate of climb)

- (b) F-101AI 50,000 feet combat ceiling (500 foot min rate of climb)
- (c) F-102B 55,000 feet combat ceiling (500 foot min rate of climb)
- (d) F-101BI 54,500 feet combat ceiling (supersonic rate of climb)

2

335

- (7) Delete the following aircraft from consideration as all-weather interceptors:
 - (a) F-89X
 - (b) F-100AI
 - (c) F-107
- (8) Change MIL-C-50llA as pertains to the basic air defense mission as follows:
 - (a) Take-off and climb to altitude at maximum power.
 - (b) Cruise out at maximum power.
 - (c) Climb to combat ceiling (defined as max altitude a 1.2G steady state turn can be made) at maximum power.
 - (d) Combat 5 minutes at combat ceiling at maximum power.
 - (e) Return to base at optimum altitude and power.
 - (f) Loiter 20 minutes at sea level.
 - (g) Land with 5% internal fuel reserve.
- (9) Desired performance for the FI-X medium range interceptor for the above profile is:
 - (a) Radius -- 300 NM
 - (b) Combat -- 75,000-85,000 feet.
 - (c) Minimum top speed at ceiling -- Mach 3.0
- b. Nuclear Armament Major Bodinger. Integration of nuclear warheads into the air defense family of armament requires that the following conditions be satisfied:
 - (1) No restructions on operational use.
 - (2) We must have simple weapon in the sense that we cannot have on-base assembly procedures and logistical support.
 - (3) We must have relaxed security and legal restrictions.

233

(4) We must require no unusual operational techniques associated with the weapon.

The first programmed ADC aircraft scheduled to receive this weapon will be the F-89H. Reasons for specifying this aircraft ahead of the F-102 are:

- (1) External installation on wing is a fairly simple job.
- (2) F-102 fit is not firm.
- (3) F-102 has possible problem of engine induction and rocket exhaust.
- (4) HUGARN will not destroy FALCON capability on this acft.
- (5) F-89H is available and in place at time of first production HUGARN.

The necessary Public Works program is now under study in this Headquarters. Objective of construction is to provide protection from damage by explosion of the 125 lbs of HE present in each weapon. It is visualized that the PW programs will involve the following areas:

- (1) Assembly and check-out
- (2) Storage
- (3) Loading and alert

Full integration of atomic armament into ADC requires intensive study of the following problems:

- (1) Snap-on capability of HUGARN.
- (2) Mixed Weapons loads.
- (3) BIRD DOG integration.
- (4) HE warheads for HUGARN.
- (5) HUGARN type warheads for interceptor missiles.

<u>Discussion</u>. Major Bodinger advised the Council that we should begin receiving these weapons by 1 Jan 57. Further, that by

4

232

utilizing figures available from Hq USAF, we have come up with a requirement for 16,300 weapons by 1961. The question was raised as to what was meant by "relaxed security and legal restructions." Major Bodinger stated that unless some restrictions are lifted concerning the use of nuclear weapons. MICARN tions are lifted concerning the use of nuclear weapons; HUGARN may have to be scratched from our program. In this connection, General F. H. Smith remarked that there is some public opinion that if we give an offensive weapon to the military, they are apt to use it without authority. It was further pointed out that before we have alert aircraft with HUGARN, we will have to have an early warning line in and operating.

c. Interceptor Missiles - Lt Colonel Thornton.

- (1) Problem areas. There are generally two problem areas in the Interceptor Missiles program. It appears that all the effort is being applied to the program which can be reasonably expected. Therefore, there are only two major limiting factors (low altitude and range) which can be pursued with vigor.
 - (a) Low Altitude. There are three active projects in the field of seekers: Pulse Doppler, being developed by Boeing/RCA Victor; and Continuous Wave Doppler, being developed separately by Ryan and Raytheon.
 - (b) Range. Range in Interceptor Missiles allows for flexibility which is desirable in any air defense weapon. It is estimated (and substantiated by war gaming) that this desired range is 200 to 300 nautical miles. There are only two development interceptor missiles which will attain these ranges: The F-98B and the advanced L-253. Neither of these weapons will be available prior to 1960.

(2) Recommendations.

- (a) Push the Pulse Doppler and Continuous Wave development programs.
- (b) Stress ADC requirement for F-98B type by 1960.
- (c) Pursue research and development for the

232

- (3) Future force structure. Indications are that increased pressure may be expected from without ADC to substitute Interceptor Missile Squadrons for Manned Interceptor Squadrons on a one-for-one basis during the post-1958 time period.
 - (a) Composite force of weapons was well planned during the 1954-60 Requirements Plan studies.
 - (b) A substitute program for interceptor missiles and manned interceptors is not offered as a solution at this time.
- (4) Recommendations.
 - (a) Maintain balanced force structure at minimum levels of each weapon.
 - (b) Disapprove any substitution for this program.

No important discussion followed this portion of the briefing.

- d. Avionics Major Preble.
 - (1) Detection and Lock-On.
 - (a) The Fire Control Systems programmed for the F-89H, F-102A, F-102B and F-101A will provide adequate detection and lock-on range for those weapons systems. The systems proposed for the F-103 and the LRI will not meet the 50 NM and 100 NM ranges required, respectively, for these systems. ARDC has forecast a 40-50 NM detection capability in the most complicated systems proposed.
 - (b) Recommendation: Requirements for extended lock-on ranges should not be relaxed.
 - (2) Augmentation Forces.
 - (a) Light weight search radar for augmentation fighters (pod type) will be evaluated by April 1955 and will be available in late calendar year 1956. First integrated systems will be in the F-104.
 - (b) Recommendation: Stress desirability for integrated systems in future augmentation aircraft.

232

- (3) Fire Control System Features.
 - (a) Air-to Air IFF. Available late calendar year 56.
 - (b) AMTI. Available on MG-3 and Mx-1179.
 - (c) Data Link. First system, GE Data Link, late CY 55.
- (4) ECCM. The following countering measures to ECM are in being or are planned for our weapons systems:
 - (a) ECM ECCM
 - (b) Microwave Jamming Tuneable Magnetron Homing Circuit in FCS
 - (c) Chaff Anti-Chaff Synchronizer
 - (d) UHF Jamming.

(5) TACAN.

- (a) TACAN, world-wide military tactical navigation system, is forecast for operational use by Jan 57. Any further slippage (very possible) will prejudice our ability to navigate modernized and future aircraft.
- (b) Recommendations:
 - 1. Support TACAN implementation.
 - Press for interim VOR-TVOR installation for ADC.

(6) Ground Based Jammer

- (a) Interim system will be available late Calendar Year 1957 with an improved system developed by late CY 1959.
- (b) Electronic intelligence is needed to assure jamming on proper frequency bands.

 $\underline{\text{Discussion}}.$ During the discussion period which followed, the TACAN system was discussed at some length. It was brought out in

7

232

the briefing that we may have to delay TACAN and go to TVOR. The point was then brought up as to why we support a move to TACAN when we can effectively operate and navigate with TVOR. Colonel Powell stated that the recommendation was made that we support TACAN due to pressure from top-side. Also, he stated that it has sufficient advantages, and if CAA has it, we ought to support it too. Our purpose is not to fight it, and it does offer advantages if it is accepted both here and internationally. If it works, we should have no objection going to TACAN when available.

e. Results of Long-Range Interceptor Competition - Col Powell.

(1) Conclusions reached.

- (a) Considering proposals submitted in the airframe and fire control system competitions, no weapon system combination met the altitude or target acquisition range requirements within the specified time period.
- (b) A LR interceptor meeting the performance requirements specified by the military characteristics will require use of advanced engines which are now in the preliminary stages of investigation. It is estimated that an operational weapon system using such engines could not be available before 1962.
- (c) The fire control system competition indicated that no new techniques are available to permit marked improvements in acquisition range. A logical development program aimed at providing the best possible capability with respect to an armament and control system for the IRI-X will result in availability of production systems no sooner than mid-1960, assuming Hughes as the source. Utilization of a new source for development would result in production availability approximately one year later.
- (d) The combat capability represented by proposals submitted in the competition, when considered realistically as to tactical availability, is inconsistent with the projected threat in the post-1960 time period.

232

(3) Recommendations.

- (a) That none of the proposals, prime or alternate, as submitted in the airframe competition, be selected for development.
- (b) That the general operational requirement for the Long Range Interceptor be reviewed in light of revisions of threat estimates and a realistic appreciation of the estimated date of tactical availability.
- (c) That a firm development program be established which will lead to a suitable armament and control system having a maximum acquisition range capability, and which is compatible with the Long Range Interceptor mission.
- (d) That the contracts be given selected contractors for the purpose of obtaining General Design Studies leading to development of a Long Range Interceptor Weapon System incorporating advanced engines and sub-systems, and which would replace the F-101 interceptor at the earliest practicable date.
- (e) That an interceptor version of the F-101 be procured to provide the earliest Long Range Interceptor capability in the 1958-60 time period.
- (f) That the procedures established by AFR 80-30 be followed in fulfillment of all future weapon system requirements.

Discussion. A rather lengthy discussion followed this portion of the briefing, and it was a final determination that we would have to take the F-101 as an interim Long Range Interceptor and follow up with developments. It was stated that the 101 with a J-67 engine will have a supersonic speed at ceiling, and it is within the realm of possibility the F-101 can be improved. Col Powell stated that members of the LR Interceptor Committee had taken these results back to their respective commanders for review and comment, and at a formal meeting to be held at Hq ARDC, the final report will be drawn up. General Chidlaw stated he would discuss the LRI problem further with Colonel Powell on the flight to Wright-Patterson AFB, and that while there, he may have a chance to discuss it informally with General Power.

9

232

- 4. Council Action. The ADC Council accepted the ADC weapons requirements proposals subject to further study in some instances.
- 5. There being no further business to come before the council, the meeting adjourned at 1210.

FREDERIC H SMITH, JR Major General, USAF Vice Commander (Chairman, AD Command Council)

10

COPY 233

AFDRQ-AD/F

SUBJECT: Draft Copies of GOR for a Piloted Interceptor Weapons System (Medium Range) (U)

Air Defense Command Ent Air Force Base Colorado Springs, Colorado

Attached for your information are two draft copies of a GOR for a Piloted Interceptor Weapons System (Medium Range). This GOR is for a new medium range interceptor aircraft to be a follow-on to the F-102 series aircraft. It is requested that any comments or recommendations you may have be returned to the Air Defense Division, Directorate of Requirements, DCS/0, Hq USAF, prior to 30 November 1954.

BY ORDER OF THE CHIEF OF STAFF:

1 Incl: As mentioned abv. (2 cys) JOSEPH L. LAUGHLIN Colonel, USAF Chief, Air Defense Division D/Requirements, DCS/D

233

Hq USAF AFDRQ-AD/F Subj: (U) Draft Copies of GOR for a Piloted Interceptor Weapons System (Medium Range)

ADOPR (15 Nov 54)

1st Ind

28 Dec 1954

HQ AIR DEFENSE COMMAND, Ent Air Force Base, Colorado Springs, Colorado

TO: Director of Requirements, Headquarters USAF, ATTN: Air Defense Division, Washington 25, D. C.

The following comments and recommendations by item to the attached GOR for a Piloted Interceptor Weapons System (Medium Range) are submitted as per your request and for your consideration.

- I. Purpose. The referenced Development Planning Objective has not been approved and published and should not be used as a basis for a weapons system requirement until the information contained therein is approved and disseminated to interested agencies.
- III. Enemy Effectiveness Estimates. This Command does not envision use of manned interceptors against a ballistic threat but only against air breathing vehicles. Although the latest National Intelligence Estimate does not give the Soviet Union an intent to develop a "Navaho" type missile, this Command considers that such a device, the possible ultimate in air breathing weapons, can be built and launched against this country in the time period covered by this COR. Therefore, future interceptors must be designed with the capability of destroying this threat. Reference USAF Standard Aircraft Characteristics, "Green Book," the "Navaho," B-64A, is designed to fly at Mach 3.25 at an altitude of 80,000 to 88,000 feet.
 - IV. Friendly Environment.
 - D. Maintenance Facilities.
- l. The statement, "Overall facilities....," should be deleted as not necessarily applicable to a GOR. The Wartime Planning Factors Manual is undergoing revision to reflect a change in operational concept.
- V. Operational Employment. The third sentence, "To permit....," should be amended to include a provision for re-installing droppable fuel tanks in the maximum turn-around time in the cases where the use of such tanks is part of the basic mission.
 - VII. Operational Performance.
 - A. Radius of action. Should be 300 nautical miles.

2

233

Hq USAF AFDRQ-AD/F Subj: (U) Draft Copies of GOR for a Piloted Interceptor Weapons System (Medium Range)

ADOPR (15 Nov 54) lst Ind (Cont'd)

- B. Altitude. This document should reflect a 1.2 G maneuverability ceiling as being required for the interceptor at the maximum altitude of the target, in this case the maximum operating altitude of Navaho type cruising missiles.
- C. Speed. Consistent with the foreseeable technical development of ram jet engines, a maximum speed of Mach 4.5 for this interceptor is highly desirable. In any event a 20 to 25 percent speed advantage over the anticipated target is mandatory.
- E. Fire Control Systems. In subparagraph $l(\mathfrak{b})$ an additional statement should be included which will insure that the fire control system will provide an automatic break away maneuver when the firing impulse has been given. This is considered a mandatory feature on interceptors firing atomic armament or on interceptors which may be closing with the target at extremely high rates of speed.

FOR THE COMMANDER:

JOSEPH D. HORNSBY Lt Col, USAF

COPY OF INCLOSURE NOT AVAILABLE FOR COMMAND ADJUTANT FILE.

COPY

234

11 Aug 1954

Dr. C. C. Furnas Chairman, Advisory Panel on Aeronautics Office of the Asst Secretary of Defense for R&D Washington 25, D. C.

Dear Dr. Furnas:

Further to our conversation on the F-103 during your visit here, I should like to be certain that I left with you no misunderstanding as to our desire in this command that this project be pushed as fast as is practicable. While we realize, as I told you, that in certain areas we are very probably pushing the state of the art in the development of this aircraft and its power plant, the fact remains that the recent evidence of a much more rapid than forecast rate of development in Russian bombardment aircraft creates a pressing requirement for fighter-interceptors of extremely high performance. Thus, while in its present state, the F-103 may be a purely research vehicle, there is a requirement for a fighter in our inventory of similar performance by 1958 or as soon thereafter as possible. This requirement has been established with Headquarters USAF and is perhaps the source of your information that quantity production was being considered.

In clarification of our conversation, therefore, we have stated a requirement for an operational manned interceptor with a combat ceiling of 70 to 75,000 feet and a speed approaching Mach 3.0. This aircraft would be employed within the combat zone under close control as a weapons system teaming with the long-range interceptor presently under Phase I competition.

Trusting that this communication will serve to establish our position on the F-103 or an aircraft of like performance, I am

Sincerely,

FREDERIC H. SMITH, Jr. Major General, USAF Vice Commander

COPY
Easy reading copy made

235

16 October 1954

From: COMDR AIR DEFENSE COMMAND ENT AIR FORCE BASE COLORADO SPRINGS, COLORADO

To: CHIEF OF STAFF, USAF, WASH 25, D. C.

(SECRET) ADOPR 1828 REUR AFDRQ-AD/F 52477 DID 15 Oct 54. Estimates of maximum altitude attainable by Russian Jet bombers have increased by more than ten thousand feet since 4 May 54. Situation so serious ADC must take more than passing interest in any repeat any weapon proposal that insures successful engagement at altitude around fifty five thousand feet. Reference (TS) ltr Gen Chidlaw to CofS USAF, dated 17 Aug 54, subject: "Air Defense Capabilities." Renewed interest shown F89X due to claims by Northrup and failure of F-102 to meet specifications. Northrup representatives in early October indicated WADC concurrence in performance figure contained in proposal from Northrup. No recent figures were available from WADC to confirm or deny. Letter from He ARDC to He USAF dated 1 Oct 54, subject: "Evaluation of F89X" was not known to this headquarters until 15 Oct upon receipt of 52477. Informal information same day from Hq USAF indicates combat ceiling of subject aircraft as being fifty-two thousand five hundred. This is below previous estimate and coupled with serious speed deficiencies would make this aircraft unacceptable for the air defense mission in the time period of availability. This further emphasizes the requirement

235

for new interceptor of better performance at altitude nearing sixty thousand with the least possible delay. If interceptors cannot meet these performance requirements other weapons will have to be substituted in greater numbers.

2

COPY
Easy Reading Copy Made

235

From: HQ USAF, WASH D. C.

To: COMMANDER, AIR DEFENSE COMMAND, ENT AFB COLORADO

(SECRET) From AFDRQ-AD/F Cite 52477. Reference telecon between Brig Gen Gerrity, this Hq, and Maj Gen George F. Smith, your Hq, regarding F-89X aircraft in which more than passing interest was shown on the part of ADC. This represents a significant change in ADC views, reference ADOFR 0726, 4 May 54 and indication to Hq ARDC personnel on their visit to Hq ADC, 11 June 54. Further, letter from Hq ARDC, Subject: "Evaluation of F-89X,"1 Oct 54, recommends no further consideration be given to F-89X proposals based on comparison of F-89X performance estimates to those of other interceptors that could be available in the same time period. Request latest views and comments of ADC relative to the F-89X proposal be forwarded to arrive this Hq not later than 18 Oct 54.

Subject: Pers ltr from Gen Everest to Gen Chidlaw and Draft of

Proposed Reply
To: DCS/0 DCS/M

From: VC

Date: 12 Nov 54 Comment No. 1

Asst for Programming C/S IN TURN

For coordination.

2 Incls

1. Ltr to Gen Chidlaw
2. Proposed Reply

FREDERIC H. SMITH, JR. Major General, USAF Vice Commander

COPY

235

16 November 1954

Lt. Gen. F. F. Everest Deputy Chief of Staff, Operations Headquarters USAF Washington 25, D. C.

Dear Hank:

Thanks a lot for your letter of 5 November. As you surmised, we are keeping in as close touch as possible with developments at Muroc and are extremely encouraged by the initial flight test information on the F-101. As you may know, we were instrumental in having the 101 mocked up as an all-weather fighter, for we felt very definitely that we needed a companion piece for the F-102 through its various configurations. We were informed by WADC that if we would accept initially a rocket-firing fighter only, and were able to shorten the Cook-Craigie program by test data obtained on the F-101 in its escort-fighter configuration, we could have a companion piece in our inventory shortly after we start our F-102A conversion. Assuming continued successful tests of the 101, we would advocate initial planning for about equal numbers of 101-I's and 102A's, substituting 101's for the latter on a one-for-one basis. This program could then be adjusted if experience dictates.

Insofar as the F-104 is concerned, we are, as you know, only willing to take aircraft without an all-weather capability if that is the only way by which we can achieve the minimum required altitude performance. It is our understanding that ARDC is presently engaged in the evaluation of several aircraft against the altitude criteria.

Insofar as the F-89D is concerned, and again in connection with the altitude requirement, we have expressed to your headquarters an interest in the Northrop F-89X proposal with J-65 engines, if, as Northrop expects, the last sixty-eight F-89H's on contract could be delivered as X's without a serious gap in the program and without inordinate cost. This airplane would be somewhat marginal

238

Lt Gen Everest

16 Nov 54

insofar as speed at altitude is concerned; but if it is the only way we can achieve a high altitude Falcon capability in the foreseeable future, it might well be worthwhile.

I am relieved at your news that Admiral Radford understood clearly and shared our reservations on the report of the Net Evaluation Committee. I know you shared our concern here about possible misinterpretation of the paper results obtained.

With best personal regards, I am

Sincerely,

B. W. CHIDLAW General, USAF Commander

COPY

236

5 November 1954

General Benjamin W. Chidlaw Commander, Air Defense Command Ent Air Force Base Colorado Springs, Colorado

Dear Ben:

Please know how much I appreciated the hospitality extended by you when Nate and I visited ADC last week. It was a most interesting, although abbreviated, visit and very profitable for us. We went on to Muroc that night and spent Fræday there.

I know that both you and Freddie are keeping a close touch with developments at Muroc, but I suggest one of you fly out there in the near future and take a look at the F-101, F-102, and F-104 in their current stages of testing.

Without any prejudice as to the ultimate development of the 102, the question in our minds is whether or not, and to what extent, it would be sound to plan for the equipping of a portion of your Command with a day fighter of the F-101 configuration with a limited all-weather capability. To a considerable lesser extent, there is also the question of the F-104 in the air defense role.

. I think the Chief has given up any thought of the F-89D extension. This should be a relief to Freddie,

The Net Evaluation Committee made its presentation to the National Security Council, the Joint Chiefs of Staff, and the Planning Board this morning. Admiral Radford summarized the presentation, or rather I should say he amended the presentation, with a short talk of his own which largely took the curse off of the report in the areas which were of concern to you and Freddie. I personally have not seen the report nor did I hear the presentation, but Nate told me after the meeting that Radford left no doubt in the minds of the Council as to the overly optimistic conclusions that could be drawn from the report. When we do get a copy, we will give you the reaction of Plans and Operations.

236

Thanks again for taking care of us so nicely.

Sincerely,

F. F. EVEREST Lieutenant General, USAF Deputy Chief of Staff, Operations

COPY

237

Major General George W. Mundy Director, Supply and Services Office of Deputy Chief of Staff, Materiel Headquarters United States Air Force Washington 25, D. C.

6 Aug 1954

Dear George:

Thank you very much for the copy of your report, "DCS/M Staff Visit to ADC," which was recently received. I think that you have selected for comment many of the vital problems affecting logistic support of this command.

I would like, however, to make one comment on Item 8, which is entitled "F-102 Aircraft." This is an item on which we have been going around and around on for sometime since there exists at all levels and between all levels some difference of opinion. Some of the Operational people believe that it is necessary to keep gyros spinning, tube filaments warm, inverters running, etc., while the airplanes are in the alert hangar on five minute alert. Other Operational people believe this is not necessary. The same situation exists in DCS/M. Personally, I feel that the wear and tear on gyros and electronics equipment will be greater and thus cause more aborts or more out of commission time than would exist if we turned them on at the sound of the bell and used the subsequent four minutes to get gyros up to speed and electronics equipment working.

We are going to resolve this difference of opinion this next week (9-14 August).

The resolution, I hope, will result in requirements something like the following: flight instrument gyros up to speed in two minutes; communications equipment operating approximately two minutes; fire control system up to speed, warmed up, and operating five minutes, etc. This will permit proper control and safe flight

237

during scrambles, and I believe will provide enough time for the fire control system to become operating about the time the pilot reaches eight to ten thousand feet.

I point this out to you at this time because I notice you took action with Deputy Chief of Staff Development and Depty Chief of Staff Operations and I feel we should not get these organizations hot and bothered until we come up with a firm and well-supported requirement -- one way or the other.

Let me thank you again for your helpful visit to this headquarters.

Sincerely,

MARSHALL S. ROTH Brigadier General, USAF Acting Chief of Staff

2

CONFIDENTI

OFFICE OF ADC PROJECT OFFICER Edwards Air Force Base Edwards, California COPY

033

10 September 1954

SUBJECT: Early "Lock On" Type Testing of F-102A

TO: Commander, ADC
ATTN: Director, Plans & Requirements
Ent Air Force Base, Colorado

- 1. It is generally agreed that "Lock On" testing of squadrons equipped with F-86D and F-94C type aircraft has given ADC valuable information. However, I believe that this information came late in the program. Had this information been available at or near the beginning of conversion of ADC squadrons to this type aircraft, some man-hours, money and resources would surely have been saved. This is to say nothing of the possible earlier attainment of combat readiness of these squadrons.
- 2. In order to avoid some of the difficulties of the F-86D Program, it was proposed to certain officers of DCS/O and DCS/M of Headquarters ADC that an extended "Lock On" type testing be accomplished on the first ADC F-102A Squadron. This test is not to replace the Phase VI or VII testing by ARDC or APGC. These officers agreed that the idea was sound. To get the Air Proving Ground Command's reaction to this proposal, a visit was made to the Air Force Operational Test Center at Eglin AFB on 2 September 1954. Colonel E. W. Szaniawski, Deputy Commander, and Colonel T. D. DeJarnette, Chief of Air Defense Division, were contacted. Both officers felt that this was a sound approach to the problem.
- 3. In reference to the Cooke-Craige plan for testing the F-102A, it is believed that this plan will eliminate a majority of the problems encountered in the F-86D Program. However, as an added insurance, it is felt that the early squadron testing of the F-102A aircraft for an extended period will pay dividends.
- 4. On 3 September, a conference was held with Lt. Colonel Victor Milner, Jr., Chief of System Training and Operations Division, Lt. Colonel P. E. Joyal and Major M. C. Johansen of Operation and Training, Headquarters ADC. At that time I outlined in detail the proposal for early "Lock On" testing of the first F-102A squadron. Lt. Colonel Milner will prepare a letter of requirement, with

CONFIDENTIAL

CONFIDENTIAL

238

Office of ADC Proj Off, Edwards AFB, Culif, Subj: Early 'Lock On' Type Testing of F-102A

all necessary information, and after appropriate coordination will recommend forwarding of the letter to Headquarters USAF. It is requested that an information copy of that letter be forwarded to Colonel T. D. DeJarnette of the AFOTC.

/s/ ROYAL M. BAKER Colonel, USAF. ADC Project Officer (F-102)

5

CONFIDENCE

COPY

B/Ltr fm ADC, Subject: (Unclassified) Requirement for Medium Range Interceptor, dated 10 July 1954

AFDRQ-AD/F

1st Ind

27 August 1954

DEPARTMENT OF THE AIR FORCE, HQ USAF Washington 25, D. C.

TO: Commander, Air Defense Command, Ent Air Force Base, Colorado Springs, Colorado

- 1. This headquarters has directed ARDC to proceed with the mock-up of the F-10lA in both a rocket-only version and a MG-3/Falcon/rocket version. Also, ARDC has been directed to initiate a study of a two-place configuration of both the F-10lA and F-10lB incorporating the MX 1179/Falcon/rockets which would utilize the J-67 or J-75 engines. The mock-up of the rocket-only version is scheduled for completion in late November, this year.
- 2. Future development action will be withheld pending completion of Phase I testing of the F-101A. Phase I testing is now scheduled to commence 25 September 1954. This headquarters plans to review both the F-100BI and the F-101AI at the earliest possible date after Phase I testing of the F-101A, in order to select a companion or back-up aircraft for the F-102A.

BY ORDER OF THE CHIEF OF STAFF:

/s/ GILBERT L. MEYERS
Colonel, USAF
Acting Director of Requirements
Deputy Chief of Staff, Development

COPY Easy Reading Copy Made

240

From: HQ ADC ENT AFB COLORADO SPRINGS COLORADO

2 Nov 1954

To: COMDR SAAMA, KELLY AFB, SAN ANTONIO TEXAS

COMDR WRAMA, ROBINS AFB, GEORGIA
COMDR AMC, WRIGHT PATTERSON AFB, OHIO
COMDR WADC, WRIGHT PATTERSON AFB, OHIO
DEPUTY CHIEF OF STAFF/MATERIEL, HQS USAF, WASH. D. C.
COMDR EDWARDS AFB, CALIFORNIA

(SECRET) ADMAC-5A 1917 . For Mr. F.E. Thrailkill, SAAMA. For WINT, WRAMA. For MCMIN, AMC. For AFTRQ, Hqs USAF. For ADC F-102 Liaison Officer, Col. R.N. Baker, EDWARDS AFB. This message is in two parts. PART I. It is imperative that maintenance of all electronic systems with their connectors and couplers, peculiar to the F-102 type aircraft, be accomplished in a like manner. This is necessary to provide a unified and integrated F-102 electronic maintenance program. This command strongly recommends that all electronic maintenance on F-102 peculiar systems be accomplished at a combined organizational and field maintenance facility at organizational level with depot support provided on contract or at zonal depots. It is imperative that a functionally integrated electronic system not be split up into several AMA depots for logistic support. Part II. To assist this Hqs in planning for the logistical support of the F-102 electronic system, it is requested that you indicate which of the following F-102 systems

. (SECRET) ADMAC-5A

(a) Three (3) distinct echelons of maintenance, (organizational, field and depot)

- (b) A combined organizational and field at organizational level with contract depot support
- (c) Other (describe)

FCS Radar

Computer

Power Supply

Missile Auxiliaries

Automatic Flight Control (Including ILS Coupler)

AN/APX-26

AN/APX-27

AN/ARR-39

Optical Sight

Pitch and Yaw Damper system. Connectors and Couplers for the above systems. It is further requested that this information be forwarded ASAP since shop designs, ECL's, Ground Handling Equipment, spares and test equipment are dependent upon the levels at which maintenance is to be accomplished.

2

COPY

OFFICE OF THE ADC PROJECT OFFICER (F-102)
EDWARDS AFB
EDWARDS, CALIFORNIA

13 May 1954

SUBJECT: Preliminary Air Force Phase II Flight Test & Data on YF-102A

TO: Commander

Hq Air Defense Command
ATTN: Director of Plans and Requirements
Ent Air Force Base
Colorado Springs, Colorado

1. Inclosed is a copy of classified message sent to Hq USAF and Hq ARDC by the AFFTC regarding the Preliminary Data on YF-102A airplane from Air Force Phase II Flight Tests.

- 2. Please note that the preliminary limiting altitude of the aircraft as a weapon is approximately 44,000 to 47,000 feet. In the first evaluation by ARDC pilots this altitude was thought to be approximately 40,000 feet. This office will advise your Headquarters as to the effective combat altitude as soon as final data becomes available.
- 3. Suggest the inclosed message be sent to the Commander and Vice Commander for their information.

1 Incl TWX /s/ ROYAL N. BAKER Colonel, USAF F-102 Project Officer

COPY

001

From: COMMANDER AFFIC, EDWARDS AFB, CALIFORNIA

13 May 1954

To: COMMANDER WADC, WRIGHT-PATTERSON AFB OHIO ATTN: WCSF

HQ ARDC, RDDSB, ATTN: LT COL L V COSSICK HQ USAF, DRD, ATTN: LT COL C W BUTCHER

FIDIP-5-35-E....PRELIMINARY DATA ON YF-102A AIRPLANE FROM AIR FORCE PHASE II FLIGHT TESTS. LIMITED PERFORMANCE WITH QUALITATIVE STA-BILITY AND HANDLING CHARACTERISTICS ARE AVAILABLE FROM THE PHASE II TESTS AT THIS DATE. THESE DATA INDICATE THAT THE LIMITING ALTITUDE OF THIS AIRPLANE AS A WEAPON IS APPROXIMATELY 44,000 to 47,000 FEET. /1/ THE STABILITY AND CONTROL CHARACTERISTICS HAVE BEEN OBSERVED. ' /A/ THE GROUND HANDLING CHARACTERISTICS ARE UNSATISFACTORY IN THAT THE NOSE WHEEL STEERING IS EXCESSIVELY SENSITIVE AND THE TURNING RADIUS IS APPROXIMATELY TWICE AS LARGE AS DESIRED. /B/ DURING THE TAKE OFF THE SENSITIVITY OF THE NOSE WHEEL STEERING IF USED TENDS TO CAUSE OVERCONTROLLING. DIRECTIONAL CONTROL CAN BE MAIN-TAINED WITH THE BRANCES, AND WITH THE RUDDER AT HIGHER SPREDS. IT IS RECOMMENDED THAT NOSE WHEEL STEERING NOT BE USED IN THE TAKE OFF. /C/ THE STICK FORCES FOR MOSE WHEEL LIFT OFF ARE HIGH WHEN USING THE RECOMMENDED TRIM SETTINGS; HOWEVER THE FORCES FOR TAKE OFF ARE NOT HIGH AND LITTLE TRIM CHANGE IS REQUIRED WITH THE RETRACTION OF THE LANDING GEAR. THERE IS NO TENDENCY TO OVER-CONTROL EITHER LONGITUDINALLY OR LATERALLY DURING OR IMMEDIATELY AFTER TAKE OFF. /D/ THE AIRPLANE ACCELERATES RAPIDLY TO BEST

241

FIDTP-5-35-E

CLIMB SPEED AFTER TAKE OFF TAKING APPROXIMATELY ONE AND ONE HALF MINUTES FROM BRANCE RELEASE. VISIBILITY THROUGHOUT TAKE OFF AND THE INITIAL CLIMB IS SATISFACTORY EXCEPT FOR THE RESTRICTION CAUSED BY CANOPY STRUCTURE. /E/ IN LEVEL FLIGHT THE AIRPLANE EXHIBITS A SLIGHT BUFFET NEAR THE MAXIMUM LEVEL FLIGHT SPEEDS. A DIRECTIONAL TRIM CHANGE ALSO OCCURS IN THE RANGE OF .91 TO .93 INDICATED MACH NUMBER REQUIRING RIGHT RUDDER TO MAINTAIN STRAIGHT AND LEVEL FLIGHT. THE SEVERITY OF THIS TRIM CHANGE VARIES POSSIBLY DUE TO ASYMMETRIC FUEL LOADINGS. /F/ THE DYNAMIC LATERAL DIREC-TIONAL OSCILLATIONS ARE ADEQUATELY DAMPED WHEN THE YAW DAMPER IS FUNCTIONING PROPERLY; HOWEVER THE DAMPER MALFUNCTIONED ON FOUR OF THE ELEVEN PHASE II FLIGHTS. (THIS DAMPER IS UNSATISFACTORY FOR USE IN THIS AIRPLANE. /G/ THE AIRPLANE APPEARS TO DEMONSTRATE MEUTRAL TO NEGATIVE STATIC LONGITUDINAL STABILITY IN THE SPEED RANGE AT 250 KNOTS TO 340 KNOTS INDICATED AIRPSEED AT 35,000 FEET ALTITUDE. /H/ IN MANEUVERING FLIGHT AT ALTITUDE STICK FORCES LIGHTEN WITH INCREASING NORMAL ACCELERATIONS. AT 35,000 FEET AND .9 INDICATED MACH NUMBER FORCES ARE SATISFACTORY TO APPROXIMATELY 2.5G BUT GO TO ZERO BY 3.0 TO 3.2G. SIMILAR CHARACTERISTICS WERE NOTED AT .7 INDICATED MACH NUMBER AND LOWER "G" LOADINGS. /I/ BUFFETING IN MANEUVERING FLIGHT AT 47,000 FEET BECOMES SEVERE ENOUGH TO PREVENT ACCURATE GUN SIGHTING AT APPROXIMATELY 2G AND AN INDICATED 0.8 MACH NUMBER. AS "G" IS INCREASED THE DRAG

2

241

FTDTP-5-35-E

INCREASES RAPIDLY RESULTING IN A FAST BLEED OFF OF IAS OR LARGE RATES OF DESCENT IN A TURN. ACCELERATION TO SPEED IS SLOW EVEN WITH AFTERBURNER. /J/ ADVERSE YAW IN ROLLING MANEUVERS IS UNSATISFACTORY CREATING A SLOPPY LATERAL DIRECTIONAL FEEL DURING ROLLS. /K/ THE STALL IS CHARACTERIZED BY A HIGH RATE OF SINK WITH AMPLE WARNING IN A MILD AIRFRAME BUFFET. WITH GEAR RETRACTED AND POWER FOR LEVEL FLIGHT AT 275 KNOTS, 35,000 FEET ALTITUDE AND 25,000 POUNDS GROSS WEIGHT A BUFFET IS EXPERIENCED AT 176 KNOTS AND A RATE OF SINK DEVELOPS AT APPROXIMATELY 140 KNOTS WITH ADEQUATE CONTROL TO APPROXIMATELY 105 KNOTS. IN THE POWER APPROACH CONFIGURATION GEAR DOWN POWER FOR LEVEL FLIGHT AT 180 KNOTS 25,000 FEET AND 24,000 POUNDS GROSS WEIGHT A BUFFET IS NOTICED AT 168 KNOTS WITH A SINK STARTING AT 150 KNOTS AND THE NOSE FALLING OFF TO THE LEFT AT 106 KNOTS. /L/ SUPERSONIC FLIGHT IS ATTAINABLE IN SHALLOW DIVES WITH MAXIMUM POWER. HO UNUSUAL TRIM CHANGES OCCUR AFTER THE DIRECTIONAL CHANGE IN THE TRANSONIC REGION. THE AIRPLANE APPEARS MORE STABLE IN THIS SUPERSONIC REGION THAN IN THE SUBSONIC REALM. ABOVE MACH NO. 1.0 ELEVON EFFECTIVENESS IS DECREASED WITH RESULTANT LARGE DEFLECTIONS AND HIGH FORCES FOR MANEUVERING AND DIVE RECOVERY. /M/ AILERON FORCES ARE SATIS-FACTORY IN ALL REGIONS OF FLIGHT. THE RUDDER FORCES ARE SLIGHTLY LIGHT OR THE RUDDER TOO EFFECTIVE IN THE SUBSONIC REGION. ELEVA-TOR FORCES ARE TOO LIGHT IN THE SUBSONIC AND TRANSONIC REGIONS BECOMING TOO HIGH AT SUPERSONIC SPEEDS. THE TRIM RATES ABOUT ALL AXIS ARE TOO SLOW. /N/ THE SPEED BRAKES ARE AS EFFECTIVE AS

241

FIDTP-5-35-E

THOSE OF AN F-86 AIRPLANE: HOWEVER A BUFFET OCCURS AT HIGH SPEEDS WITH FULL EXTENSION. THE ACTUATION TIME FOR THE BRAKES IS TOO LONG. THE OPERATING SWITCH IS UNSATISFACTORY AND SHOULD BE CHANGED TO THE TYPE EMPLOYED IN F-86 AIRCRAFT. THE SPEED BRAKES ARE NOT AVAILABLE WITH THE LANDING GEAR EXTENDED UNTIL WEIGHT IS PLACED ON THE NOSE GEAR. /O/ IN LANDING THE TURN ON TO FINAL APPROACH MUST BE STARTED EARLIER THAN IN PRESENT DAY FIGHTERS AS A TENDENCY EXISTS TO OVERSHOOT THE FINAL APPROACH. THE RECOMMENDED PATTERN SPEEDS ARE 180 KNOTS ON BASE WITH 160 KNOTS ON FINAL AND 140 to 125 KNOTS AT TOUCHDOWN. WITH A GOOD FINAL AFPROACH THE AIRCRAFT SHOULD BE TOUCHED DOWN AT 130 KNOTS OR LOWER. THE DRAG CHUTE WAS PROVEN UNSAFE ON THE SECOND FLIGHT OF PHASE II AND HAS NOT BEEN USED SINCE. LANDINGS WITHOUT THE CHUTE CAN BE ACCOMPLISHED WITH MODERATE BRAKING ON A DRY 8,000 FOOT RUNWAY. /2/ THE STANDARD DAY PERFORMANCE DATA THUS FAR OBTAINED ARE SUMMARIZED HEREIN. /A/ THE MAXIMUM LEVEL FLIGHT SPEEDS WITH AFTERBURNING ARE 0.96 TRUE MACH NUMBER AT 15,000 FEET and 0.97 MACH NUMBER AT 25,000 FEET. WITH MILITARY POWER THE LEVEL FLIGHT SPEEDS ARE 0.93 TRUE MACH NUMBER AT 15,000 FEET, 0.94 MACH NUMBER AT 25,000 FEET, AND 0.90 MACH NUMBER at 40,000 FEET. /B/ THE BEST CRUISE MACH NUMBER AT 40,000 FEET IS 0.72 WITH A RANGE AT .35 NAUTICAL AIR MILES PER POUNT OF FUEL. /C/ THE RATE OF CLIMB AT 25,000 FEET WITH THE SPEED FOR BEST CLIMB IS 13,400 FEET PER MINUTE. THE TIME TO CLIMB TO 40,000 FEET FROM BRAKE RELEASE IS 4.7 MINUTES AND THE TIME TO

241

FIDIP-5-35-E

CLIMB TO THE COMBAT CEILING AT 48,000 FEET (500 FEET PER MINUTE) IS 8.5 MINUTES. /D/ THE STATIC THRUST OF THE J-57-P11 ENGINE INSTALLED IN THE F-102 AIRPLANE IS 11,600 POUNDS AT SEA LEVEL WITH MAXIMUM POWER AND 8,400 POUNDS WITH MILITARY POWER. /3/ THE FOLLOWING EQUIPMENT ON THE AIRPLANE HAS MALFUNCTIONED DURING THE PHASE II TESTS CAUSING DELAYS: /A/ THE YAW DAMPER MALFUNOTIONED ON FOUR OF THE ELEVEN FLIGHTS. /B/ THE DRAG CHUTE JETTISONED AS A PACKAGE WHEN AN ATTEMPT WAS MADE TO DEPLOY THE CHUTE AT TOUCH-DOWN. ON THE NEXT FLIGHT THE CHUTE INADVERTENTLY DEPLOYED IN FLIGHT AT 400 KNOTS INDICATED ATRSPEED. THE SHEAR LINK DID NOT FAIL AND THE PARACHUTE WAS JETTISONED BY THE PILOT AFTER SOME DIFFICULTY. /C/ THE COCKPIT PRESSURIZATION IS UNSATISFACTORY IN THAT THE FUNES OBTAINED WITH HIGH ENGINE POWERS INTERFERE WITH THE PILOTS VISION. A FLUCTUATION OF THE CABIN PRESSURIZATION ON LATER FLIGHTS MADE HIGH ALTITUDE OPERATION VERY UNCOMFORTABLE. /D/ THE LEFT FUEL TANK FEEDS AT A GREATER RATE THAN THE RIGHT TANK REQUIRING CONSTANT ATTENTION TO THE FUEL SEQUENCING TO AVOID ASYMMETRIC LOADINGS. /4/ THESE TESTS ARE BEING ACCOMPLISHED WITH THE NORMAL COMBAT LOADING AT TAKE OFF. THE WEIGHT IS IN THE REGION OF 29,900 POUNDS WITH A CG OF 28% MACH. THE FOLLOWING COMMENTS REGARDING PILOT TRANSITION TO THE F-102 TYPE AIRCRAFT ARE BELIEVED PERTINENT. /A/ THE NOSE HIGH ATTITUDE ON TAKE OFF AND LANDING IS NOT NOTICEABLE AND SHOULD IMPOSE NO TRAINING PROBLEM. /B/ GENERAL HANDLING IN THE TRAFFIC PATTERN AND ON APPROACH IS SLIGHTLY

5

241

FIDTP-5-35-E

MORE DIFFICULT THAN THAT OF THE F-86D. /6/ IT IS EMPHASIZED THAT THE ABOVE INFORMATION PARTICULARLY THE LIMIT ALTITUDE CAPABILITY AND THE HANDLING CHARACTERISTICS IS PRELIMINARY AND THAT A COMPLETE EVALUATION CANNOT BE MADE UNTIL THE REMAINDER OF THE PHASE II TESTS HAVE BEEN COMPLETED AND THE DATA REDUCED.

JOHN L. WESESKY, Flight Test Engineer H. A. HANTES, Colonel, USAF

FIDIP

Director, Flight Test and Development

CONFIDENTIAL

242

HEADQUARTERS
AIR FORCE FLIGHT TEST CENTER
DIRECTORATE, FLIGHT TEST AND DEVELOPMENT
EDWARDS AIR FORCE BASE
EDWARDS, CALIFORNIA

COPY

21 January 1955

SUBJECT: Air Force Evaluation of the YF-102A # 53-1787

TO:

Commander
Wright Air Development Center
Wright-Patterson AF Base, Ohio
Attn: F-102 JPO

- 1. During the week of 15 21 January 1955, the Air Force Flight Test evaluation of the YF-102A was conducted at this Air Force Flight Test Center, Edwards AF Base, California.
- 2. One qualitative evaluation flight each was made by Major General A. Boyd, Colonel H. A. Hanes, Lt. Colonel F. K. Everest, Jr. (aborted after 10 min. flight due to malfunction of hydraulic pressure gage), and Captain J. S. Nash. Three (3) quantitative flights were conducted by Major R. L. Stephens, AFFTC F-102 Project Officer.
- 3. This aircraft is the first YF-102A with the NACA ideal body shape incorporating the longer nose, refaired aft section and improved canopy. Weight was reduced synthetically to 27,350 pounds and thrust increased to slightly over 16,000 pounds (before installation).
- 4. The most noticeable improvement in this airplane over the earlier YF-102 is increased performance. The Phase II recommendations to decrease weight, increase thrust and decrease drag have been accomplished. Take-off distance is reduced from 3800 feet normal ground roll and 5,200 feet to clear a fifty (50) ft. obstacle in the YF-102, to 2,500 feet and 3,600 feet respectively in the YF-102A. Maximum speed obtained in level flight was 1.22 Mach number at 40,000 feet. Maximum altitude reached in a straightaway climb was slightly over 54,500 feet with outside air temperature three (3) or four (4) degrees colder than standard. At this altitude the afterburner blew out and the climb was terminated. Corrected to standard day conditions, the rate of climb was approximately 19,000 feet/min. at sea level and decreased to zero at 54,250 feet. Time to climb from brake release to 50,000 feet was just over six (6) minutes, and to 54,000 feet ten (10) minutes were required. This data is shown in Inclosure 1.

GOVERDENTIAL

742

Hq AFFTC ltr to Hq WADC, 21 Jan 55, Subj: "Air Force Evaluation of the YF-102A # 53-1787"

- 5. A simulated intercept mission at high altitude was accomplished. The details of this flight are included as Inclosure 2. This flight indicated that it is possible to intercept a non-maneuvering target of lesser speed between 52,000 and 53,000 feet. At this altitude, the YF-lO2A can do limited maneuvers restricted by 20° to 30° angles of bank.
- 6. Deficiencies in the aircraft are listed below. Many of these are the same as those previously listed in the Phase II report of YF-102 # 52-7995. It is recommended that the following deficiencies be corrected prior to the Phase II flight test evaluation of this aircraft:
- a. The flight control system should be improved to eliminate the longitudinal trim change and the excessively high sensitivity in the transonic speed range, (Mach No. .85 to .98). The maximum power climb speed schedule is in this speed range and with the present control system, it is almost impossible to hold the aircraft on best climb speed. The static longitudinal instability results in a longitudinal stick force lightening as speed decreases through this speed range during maneuvering flight. It would be relatively easy to overstress the aircraft inadvertently because of this trim change.
- b. An acceptable turn coordinator has not yet been installed. The yaw dampener presently works against turn coordination. This is particularly objectionable after rolling maneuvers and during simulated tracking.

The following deficiencies were not fully investigated due to limitations placed on the aircraft by the Contractor. It is recommended that a high priority be given to the correction of these problems:

- c. A duct "buzz", or high frequency vibration, occurs at high speed, above approximately 1.24 Mach Number. Unless corrected, this could result in a speed restriction being placed on the aircraft.
- d. A duct rumble occurs at high subsonic speeds and low power settings, as in a descent.

It is recommended that the following deficiencies be corrected as early as possible, and prior to delivery of the aircraft to tactical units:

- e. Longitudinal, lateral and directional control forces are excessively high.
 - f. Nose wheel lift off force is high.

242

Hq AFFTC ltr to Hq WADC, 21 Jan 55, Subj: "Air Force Evaluation of the YF-102A # 53-1787"

- g. Fuel feeds unevenly from each wing during afterburner operation.
- h. Engine compressor stalls were encountered and must be eliminated.
 - i. No speed brakes are installed on this aircraft.
- j. The fuel quantity indicator is unreliable, particularly at low indications. With the indicator selector in the right or left position, the indicator should show the fuel remaining in that side at all times, even after the low lovel light comes on.
 - k. Para-brake operation is slow and not 100% reliable.
- l. Nose wheel steering has been improved but pedal forces are excessively high.
- m. Visibility has been improved but the spacer between the panels of the windscreen must be extended further aft to eliminate as much reflection as possible.
- 7. Until the deficiencies described in a, b and possibly c above are eliminated, this aircraft is considered tactically unuseable.
- 8. It is re-emphasized that this aircraft was stripped to a weight of 27,350 pounds and had approximately 16,000 pounds thrust. Duplicate performance of the production airplane requires that it meet these same weight and thrust conditions. Every effort should be made by all agencies concerned to keep the weight of the production airplane to an absolute minimum.

FOR THE COMMANDER:

cc: ARDC

2 Incls:

1. Climb Performance

2. Simulated GCI Mission

/s/ ROBERT L. STEPHENS
Major, USAF
F-102 Project Officer

242

Ltr, subj: Air Force Evaluation of the YF-102A #53-1787

(21 Jan 55)

1st Ind.

1 February 1955


OFFICE OF ADC PROJECT OFFICER, Edwards Air Force Base, Edwards, Calif.

TO: Commander, ADC, ATTN: Director, Plans and Requirements, Ent AFB, Colorado

- 1. On 21 January 1955 I flew one qualitative flight on YF-102A S/N 53-1787. The information gained on this flight was given verbally (in part) to General Chidlaw and (in full) to General Bergquist. The AFFTC flight evaluation gives in detail the qualitative and quantitative data obtained on this aircraft. I concur with this report.
- 2. Request that this letter be forwarded to the Commander, Vice Commander, Chief of Staff, DCS/O, and DCS/M for their information.

2 Incls: n/c

/s/ ROYAL N. BAKER Colonel, USAF ADC Project Officer (F-102)

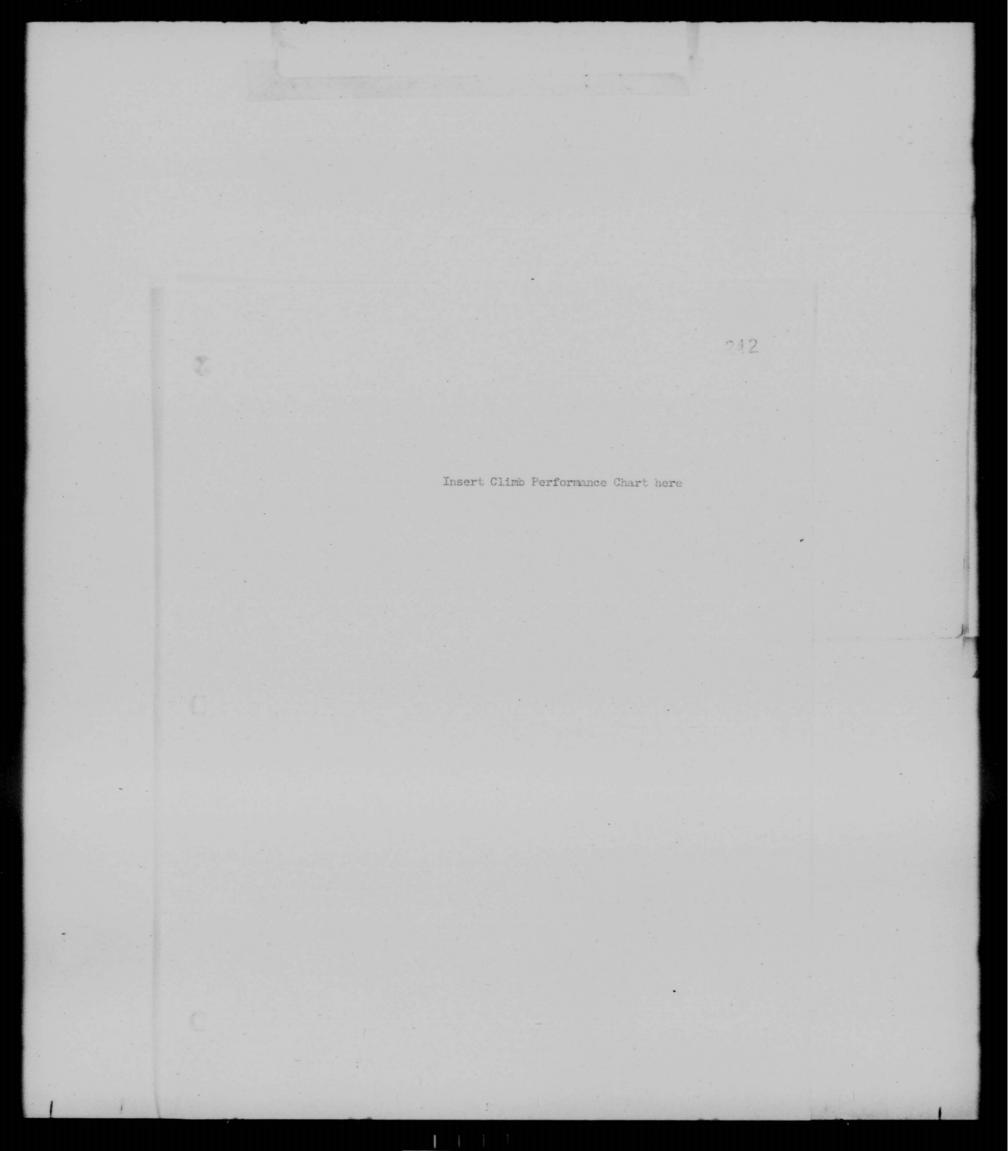

THIS PAGE IS DECLASSIFIED IAW EO 13526

COPY

243

From: HQ ADC ENT AFB COLORADO SPRINGS COLORADO 6 Aug 1954
To: COFS USAF, WASHINGTON, D. C.

(SECRET) ADOPR 1385 . Reference your message AFDRQ-AD 59234. Speed and Altitude Figure quoted for the F-102A do not appear acceptable to this Hq. The threat which must be expected, as accepted by this command, is 53 to 55 thousand feet over target at speed of .78 to .8 Mach. The F-102A must be capable of Mach. .98 at 52,000 feet and be able to guide Falcon to target at 55,000 feet or it must be capable of .97 Mach. at 55,000 feet. It must have sufficient maneuverability to perform at least two passes on a single target. The design load factor of this aircraft must permit required combat maneuvers at low altitudes and high speed. Any performance less than this will not be acceptable to the Air Defense mission. If the F-102A cannot produce a kill at 55,000 feet every effort should be made to speed up development and procurement of F-102B or like aircraft.

COPY

244

ADOPR

18 Sep 1954

SUBJECT: (Unclassified) Evaluation of F-104 for Air Defense

TO:

Commander
Air Research and Development Command
P. O. Box 1395
Baltimore 3; Maryland

- Reference is made to your letter, subject as above, 23 August 1954.
- 2. This headquarters does not have sufficient technical information upon which an evaluation of the F-104 as an air defense weapon can be mide. Based on the limited knowledge available, it does not appear that this aircraft could be expected to meet the performance and electronic criteria established for all-weather interceptors without seriously jeopardizing its present design performance.
- 3. There is an urgent need for a medium range interceptor which has sufficient speed and maneuverability to perform combat and attain kills at 55,000 feet. This altitude is consistent with the evaluated capability of the Type 37, 39. None of our present interceptors nor the predicted performance of the F-102A meets this requirement. The F-104A with modified scoops and the F-100I may possibly achieve this capability.
- 4. It is recommended that the F-104A and all others of this type be thoroughly considered in attempting to obtain an interceptor to meet the above urgent requirement. This aircraft would be considered as interim to the F-102B and should be introduced so as to replace present interceptors and the F-102A as rapidly as possible.
- 5. The aircraft is suggested as interim on the basis of ADC's standing requirement for an interceptor capable of combat under all weather conditions from the ground to 60,000 feet and on the assumption that the F-102B will meet all our requirements in this respect.

FREDERIC H. SMITH JR. Major General, USAF Vice Commander

COPY

244

AIR RESEARCH AND DEVELOPMENT COMMAND
Post Office Box 1395
Baltimore 3, Maryland

RDTSD

23 Aug 1954

SUBJECT: Evaluation of F-104 for Air Defense

TO:

Commander
Air Defense Command
Ent Air Force Base
Colorado Springs, Colorado

- 1. Reference is made to the attached wire from Headquarters USAF dated 10 August 1954. This Command is evaluating the capability of the F-104, as an air defense weapon, from the viewpoint of technical feasibility and availability. Since an evaluation of this type is so largely dependent on operational factors, your recommendations are requested as to:
- a. How this weapon would fit into programmed electronic environment. Data link should be considered as a possible requirement in the over-all tactical employment of a weapon of this type.
- b. The degree of "sophistication" desirable, i.e., the relative priority and requirement for autopilot, radar tie-in or CSTI, air to air identification, AILS, AGCA, and lead collision and/or lead pursuit firing of rockets or guns.
- c. Possible tactical employment and total quantities desired to complement the F-lOOI, F-lOII and F-lO2 type interceptors.
- d. The desirability, from an operational standpoint, of pursuing a development program of this type.
- e. Possible other operational inputs which might influence a decision on this system. (Secret)

244

HQ ARDC, RDTSD, Subj: Evaluation of F-104 for Air Defense

2. It is our desire that your recommendations be integrated with the results of our study on this subject. Our final recommendations will be coordinated with you prior to submission to Headquarters USAF. (Unclassified)

1 Incl Cy msg for HQ USAF dtd 10 Aug 54 (S) /s/ THOMAS S. POWER -Lieutenant General, USAF Commander

2

COPY

244

HEADQUARTERS AIR RESEARCH AND DEVELOPMENT COMMAND Baltimore, Maryland

INCOMING CLASSIFIED MESSAGE

RC 11/10 AUG RH RH RH

PRIORITY 091552z AUG

10 AUG 54

FM HQ USAF WASH D C TO COM ARDC BALTO MD

AFDRD-AD ATTN RDTSD INFO COM WADC WP AFB OHIO ATTN WCSF

/S E C R E T/ CITE 59619. THIS HQ CONSIDERING POSSIBILITIES OF F-104 AS AN ALL WEATHER INTERCEPTOR OF INTERIM LIMITED CAPABILITY WHICH MIGHT BE USED TO AUGMENT AIR DEFENSE FORCES EQUIPPED WITH F-102, F-101 OR F-1001 AIRCRAFT. ENVISIONED THAT F-104 BASIC AIRFRAME CONFIGURATION WOULD REMAIN ESSENTIALLY AS IS AND THAT DEVELOPMENT PROGRAM WOULD PROCEED AS FOLLOWS:

- A. INITIAL MODELS WOULD POSSESS THE BEST "AW" CAPABILITY THAT COULD BE ATTAINED BY INSTALLING ARMAMENT AND EQUIPMENT AVAILABLE NOW AND IN NEAR FUTURE. THE RESULTING "AW" CAPABILITY MIGHT BE LIMITED. FOR INSTANCE TO PROVIDING BLIND FIRING ONLY FROM ASTERN OR MIGHT BE LIMITED TO VISUAL FIRING AFTER GCI/AI PICKUP.
- B. ULTIMATE MODELS WOULD POSSESS A TRUE ALL WEATHER CAPABILITY ALTHOUGH PROBABLY REMAIN LIMITED IN RADIUS AND ARMAMENT LOAD. THIS ALL WEATHER CAPABILITY TO BE ATTAINED BY INTENSIVE PROGRAM OF MINATURIZATION OF EQUIPMENTS PERMITTING ALL REQUIRED EQUIPMENTS TO BE PACKAGED IN F-104. REQUEST WITHIN 30 DAYS A STUDY OF F-104 POSSIBILITIES INCLUDING:
- A. AIRCRAFT PERFORMANCE (STUDY WILL ALSO CONSIDER POSSIBLE USE OF GENERAL ELECTRIC J-73 ENGINE.)

Page 1 of 2 pages

244

- B. ESTIMATE OF INITIAL, INTERIM AND ULTIMATE "AW" CAPABILITIES
 IN TERMS OF ARMAMENT, FIRE CONTROL SYSTEMS AND GROUND ENVIRONMENT
 CAPABILITY.
- C. DEGRADATION OF DAY FIGHTER CAPABILITIES WITH INCREASE IN "AW" CAPABILITIES. DESIRE TO RETAIN MAXIMUM DAY FIGHTER CAPABILITY.
- PROGRAMS. THE ABOVE AIRCRAFT SHOULD BE CONSIDERED AS SEPARATE AND DISTINCT FROM THE DAY FIGHTER, AIR SUPERIORITY VERSION OF THE F-104 WHOSE COMBAT CAPABILITIES MUST NOT BE COMPROMISED BY THE EXISTENCE OF AN "AW" VERSION OF THE F-104. YOUR OPINION REGARDING ADVISABILITY OF HAVING A COMPANION AIRCRAFT SUCH AS F-104 IN THE ALL WEATHER INTERCEPTOR PROGRAM IS REQUESTED.

Page 2 of 2 pages

COPY
Easy reading copy made

245

From: COMMANDER ADC

13 Oct 1954

To: COMMANDER, ARDC, BALTIMORE

(SECRET) ADOPR 1800 . For RDGRD. Reference our letter, Subject: "Evaluation of the F-104 for Air Defense", 18 Sep 54. ADC has an interest in the XF-104 type interceptor and desires every opportunity to evaluate the potential of the Ar-10, to determine its capability in performing an Air Defense Mission. The predicted performance of the F-102A makes it imperative that this command obtain an early evaluation of this and any other aircraft which may offer a solution to our necessity for obtaining kills at altitudes of 55,000 feet and above. Approval is requested for Colonel Royal N. Baker, 8315A, and Colonel William H. Powell, Jr., 4768A to fly the XF-104 at Edwards AFB during Phase II testing. Colonel Powell is Chief, Weapons Division, Plans and Requirements, Hq ADC and is responsible for submitting requirements for all Air Defense Weapons Systems. Colonel Baker is ADC Project Officer for the F-102 and is closely related with weapons requirements. Both have extensive background in fighters and are current in jet aircraft.

> C. F. HUMPHREYS Captain, USAF Asst Command Adj

COPY

DEPARTMENT OF THE AIR FORCE HEADQUARTERS UNITED STATES AIR FORCE WASHINGTON 25, D. C.

245

AFCGM

29 November 1954

SUBJECT: Air Force Nomenclature for Guided Missiles

TO:

Commander

Air Defense Command Colorado Springs, Colorado

1. This headquarters has recently reviewed the existing nomenclature for USAF guided missiles and unit designations, and has adopted the following official nomenclature.

Equipment

Unit Designations

TM-61	(Tactical Missile)*
SM-62	(Strategic Missile)*
SM-64	(Strategic Missile)*
	(Strategic Missile)*
	(Interceptor Missile)*
GAR-1	(Guided Aircraft Rockets)*
	(Guided Aircraft Missile)

Tactical Missile Sq (Wg)
Strategic Missile Sq (Wg)
Strategic Missile Sq (Wg)
Strategic Missile Sq (Wg)
Air Defense Missile Sq (Wg)
(No squadron designation required since these missiles are aug(mentations of armament.

- * The words in () are added here for clarity and are not part of the official nomenclature. It should be noted that the term "Pilotless Aircraft" has been dropped from official use at far as guided missiles are concerned. Changes to existing documents are to be accomplished only as revisions are made. New documents will reflect this new nomenclature. In the near future, the existing AFOGM Letter 452.1, subject: AF Policy Guided Missiles, dated 16 September 1952, and AFL 136-3, subject: Armament, dated 18 September 1952, will be amended.
- Each major command will be responsible for dissemination of this information to subordinate commands, services and air divisions.

/s/ CHARLES M. McCORKLE

Brigadier General, USAF
Deputy Asst Chief of Staff
for Guided Missiles

COPY
Easy reading copy made

247

From: COMMANDER ADC

23 Dec 1954

To: CHIEF OF STAFF, USAF, WASHINGTON, D. C.

(SECRET) ADOPR 3162 . Reference your message AFOOP-OP-D 54801 dated 14 Dec 1954. Your questions A, B and C answers as part 1, part 2 and part 3. Part 1. (A) All future ADC interceptors should have capability of launching mixed loads of IR and Radar Falcon missiles. (B) With regard to INV interceptors, sufficient information is not available within this Headquarters to evaluate desirability of Falcon IR COMB. Before any decision can be made the following factors should be considered: extent of airframe and FCS modifications; performance degradation; utilization of simpler missile such as Sidewinder; availability to ADC of tactically useable weapon. Only after receipt of technical and production data can evaluation be made. Fart 2. ADC medium range interceptor missiles must have two capabilities: altitude and range. Prior to 1960: altitude of at least 60,000 feet and range of at least 50 nautical miles. Talos appears capable of this altitude and range requirement. Talos is extremely desirable since most other ADC weapons are delinquent in altitude capability. Part 3. ADC has requirement for 50-53 squadrons of long range interceptor missiles by end 1961. Bomarc being two to three years later than Talos allows for sizeable buildup in Talos capability. Therefore it is most desirable to

247

(SECRET ADOPR 3162) (Cont'd)

have Bomarc and Talos in the same system. As Bomarc becomes available it will phase Talos out of most critical areas into less critical areas and eventually replace Talos. As Talos is phased out these weapons will be channelled into ADC unit training program and returned to stockpile for other AF uses.

JAMES S. PURDUM Major, USAF Asst Command Adj

2

COPY
Easy reading copy made

248

From: HEADQUARTERS USAF, WASHINGTON, D. C. 28 Oct 1954
To: COMMANDER, AIR DEFENSE COMMAND, ENT AFB, COLORADO

/SECRET/ FROM: AFDRQ-AD/F 52957 . Recent JCS decision (JCS-1620/95, dated 9 September 54) assigns to USAF responsibility to develop, procure and employ surface-to-air missiles as required by its assigned functions. For the air defense of the Continental U. S. these missiles would be effective beyond ranges of approximately 50 nautical miles. Land-based version of Navy-developed Talos surface-to-air missile is being considered for Air Force use. As improvement for initial Talos, contractor has proposed landbased Talos system (high explosive and atom. versions) with range of approximately 100 nautical miles and interception capability up to 70,000 feet. Feasibility of this much range increase being investigated by ARDC. Preliminary estimate of Talos unit strength is 7 officers and 75 airmen for a 2 launcher, 60 missile Talos installation with appropriate control and support equipment. Landbased system is to be compatible with semi-automatic ground environment (Lincoln Transition System) as well as earlier nonautomatic nets. Operational concepts for such a missile are now in preparation. Request you provide ADC requirement for such a surface-to-air missile based on Air Force operation. (a) Qualitative - operational characteristics desired. (b) Quantitative -Assume missile could become available for USAF operation in 1958.

248

AFDRO-AD/F 52957 (con't)

Request desired unit build-up for first four years. Current status of R&D programs indicates there is approximately 2 years difference in operational availability of Talos and F-99. Reply should be forwarded by 30 Nov 54.

COPY

249

26 Nov 1954

SUBJECT: (UNCLASSIFIED) Requirement for Land Based Talos in Air Defense

TO: Director of Requirements
Headquarters USAF
Washington 25, D. C.

1. References.

a. Letter, Headquarters ADC, ADOPR 471.6, subject: (SECRET) Requirement for Weapons with Atomic Capability in the Air Defense System, dated 6 May 1953, and 1st Indorsement Headquarters USAF, AFDRQ-AD, dated 22 June 1953.

b. Teletype message, Headquarters USAF, AFDRQ-AD/F 52957, dated 28 October 1954.

2. The following requirement is submitted in accordance with Air Force Regulation 57-3, dated 28 May 1951.

3. Introduction.

a. Air Defense Command requirements previously established required the tactical deployment of fifty-three (53) squadrons of pilotless interceptors in the time period 1957 to 1960. The slippage of the F-99 (Bomarc) program, the pilotless interceptor planned and programmed for deployment in air defense, precludes the fulfillment of the established requirement. Therefore a requirement exists for an interim pilotless interceptor with a range capability of greater than fifty (50) nautical miles. Furthermore, this interim weapon should have a high performance capability as an augmentation weapon in the future pilotless interceptor program. It appears that this requirement can be met with the land based Talos with extended range.

b. It is conceivable that Talos would be deployed in the proposed F-99 Base environment, thereby minimizing special installation facilities. Talos deployment would proceed until the Bomarc Type weapon production, along with the Talos production, filted the requirement for the Pilotless Interceptor program. The Talos production would be phased out at this time and the ADC inventory would be diverted into the Air Defense Command Pilotless Interceptor Training Program.

249

Hq ADC, Subject: (Unclassified) Requirement for Land Based Talos in Air Defense

4. Objective.

- a. To possess in the Air Defense Command during the period 1957 to 1960 a pilotless interceptor capability.
- b. To possess in the Air Defense Command during the period 1957 to 1960 an interim pilotless interceptor pending the fulfillment of previously established requirements.
- c. To enable the Air Defense Command to activate and man pilotless interceptor bases and sites which will be required for future programs.
- d. To possess in the Air Defense Command a pilotless Interceptor for tactical deployment and use which, in addition to providing the required operational, maintenance and logistics training for future units, will also provide a stockpile of weapons for the pilotless interceptor training program, and for the further development and evaluation of Logistic and Operational Plans for the use of pilotless interceptors.

5. Description.

a. Nomenclature. Talos, Surface to Air Missile; Extended Range Land Based Version of the Navy Talos Program.

b. Purpose.

- (1) To provide the Air Defense Command with operational Pilotless Interceptor units equipped with a weapons system possessing high kill probability.
- (2) To provide an interim pilotless interceptor for tactical deployment to cover the slippage of programs established to meet air defense requirements.
- (3) To provide an interim weapon for deployment on pilotless interceptor bases which must be activated for phase-in of the ultimate weapons system.
- (4) To provide a pilotless interceptor, which in addition to providing an active air defense capability with a high kill probability will:

2

245

- (a) Have a high value in maintaining a state of unit operational readiness in air defense pilotless interceptor squadrons thus providing combat ready units for phase-in of the higher capability weapon.
- (b) Provide a stockpile of weapons for use in the pilotless interceptor training program.
- (c) Be used to further develop and evaluate Logistic and Operational Plans for Pilotless Interceptors.
- (5) To provide the Air Defense Command with a pilotless interceptor capability on a 1A priority under AFR 80-11.

c. Performance.

- Operational reliability of 75% or greater and a kill probability of .50 or greater per interceptor.
- (2) A range greater than fifty (50) nautical miles through 1957 and a range greater than seventyfive (75) nautical miles after 1957.
- (3) A speed of 2000 feet per second or greater.
- (4) An altitude capability of approximately 60,000 feet through 1957.
- (5) An altitude capability greater than 60,000 feet after 1957.

d. Design Features.

- The Talos weapon as presently designed but incorperating the necessary engineering changes required to provide for increased ranges.
- (2) The necessary improvements in mid-course guidance to provide the accuracy required to provide a kill potential greater than .50 per interceptor.
- (3) A semiactive radar seeker for Talos equipped with a standard warhead.
- (4) Capable of being equipped with an atomic warhead.

3

249


- (5) Capable of being launched from the site and revetments to be used by the ultimate F-99 (Bomarc) Base installation, with a minimum of engineering changes required for phase-in of the F-99 (Bomarc).
- e. Special Features.
 - (1) The Talos must be compatible with the F-99 Base installations.
 - (2) The Talos weapon system must be compatible with the air defense ground electronic environment in use during the time period of the weapons deployment.
- f. Proposed Basis of Issue. One hundred twenty (120) Talos per squadron in up to fifty-three (53) squadrons (this quantity requirement is dependent upon the deployment of the F-99 and/or the L-253 toward the required activation of fifty-three (53) squadrons of pilotless interceptors.)
- g. Method of Meeting the Requirement. It is recommended that the land based Talos with extended range be given a top priority for development, testing and production.
- 6. The land based Talos with extended range will provide the Air Defense system with an early capability at high altitudes and at extended ranges which cannot be obtained with other weapons. It will provide Pilotless Interceptor capability in the air defense system regardless of the progress of other pilotless interceptor programs. The Talos, when developed to be employed in the Bomarc Base environment, will provide a weapon for the extensive Air Defense Command Pilotless Interceptor Program requirement. Therefore this headquarters requests that a high priority be established to develop Talos with extended range for first unit deployment in 1957.


Commander, Air Research and Development Command

Deputy Chief of Staff for Guided Missiles, Headquarters USAF

Director of Research and Development, Headquarters USAF

FREDERIC H. SMITH, JR. Major General USAF Major General Vice Commander

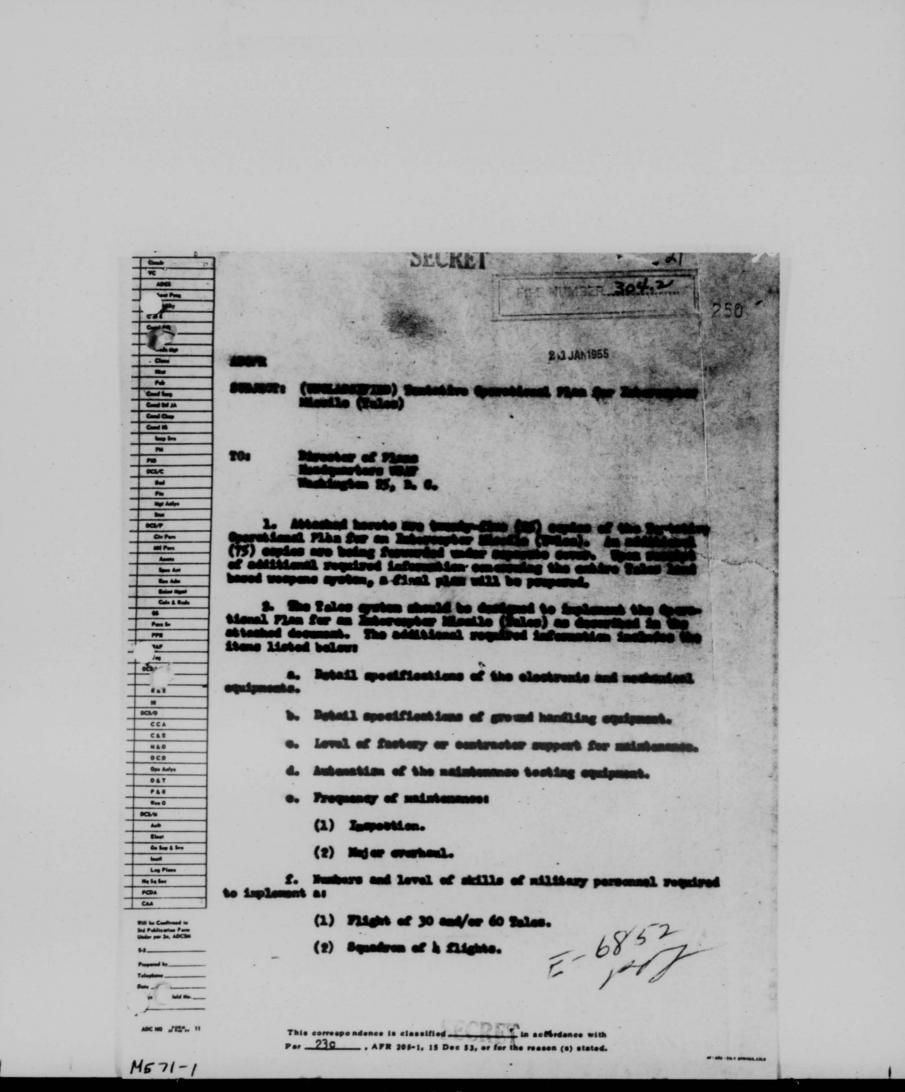

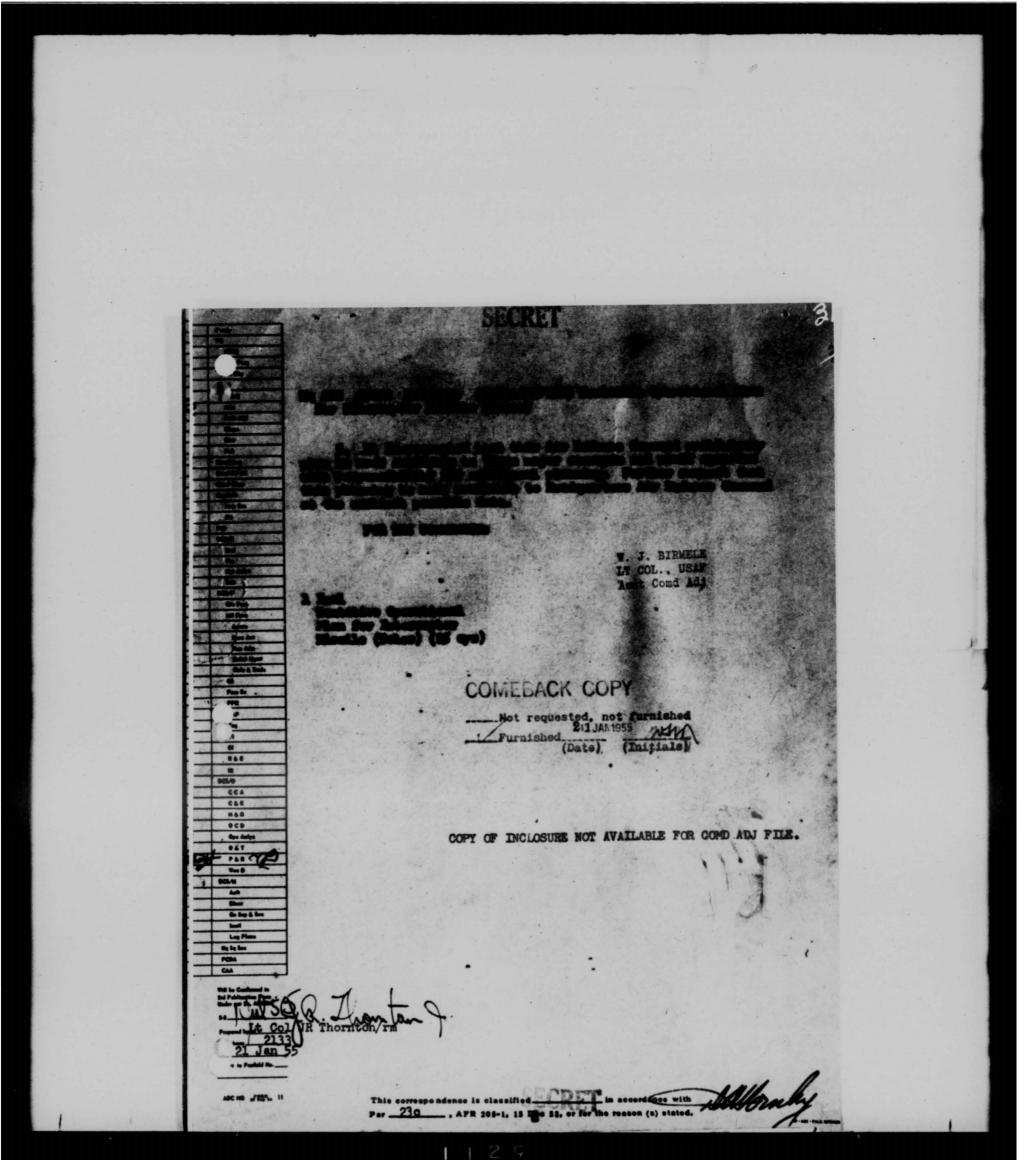



DEPARTMENT OF THE AIR FORCE HEADQUARTERS UNITED STATES AIR FORCE WASHINGTON 25, D. C.

250

& her 1054

SUBJECT: (U) Operational Concept for USAF Area Intercept Missile (TALOS)

TO:

Commander
Air Defense Command
Ent Air Force Base
Colorado Springs, Colorado

1. The attached Operational Concept on the USAF Area Intercept Missile (TALOS) has been developed in accordance with AFR 5-47 and is forwarded for your information and necessary action. It is desired that you develop an operational plan on the USAF Area Intercept Missile (TALOS) in accordance with AFR 5-47.

2. This plan must be in this Headquarters not later than 15 January 1955.

BY ORDER OF THE CHIEF OF STAFF:

1 Incl
Opnl Concept for
USAF Area Intercept
Missile (TALOS) (5 cys)

EARL H. DUNHAM Colonel, USAF

Chief, Defense Branch Operational Plans Div., D/O

34694

Sacl I.b.

250

OPERATIONAL CONCEPT USAF AREA INTERCEPT MESILE (TALOS)


I. GENERAL DESCRIPTION.

1. TAIOS is an interceptor missile which will be integrated into the overall defense system to augment the manned interceptors. It is a remist-propelled, supersonic, surface-to-air guided missile designed to intercept and destroy enemy aircraft at horisontal ranges up to 100 NH at altitudes up to 80,000 feet and at elevation angles over water as low as one to two degrees.

2. TAIOS is launched at elevation angles from 25 to 55 degrees. It is boosted to a nominal flight speed of Mach 2.4 by a solid fuel booster rocket providing impulse for the first four seconds of flight. Stabilisation during the boost period is accomplished by means of movable jet vanes in the booster nozzle, coupled to external booster fins. After boost, the rocket sutomatically separates from the missile, and the missile is ramjet-propelled at a speed of Mach 2.4 at a cruise altitude of 70,000 feet. The missile is capable of maneuvering at greater than 30°s in any direction up to 30,000 feet and approximately AG°s at an altitude of 70,000 feet.

3. The general launching configuration of the TAIOS missile assembly is as follows. The forward annular compartment of the missile houses an annular rod-type warhead, guidance and houing electronics, also trical power supplies, and the proximity fuse. The after compartment contains the hydreulic and fuel-system equipment and the fuel tank. The forward electronic equipment is packaged in sections installed in an integrated arrangement designed to facilitate checkout maintenance, and repair. Like sections are physically and functionally interchangeable to parall replacement in the event of equipment failure during checkout. Interchangeable wings and fine are provided which can be quickly attached to or removed from the missile booster assembly.

SECRET

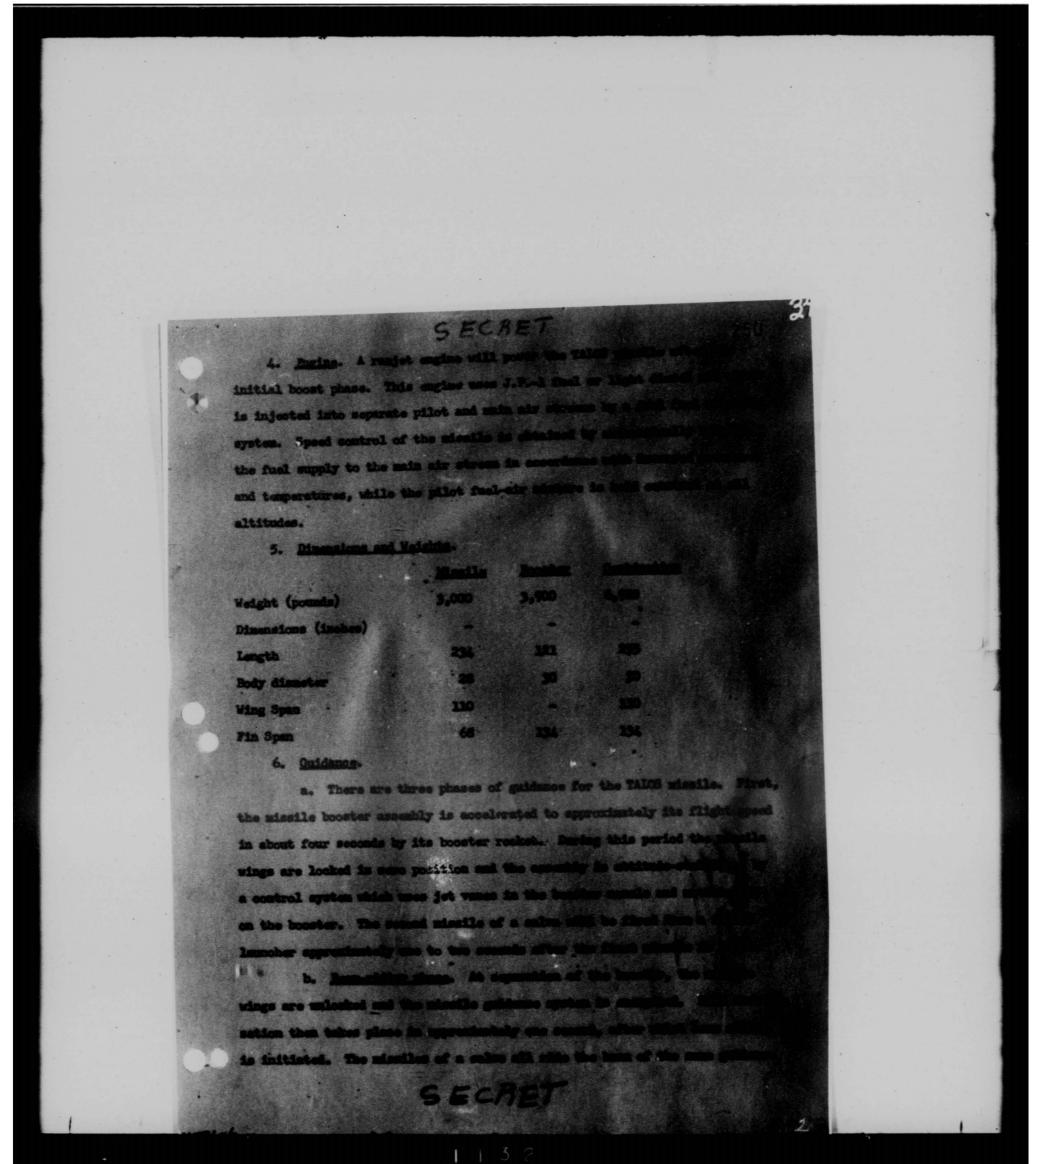

250

position of the guidance been is programmed continuously through flight so that the missile follows an up and over trajectory. This type of trajectory is chosen primarily for fuel economy. In addition, this type of trajectory control permits flexibility in the missile approach to low altitude targets.

- phase by its semi-active interferometer seeker system. Guidance during this horsing phase is obtained from signals reflected from the target by an illuminating radar located at the defense unit. This illuminating radar (AN/SFG-49 initially) is also the same target-tracking radar which provides the precision target-position data required toward the end of the beam-riding phase of guidance. The beam-riding system is automatically turned off after the target has been acquired by the range-acquisition unit of the seeker and from them on the homing system guides the missile to the target. The signals from the guidance transmitter are still used during this phase so as to provide a time reference for the range-tracking unit.
 - d. Another version of the TAIOS missile (termed TAIOS-W) carries an atomic warhead which is command detonated. Initial versions of TAIOS-W will not be equipped with a terget seeker.

II. ORGANIZATION.

1. The TAIOS is designed as an interceptor missile and will be part of the unit equipment of interceptor missile squadrons. The squadrons will be composed of one or more TAIOS defense units, each of which will stock 30-60 assembled missiles in ZI installations. Actual quantities will be decided at a later date. It is anticipated that the personnel requirements will be similar to BOMARC squadrons. It will require approximately seven (7) officers and seventy-five (75) airmen to operate TAIOS defense unit.

250


2. Formation of new organizations of this type will require adjustments in personnel and facilities. The TAIOS (with atomic verbend) will require special handling and security measures which can be adjusted more assumably after experience has been bitained. It is expected that personnel to mintain and install the atomic verbends will be integral to the personnel allowance of each unit.

III. OFFRATIONAL LIMITATIONS:

- 1. Performance Characteristics.


 - d. Launching Elevation Angle 25° to 55°.
 - o. Can pull 80 below 30,000
 - f. Can pull 4.50 below 55,000
 - g. Climb Speed Approx. 2,000 Pt/Sec.
 - h. Launch weight with boost 6,900 lbs.
- 2. Invariance to Formy Tection.
- a. The boundary condition on the TAIGS version system design must provide a defense invariant to cope with away testion. This test has four main factors - high altitude, low altitude, high speed, and formation absent
- b. High Altitude. TAIOS can emerge tempts up to 60,000 feet. The engine has operated smoothly in flight to 67,000 feet, and although limited to less than maximum managerability at these allitudes, the second has responded with 4.50 accolerations at 55,000 feet. So difficulty to expected with non-managering tergets, nor with minesyaring tergets unless the managering tergets that of the missile, which seems unlikely for some time.

SECHET c. Lou Altitude. There are major limitations in any centrally vectored guidence system. This is the to target elevation tracking at low engles. This limited to in TAIOS due to its two-phase guider The shrinkage of effective intercept r its effect on firepower are very existent. A ability to maintain firspower close-in bear trainable launchers provides TAIOS with the shallto to targets at relatively short ranges. In spite of tide, power is still appreciable. As long as the treating and it are combined in a tracking redar which must be more there is little that can be done to improve this site duction of SAGE and the integration of TAIGS into the possible to vector the illuminator from the natural to is then directly determined by a problem in civil engineering high an elevated illusinating site is it economically feasible to me lieu of local high terrain it seems reasonable, on the basis of micro-link experience, to contemplate illuminators on 500 feet towers. In this case a target at 375 feet could be illuminated out to 50 neutical wiles, are full TAIOS firepower down to this elaitade. A final low angle consideration is that of me over land. The low angle limitations of pulse senters are a the pulse interferenceer socker used in TAIOS is no en a low angle adventages of a semi-active guid rporate a CV seeker for any extensive use ever h supported for nearly two years, and will cultilate in t ferometer ecoker. This seeker may be eveliab missiles delivered to the Air Pe

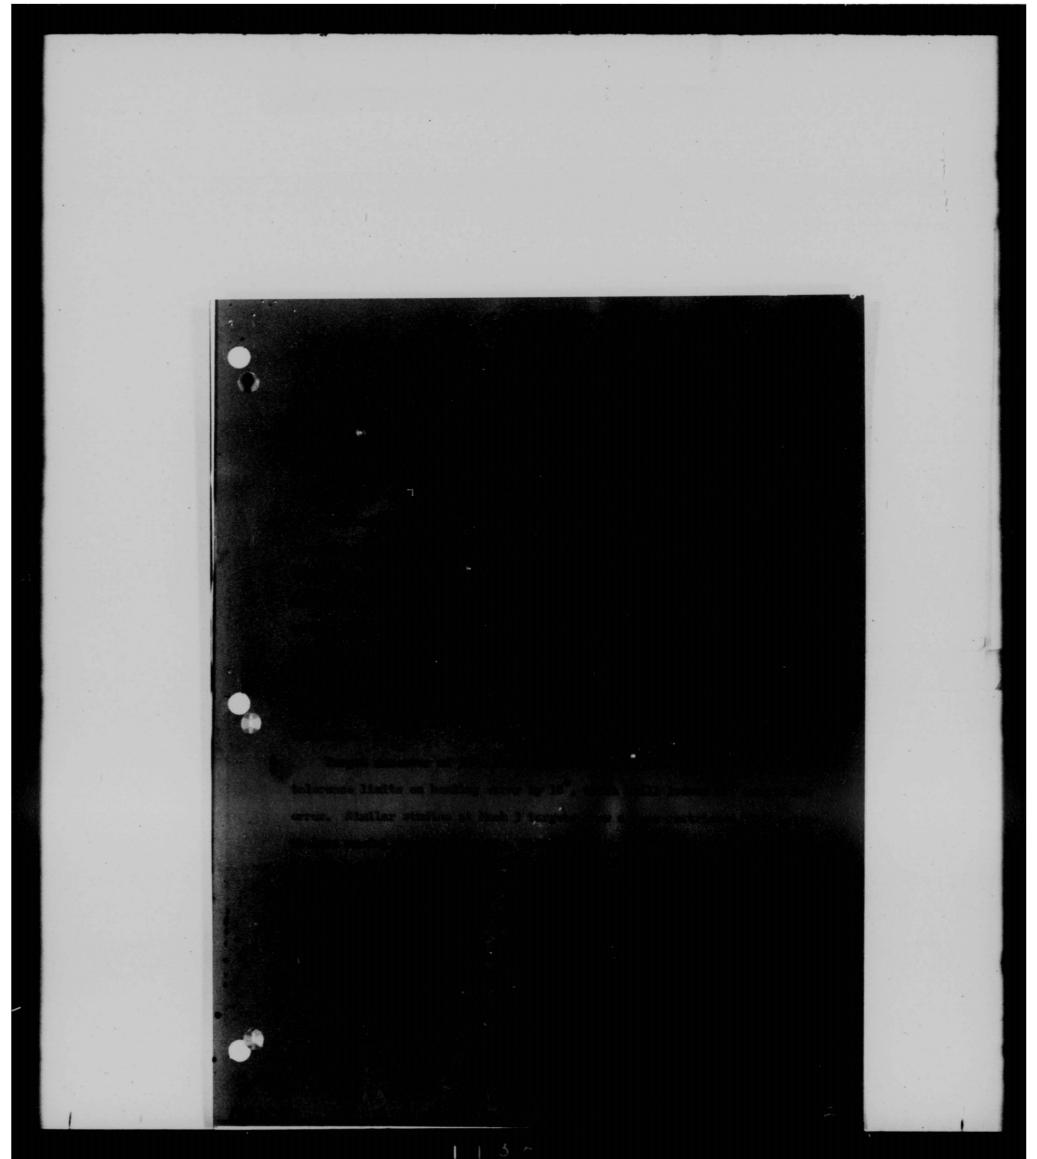


THIS PAGE IS DECLASSIFIED IAW EO 13526

SECRET type warhead also has excellent kill oupsbilittles against single to 50-mile range version of this model is now entering the product is still the only imediate and certain amount to the problem of the TAIGS seeker in the face of properly special formations. The and higher kill probability inherent in the use of the sh obvious. This is especially apparent at high altitude to standard where limited maneuvershility makes the disgrindrettes making the an order of magnitude. 3. Pure and Verhead. a. The fune is of the microseve pro in the missile surface contain the six fuse enteres. damage from the warhead blast, it is planned to find the information also to the fuse in order to trigger the teach time in flight for any approach to the targets. b. The TAICS smuler rod-type warhead weighs 120 pounds, and aparts high-velocity red segments. The rods are designed to inflict major struct demage due to blast against tergets which are passed at small miss distances. This werhead, therefore, consists of an explosive oberge and rate a lengthries along the missile. The rods form the contra matter of the com containing this charge. Firing of the Schoolse arming device initiates a warhand booster thick in the c. A new type of rol warherd to also a arbend expels one continuous sirele of real t in the style of a folding ruler or velstances about 4,500 feet/Sec. Preliminary tests for allistics (including firings

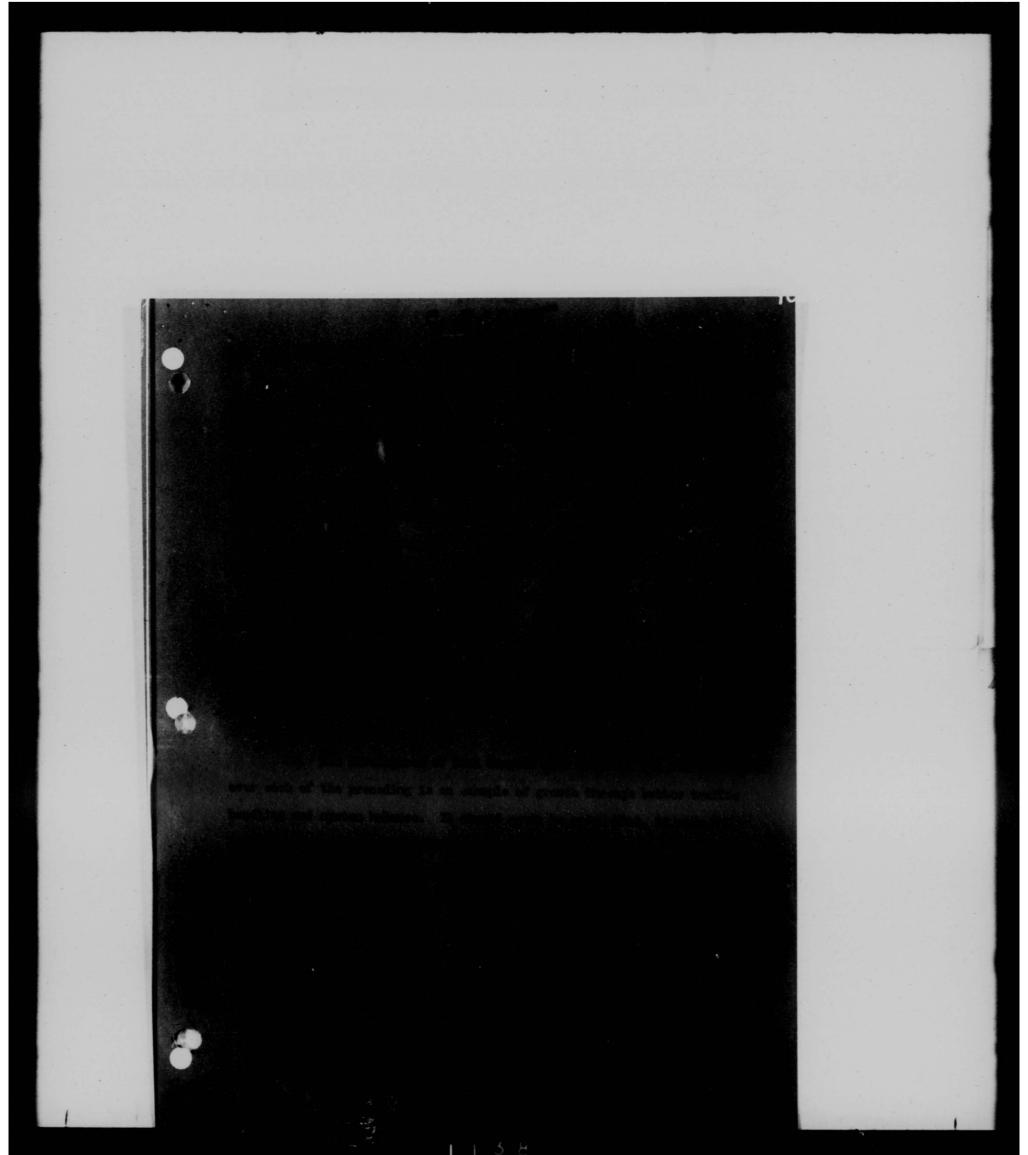

THIS PAGE IS DECLASSIFIED IAW EO 13526

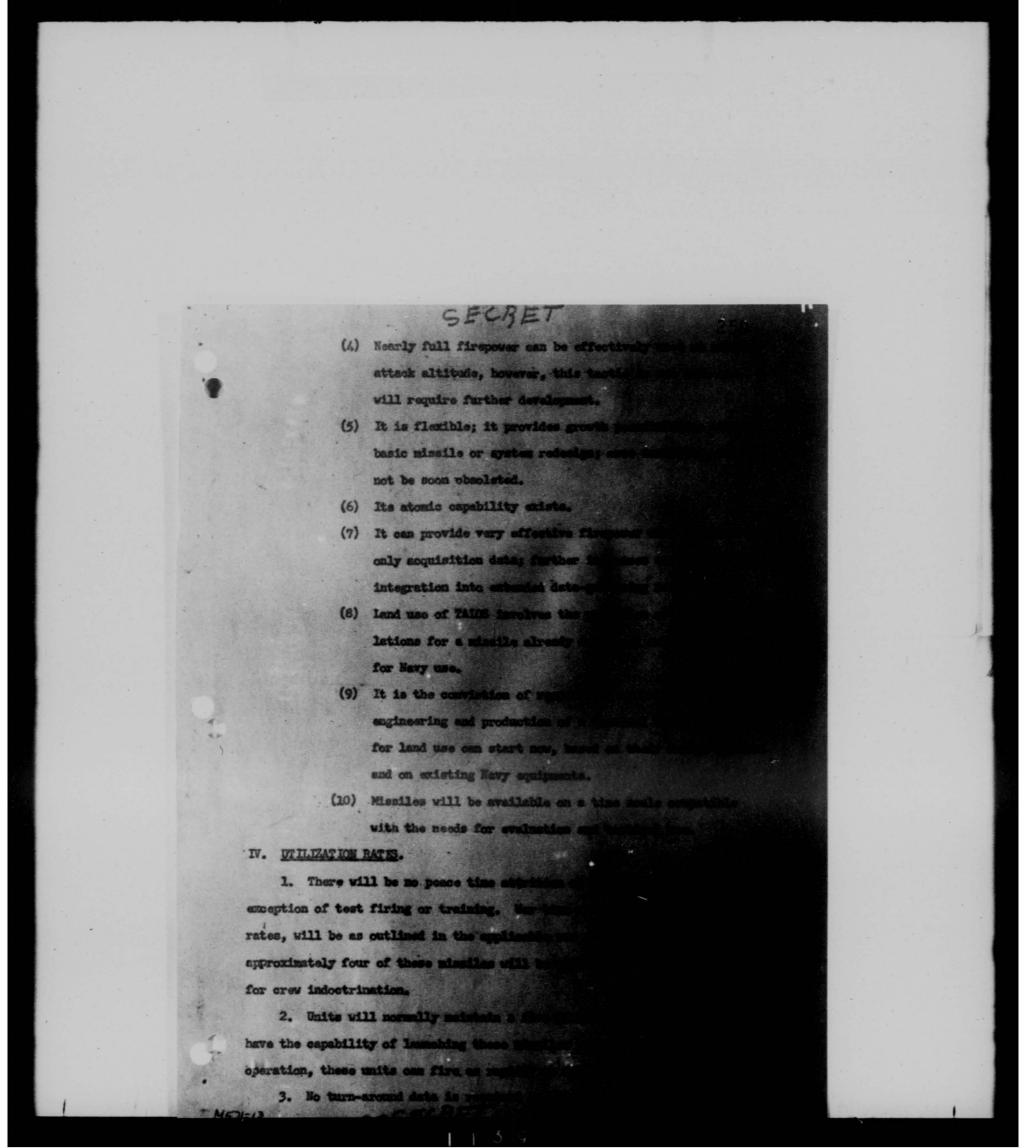

250

V. DEPLOYMENT.

1. The use of TALOS for areas other than the continental United States is under current consideration. Present indications are that equipment for the first TALOS squadron may be available late in Calendar Year 1957. The latest information on this subject may be found in current programming documents.

R. E. KOON

Brigadier General, USAF Deputy Director of Operations, DCS/O

Document number:

Obtained by:

R. W. Smith

APL, Dr. C. F. Meyer, March 1954

Nature of Privileged Information:

APL data supplied for use of Project Combine and other members

of the Air Force

Limitations on use:

Prepared for use of RAND, AF, 5 APL

SECREI

COST ESTIMATES OF TALOS-TYPE CW C TALOS-TYPE W.
DUAL MULTIPLEX DEFENSE RATTALIONS
(ADC Project Combine)

25

The Talos-type missile used in the Combine Defense Study is of two types:
the Talos-type with CW seeker and the Talos-type W. The organization of the
Talos-type CW battalion differs with method of deployment.

I. Talos-type Cost Systems

It was requested that six types of missile systems be estimated.

The standard Talos-type battalion is to consist of four sites or batteries.

In all cases the same guidance equipment is used for each site.

The six cases are summarized as follows:


TALOS-TYPE BATTALION SYSTEMS

Case No.	Case Type	No.*of Talos- Type CW	No. of Talos- Type W	No. of Launching Buildings	Type of Launching Building		
1	Standard	240	-	4	Double	All together	
2	Standard-dispersed	240	-	4	Double	Two together	
3	Standard-dispersed	240	-	4	Double	Separate	
4	Special-dispersed	360	-	4	Triple	All together	
5	Special-dispersed	480	-	8	Double	All together	
	Standard	-	120	4	Double	All together	400

*These numbers do not include the missiles in depot maintenance.

II. Equipment Facilities

In Cases 1, 2, 3, and 6 each site is to have an equipment facility and two electronics buildings as indicated in sketch.

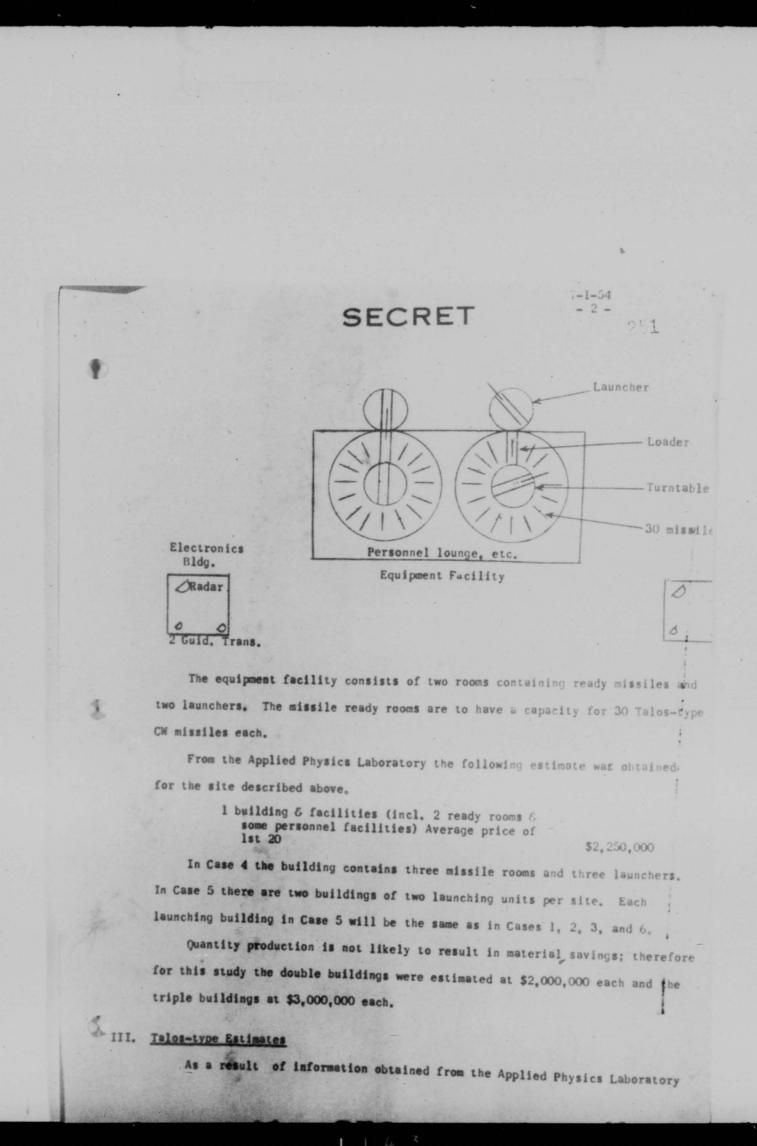

and a previous component study in December 1952 by the Cost Analysis Section, it was decided to use a cumulative average price for the Talos as follows:

Talos-type CN \$100,000 in quantity of 8280 251

Talos-type W 80,000 in quantity of 5880

It is assumed that a 90 per cent improvement curve may be applied to missiles even though there is little or no evidence that there will be improvement in some of the higher quantities contemplated. The estimates may then be approximated by:

Talos-type CW $C_{CW} = 395,000N^{2}$ $C_{W} = 300,000N^{2}$

where

N is the number of missiles a is -0.152

Each missile ready room contains 30 Talos-type CW missiles or 15 Talostype W missiles. In addition to the ready missiles, fifteen per cent more missiles are assumed to be in depot maintenance.

Special Equipment

The Applied Physics Laboratory furnished the following estimates for special equipment.

- A. Launcher & Test Equipment (Average price of first 20)
 - 1. Double Building
 - (2) Launching & handling system at 0.750
 - (1) Missile & D.V. test equipment at 0.400
 - 2. Triple Building
 - (3) Launching 6 handling system at 0.750

(1-1/2) Missile & D.V. test equipment at 0.400

B. Guidance Equipment (Average price of first 100)

- (2) Tracking radars at 0.433
- (4) Simplex computers at 0.223
- (4) Guidance transmitters at 0.245 (Incl. receiver & tracking unit)

0.9

95

Transmission & Communications Equipment (Average price of first 20)

(1) Data transmission system per site . O.

0.100

(1) Defense site communications system

0.030

It is assumed that a 90 per cent improvement curve may be applied to all special equipment. The above estimates may then be approximated by:

1. Double building, special equipment, Con

9,128

2. Triple building, *

TB 12.120

3. Guidance equipment

14,808

4. Trans, & Commun. equipment

0.688

where

R is the number of battalions

a 18 -0.152

Personnel

The Applied Physics Laboratory estimates the on-duty operating personnel

per site to be:

Launcher control
Tracking & radar operators
Guidance transmitter monitors
Tectical control
Guiputers
Tetter
Maintenance & check-out of missiles

Command support and service people will greatly increase this number. It is believed that the personnel requirements will be approximately 500 men for the standard system (Case 1). This has been adjusted for the other five cases as shown above in Section I.

VI. Tslos-type System Estimate

The estimates of the system costs for the Talos-type missile for the six cases and the various quantities required are given in the following tables. It is to be noted that the annual operating costs are through battalion level

			Talos-type CM			Tales-type W
	Case 1	Case 2	Case 3	Case 4	Case 5	Case 6
Initial Investment						
Equipment Facilities	6,00	8.00	8,00	12,00	16,00	6.00
Personnel Facilities	1,50	1,50	1,50	1.65	1.00	1.20
quipment Talos-type missile (Incl. 15% in Maint.) Launching G Test Equipment, etc. Bars, Guidances G Computers Trans. G Comm. Equipment Organizational Equipment	46.508** 9.128** 14.808** 0.668* 0.66	46,506* 9,128* 14,806* 0,688* 0,75	46,508** 9,125** 14,808** 0,668** 0,82	65,008* 12,728* 14,808* 0,668* 0,75	83,508 ⁸ 16,428 ⁸ 14,808 ⁸ 0,688 ⁸ 0,82	19,568 ⁴ 9,125 ⁸ 14,608 ⁸ 0,688 ⁶ 0,54
tocks and Spares Initial Stock Level Installation Maintenance Personnel Supplies Services and Miscellaneous	0.11 0.09 0.05	0,11 0,10 0,06	0.11 0.11 0.06	0.16 0.10 0.06	0,21 0,11 0,06	0,11 0,08 0,04
Spares Talos-type - 20% Launching & Test Equipment, etc 10% Raders, Guidance & Computers - 30% Organiz., Trans. & Comm. Equip.	9,308* 0,918* 4,458* 0,07	9,308* 0,918* 4,458* 0,07	9,308 ⁸ 0,918 ⁴ 4,458 ⁸ 0,08	13,008 ⁸ 1,278 ⁸ 4,458 ⁸ 0,07	16,606 ^a 1,646 ^a 4,458 ^a 0,08	3,928 ⁸ 0,918 ⁸ 4,458 ⁸ 0,06
ransportation	1.75	1.75	1,75	2,25	2,60	1,10
Personnel Training Travel	2.00 0.10	2, 20 0, 11	2.40 0.12	2.20 0.11	2, 40 0, 12	1,60
TOTAL INVESTMENT COST PER DATTALION 80	.88* + 14.4	85.88% · 14.6	85.88ª + 15.0	111.988 + 19.4	138,184 + 24,2	53.58* + 12.0

CLASSIFICATION OF EXPENDITURES FOR TALOS-TYPE DUAL MULTIPLEX DEFENSE BATTALIONS
(Millions of Dollars)

			Tales-type CW			Talos-type W
Annual Operating .	Case 1	Case 2	Case 3	Case 4	Case 5	Case 6
Spares Installation Tales-type Missile - 10% Launching & Test Equipment, etc 10% Radars, Guidance, & Computers - 20% Trans. & Comm. Equipment - 10% Organizational Equipment	0.10 4,658 ³ 0.918 ³ 2.968 ³ 0.078 ³	0,10 4,658° 0,918° 2,968° 0,078° 0,04	0.10 4.658* 0.918* 2.968* 0.078*	0.14 6.508 a 1.278 a 2.968 a 0.078 a	0.18 8.358* 1.488* 2.968* 0.078*	0.09 1.968* 0.918* 2.968* 0.078*
Utilities, Installation Services, etc.	0638	0,38	0.05	0,04	0,05	0,03
Personnel	179500	0,36	0.38	0.55	0.71	0.36
Pay and Allowances Travel	1,60 0,02	1.76 0.02	1,92 0,02	1.76	1,92 0,02	1.26 0.02
POL Miscellaneous	0.05	0,06	0.06	0.06	0.06	0.04
Indirect Services	0.06	0,06	0,06	0.06	0,06	0.04
Support Intermediate Commands	Usually 17-1	2% of above items	for ADC - Omit for	Project "Combine"		
Tales-type Missile Replacement - 2%	0,938ª	0,938°	0,9384	1,308ª	1,668	0,398*
Transportation	0,20	0,20	0,20	0, 25	0,30	0,15
Training of Replacement Personnel	0,50	0.55	0,60	0.55	0.60	0.40
Support Major Commands	Deselly 33-1	/3% of above items	for ADC Owit for	Project "Combine"		
TOTAL ANNUAL COST PER BATTALION 9	,528° + 2,95	9,528* • 3,17	9,528* - 3,39	12.108ª + 3.43	14.688* • 3.90	6,298* + 2,41
			-	-		OKTOWE .

NOTE: B is the number of battalions.

COPY

25%

ADOPR

10 Nov 1954

SUBJECT: (UNCLASSIFIED) Minimum Requirements for Air Defense Pilotless Interceptor

TO: Director of Requirements
Readquarters USAF
Washington 25, D. C.

- 1. Judging from many reports, verbal and written, which have reached this headquarters, it is apparent that the capability of the various components of the pilotless interceptor have departed from the original text of the contract. For example, the reorientation of the Boeing Aircraft Corporation contract for the F-99 (Bomarc), which this headquarters understands is being considered, will result in a weapons system of marginal capability, i.e., its range, speed and altitude capability will not be sufficient to counter the then existing threat. Therefore this headquarters considers it necessary to restate its requirements by time periods in terms of the minimum acceptable for air defense pilotless interceptors.
- 2. Intelligence information indicates that time periods based on the existing and anticipated threat can be defined as follows:
 - a. Present through 1957.
 - b. 1958 through 1962.
 - c. 1963 until appearance of the ballistic threat.
- 3. a. The minimum acceptable requirements for a pilotless interceptor capable of defending against the threat during each time period are as follows:
 - (1) Present through 1957.
 - (a) Speed: Mach 2.0 2.5.
 - (b) Altitude: Up to 60,000 feet.
 - (c) Range: 100 125 nautical miles.

Hq ADC Subject: (Unclassified) Minimum Requirements for Air Defense Pilotless Interceptor

(d) Seeker Lock-On: 10,000 to 60,000 feet altitude (capable of retrofit for 0 - 60,000 feet altitude).

250

- (e) Warhead: High explosive or nuclear.
- (2) 1958 through 1962.
 - (a) Speed: Mach 2.5 3.0.
 - (b) Altitude: Up to 80,000 feet.
 - (c) Range: 250 300 nautical miles.
 - (d) Seeker Lock-On: 0 to 80,000 feet altitude at 20 nautical mile range.
 - (e) Warhead: Interchangeable; high explosive or nuclear.
- (3) 1963 through an indefinite time period.
 - (a) Speed: Mach 4.0 4.5.
 - (b) Altitude: Up to 100,000 feet.
 - (c) Range: 300 nautical miles.
 - (d) Seeker Lock-On: 0 100,000 feet altitude at 25 nautical mile range.
 - (e) Warhead: Interchangeable; high explosive or nuclear.

b. In addition to the above, the weapons system must be compatible with the ground electronic environment in use during the time period of the weapons deployment.

be applied not only to the F-99 (Bomarc) and the L-253, for which this headquarters desires that Lockheed Aircraft Corporation be given a contract, but to all future air defense pilotless interceptor programs. Furthermore, to assure that a weapons system possessing the necessary minimum acceptable requirements will be developed as rapidly as possible, it is urgently requested that

2

252

Eq ADC Subjects (Unclassified) Minimum Requirements for Air Defense Pilotless Interceptor

the F-99 and L-253 programs be given a high priority and that they be developed as weapons systems on separate, distinct and competitive bases.

5. This headquarters has been informed that Headquarters ARDC is evaluating a study made by the Applied Physics Laboratory, Johns Hopkins University, which indicates that the overland range of the Talos can be extended to 100 nautical miles. If such a range extention is deemed possible, then this headquarters desires that every effort be made to develop this weapons system for tactical deployment as early as possible.

FREDERIC H. SMITH JR. Major General, USAF Vice Commander

3

SECRET ISSUE NUMBER BOEING AIRPLANE COMPANY SEATTLE, WASHINGTON BOMARC $\underline{\mathbb{N}} \; \underline{\mathbb{E}} \; \underline{\mathbb{V}} \; \underline{\mathbb{S}} \; \underline{\mathbb{L}} \; \underline{\mathbb{E}} \; \underline{\mathbb{T}} \; \underline{\mathbb{T}} \; \underline{\mathbb{E}} \; \underline{\mathbb{R}}$ No. 35 June 11, 1954 Reference No. 60-837D-1994 TABLE OF CONTENTS PAGE Boost Rocket Testing Ramjet Developments

2 - 3

TESTING 624N Program 5 6 - 7 Control Surface Testing Hydraulic System Heat Test 623-7 Functional Testing Captive Firing Stand

SECRET

Battery Research Program

Cluster Warhead Research Warhead Temperature Study

GROUND SUPPORT EQUIPMENT JP-X Fueling Trailer

Helium Supply

PROPULSION

FUSE AND WARHEAD

253

BOMARC Newsletter No. 35 Page One

Reference No. 60-837D-1994

PROPULSION

Boost Rocket Testing - Four additional full duration runs with Desert Rat 3 at EAFB have produced further data necessary to finalize boost system designs for Desert Rats 4 and 5 and interceptor 623-7. A conference is scheduled for the week of June 14 at Aerojet to evaluate test results and discuss the configuration for flight approval testing.

While all four runs were considered satisfactory, the last two produced the most significant results. The following items indicate that orifices in the propellant supply lines and DMH in the fuel both contribue to rocket stability:

- (a) A run on June 8 was made without orifices and was terminated with propellant exhaustion and operation of the fuel bypass valve. Except for using JP-X and RFNA as propellants, this substantially duplicated the Desert Rat 2 tests that resulted in failure. With 40% DMH in the fuel, the June 8 run exhibited short periods of oscillation but no failures occurred.
- (b) On June 10 the oxidizer exhaustion run was repeated with orifices in the propellant supply lines. This run was smooth.

These last two runs were the first made with Desert Rat 3 where a timed shutdown was not employed. Some of the stability data obtained during these tests agrees very closely with Boeing-Seattle vertical test facility results using interceptor 623-4.

Installation of boost system components in Desert Rat 4 by Aerojet is nearly complete. Shakedown runs will be made before starting flight approval tests. Desert Rat 5 has been shipped to Aerojet for completion of the boost system. With the completion of a second test stand at EAFB, flight approval testing will be able to proceed as rapidly as the supply of DMH permits. Initial shipments of DMH have been received from Westvaco under the new contract. (Newsletter No. 32)

Ramjet Development - Marquardt Aircraft Company has been conducting intensive development tests recently on a

253

BOMARC Newsletter No. 35 Page Two

Reference No. 60-837D-1994

modification of the 75C burner for the Appendix "C" ramjet engine. This revised configuration omits the shroud between the inner and outer fuel injection rings and adds an aerodynamic grid (latticework having airfoil across sections) upstream of the fuel injector rings. The new burner has been designated 75J.

Testing of the 75J configuration has given encouraging results over a considerable range of positive and negative angles of attack, Mach number, and fuel/air ratios. The presence of the aerodynamic grid apparently gives a pattern of air flow in the burner which results in an expanded tolerance of angle of attack and expanded fuel/air limits. Runs were made at Mach numbers of .8, 1.0, 1.2, 2.2, 2.5 and 2.7 with angles of attack from -9° to / 3° and fuel/air ratios from .02 up to 0.85. Under these conditions no rich blow-outs were encountered. Further tests are to be made at the Marquardt Jet Laboratory at Mach 1.5 and Mach 1.92.

Testing is also scheduled to be initiated at NACA-PSL during the week of June 6 when the 75J configuration will be tested at Mach numbers of 2.2, 2.35, 2.5, and 2.7 at altitude. All testing is under free-jet conditions.

An MX-883 flight has been tentatively scheduled for June 17. This flight will be accomplished with an Appendix "C" engine with shroud, no aerodynamic grid, and inner ring fuel injection only. Marquardt's support testing indicates that this configuration should result in a favorable flight on the flight path that has been selected. Launch will be at approximately 25000 feet instead of the previous 30000 feet.

STRUCTURE

Battery Cell Research - A contract has been awarded to Batelle Memorial Institute of Columbus, Ohio, for a nine-month cell research program to improve the zinc-silver peroxide secondary battery now used for interceptor power. Three additional proposals for this work were considered. This effort has been initiated in competition with the auxiliary power unit development program which the Contractor is also pursuing in an endeavor to develop a satisfactory power source for the tactical interceptors.

253

BOMARC Newsletter No. 35 Page Three Reference No. 60-837D-1994

Model 623 interceptors use four separate batteries for tube plate circuits, tube heater circuits, hydraulic pump, and destruct unit. An additional battery will be required for an inverter which will supply power for the target seeker when this unit is incorporated. The secondary cells now used are zinc-silver peroxide with potassium hydroxide electrolyte, manufactured by Yardney Electric Company under the trade name "Silvercel." These batteries can be stored for long periods in the dry condition, but are limited to three months reliable life in the charged state. The cells are relatively light in weight and have a high discharge rate. The present operating conditions for the hydraulic pump battery are 25 to 30 watt-hours per pound with 450 amperes average current during an 8 minute discharge cycle.

The following items are included in the statement of work for the battery research contract:

- a. The rates of erosion and efficiency of deposition of zinc in alkaline solutions containing amounts of dissolved silver peroxide will be determined.
- b. Combinations of resins and semi-permeable membranes will be tested for ability to prevent transfer of silver and zinc to the analyte and catholyte respectively.
- c. Improved testing techniques will be developed to determine cell life.
- d. Recommendations for possible design of long-life cells for manufacture and use will be made.

Batelle has facilities and experienced personnel which are qualified to undertake cell chemistry research. Development of a battery suitable for tactical interceptors is expected to result in increased reliability over other power sources.

FUSE AND WARHEAD

Cluster Warhead Research - Feasibility of a fin-stabilized cluster warhead for BOMARC is being investigated by Armour Research Foundation under a six months study contract with Ballistics Research Laboratory. A similar fin-stabilized cluster warhead for Sparrow appears to be a promising development and has reached the sled test stage. Armour

253

BOMARC Newsletter No. 35 Page Four Reference No. 60-837D-1994

representatives visited Boeing-Seattle June 7, 1954, to coordinate the study program.

Warhead Temperature Study - A study to determine hot spot temperatures and average temperature of the T-33 fragmentation and T-44 cluster warheads has been conducted. The study conditions were Mach 2.55 at 60,000 feet with free air temperatures of -50°F and typical launching operations.

Both T-33 fragmentation and T-44 cluster warhead explosive hot spot temperatures occurred adjacent to the mounting brackets because of heat conduction from the interceptor skin. The T-33 warhead will reach its melting temperature of 174° F in local areas after about 5 1/2 minutes of a typical flight; the T-44 warhead will reach its melting temperature of 180° F in local areas after approximately 8 minutes. The average temperatures of either warhead will not reach melting point during 10 minutes of a typical flight.

The effect of shock upon a warhead with melted areas is not fully known. The results of this study are being discussed with Ballistics Research Laboratory and the Contractors involved. Means of reducing heat transfer to the warhead compartment will be developed if the melted explosive condition cannot be tolerated.

CROUND SUPPORT EQUIPMENT

JP-X Fueling Trailer - Design, procurement, and fabrication of JP-X fueling equipment are progressing on a close schedule to meet the shipment date for interceptor 623-7. Special facilities are required for handling fuels containing unsymmetrical dimethyl hydrazine (DMH) because the fuel will be mixed at Aerojet's plant. A closed pumping system will be used to prevent contamination and reduce exposure to air.

JP-X will be supplied by Aerojet and shipped to AFMTC in stainless steel drums. Five drums of JP-X will be required for each Block III test flight. Three sets of drums will be used so that a reserve fuel loading is always available at AFMTC. Each drum of JP-X will be checked for specific gravity and temperature at the time drums are installed on the trailer prior to fueling an interceptor. No procedures are available at AFMTC for chemical analysis of JP-X.

253

BOMARC Newsletter No. 35 Page Five Reference No. 60-837D-1994

The JP-X fueling trailer consists of an M-l trailer equipped to receive five shipping drums, manifold piping, and a pumping system. JP-X will be pumped directly from shipping drums to the interceptor by two ECO pumps in parallel which are capable of delivering 20 gallons per minute at 40 psi. An ullage control tank is incorporated in the pumping system.

The new JP-X fueling trailer will be checked out and personnel familiarized with its use before interceptor 623-7 is fired. It has been determined that RENA can be handled with the existing acid trailer. Horizontal and vertical defueling and interceptor decontamination procedures have been established.

Helium Supply Equipment - Arrangements have been completed for equipment at AFMTC to fill interceptor nose pressure bottles with high pressure helium for flight. A series of interceptors starting with 623-7 will use a 3000 psi nose pressure bottle of 26 cubic foot capacity for cold gas (helium) pressurization of boost system. A Greer transfer unit will be used to pressurize the helium from 2400 psi maximum bottle pressure. A nose tank simulator has been fabricated for testing the supply equipment. Helium will be furnished by the Air Force in standard commercial bottles. Low pressure leak tests are accomplished with nitrogen containing 1% freon. Each interceptor nose pressure bottle will be tested with helium on the day previous to the firing schedule date.

TESTING

F-94B/624N-1 Nose Program - The F-94B airplane has been ferried to AFMTC and electronic equipment is being reinstalled and tested preparatory to flight testing. Considerable delay during the ferry to AFMTC resulted from unfavorable weather and difficulties with fuel tanks and engine. The airplane arrived at AFMTC May 31.

The present schedule for the first flight is June 22, dependent upon continuous availability of necessary facilities. Nose power system checks are complete; beacon, command receiver, and telemeter checking is in progress. Field tests of all equipment will be performed before flight tests are begun. The temporary nose pressurization truck to provide nitrogen and ammonia servicing has been completed and placed in operation.

253

BOMARC Newsletter No. 35 Page Six Reference No. 60-837D-1994

Control Surface Testing - A new method which has been developed for determining interceptor control surface natural rotational frequencies will result in sharply reduced testing time and cost. Rotational natural frequency tests establish that frequencies are higher than the minimums which will insure freedom from control surface flutter.

Previous rotational frequency tests involved considerable time and equipment during Period I inspections. Each control surface was vibrated by a shaker pot in a bulky fixture while the frequency was swept from 4.5 to 100 cps. Natural frequencies were determined by observing surface deflections.

The new method of determining natural rotational frequency uses the interceptor hydraulic system and the Moog control valves to supply the required test vibrations. Sine waves of the required sweep frequencies are supplied to the Moog valves as a control current. The increase in amplitude of rotation at natural frequency is determined either by observation or by instrumenting the surface with an accelerometer. Recently improved control valve reliability has made this type of test feasible. The time to determine interceptor control surface natural rotational frequencies has been reduced to about one hour by this new method.

A series of tests was conducted with interceptors 623-4, -7, and -007 to determine if this shortcut in testing was reliable. The results were entirely satisfactory. Agreement of measurements by the two methods for interceptor 623-7 was between 98 and 100% for the various control surfaces. Accordingly, the improved testing method will be used for 623-8 and subsequent interceptors as a period II functional test. This type of test will also be useful to verify reassembly procedures at AFMIC.

Hydraulic System Heat Tests - Environmental tests are being conducted to determine the performance of the hydraulic pumping unit at cruise conditions. The initial test used a full scale interceptor section containing hydraulic pump, motor, battery, and temperature instrumentation. Succeeding tests will substitute laboratory power for the battery. The test section is operated in a strato-chamber equivalent to approximately 60,000 feet altitude and heat is supplied by radiant sources to raise skin temperature to 5000 F. Hydraulic

253

BOMARC Newsletter No. 35 Page Seven Reference No. 60-837D-1994

system loads are regulated by external valves to simulate a flight condition.

The first test which used battery power simulated a flight of 8 minutes duration. All equipment operated without failure and the recorded test data is being analyzed. The servo battery used was a spare from Block II flight testing, representative of Block III batteries. Preliminary results indicate a battery case temperature of 336°F and an electrolyte temperature of 136°F. The maximum battery output was equivalent to about 27 H.P. at a hydraulic pump output of approximately 19 H.P.

Further tests will be conducted with this facility to investigate hydraulic pump and motor operation under various loads and operating conditions.

623-7 Functional Testing - Period II testing of interceptor 623-7 began June 2 as planned. The hydraulic system tests were successfully completed. FM and PDM telemeter system tests are partly complete and are on schedule. The pitch system is being investigated to determine the effect of configuration changes on the stability margin. Necessity for relocation of the pitch angular accelerometer is being considered.

Captive Firing Stand - Construction of the firing pad and related facilities for the captive firing stand (soft mount) at AFMTC have been completed by the subcontractor. This installation will be used for boost rocket system captive firing with the interceptor in a vertical attitude subject to limited freedom in pitch and yaw. (See Progress Report No. 11 for a description of the facility). Because current flight problems are not of a nature suited to investigation in the captive firing stand, no test schedule has been set.

In accordance with previous plans, it is intended to place the captive mount structure and supporting steel frame work in storage pending establishment of a test schedule. Installation and removal of the structure for checkout purposes does not appear warranted. Permanent erection of the structure would constitute a potential hazard during forthcoming interceptor firings.

253

BOMARC Newsletter No. 35 Page Eight Reference No. 60-837D-1994

Ready availability of this test facility will be of considerable benefit when investigation of certain problems related to boost system operation is necessary.

/s/ R. H. Jewett

COPY

254

(Uncl) Bomarc Performance Data

Management Analysis (Maj Leggette) THRU: DCS/O (Col Bond) ADOOA

12 August 1954

- 1. Reference is made to your verbal request. The following data is furnished under Priority C project entitled "Interceptor Aircraft Performance."
 - 2. Requested data is as follows:
 - a. Weight at launch 12,000 lbs.
 - b. Fuel load:

Jet fuel - 500 gal. Oxidizer - 360 gal.

c. Thrust:

Booster rocket - 35,000 lbs. Ram-jets (2) - 3,600 lbs. at 60,000'

- d. Scramble order to launch time (min.) 2 min.
- e. Cruise speed:

Bomarc I - 2.5M @ 60,000' (24 n.mi/min.) Advanced Bomarc - 2.7M @ 80,000' (26 n.mi/min.)

f. Combat radius and time of flight:

Bomarc I - 125 n.miles in 5.5 min. Advanced Bomarc - 250 n.miles in 10 min.

g. Time vs. distance vs. altitude in climb:

Bomarc I

Time (Min)	Dist (n.mi)	Alt (100)	
.25	.2	. 8	
•5	2.0	30 5 2	
•75	12.0		
1.00	20.0	60	

Subj: (Uncl) Bomarc Performance Data, 12 Aug 54, Cont'd

Advanced Bomarc

Time (Min)	Dist (n.mi)	Alt (1000'
.25	.2	12
•5	2.0	45
.75	9.0	68
1.00	17.0	80

h. Curves of combat radius or cruise speed vs. altitude are not required since in all cases the aircraft is to be flown at 60,000' or 80,000' to a transition point in the vicinity of the target prior to going into a terminal dive.

3. Up-to-date data on the F-102 has been requested from ARDC and will be furnished as soon as available.

E. C. HELFRICH Ftr & Armt Div, OOA Ext 2742-3 P. S. BALL, JR. Chief, Operations Analysis Ext 2742 - 3

COPY

255

AFOOP-OP-D

1 Oct 1954

SUBJECT: (U) Revised Operational Concept of the F-99 (BOMARC)

TO:

Commander
Air Defense Command
Ent Air Force Base
Colorado Springs, Colorado

The attached Operational Concept of the F-99 (BOMARC) is forwarded for your information and necessary action in accordance with AFR 5-47. It is desired that your Headquarters develop an Operational Plan on the F-99 (BOMARC) and that it be submitted to this Headquarters for review and final approval not later than 15 November 1954.

BY ORDER OF THE CHIEF OF STAFF:

1 Incl
Opnl Concept of F-99
(BOMARC) (Revised)
(5 cys)

EARL H. DUNHAM Colonel, USAF Chief, Defense Branch Operational Plans Div., D/O

COPY

255

FOR F-99 (BOMARC)

(REVISED)

This document supercedes the original concept for the F-99, dated March 1953.

Reproduction of this document in whole or in part is prohibited except with permission of the office of origin.

Incl 12

COPY

255

OPERATIONAL CONCEPT - F-99 BOMARC

I. GENERAL DESCRIPTION

- 1. The F-99 (BOMARC) is a pilotless interceptor which will be ultimately integrated into the overall air defense systems as an area supplement to the manned interceptors.
- 2. The mission of the F-99 is the interception and destruction of hostile aircraft and missiles from subsonic to Mach 2.0 speeds, at altitudes from 10,000 to 80,000 feet and at ranges up to 250 miles from the launching site. The F-99 will be launched vertically by an acid petroleum rocket booster, which will carry it to cruising altitude. A pre-set guidance system will be employed during the initial stage. Upon reaching the optimum altitude, the F-99 will level off and the gasoline ram jet, which becomes effective during the rocket phase, will power the weapon throughout the remainder of the flight. During this phase of the flight, two guidance systems, mid-course and terminal, will be employed. The mid-course guidance will be inertial with refined heading corrections received through the radio data link from Air Defense Direction Centers as required. The final phase of the interception is a programmed dive on the target coupled with automatic search and lock-on by the target seeker. As the F-99 nears the target, commands are sent via the radio data link that pre-orients the target seeker to bring the target in its field of search. At the distance of about ten (10) miles from the target, the seeker is energized and begins tracking the target. When the missile's radar seeker is tracking on target, it automatically assumes direction of the auto-pilot. This radar seeker then directs the F-99 on a collision course with the target. When the F-99 is within 750 feet of the target, the influence fuze of the 300-pound, or larger, warhead will be armed and the warhead will be detonated within lethal range of the target. In the event of a target miss, a self - or command - destruction capability is included within the weapon. The dimensions of the F-99 are as follows: Length - 35 feet, diameter - 35 inches, span - 18 feet, and weight - 11,000 pounds gross.

II. ORGANIZATION

1. The F-99 squadron will consist of a Headquarters section, maintenance and supply section, armament section, and an air installations section. Approximately twenty-five (25) officers and two-hundred-eighty (280) airmen will be required to man a squadron responsible for four launching sites. Several of the F-99 squadrons may have less than four (4) launching sites assigned, therefore, the personnel breakdown will be as follows:

255

A squadron with one (1) launching site will consist of approximately ten (10) officers and one hundred (100) airmen, and for each additional launching site assigned, approximately five (5) officers and sixty (60) airmen will be required in this section.

- 2. A table of organization for an F-99 squadron and the personnel required for the direction and assignment sections cannot be firmly determined or established until the weapon and control facilities have been tactically evaluated.
- 3. The squadron maintenance section will be responsible for assembly, maintenance, and testing of the F-99. This section will also be required to transport the vehicle to revetments, erect it on the launching stands and prepare for launching. In addition to normal maintenance, it may be assumed that the F-99 will have to be re-cycled every six (6) months.
- 4. Training Specialized technical training will have been accomplished prior to the activation date of these units. Refresher training will be accomplished within the squadron by electronic devices which simulate all phases of the operation. Periodically, the units will be afforded the opportunity to perform actual firings at available missile ranges. Pre D-day it is anticipated that each squadron will fire at least two missiles per year for quality test. After D-day it is anticipated there will be no requirement for practiced firing; however, operational training will continue using synthetic training devices.

III. OPERATIONAL LIMITATIONS

- 1. The F-99 unit will be designated as an interceptor squadron, it will be supported and administered as a separate squadron in much the same manner as presently manned interceptor squadrons. Although currently manned interceptor squadrons operate as an integral unit, F-99 squadrons will be cellular and operate from one (1) to four (4) launching sites. The following limitations are inherent in this weapon and requires special attention to insure maximum combat capability.
 - a. Complex weapon and support equipment.
- b. Large numbers of weapons per squadron, wide dispersion of squadrons throughout the U. S. and difficulty in handling this equipment to numerous sites throughout the ZI.
- c. Electronic Environment The F-99 will require a very comprehensive and detailed guidance system within the ZI. This is due to the fact that this equipment will be under the

2

255

electronic control of the guidance system until terminal phase of the flight has been reached. This portion of the flight is comparatively small in comparison to the total distance this weapon must travel.

IV. UTILIZATION RATES

- 1. Utilization rate of a F-99 unit will be determined by the number of launching sites. Each launching site will be capable of launching 24 F-99's within five minutes. A capability of launching four (4) of these immediately must be maintained 24 hours a day. Thirty-five (35) F-99's will be required for each site; 28 will be operationally ready, 2 for cyclical maintenance and 5 for spares.
- 2. The limiting factor is the rate at which the weapon can be directed to designated targets. A direction team will be capable of controlling a maximum of two (2) weapons simultaneously. The control center will have two (2) direction teams.
- 3. Allocation of weapons will be made on a Sector basis and determined at the Air Division Combat Center. When the decision has been made to utilize the F-99, the Combat Center will assign the mission to a Direction Center within the Sector. The F-99 squadron will launch the interceptors in accordance with instructions received from the Direction Center. The Air Defense Direction Center will have two (2) direction teams, and required equipment, to direct the vehicle during the mid-course guidance phase of the flight. This method of employment has been selected because of the short flight time of the F-99 and to permit maximum utilization of the search and tracking capabilities of the aircraft control and warning system that will ultimately be in operation.
- 4. Present planning now indicates that storage quantities of F-99's, other than on-base, will not be required prior to the end of FY 60.
- 5. The squadrons in being at this time will not have received their total operational stock of F-99's. As war plans and planning factors are reviewed, the storage back-up requirements, if any, for F-99's will also be re-evaluated.

V. THEATER AND TIME DEPLOYMENT

Present planning envisions that F-99 squadrons will be deployed within the ZI commencing in 1958. Subsequent deployment will be as indicated in appropriate programming documents.

SECRET

/s/ WILEY D. GANEY
Major General, U. S. Air Force
Director of Operations, Office of
Deputy Chief of Staff, Operations

COPY

B/Ltr fr ABC, sub.j: (S) Requirements for a Development and Testing Program for the Lockheed Pilotless Aircraft, L-253, dated 19 February 1954

AFDRQ-AD

lst Ind

1 Apr 1954

DEPARTMENT OF THE AIR FORCE, HQ USAF, Washington 25, D. C.,

- TO: Commander, Air Defense Command, Ent Air Force Base, Colorado Springs, Colorado
- 1. The requirement for a pilotless interceptor capable of providing a good defense capability at short and medium ranges is being studied in light of:
 - a. Current pilotless interceptor developments.
 - b. Air Force plans for use of TALOS.
- c. Improved capabilities expected from advanced development of BOMARC.
- 2. As background in this area of air defense requirements, characteristics covered in your basic letter as well as those of several pilotless interceptors under development are summarized in Inclosure 1. It may be noted that characteristics of the TALOS nearly match the characteristics of the ADC requirement for the short range application and the growth potential indicated could satisfy the medium range insurance requirement.
- 3. As part of the Air Force support for missile development a proposal is now being evaluated in ARDC for use of the X-7 Test Vehicle for flight testing a development model of the Ryan CW Seeker. Effort on such a program would apply as insurance on the present pilotless interceptor program.

BY ORDER OF THE CHIEF OF STAFF:

1 Incl:

B. K. BOLLOWAY Brigadier General, USAF Deputy Director of Requirements

COPY

256

Hq ANC ADOPR Subj: (SECRET) Requirements for a Development and Testing Program for the Lockheed Pilotless Aircraft, L-253

ADOPR (19 Feb 54)

2d Ind

10 Jul 1954

HQ AIR DEFENSE COMMAND, Ent Air Force Base, Colorado Springs, Colorado

TO: Director of Requirements, Headquarters USAF, Washington 25, D. C.

- 1. Attached is a copy of an Air Research and Development Command letter, RDCRD, subject: "Lockheed Missile Proposal," dated 8 June 1954, which introduced the L-275 missile to Meadquarters Air Defense Command. Reference also paragraph 3 of your 1st Indorsement to the ADC basic letter subject as above, in which you described a program for the evaluation of the X-7 for flight testing the Ryan CW Seeker. It is assumed that the X-7 and the L-275 is in fact the same vehicle.
- 2. In reviewing the basic requirement, with the information contained in paragraph 3 of the RDCRD letter and paragraph 3 of the USAF 1st Indorsement, this headquarters is of the opinion that the L-275, or X-7, more nearly fulfills the requirement as stated in the basic letter.
- 3. Further reference is made to your 1st Indorsement, paragraph 2. This headquarters is extremely interested in Talos and its possible role as a replacement for other weapons of the short range class (50 nautical miles) and as a complementary weapon for the medium range class (up to 500 nautical miles). Air Defense Command does not envision Talos as a companion weapon for, nor a replacement weapon for the F-99 in the event the Bomarc program fails. It should be emphasized that this headquarters does not wish to substitute the Lockheed missile for the F-99 nor does it wish to negate the F-99 program in any way. It does appear sound to develop a companion weapon in this medium range area so as to provide capability to guard against long delays in this development and to provide a capability in the event of Technical Order compliance.
- 4. It is requested therefore that a high priority be established for an approved L-275 project as referred to in the RDGD letter and that it be developed in the same way as the F-99 (Bonarc) to be compatible with the air defense ground environment system.

FOR THE COMMANDER:

1 Incl Ltr Hq ANDC, RDCRD, subj: Lockheed Missile Proposal, 8 June 54 (trip) REMETE P. EERGQUIST Brigadier General, USAF Deputy Chief of Staff, Operations

2

COPY

B/Ltr fm ADC, subj: (S) Requirements for a Development and Testing Program for the Lockheed Pilotless Aircraft, L-253, dated 19 February 1954

AFDRQ-AD/F

3rd Ind.

20 Sep 1954

DEPARTMENT OF THE AIR FORCE, HQ USAF, Washington 25, D. C.

TO: Commander, Air Defense Command, Ent Air Force Base, Colorado Springs, Colorado

A contract is currently being negotiated with Lockheed for the L-275. This will provide for modification as required to ground launch the K-7 vehicle and use it to flight test ramjet engines, target seekers, and other components of the F-99. The L-275 will be recoverable by parachute and will be used to simulate the F-99 mission. This will provide an economic means of expediting the BOMARC program and will provide an alternative in the event the F-99 development lags behind the overall BOMARC system schedule.

BY ORDER OF THE CHIEF OF STAFF:

0

1 Incl: n/c (2 cys w/d) JOSEPH L. LAUGHLIN Colonel, USAF Chief, Air Defense Division D/Requirements, DCS/D

3

COPY 258

Eq ADC ADCPR Subj: (Secret) Requirements for a Development and Testing Program for the Lockheed Pilotless Aircraft, L-253

ADOPR (19 Feb 54)

4th Ind

16 Oct 1951

HQ AIR DEFENSE COMMAND, Ent Air Force Base, Colorado Springs, Colo

TO: Director of Requirements, Headquarters USAF, ATTN: Air Defense Division, Washington 25, D. C.

- 1. Reference is made to message this headquarters (Secret)
 ADDER 1493 dated 25 August 1954, confirming a conversation between
 Major General F. H. Smith, Vice Commander, Air Defense Command,
 and Lieutenant General Putt, Director of Requirements, Deputy Chief
 of Staff, Development, Headquarters USAF. This conversation dealt
 with the desire of this headquarters that the L-253 be developed
 and test evaluated as a weapons system separate and distinct from
 the F-99 (Bomarc) and that it be developed on a high priority
 program.
- 2. Your third indorsement states that a contract is currently being negotiated with Lockheed for the L-275. This indorsement implies first, that the Lockheed vehicle will be a flight test vehicle for F-99 components and second that it will provide an alternate to the F-99. Recent information reaching this head-quarters indicates that the L-275 is in fact a test bed vehicle for Research and Development. It is requested therefore that the terms of the contract be clarified to provide a development contract for the L-253 pilotless interceptor.
- 3. This headquarters desires and recommends that the L-253 be a competitive development, a separate and distinct contract to the F-99. It is the opinion of this headquarters, an opinion supstantiated by wide experience, that in the interests of national security, air defense is best served by competitive development of weapons systems.

FOR THE COMMANDER:

1 Incl

KERNETH P. BERGQUIST Brigadier General, USAF Deputy Chief on Staff, Operations

COPY

555

ADC TALOS Insurance BOMARC (Growth) F-99A Requirement F-99C TALOS 7-100 15-250 15-125 5-100 5-50 Range N.Mi. 24 2.7 2.5 Speed Mach No. 2.06 2.2 60,000' "Low"Alt. 80,000 70,000' 60,000' Altitude 60,000' 0 Maximum Minimum 25 at once 25 at once 6/min 2/min 2 2 launch-2/min Launch Rate 2 launch-25 launchers with ers ers 360° 3600 3600 Launch Azimuth 360° 360° 42 years 31-4 years 31-4 years Availability 2-3 years

Incl 1

DECKE

COPY

Headquarters
AIR RESEARCH AND DEVELOPMENT COMMAND
Post Office Box 1395
Baltimore 3, Maryland

256

RDGRD

8 June 1954

SUBJECT: Lockheed Missile Proposal

TO:

Commander
Air Defense Command
ATTN: P & R
Ent Air Force Base
Colorado Springs, Colorado

- 1. Reference request for additional information on the Lockheed missile proposal made by Col Powell and Lt Col Thornton. (UNCL)
- 2. Hq ARDC has carefully considered the Lockheed L-253 proposal and cannot support it for the following reasons:
- a. The guided missile budget has been cut several times and retention of the Bomarc program without serious reduction in funds has been affected with extreme difficulty. Supporting the L-253 proposal at this time apparently could only be at the expense of Bomarc. L-253 would initially cost \$14 million and ARDC experience with similar program indicates that estimated costs increase with time.
- b. The absence of a stated requirement for a second pilotless interceptor program of the Bomarc type requires we clearly prove that any such program will provide a level of operational effectiveness not possible with weapon systems now being developed. This cannot be proven.
- c. The most attractive feature of L-253 is an early operational date. This is based on integration of many features of Bomarc which are assured to be operationally effective. It is a fact, however, that several of these equipments are undergoing difficulties (ile., Ramjet engines) which will require time for solution, thereby slipping the operational date of any missile tied to this equipment.
- d. The low altitude capability, another attractive feature of L-253, will also be provided in Bomarc. (SECRET

Inclosure # 2

258

RDGRD Subject: Lockheed Missile Proposal

- 3. Support of the Bomarc program requires substantial seeker testing, and ARDC has proposed to Hq USAF that the Lockheed ramjet test vehicle be adapted to a missile seeker test for this purpose. This program, known as L-275, if approved, will require the development of substantial launch, guidance and corollary equipment which will be of considerable value in the event the Lockheed proposal is accepted in the future by the Air Force as a weapon system development program. (SECRET)
- 4. Paragraphs 2 and 3 classified SECRET in accordance with paragraph 23 b (8), AFR 205-1. (UNCL)

FOR THE COMMANDER:

JOSEPH A. BARRETT, JR. Lt Colonel, USAF Chief, Air Defense Division Asst for Operational Readiness

2

COPY Easy reading copy made

057

From: HQ USAF, WASHINGTON, D. C.
To: COMMANDER, ARDC, BALTIMORE, MARYLAND

3 January 1955

COPY

258

ADOPR

28 December 1954

SUBJECT: (Unclassified) Requirement for Standard Interceptor Missile Base in Air Defense Command

TO:

Director of Requirements Headquarters USAF Washington 25, D. C.

1. References.

a. Letter, ADOPR, Headquarters Air Defense Command, 10 November 1954, subject: (Unclassified) Minimum Requirements for Air Defense Pilotless Interceptor.

- b. Letter, ADOPR, Headquarters Air Defense Command, 26 November 1954, subject: (Unclassified) Requirement for Land Based Talos in Air Defense.
- 2. The following requirement is submitted in accordance with AFR 57-3, dated 23 May 1951.
- 3. Introduction. Recently announced slippage in the F-99 (Bomarc) program has necessitated a reorientation of the Air Defense Command's planning for deployment of Long Range Interceptor Missiles. Allied missile projects such as the Talos and L-253 programs have provided alternate avenues of approach to the interceptor missile requirement in air defense. The L-253 appears to be a parallel development program to the F-99 in both performance capability and development. Talos however appears to be two or three years nearer realization. It appears feasible and is considered essential that all three weapons should fit into the same missile base environment. Furthermore, it appears feasible that all three missiles could fit into the missile base environment which will be required for the advanced Long Range Interceptor Missile (IRIM-I) which will be required in the time period 1963-1965.
- 4. Objective. To provide a base for Air Defense Command interceptor missiles which will be standard to all interceptor missiles.
 - 5. Description.
 - a. Momenclature: Air Defense Interceptor Missile Base.

250

Hq ADC Subject: (Unclassified) Requirement for Standard Interceptor Missile Base in Air Defense Command

- b. Purpose: To establish a standard base environment, including all facilities for receipt, storage, assembly, fueling, checkout, maintenance, and launching, for all Air Defense Command interceptor missiles which will:
 - (1) Provide for redeployment of ADC interceptor missiles as tactical requirements may dictate.
 - (2) Provide for the phasing in of long range interceptor missiles of increased capability without requiring major changes in existing base facilities which would render the base tactically inoperative for a long period of time and which would require a large expenditure of Public Works funds.
 - (3) Provide manufacturers with a set of standard requirements which will result in all air defense interceptor missiles being compatible with and interchangeable on the standard base.
 - (4) Provide the Air Defense Command with the standard base on a LA priority basis.
- c. <u>Performance</u>: The standard base should be planned, designed and constructed so that the most critical function or characteristic of any interceptor missile expected to be deployed by ADC can be performed or accommodated by the standard base facilities without major changes. Particular attention should be given to the requirements for the advanced long range interceptor missile (IRIM-I) to be deployed in the time period subsequent to 1963. The standard base facilities should be capable of accommodating this advanced type missile.

d. Design Features:

- (1) Preliminary design studies should be undertaken immediately to determine the optimum design for the base.
- (2) It is considered that the general principles of design and operation as projected for the F-99 (Bomarc) installation would be a suitable standard for the Interceptor Missile Base.

2

258

Hq ADC Subject: (Unclassified) Requirement for Standard Interceptor Missile Base in Air Defense Command

- e. Special Features: None.
- f. Proposed Basis of Issue: The standard bases should be constructed at such places and at such times as to meet the ADC requirements for tactical deployment as published in appropriate USAF Programming Guides and USAF Programming Documents.
- g. Method of Meeting the Requirement: Conduct appropriate design studies.
- 6. The establishment of a Standard Air Defense Command Interceptor Missile Base will prevent a possible major problem, i.e., the necessity of constructing a new type missile base to accommodate each new interceptor missile and, in addition, would provide the Air Defense Command with a certain tactical mobility in its interceptor missile deployment and employment. It is requested that urgent consideration and approval be given this request so that it will be applicable to the earlier interceptor missile employed by the Air Defense Command.

Info cy Comdr, ARDC Comdr, WADC FREDERIC H. SMITH JR. Major General, USAF Vice Commander

3

Easy reading copy made

259

From: COMMANDER, ADC

13 Jan 1955

To: CHIEF OF STAFF, USAF, WASHINGTON, D. C.

(SECRET) ADOPR 0094 . Reference message AFOPD 55494 dated 30 December 54 regarding item (6) augmentation of Ft. Myers Gunnery Base to include missile training facilities. Attention invited to letter ADOPR, Hq ADC, 25 May 54, Subject: (unclassified) Requirement for Pilotless Interceptor Unit Training, and first indorsement ADOPR, Hq ADC, 14 July 54, to letter AFDDC, Hq USAF, 4 June 54, Subject: Siting of Air Defense Guided Missile Operational Suitability Test. An interceptor missile unit training base is a requirement for 57 for the following reasons: (1) One Talos Squadron will be activated in 58. (2) Unit activation and training must be accomplished three to six months prior to tactical base assignment. (3) Launching of missiles must be a part of initial training. (4) Missiles cannot be launched from tactical bases because (a) there will be no range facilities and (b) most interceptor missile bases will be located in areas of high population and industry.

> /s/ LT COL J R THORNTON, USAF for C. F. HUMPHREYS Captain, USAF Asst Command Adj

COPY Easy reading copy made

259

From: HEADQUARTERS USAF

30 December 1954

To: COMMANDER, ENT AFB, COLORADO

/SECRET/ FROM: AFOPD 55494 . Re your ADOPR 3082 and letter this headquarters, Subject: "Air Defense Requirements 1954-1960," 1 December 54. Following remarks refer to same numbered item in ADOPR 3032. (1), (2) and (3) Action being taken on these items is outlined in referenced letter. (4) No action being taken. ADC force level will remain at 69 squadrons. (5) FY 57 programming objectives objectives, now being considered by AFC include 2 squadrons TALOS end FY 58, 5 squadrons TALOS end FY 59, and 61 Bomarc squadrons end FY 59. Ten site concept for five TALOS squadrons now under consideration by Air Staff. (6) Augmentation of Ft. Myers Gunnery Base to include missile training facilities - not contained in FY 57 program objectives. This item being considered as new requirement by this headquarters. (7) Action now being taken to include a requirement in FY 57 program for Atomic Rocket storage and handling facilities at those ADC bases which will have F-89D/H or F-102 squadrons in FY 57-58 time period. (8) FY 57 program objectives for SAGE follows phasing previously recommended by your headquarters. FY 57 C&E requirements being developed by JPO. Current procedures provide for submission of these requirements to this headquarters thru your Command. Development of PWP in support of SAGE C&E requirements is a responsibility of your Command.

COPY

ADPIR-8-1

10 September 1954

280

SUBJECT: Special Weapons and Guided Missiles Orientation Course

TO:

Commander Eastern Air Defense Force Stewart Air Force Base Newburgh, New York

Identical Letters: CADF, WADF

- 1. Reference is made to my message ADPIR-S-1 21897, 9 July 1954. Cited message indicated the availability of a limited number of spaces in the Army Special Weapons and Guided Missiles Orientation Course conducted at Pt. Bliss, Texas.
- 2. The following quotes are allocated commands indicated in subject course:

Class Nr	Rept Dt	EADF	WADF	CADF
66	3 Oct 54	0	1	0
74	16 Jan 55	1	ō	0
78	13 Mar 55	0	0	1
82	1 May 55	0	1	ō
	22 May 55	1	0	0
85 86	5 Jun 55	0	0	1
	12 Jun 55	0	1	0
87	19 Jun 55	0	0	1
90	26 Jun 55	0	1	0

These are the maximum number of spaces available to this command at the present time and no additional quotas are expected to be available during Fiscal Year 1955.

- 3. Reporting instructions and other administrative details pertaining to this course are as follows:
- a. MISSION. The mission of this course is to orient selected officers in the basic factors of the characteristics and effect of atomic weapons and guided missiles, and in the peculiarities inherent in operations involving these weapons.
- b. FREXECUTETYSS. Officers selected for this training must be in the grade of captain or above, must require information concerning special weapons in the performance of assigned duties

260

ADPTR-8-1, subject: Special Wpns and Guided Missiles Orientation

and must possess a security clearance of TOP SECRET. (Orders detailing officers to attend this course must indicate such a clearance).

- c. DURATION. The duration of the course is one week.
- d. REFORTING. Officers will report to the Commandant, Antiaircraft and Guided Missiles Branch, The Artillery School, Fort Bliss, Texas, on the class reporting date indicated in paragraph 2.
- e. FUNDING. Use following fund citation in orders detailing officers to this course: 5753400 564-4110 P443-02-03-07 822-606.
- f. Cite as authority, letter, Headquarters USAF AFPMP-1-E-3c, subject: Special Weapons and Guided Missiles Orientation Course, 27 August 1954.

BY ORDER OF THE COMMANDER:

DONAVON F SMITH Colonel, USAF Dir of Training

COPY

DEPARTMENT OF THE AIR FORCE HEADQUARTERS UNITED STATES AIR FORCE WASHINGTON 25, D. C.

260

AFPNP-1-E-30

27 August 1954

SUBJECT: Special Weapons and Guided Missiles Orientation Course

TO:

Commander
Air Defense Command
Ent Air Force Base
Colorado Springs, Colorado

- 1. Reference is made to messageform, Headquarters USAF, AFFMF-1 1270 M, dated 6 July 1954. Cited messageform indicated the availability of a limited number of spaces in the Army Special Weapons and Guided Missiles Orientation Course conducted at Fort Bliss, Texas.
- 2. A quota of one is allocated your command in each of the classes indicated below:

lass Number	Reporting	Dat
66	3 Oct	54
70	14 Nov	
74	16 Jan	55
7 ¹ 4 78 8 ¹ 2 8 ¹ 4	13 Mar	55
82	1 May	55
	22 May	55
85 86	5 Jun	
	12 Jun	
88	19 Jun	55
00	26 Jun	55

- 3. Reporting instructions and other administrative details pertaining to this course are as follows:
- a. MISSION. The mission of this course is to orient selected officers in the basic factors of the characteristics and effect of atomic weapons and guided missiles, and in the peculiarities inherent in operations involving these weapons.
- b. PRESCOURTES. Officers selected for this training must be in the grade of captain or above, must require information concerning special weapons in the performance of assigned duties and must possess a security clearance of TOP SECRET. (Orders detailing officers to attend this course must indicate such a clearance).

260

Ltr to ADC, Subj: Special Weapons and Guided Missiles Orientation Course (Contd.)

- c. DURATION. The duration of the course is one week.
- d. REPORTING. Officers will report to the Commandant, Antiaircraft and Guided Missiles Branch, The Artillery School, Fort Bliss, Texas, on the class reporting date indicated in paragraph 2.
- e. FUNDING. Use following fund citation in orders detailing officers to this course: 5753 400 564-4110 F443-02-03, 07 822-606.
- 4. No additional quotas are expected to be available to the Air Force during Fiscal Year 1955. If any additional quotas become available, however, consideration will be given to your additional requirements submitted in response to the message cited in paragraph 1, above.

BY ORDER OF THE CHIEF OF STAFF:

DOCUMENT TO ROLL INTEX Email State Prince Classification Remarks	9 3					8 -		
DOCUMENT TO ROLL INTEX Remarks Document Date Dat				The state of the s		ACE TO INM ACCIPIES		
DOCUMENT TO ROLL INDEX Some watershalls pages Pow off				TH	IS PA	AGE IS UNCLASSIFIE		
DOCUMENT TO ROLL INDEX Some watershalls pages Pow off								
DOCUMENT TO ROLL INDEX Some watershalls pages Pow off								
DOCUMENT TO ROLL INDEX Some watershalls pages Pow off		-						
DOCUMENT TO ROLL INDEX Some watershalls pages Pow off								
DOCUMENT TO ROLL INDEX Some watershalls pages Pow off								
DOCUMENT TO ROLL INDEX Some watershalls pages Pow off								
DOCUMENT TO ROLL INDEX Some watershalls pages Pow off								
DOCUMENT TO ROLL INDEX Some watershalls pages Pow off								
Some susceedable paper Period			10					
Some susceedable paper Period								
Some susceedable paper Period								
Some susceedable paper Period								
Some susceedable paper Period								
Some susceedable paper Period								
Some susceedable paper Period								
Frame Classification Number Period Vol. Pt. Title Classification Remarks					1	DOCUMENT TO ROLL INDEX		
Kh10.01-5						Some unreadable pages Poor ald		
Kh10.01-5	Frame Number	Classification Number	Date Period	Vol.	Pt.	Title	Security Classification	Remarks
S S T Jul-Dec-5 1 S S S S S S S S				1	18.2	West and Alice December 2		
714 Jul-Dec-54 4 S 952 Jul-Dec-54 5 S 1187 Kh10.01-5 Jul-Dec-54 6 Ristory Air Defense C mma d S 1484 Index Index Page 1 01 1 Roll Number K4007.		N410.01-5	Jul-Dec-54	1	TOCK	History Air Defense Commaria	S/RD	
1187		The second secon			Total	History Air Defense Commar 1		
1187 Kh10.01-5 Jul-Dec-5h 6 History Air Defense C mma d S Index Index Index Page 1 0f 1 Roll Number Kh007.	307 523		Jul-Dec-54	2	Torz	History Air Delense Commar 1	S	
3825 FORM NOV 71 0 - 23 PREV EDIT WILL BE USED Page 1 Of 1 Roll Number Ki4007.	307 523 714		Jul-Dec-54 Jul-Dec-54	2	Taz	History Air Delense Commari	S	
3825 FORM 0 - 23 PAEV EDIT WILL BE USED Page 1 Of 1 Roll Number KI4007.	307 523 714 952		Jul-Dec-54 Jul-Dec-54 Jul-Dec-54	3 4	Taz	History Air Delense Commar 1	S S	
3825 FORM O - 23 PAEV EDIT WILL BE USED Page 1 Of 1 Roll Number KLIOO7.	307 523 714 952 1187	K):10:01-5	Jul-Dec-54 Jul-Dec-54 Jul-Dec-54 Jul-Dec-5h	3 4 5	102		S S S	
3825 FORM 0 - 23 PAEV EDIT WILL BE USED Page 1 Of 1 Roll Number K4007.	307 523 714 952 1187	K):10:01-5	Jul-Dec-54 Jul-Dec-54 Jul-Dec-54 Jul-Dec-5h	3 4 5		History Air Defense C mma d	S S S S	
3825 FORM 0 - 23 PAEV EDIT WILL BE USED Page 1 Of 1 Roll Number K4007.	307 523 714 952 1187	K):10:01-5	Jul-Dec-54 Jul-Dec-54 Jul-Dec-54 Jul-Dec-54 Jul-Dec-54	3 4 5		History Air Defense C mma d	S S S S	
3825 FORM 0 - 23 PAEV EDIT WILL BE USED Page 1 Of 1 Roll Number K4007.	307 523 714 952 1187	K):10:01-5	Jul-Dec-54 Jul-Dec-54 Jul-Dec-54 Jul-Dec-54 Jul-Dec-54	3 4 5		History Air Defense C mma d	S S S S	
3825 FORM 0 - 23 PAEV EDIT WILL BE USED Page 1 Of 1 Roll Number K4007.	307 523 714 952 1187	K):10:01-5	Jul-Dec-54 Jul-Dec-54 Jul-Dec-54 Jul-Dec-54 Jul-Dec-54	3 4 5		History Air Defense C mma d	S S S S	
3825 FORM 0 - 23 PAEV EDIT WILL BE USED Page 1 Of 1 Roll Number K4007.	307 523 714 952 1187	K):10:01-5	Jul-Dec-54 Jul-Dec-54 Jul-Dec-54 Jul-Dec-54 Jul-Dec-54	3 4 5		History Air Defense C mma d	S S S S	
3825 FORM 0 - 23 PAEV EDIT WILL BE USED Page 1 Of 1 Roll Number KI4007	307 523 714 952 1187	K):10:01-5	Jul-Dec-54 Jul-Dec-54 Jul-Dec-54 Jul-Dec-54 Jul-Dec-54	3 4 5		History Air Defense C mma d	S S S S	
3825 FORM 0 - 23 PAEV EDIT WILL BE USED Page 1 Of 1 Roll Number KI4007	307 523 714 952 1187	Kh10.01-5 Index	Jul-Dec-54 Jul-Dec-54 Jul-Dec-54 Jul-Dec-54 Jul-Dec-54	3 4 5		History Air Defense C mma d	S S S S	
3825 FORM 0 - 23 PAEV EDIT WILL BE USED Page 1 Of 1 Roll Number KI4007	307 523 714 952 1187	Kh10.01-5 Index	Jul-Dec-54 Jul-Dec-54 Jul-Dec-54 Jul-Dec-54 Jul-Dec-54	3 4 5		History Air Defense C mma d	S S S S	
3825 FORM 0 - 23 PAEV EDIT WILL BE USED Page 1 Of 1 Roll Number KI4007	307 523 714 952 1187	Kh10.01-5 Index	Jul-Dec-54 Jul-Dec-54 Jul-Dec-54 Jul-Dec-54 Jul-Dec-54	3 4 5		History Air Defense C mma d	S S S S	
3825 FORM 0 - 23 PAEV EDIT WILL BE USED Page 1 Of 1 Roll Number KI4007	307 523 714 952 1187	Kh10.01-5 Index	Jul-Dec-54 Jul-Dec-54 Jul-Dec-54 Jul-Dec-54 Jul-Dec-54	3 4 5		History Air Defense C mma d	S S S S	
Page 1 (1 1 Roll Number Kl4007	307 523 714 952 1187	Kh10.01-5 Index	Jul-Dec-54 Jul-Dec-54 Jul-Dec-54 Jul-Dec-54 Jul-Dec-54	3 4 5		History Air Defense C mma d	S S S S	
	307 523 714 952 1187 1484	Khilo.ol-5 Index	Jul-Dec-54 Jul-Dec-54 Jul-Dec-54 Jul-Dec-54 Jul-Dec-54	2 3 4 5 6		History Air Defense C mma d	S S S S	
	307 523 714 952 1187 1484	Khilo.ol-5 Index	Jul-Dec-54 Jul-Dec-54 Jul-Dec-54 Jul-Dec-54 Jul-Dec-54	2 3 4 5 6		History Air Defense C mma d Index	S S S S S	